ENERPAC

INDUSTRIAL TOOLS

Cylinders
Lifting Products
Pumps
Control Valves
System Components
Presses
Pullers
Specialty Tools
Cutters
Bolting Tools
Flange Maintenance
Heavy Lifting Technology
On-site Machining

400+ PAGES FILLED
WITH OVER 2,000 TOOLS

US E330

Table of Contents

ENERPAC

Introduction

The Right Tool 2-3

Cylinders (Hydraulic) 4-83

Introduction 4-5
RC-Series TRIO, Single-Acting Cylinders 6-9
RC-Series TRIO, Cylinder Accessories 10
RA-Series, Aluminum Cylinders Introduction 11
RAC-Series, Single-Acting Aluminum Cylinders. 12-13
RACL-Series, Single-Acting Aluminum Lock-nut Cylinders 14-15
RACH-Series, Single-Acting Aluminum Hollow Cylinders 16-17
RARH-Series, D/A Aluminum, Hollow Plunger Cylinders . . 18-19
RAR-Series, Double-Acting Aluminum Cylinders 20-21
CULP-Series, Ultra-Flat Cylinders 22
CUSP-Series, Ultra-Flat, High Tonnage Cylinders 23
LPL-Series, Single-acting Low Height Lock-Nut Cylinders 24-25
RSM/RCS-Series, Single-Acting Low Height Cylinders . 26-27
RLT-Series, Low-Height Telescopic Cylinders. 28-29
RT-Series, Telescopic Cylinders. 30-31
BRC-/BRP-Series, Single-Acting Pull Cylinders 32-33
RCH-Series, Single-Acting Hollow Plunger Cylinders . . 34-35
RRH-Series, Double-Acting Hollow Plunger Cylinders . 36-37
RD-Series, Double-Acting Precision Cylinders 38-39
RR-Series, Double-Acting Cylinders. 40-43
HTC-Series High-Tonnage Cylinders Intro 44-45
High-Tonnage Cylinders Quick Selection Chart, HCG, HCR, HCL, HCRL-Series 46-47
HCG-Series, Single-Acting High-Tonnage Cylinders . . . 48-51
HCR-Series, Double-Acting High-Tonnage Cylinders . . 52-55
HCL-Series, S/A, High-Tonnage Lock Nut Cylinders . . . 56-59
HCRL-Series, D/A,High-Tonnage Lock Nut Cylinders . . 60-61
SC-Series, Cylinder-Pump Sets 62-63
RC, P, V-Series, Extreme Environment Products 64
SC, SL, SR, SW-Series, Portable Hydraulic Toolbox. 65
JH/JHA-Series, Aluminum & Steel Jacks 66
GBJ-Series, Industrial Bottle Jacks 67
PR-Series, Pow'R Riser® 68-69
PL-Series, Pow'R LOCK™. 70-71
BLS-Series, Double-Acting Climbing Jacks 72-73
SCJ-Series, Self-Locking Cube Jack 74-77
LH-Series Skidding Systems 78-81
ETT-Series, Turntables 82
Custom Hydraulic Cylinders 83

Pumps and Directional Control Valves 84-145

Introduction 84-85
P-Series, Lightweight Hand Pumps 86-87
P-Series, ULTIMA Steel Hand Pumps 88-89
P-Series, Low-Pressure Hand Pumps 90-91
P-Series, Lightweight Foot Pump 92
MP-Series, Multifluid Hand Pumps 93
P- and 11-Series, Ultra-High Pressure Hand Pumps . . 94-95
XC-Series, Cordless Pump. 96-97
ZC-Series, Cordless Hydraulic Pumps 98-99
PU-Series Economy Pumps. 100-101
E-Series, E-Pulse Electric Pump 102-103
Z-Class Electric Pump Intro. 104-105
ZU-Series, Electric Pumps. 106-111
ZE-Series, Electric Pumps 112-117
8000-Series (PE), Electric Pumps 118-119
PA & PAM-Series, Air Hydraulic Pumps 120-121
PA-Series, Turbo II Air Pumps 122-123
XA-Series Air Pumps. 124-125
ZA-Series, Air Hydraulic Pumps. 126-127
ZG-Series Gasoline Powered Pumps 128-130
8000-Series (EGM), Gasoline Powered Pumps 131
SFP-Series Split Flow Pumps 132-135
EVO-Series, Synchronized Lifting Systems 136-137
Custom Hydraulic Pumps 138

Pump Mounted Directional Control Valves 139-145

Introduction 139
VM, VE-Series, Pump-Mounted Valves. 140-141
VC-Series, Remote Mounted Valves. 142
VC, VM, VE Valve Dimensions. 143
VE-Series, Solenoid Operated Modular Valves 144-145

System Components and Control Valves 146-165

Introduction 146-147
High-Pressure Hoses 148-149
Hydraulic Couplers 150-151
Hydraulic Oil, Manifolds and Fittings 152-155
GF and GP-Series, Hydraulic Force and Pressure Gauges. 156-157
G & H-Series, Hydraulic Pressure Gauges 158-159
T-Series, Test System Gauges 160
DGR-Series, Digital Hydraulic Gauges 161
GA45GC Gauge Adaptor Assembly. 162
GA, NV, V Gauge Accessories 163
V-Series Flow & Pressure Control Valves 164-165

Hydraulic Presses 166-181

Introduction 166-167
IP-Series, H-Frame Presses. 168-171
IPR-Series, Roll Frame Presses 172-173
A-Series, C-Clamps and Arbor Presses 174-175
Press Accessories. 176
Press Speed Chart 176
Custom Built Presses 177
VLP & XLP-Series Presses 178-179
TM, LH Tension Meter and Load Cells 180
Custom Hydraulic Presses 181

Pullers (Mechanical and Hydraulic) 182-201

Introduction 182-183
BHP-Series, Hydraulic Puller Sets 184-187
Sync Grip Pullers Introduction 188-189
SGM-Series Mechanical Sync Grip Pullers. 190
MPS-Series Master Puller Sets 191
GPS-Series Hydraulic Puller Sets. 192
BHP-Series Cross Bearing Puller Sets 193
LGM-Series, Mechanical Lock-Grip Pullers 194-195
LGH-Series, Hydraulic Lock-Grip Pullers 196-197
LGH-Series, Hydraulic Master Lock-Grip Pullers . . . 198-199
LGHMS-Series, Hydraulic Master Lock-Grip Pullers 199
IPM-Series Internal Mechanical Pullers 200
EPH-Series, Posi-Lock® 100-Ton Hydraulic Grip Pullers . . 201

Specialty Tools (Mechanical and Hydraulic) 202-219

Introduction 202-203
MS-Series, Maintenance Sets 204-207
SP, MSP, STP-Series, 35-Ton Hydraulic Punch 208-209
SP-Series, 50-Ton Hydraulic Punch. 210-211
LW-Series, Vertical Lifting Wedge 212
SOH-Series, Hydraulic Machine Lifts 213
ER, ES and ELP-Series, Heavy-Duty Load Skates . . . 214-215
CM-Series, Storage Cases. 216
A, WR-Series, Wedgies & Spread Cylinders 217
STB-Series, Pipe Benders 218-219

Cutters 220-237

Introduction 220-221
EBH-Series, Hydraulic Bar Cutters. 222-223
EBE-Series, Electric Bar Cutters 224
EBC-Series, Cordless Bar Cutters 225
EDCH-Series Decommissioning Cutters. 226
EFBE-Series, Flat Bar Cutters 227
ECCE-Series, Chain Cutters. 228-229
EWCH-Series, Hydraulic Wire and Cable Cutters . . . 230-231
EWCE-Series, Electric Wire and Cable Cutters 232
ECSE-Series, Cutter/Spreader Combination Tools 233
WHC, WHR, STC-Series, Hydraulic Cutter Head 234
WMC-Series, Self-Contained Hydraulic Cutters 235
Pumps/Accessories for EWCH, EBH, EDHC-Series Cutters 236-237

Bolting Tools 238-341

Introduction. 238-239
S-Series X-Edition, Square Drive Steel Torque Wrenches. 240-243
TSP, RTEX, SRSX Accessories for S-Series X-Edition Torque Wrenches 243
BSH-Series Sockets 244
BUS-Series, Back-Up Spanners. 245
STTL-Series, Safe T™ Torque Lock 246-247
W-Series X-Edition, Low Profile Hexagon Torque Wrenches. 248-249
W-Series Hexagon Cassettes 250-257
W-SL-Series, Ultra Slim Cassettes. 258-259
TSP, WTE, WRP Accessories for W-Series X-Edition Torque Wrenches 260
Bolting Application Ideas. 261
RSL-Series, Low-Profile Cassettes 262
RSL Drive Units for Hexagon & Square Drive Cassettes. 263
RSL-Series Hexagon Cassettes 264-268
Accessories for RSL wrenches, ERA, ERT. 269
RSL-Series, Slimline Hexagon Cassettes (RLP-SL) . . 270-271
RSL-Series, Square Drive Torque Wrenches, RSQ . . 272-273
DSX-Series, Square Drive Torque Wrenches 274-275
DSX-Series, Allen® Wrenches (DDA) 276
Bolting Applications & Portable Machining. 277
HMT-Series, Modular Torque Wrenches 278
Drive Units for Hexagon & Square Drive Cassettes. 279
HLP-Series Hexagon Cassettes for HMT Drive Units 280-281
HMT-Series Square Drive Hydraulic Torque Wrenches/HSQ Cassettes) 282-283
E-Series Manual Torque Multipliers. 284-285
PTW-Series Pneumatic Torque Wrenches 286-287
PTW-Series Torque Wrench Accessories 288-289
MCS-Series, Mobile Calibration System. 290
Torque Wrench & Pump Selection Chart. 291
XC-Series, Cordless Torque Wrench Pump. 292-293
E-Series, E-Pulse Electric Torque Wrench Pump . . . 294-295
TQ700 Series Electric Torque Wrench Pump 296-297
ZU4T-Series, Electric Torque Wrench Pumps 298-301
ZE-Series, Torque Wrench Pumps 302-303
LAT-Series, Air Hydraulic Torque Wrench Pumps . . . 304-305
ZA4T-Series, Air Driven Torque Wrench Pumps 306-309
HM-Series, Hydramax Topside Bolt Tensioners. 310-313
GT-Series, Hydraulic Bolt Tensioners 314-315
EAJ-Series, Aquajack Subsea Tensioners. 316-317
PGT-Series, Power Generation Bolt Tensioners. 318-319
FTR-Series, Foundation Bolt Tensioners. 320-321
FTE-Series, Foundation Bolt Tensioners. 322-323
HPT-Series Pump and Accessories 324
HT, B, Ultra High-Pressure Hoses and Couplers 325
Multi-Stage Tensioners Awareness 326
ATP -Series, Ultra-Pressure Air Hydraulic Pump. 327
ZUTP-Series, Electric Tensioning Pump 328-329
ATM-Series, Flange Alignment Tools 330-331
FSM, FSH, FSC-Series Hydraulic and Mechanical Industrial Spreaders. 332-333
NC-Series, Hydraulic Nut Splitters 334-335
NSC, NSH-Series Integral & Hydraulic Nut Splitters . 336-337
NSH-Series Hydraulic Nut Splitters (S/A & D/A) 338-339
FF-Series, Mechanical Flange Face Tool 340-341

Table of Contents

Flange Maintenance Tools 342-357

Introduction 342-343
SWi, Flange Spreading Tools 344-345
SWi, Flange Spreading Tools (ATEX) 346-347
SG-Series, Flange Spreading Tools 348-351
VC-Series, Valve Change-Out Tools 352-353
MG-Series Flange Spreading Tools 354
FC-Series, Flange Pulling Tool 355
TFA-Series, Flange Alignment Tools (Wind Turbine Tower) 356
HP-Series, Hand Pumps and Hoses 357

Heavy Lifting Technology 358-377

Introduction 358-359
LH, HSK-Series, Skidding Systems 360-361
HSL-Series, Strand Jacks 362-363
SL, SBL-Series, Hydraulic Gantries 364-365
JS-Series, Jack-Up System 366-367
SHS/SHAS-Series, SyncHoist System 368-369
ETR-Series, Trolly System 370-371
SPMT-Series, Self-propelled Modular Transporter 372
Lifting Solutions 373-377

On-Site Machining Tools. 378-397

Introduction 378-379
FF, MM-I Series, Internal Mount Flange Facing Machines . 380
MM-E Series, External Mount Flange Facing Macines . . . 381
DLR-Series, Clamshell Pipe Cutting
& Beveling Machines 382-383
OM-Series, General Orbital Milling Machines 384
WP-Series, Wind Power Orbital Milling Machines 385
LMR, MR, MRY, GM-Series, Linear Milling Machines 386-387
HTM, LPH, MHT, CHT, LSA-Series, Hot Tapping Machines
& Line Stopping Actuators 388-389
MWDS Decommissioning Diamond Wire
& Band Saws 390-391
HT, T, DDU-Series, Drilling & Tapping Machines 392-393
GeniSYS IV Portable 3-Axis CNC Mill 394-395
MITT-Series, Isolation and Test Tools 396-397

Yellow Pages (Information Section) 398-417

Warranty Statement, Introduction and Standards . . . 398-399
Safety Instructions 400-401
Cylinder & Pump Matching and Selection Chart 402
Hydraulic Work Sheet 403
Basic Hydraulic System Set-ups 404-405
Basic Hydraulics 406-407
Conversion Tables 408
Cylinder Speed Charts 409
Valve Information 410
Hexagon Nut and Bolt Sizes 411
Bolting Tightening & Tensioning 412-415
Bolting Integrity Software 416-417
Enerpac Academy 418-419
Enerpac Worldwide Locations 420

All information in this catalog can be changed due to product improvements without prior notice.

© Copyright 2021, Enerpac Tool Group. All rights reserved. Any copying or other use of material in this catalog (text, illustrations, drawings, photos) without express written consent is prohibited.

Section Index

Cylinders & Lifting Products
Page 4-83

Pumps & Directional Control Valves
Page 84-145

System Components & Control Valves
Page 146-165



Presses
Page 166-181

Pullers
Page 182-201

Specialty Tools
Page 202-219

Cutters
Page 220-237

Bolting Tools
Page 238-341

Flange Maintenance Tools
Page 342-357

Heavy Lifting Equipment
Page 358-377

On-Site Machining Tools
Page 378-397

CUSTOMER-DRIVEN INNOVATION



INDUSTRY LEADING TECHNOLOGY



CONTINUOUS IMPROVEMENTS



ENDLESS INNOVATION

RESULTS IN THE RIGHT TOOL

We believe it takes advanced technical expertise and ingenuity to develop the industry's most trusted solutions. Our relentless pursuit to deliver the highest standard of excellence means never compromising on quality. Yet, it all starts with a thorough understanding of our customer needs, the environments they work in and the ideas of tomorrow that help get jobs done faster, easier and safer.

SOLVING CUSTOMER PROBLEMS

One of our core values is to continually innovate and solve customer problems. That all begins with the discovery process. Through the efforts of a dedicated innovation team and several centers of excellence, new ideas are uncovered by listening to our customer's pain points and observing how they perform tasks in their own environments. These inputs lead to the forming of ideas and eventually prototypes that can be tested, refined and transformed into finished products.

FIND OUR NEWEST PRODUCTS AT ENERPAC.COM/INNOVATION

Continuous improvement means new products are introduced and made available to customers on a regular basis throughout the year. Find the newest Enerpac products at Enerpac.com/Innovation.

THE RIGHT TOOL
MAKES ALL THE DIFFERENCE

Backed by a global legacy of ultra-reliable quality and superior precision, Enerpac is pushing the industry forward with a wide range of advanced industrial tools and services that first and foremost ensure our customers operate safely and productively every day. It isn't about being compliant. Or "as good" as the next guy; we outpace the competition by delivering technically superior solutions that are easy to get, safe to use and built to outlast.

NEVER COMPROMISE

Enerpac combines technical excellence with proven performance – every day, every year, year after year. We believe customers shouldn't have to compromise – they can rest easy knowing that even in the most complex situations, their reputations and productivity are protected by the most trusted industrial tools available.

SAFETY AND PRODUCTIVITY

Our customers put their physical well-being and reputations on the line each day they go to work; we take the fact that they put their trust in us very seriously. Enerpac team members are obsessively committed to developing solutions that keep the world's workers safe and productive in highly demanding working conditions.

ON-DEMAND ACCESS

For us, offering the ideal customer experience means working overtime to make sure our customers can be heroes when it matters most by providing on-demand access to a vast catalog of products and services, extensive training and mobilized field teams no matter where they are in the world.

As a global market leader in high-pressure hydraulic tools, controlled force products and solutions for precision positioning of heavy loads, Enerpac products have maintained and moved some of the largest structures on earth. They are the industry standard in aerospace, infrastructure, manufacturing, mining, oil & gas, power generation and much more.

Enerpac hydraulic cylinders are available in hundreds of different configurations. Whatever the industrial application… lifting, pushing, pulling, bending, holding… whatever the force capacity, stroke length, or size restrictions… single- or double-acting, solid or hollow plunger, you can be sure that Enerpac has the cylinder to suit your high force application.

Enerpac jacking cylinders fully comply to ASME B30.1 (except RD-Series).

With the 3rd Generation comes a trio of key features

The next evolution of the legendary Enerpac RC-Series hydraulic cylinder. The driving force of the Enerpac cylinder range, the new **RC-TRIO** is as **versatile** as ever. Featuring a new TRIO Bearing System for **enhanced durability** and a hybrid spring-return system for **faster retraction** and even **greater productivity**.

NEW RC-SERIES TRIO CYLINDERS

New TRIO Bearing System

- Includes up to 4 high-performance wear bands that offer increased resistance to damage, reducing bearing load and increasing cylinder lifespan
- Hardened composite material wear bands increase bearing surface area for greater side-load resistance - significantly improving cylinder life
- New high-performance Polyethylene seals provide longer life, reducing downtime

New TRIO Stop Ring

- Part of the TRIO Bearing System, the TRIO Stop Ring includes an additional wear band of high-strength bronze to absorb greater side load
- Capable of taking full cylinder extension force
- Features durable wiper to help prevent contamination from entering the cylinder during retract cycles

New TRIO Spring System

- Hybrid pre-tensioned return springs for up to 3x faster retraction and increased productivity
- High-strength steel wire improves spring life
- Spring retention design improves serviceability while allowing higher pre-load during assembly
- Spring is easily removed without special tools

Durable Piston Rod

- High-strength steel plunger for improved life and sideload resistance
- Nickel-plated plunger coating improves corrosion protection
- Internal plunger threads for easy tool fixturing

Enhanced Ergonomics

- Standard carry handles on cylinders from 33 up to 55 lbs. Sizes above include certified lifting eyes or optional handles
- Collar threads, plunger threads and base mounting holes enable easy fixturing (on most models)

Improved Saddle Retention

- Hardened plunger saddle protects plunger end during all lifting operations
- Easily removable for access to plunger mounting threads
- Tilt and smooth saddles available as accessories (compatible with new range of CATS-Series Tilt Saddles)

Enduring Compatibility

- For full compatibility and peace of mind, the new RC-Series model numbers, external dimensions and threads remain unchanged from prior RC-Series cylinders. Ensuring compatibility with historical versions and systems.

Note: The cut-away drawing is representative of typical cylinder construction and may not represent all cylinders in this section.

Cylinder & Lifting Products Section Overview

* Capacity (tons)	Stroke Range (in)	Cylinder Type and Functions	Series		Page
5-100	0.63-14.25	General Purpose Cylinders, Single-acting Accessories: Saddles, Base Plates, Mounting Attachments	RC A, CATS JBI, RE		6 ▶ 10 ▶
10-150	1.97-9.84	Aluminum Cylinders Single-Acting, Lock Nut, Hollow Plunger	RAC, RACL RACH		12 ▶ 14 ▶ 16 ▶
20-150	1.97-9.84	Aluminum Cylinders Double-Acting Hollow Plunger Double-Acting Solid Plunger	RARH RAR		18 ▶ 20 ▶
10-100 10-1000	0.24 0.26-0.69	Ultra-Flat Cylinders, Single-Acting, Load-Return with Stop-Ring or Tilting Function	CULP CUSP		22 ▶ 23 ▶
60-500 5-150	1.77-1.97 0.25-2.44	Low-Height Lock Nut Cylinders Low-Height Cylinders, Single-Acting, Spring-Return	LPL RSM/ RCS		24 ▶ 26 ▶
4.8-81.7 15.4-34.8	0.67-1.57 10.63-23.62	Low-Height Telescopic Cylinders Multi-Stage Telescopic Cylinders	RLT RT		28 ▶ 30 ▶
2.5-60	5.00-6.00	Pull Cylinders, Single-Acting, Spring-Return	BRC BRP		32 ▶
12-100 30-150	0.31-6.13 1.50-10.13	Hollow Plunger Cylinders Single- and Double-Acting	RCH RRH		34 ▶ 36 ▶
4-25 10-500	1.13-10.25 2.25-48.00	Precision Production Cylinders, Double-Acting Long Stroke Cylinders, Double-Acting	RD RR		38 ▶ 40 ▶
50-1000	1.97-11.81	High-Tonnage Cylinders Single-Acting and Double-Acting	HCG HCR		48 ▶ 52 ▶
50-1000 50-300	1.97-11.81 5.91-11.81	High-Tonnage, Lock Nut Cylinders, Single-Acting and Double-Acting	HCL HCRL		56 ▶ 60 ▶
5-50 7-100 2-110	1.50-14.25 2.00-6.00 0.44-10.13	Cylinder Pump Sets, Single-Acting Extreme Environment Products Portable Hydraulic Toolbox	SC RC, P, V SCR, SCL, SRS		62 ▶ 64 ▶ 65 ▶
	3.00-6.13 2.44-18.11	Aluminum and Steel Jacks Industrial Bottle Jack	JH, JHA GBJ		66 ▶ 67 ▶
60-200 200	14-26.5 14-24.5	POW'R-RISER® Lifting Jack Pow'R-LOCK™ Portable Lift System	PR PL		68 ▶ 70 ▶
55-220 56-110	5.91-6.34 81.4-118.3	Climbing Jacks Self-Locking Cube Jack	BLS SCJ		72 ▶ 74 ▶
400	23.5	Low-Height Skidding Components	LH		78 ▶
225-450		Hydraulic Turntables	ETT		82 ▶

* All ton values specified in this catalog are approximate and for cylinder class identification only. Please refer to the (maximum) value in US short tons for calculations

▼ Shown from left to right: **RC2510, RC53, RC1002, RC108, RC5010, and RC156**

- **TRIO Bearing System with hardened composite wear bands for optimal side-load resistance**
- **Strengthened TRIO Stop Ring improves durability and side-load resistance**
- **TRIO Hybrid pre-tensioned spring system provides faster retraction**
- **High-grade polyethylene seals for low wear and long service life**
- **Plunger wiper reduces contamination, extending cylinder life**
- **Collar and plunger threads and base mounting holes enable easy fixturing (on most models)**
- **Certified lifting eyes on cylinder models weighing over 55 lbs. Interchangeable with optional CHM6 carrying handle**
- **Designed for use in all positions**
- **Baked enamel finish for increased corrosion resistance**
- **CR-400 coupler and dust cap included on all models**

The Industry Standard General Purpose Cylinder

Saddles

All **RC** cylinders (except RC50, 101) are equipped with hardened removable grooved saddles. For tilt and flat saddles, see the RC-Series accessory page.

All CATS-Series Tilt Saddles use a nitrocarburization surface treatment for improved corrosion protection.

Page: 10

Base Plates

To ensure the stability of cylinders for lifting applications, base plates are available for 10, 25 and 50-ton RC cylinders.

Page: 10

Specialty Attachments

For solving all kinds of application problems, specialty attachments are available for 5, 10 and 25-ton RC cylinders.

Page: 206

▼ *To re-stabilize the foundation, the 308-ton silo needed to be lifted, levelled and structurally supported. Twenty-five ton RC-Series hydraulic cylinders were attached to a bracket on the top of each steel pier. Powered by a Z-Class pump, the hydraulic cylinders applied 20 tons of force at each placement to lift the silo two inches.*

▼ *Synchronous lifting set-up for 200-ton petrochemical process module using twelve RC2510 cylinders. To ensure the stability of the cylinders JBI25 base plates are installed.*

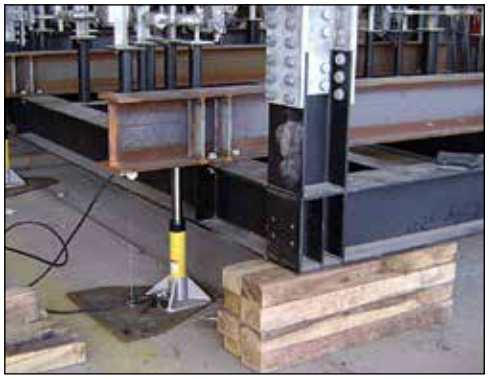

Optional Carrying Handle CHM6

Certified lifting eyes on cylinder models weighing 55 lbs. and above (RC5010 and heavier models). Interchangeable with optional carrying handle. Order model number **CHM6**.

▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity tons (maximum)	Stroke (in)	Model Number	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height (in)	Weight (lbs)
5 (4.9)	0.63	**RC50**	0.99	0.62	1.63	2.2
	1.00	**RC51**	0.99	0.99	4.34	2.3
	3.00	**RC53**	0.99	2.97	6.50	3.3
	5.00	**RC55***	0.99	4.95	8.50	4.1
	7.00	**RC57**	0.99	6.93	10.75	5.3
	9.13	**RC59**	0.99	9.04	12.75	6.1
10 (11.2)	1.00	**RC101**	2.24	2.24	3.53	4.0
	2.13	**RC102***	2.24	4.76	4.78	5.1
	4.13	**RC104**	2.24	9.23	6.75	7.2
	6.13	**RC106***	2.24	13.70	9.75	9.8
	8.00	**RC108**	2.24	17.88	11.75	12.0
	10.13	**RC1010***	2.24	22.64	13.75	14.0
	12.00	**RC1012**	2.24	26.82	15.75	15.0
	14.00	**RC1014**	2.24	31.29	17.75	18.0
15 (15.7)	1.00	**RC151**	3.14	3.14	4.88	7.2
	2.00	**RC152**	3.14	6.28	5.88	9.0
	4.00	**RC154***	3.14	12.57	7.88	11.0
	6.00	**RC156***	3.14	18.85	10.69	15.0
	8.00	**RC158**	3.14	25.13	12.69	18.0
	10.00	**RC1510**	3.14	31.42	14.69	21.0
	12.00	**RC1512**	3.14	37.70	16.69	24.0
	14.00	**RC1514**	3.14	43.98	18.69	26.0
25 (25.8)	1.00	**RC251**	5.16	5.16	5.50	13.0
	2.00	**RC252***	5.16	10.32	6.50	14.0
	4.00	**RC254***	5.16	20.64	8.50	18.0
	6.25	**RC256***	5.16	32.25	10.75	22.0
	8.25	**RC258**	5.16	42.56	12.75	27.0
	10.25	**RC2510**	5.16	52.88	14.75	31.0
	12.25	**RC2512**	5.16	63.20	16.75	36.0
	14.25	**RC2514***	5.16	73.52	18.75	39.0
30 (32.4)	8.25	**RC308**	6.49	53.56	15.25	40.0
50 (55.2)	2.00	**RC502**	11.04	22.09	6.94	33.0
	4.00	**RC504**	11.04	44.18	8.94	42.0
	6.25	**RC506***	11.04	69.03	11.13	51.0
	10.25	**RC5010**	11.04	113.21	15.13	70.0
	13.25	**RC5013**	11.04	146.34	18.13	83.0
75 (79.5)	6.13	**RC756**	15.90	97.49	11.25	65.0
	13.13	**RC7513**	15.90	208.82	19.38	130.0
100 (103.1)	2.00	**RC1002**	20.63	41.26	8.63	81.00
	6.63	**RC1006**	20.63	136.77	14.06	130.0
	10.25	**RC10010**	20.63	211.45	17.69	160.0

* Available as a set. See note on this page.

RC-TRIO Series

Capacity:
5 - 100 tons

Stroke:
0.63 - 14.25 inches

Maximum Operating Pressure:
10,000 psi

Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings!

Page: 404

Lightweight Aluminum Cylinders

If you need a higher cylinder capacity-to-weight-ratio the RAC-Series are the perfect choice.

Page: 12

Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 151



Pump and Cylinder Sets

All cylinders marked with an * are available as **sets** (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: 63

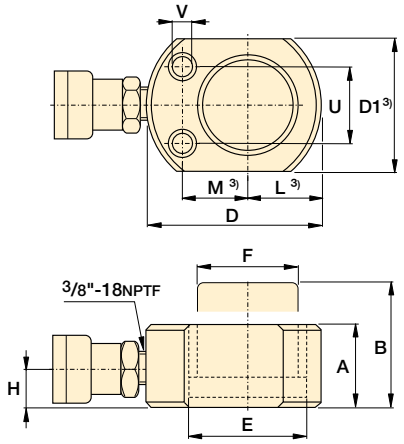

RC50

RC101 only
(U1 = 0.75 inch)



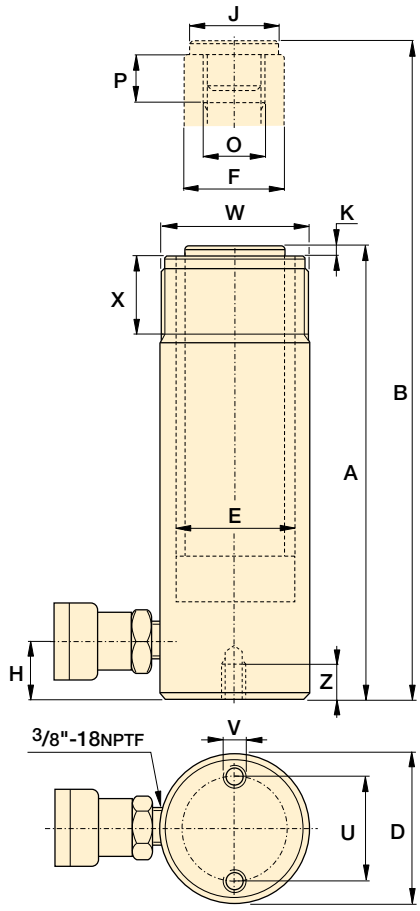

RC51 to RC5013 models



RC1002 and RC10010 models

◄ For full features see page 6.

Speed Chart and Pump Selection Chart

See the Enerpac Cylinder Speed Chart in our "Yellow Pages" to determine your approximate cylinder speed. See Pump Selection Tool on website to choose the most suitable pump for your application.

Page: 409

Cylinder Capacity tons (maximum)	Stroke (in)	Model Number	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)
5 (4.9)	0.63	**RC50** [2]	0.99	0.62	1.63	2.25	2.31 [3]
	1.00	**RC51**	0.99	0.99	4.34	5.34	1.50
	3.00	**RC53**	0.99	2.97	6.50	9.50	1.50
	5.00	**RC55** [1]	0.99	4.95	8.50	13.50	1.50
	7.00	**RC57**	0.99	6.93	10.75	17.75	1.50
	9.13	**RC59**	0.99	9.04	12.75	21.88	1.50
10 (11.2)	1.00	**RC101** [4]	2.24	2.24	3.53	4.53	2.25
	2.13	**RC102** [1]	2.24	4.76	4.78	6.91	2.25
	4.13	**RC104**	2.24	9.23	6.75	10.88	2.25
	6.13	**RC106** [1]	2.24	13.70	9.75	15.88	2.25
	8.00	**RC108**	2.24	17.88	11.75	19.75	2.25
	10.13	**RC1010** [1]	2.24	22.64	13.75	23.88	2.25
	12.00	**RC1012**	2.24	26.82	15.75	27.75	2.25
	14.00	**RC1014**	2.24	31.29	17.75	31.75	2.25
15 (15.7)	1.00	**RC151**	3.14	3.14	4.88	5.88	2.75
	2.00	**RC152**	3.14	6.28	5.88	7.88	2.75
	4.00	**RC154** [1]	3.14	12.57	7.88	11.88	2.75
	6.00	**RC156***	3.14	18.85	10.69	16.69	2.75
	8.00	**RC158**	3.14	25.13	12.69	20.69	2.75
	10.00	**RC1510**	3.14	31.42	14.69	24.69	2.75
	12.00	**RC1512**	3.14	37.70	16.69	28.69	2.75
	14.00	**RC1514**	3.14	43.98	18.69	32.69	2.75
25 (25.8)	1.00	**RC251**	5.16	5.16	5.50	6.50	3.38
	2.00	**RC252** [1]	5.16	10.32	6.50	8.50	3.38
	4.00	**RC254** [1]	5.16	20.64	8.50	12.50	3.38
	6.25	**RC256** [1]	5.16	32.25	10.75	17.00	3.38
	8.25	**RC258**	5.16	42.56	12.75	21.00	3.38
	10.25	**RC2510**	5.16	52.88	14.75	25.00	3.38
	12.25	**RC2512**	5.16	63.20	16.75	29.00	3.38
	14.25	**RC2514** [1]	5.16	73.52	18.75	33.00	3.38
30 (32.4)	8.25	**RC308**	6.49	53.56	15.25	23.50	4.00
50 (55.2)	2.00	**RC502**	11.04	22.09	6.94	8.94	5.00
	4.00	**RC504**	11.04	44.18	8.94	12.94	5.00
	6.25	**RC506** [1]	11.04	69.03	11.13	17.38	5.00
	10.25	**RC5010**	11.04	113.21	15.13	25.38	5.00
	13.25	**RC5013**	11.04	146.34	18.13	31.38	5.00
75 (79.5)	6.13	**RC756**	15.90	97.49	11.25	17.38	5.75
	13.13	**RC7513**	15.90	208.82	19.38	32.51	5.75
100 (103.1)	2.00	**RC1002**	20.63	41.26	8.63	10.63	7.00
	6.63	**RC1006**	20.63	136.77	14.06	20.69	7.00
	10.25	**RC10010**	20.63	211.45	17.69	27.94	7.00

1) Available as a set. See page 62.
2) RC50 cylinder has non-removable grooved saddle and no collar thread.
3) RC50: D1 = 1.63 inch, L = 0.81 inch, M = 1.00 inch.
4) RC-101 has plunger thread and non-removable saddle.

Single-Acting, General Purpose Cylinders



Couplers Included!
CR400 couplers included on all models. Fits all HC-Series hoses.

Capacity:
5 - 100 tons

Stroke:
0.63 - 14.25 inches

Maximum Operating Pressure:
10,000 psi

RC-TRIO Series

Cylinder Bore Diam. E (in)	Plunger Dia. F (in)	Base to Adv. Port H (in)	Saddle Dia. J (in)	Saddle Protrusion from Plngr. K (in)	Plunger Internal Thread O (in)	Plunger Thread Length P (in)	Base Mounting Holes: Bolt Circle U (in)	Base Mounting Holes: Thread V (in)	Base Mounting Holes: Thread Depth Z (in)	Collar Thread W (in)	Collar Thread Length X (in)	Weight (lbs)	Model Number
1.13	1.00	0.75	[2]	[2]	[2]	[2]	1.13	0.22	—	—	—	2.2	**RC50** [2]
1.13	1.00	0.75	1.00	0.25	¾"-16UN	0.56	1.00	¼"-20UNC	0.56	1½"-16UN	1.13	2.3	**RC51**
1.13	1.00	0.75	1.00	0.25	¾"-16UN	0.56	1.00	¼"-20UNC	0.56	1½"-16UN	1.13	3.3	**RC53**
1.13	1.00	0.75	1.00	0.25	¾"-16UN	0.56	1.00	¼"-20UNC	0.56	1½"-16UN	1.13	4.1	**RC55** [1]
1.13	1.00	0.75	1.00	0.25	¾"-16UN	0.63	1.00	¼"-20UNC	0.56	1½"-16UN	1.13	5.3	**RC57**
1.13	1.00	0.75	1.00	0.25	¾"-16UN	0.63	1.00	¼"-20UNC	0.56	1½"-16UN	1.13	6.1	**RC59**
1.69	1.50	0.75	–	–	#10-24UN	0.25	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.06	4.0	**RC101** [4]
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.13	5.1	**RC102** [1]
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.06	7.2	**RC104**
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.13	9.8	**RC106** [1]
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.06	12	**RC108**
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.13	14	**RC1010** [1]
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.06	15	**RC1012**
1.69	1.50	0.75	1.38	0.25	1"- 8UN	0.75	1.56	5⁄16"-18UNC	0.50	2¼"-14UN	1.06	18	**RC1014**
2.00	1.63	0.75	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	7.2	**RC151**
2.00	1.63	0.75	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	9	**RC152**
2.00	1.63	0.75	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	11	**RC154** [1]
2.00	1.63	1.00	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	15	**RC156** [1]
2.00	1.63	1.00	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	18	**RC158**
2.00	1.63	1.00	1.50	0.38	1"- 8v	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	21	**RC1510**
2.00	1.63	1.00	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	24	**RC1512**
2.00	1.63	1.00	1.50	0.38	1"- 8UN	1.00	1.88	⅜"-16UNC	0.50	2¾"-16UN	1.19	26	**RC1514**
2.56	2.25	1.00	2.00	0.41	1½"-16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	13	**RC251**
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	14	**RC252** [1]
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	18	**RC254** [1]
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	22	**RC256** [1]
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	27	**RC258**
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	31	**RC2510**
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	36	**RC2512**
2.56	2.25	1.00	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.75	3⅝"-12UN	1.94	39	**RC2514** [1]
2.88	2.25	1.13	2.00	0.41	1½"- 16UN	1.00	2.31	½"-13UNC	0.63	3⅝"-12UN	1.94	40	**RC308**
3.75	3.13	1.31	2.81	0.11	—	—	3.75	½"-13UNC	0.75	5"-12UN	2.19	33	**RC502**
3.75	3.13	1.31	2.81	0.11	—	—	3.75	½"-13UNC	0.75	5"-12UN	2.19	42	**RC504**
3.75	3.13	1.38	2.81	0.11	—	—	3.75	½"-13UNC	0.75	5"-12UN	2.19	51	**RC506** [1]
3.75	3.13	1.38	2.81	0.11	—	—	3.75	½"-13UNC	0.75	5"-12UN	2.19	70	**RC5010**
3.75	3.13	1.38	2.81	0.11	—	—	3.75	½"-13UNC	0.75	5"-12UN	2.19	83	**RC5013**
4.50	3.75	1.19	2.81	0.11	—	—	4.50	⅝"-11UNC	0.63	5¾"-12UN	1.75	65	**RC756**
4.50	3.75	1.19	2.81	0.11	—	—	4.50	⅝"-11UNC	0.63	5¾"-12UN	1.75	130	**RC7513**
5.13	4.13	1.63	2.81	0.11	—	—	5.50	¾"-10UNC	1.00	6⅞"-12UN	1.75	81	**RC1002**
5.13	4.13	1.63	2.81	0.11	—	—	5.50	¾"-10UNC	1.00	6⅞"-12UN	1.75	130	**RC1006**
5.13	4.13	1.63	2.81	0.11	—	—	5.50	¾"-10UNC	1.00	6⅞"-12UN	1.75	160	**RC10010**

▼ SELECTION CHART

For Use with Cylinder Capacity (tons)	Saddles			Base Plate	Mounting Block	Clevis Eyes	
	Flat	Grooved[1]	Tilt			Base[4]	Plunger
							
5	A53F[2]	A53G[2]	–	–	RB5[2], AW51[2], AW53[2]	REB5[2]	REP5[2]
10	A12[3], A102F[3]	A102G[3]	CATS12[3]	JBI10	RB10, AW102	REB10	REP10[3]
15	–	A152G	CATS12	–	RB15	REB15	REP10
25	A29 [5]	A252G	CATS52	JBI25	RB25	REB25	REP25
30	A29 [5]	A252G	CATS52	–	RB25	–	REP25
50	–	–	CATS100	JBI50	–	–	–
75	–	–	CATS100	–	–	–	–
95	–	–	CATS100	–	–	–	–

[1] Standard on 5-30 ton RC-cylinders [2] Except RC50 [3] Except RC101 [4] Mounting screws are included [5] Used with Bender Sets.

▼ DIMENSION CHARTS

Model Number	Saddle Dimensions (in)		
	A	B	C
	Flat		
A53F	1.00	0.25	0.68
A102F	1.38	0.24	0.88
A12	2.00	1.88	1"-8UNC
A29	2.00	1.88	1½"-16UN
	Grooved		
A53G	1.00	0.25	0.68
A102G	1.38	0.24	0.88
A152G	1.50	0.37	0.88
A252G	1.97	0.37	1.40

A53F, A102F



A12, A29





For Cylinder Capacity (ton)	Tilt Saddle Model Number	Addition to Collapsed Height A1 (in)	Tilt Saddle Diameter J1 (in)	
10	CATS12	0.55	1.38	
15	CATS12	0.43	1.38	
25	CATS52	0.59	1.97	
30	CATS52	0.59	1.97	
50	CATS100	0.59	2.80	
75	CATS100	0.59	2.80	
95	CATS100	0.59	2.80	

Model Number	Base Plate Dimensions (in)				
	A	B	C	D	E
JBI10	9.00	9.00	5.34	2.29	0.81
JBI25	11.00	11.00	5.53	3.41	1.03
JBI50	12.00	0.60	3.75	5.19	1.25



JBI10, -25



JBI50

Model Number	Mounting Block Dimensions (in)							
	A	B	C	D	E	F	G	H
RB5	1½"-16	3.50	3.00	–	1.00	–	–	–
AW51	1½"-16	2.76	2.36	0.43	0.98	2.13	¼"-20	1.62
AW53	1½"-16	2.87	0.28	0.31	0.75	2.25	¼"-20	0.41
RB10	2¼"-14	4.50	3.50	–	1.00	–	–	–
AW102	2¼"-14	3.94	3.25	0.63	1.18	3.00	7/16"-20	2.31
RB15	2¾"-16	4.00	4.50	–	1.50	–	–	–
RB25	3 5/16"-12	5.00	6.50	–	2.00	–	–	–



RB5, -10
RB15, -25



AW51



AW53



AW102 (J = 0.19)

Type	Model Number	Clevis Eye Dimensions (in)						Pin to Pin* (in)
		A	B	C	D	E	F	
Base[4]	REB5	1.75	1.88	0.56	0.63	0.63	1.00	2.37
	REB10	2.50	2.63	1.00	0.88	1.00	1.38	3.07
	REB15	3.00	2.63	1.00	0.88	1.00	1.38	3.07
	REB25	3.75	3.13	1.50	1.25	1.25	1.63	3.45
Plunger	REP5	1.13	1.75	0.56	0.63	0.63	0.75	—
	REP10	1.69	2.43	1.00	0.88	1.00	1.13	—
	REP25	2.25	2.81	1.50	1.25	1.25	1.38	—

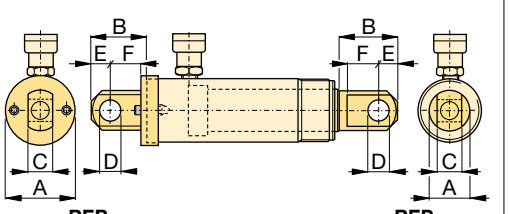

REB REP

[4] Mounting screws are included

* Pin to Pin– REB and REP Clevises fitted. Add cylinder collapsed height.

The Enerpac Lightweight Aluminum Cylinders

▼ Shown: **RAC, RACL, RACH, and RAR**

RA Series

Capacity:
10 - 150 tons

Stroke:
1.97 - 9.84 inches

Maximum Operating Pressure:
10,000 psi

- **Lightweight, easy to carry and position to allow a higher cylinder capacity-to-weight-ratio**
- **Non-corrosive by design, aluminum has always been a good material for use in many caustic environments**
- **Composite bearings on all moving surfaces guarantee NO metal-to-metal contact, to resist side loads and increase cylinder life**

Removable Hardened Saddle protects plunger from being damaged by abrasive surface contact.

Stop-Ring on all models absorbs eccentric loading and prevents plunger over-extension.

Composite Bearing material to prevent metal-to-metal contact, reducing side-load issues and increasing life.

Hard-coated Plunger and Base resist wear and prevent galling.

7075-T6 Aluminum Alloy Components for maximum strength and minimum weight.

Plunger Return Spring on all single-acting models for prompt cylinder return.

Composite Bearing material to prevent metal-to-metal contact, reducing side-load issues and increasing life.

Steel Base Plate protects cylinder base from abrasive surfaces and load induced damage.

Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings!

Page: 400

Aluminum vs. Steel

Aluminum cylinders, while offering the most lightweight solution also have some unique limitations due to material properties. It differs from steel in that it has a lower finite fatigue life. Aluminum cylinders should NOT be used in high-cycle applications such as production.

These cylinders are designed to provide 5000 cycles at their recommended pressure. **This limit should not be exceeded**. In normal lifting and many maintenance applications, this should provide a lifetime of use.

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. They will not withstand the capacity of the cylinder.

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.

▼ Shown from left to right: **RAC508, RAC1506, RAC304, and RAC206**

Lightweight for Maximum Portability

Saddles

All RAC cylinders are equipped with bolt-on removable saddles of hardened steel.

13

Lightweight Hand Pumps

Enerpac hand pumps **P392** or **P802** make the optimal lightweight set.

Page: 86

- **Composite bearings prevent metal-to-metal contact, increasing cylinder life and resistance to side-loads of up to 10%**
- **Hard coat finish on all surfaces resists damage and extends cylinder life**
- **Handles included on all models 30 tons and above**
- **For protection against load-induced damage, a saddle is standard on all models and a steel baseplate is standard on models 20-ton and above. The steel baseplate is optional only on 10- and 15-ton models**
- **Integral stop-ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity**
- **High-strength return spring for rapid cylinder retraction**
- **CR400 coupler and dust cap included on all models**
- **All cylinders meet ASME B-30.1 standards**

Cylinder Capacity tons (maximum)	Stroke* (in)	Model Number	Cylinder Effective Area (in^2)
10 (9.9)	1.97	**RAC102**	1.95
	3.94	**RAC104**	1.95
	5.91	**RAC106**	1.95
15 (15.4)	1.97	**RAC152**	3.03
	3.94	**RAC154**	3.03
	5.91	**RAC156**	3.03
20 (24.2)	1.97	**RAC202**	4.83
	3.94	**RAC204**	4.83
	5.91	**RAC206**	4.83
	7.87	**RAC208**	4.83
	9.84	**RAC2010**	4.83
30 (34.2)	1.97	**RAC302**	6.85
	3.94	**RAC304**	6.85
	5.91	**RAC306**	6.85
	7.87	**RAC308**	6.85
	9.84	**RAC3010**	6.85
50 (54.9)	1.97	**RAC502**	10.99
	3.94	**RAC504**	10.99
	5.91	**RAC506**	10.99
	7.87	**RAC508**	10.99
	9.84	**RAC5010**	10.99
100 (110.9)	1.97	**RAC1002**	22.19
	3.94	**RAC1004**	22.19
	5.91	**RAC1006**	22.19
	7.87	**RAC1008**	22.19
	9.84	**RAC10010**	22.19
150 (175.9)	1.97	**RAC1502**	35.18
	3.94	**RAC1504**	35.18
	5.91	**RAC1506**	35.18
	7.87	**RAC1508**	35.18
	9.84	**RAC15010**	35.18

* Custom strokes available.

◀ *Enerpac lightweight aluminum RAC506 cylinders are ideal for wet environments such as this tunnel under the river (Holland High-Speed Train Line).*

Optional Tilt Saddle Dimensions (in)				
For Cylinder Model / Capacity (ton)	**Tilt Saddle Model Number***	Tilt Saddle Diameter J1	Addition to Collapsed Height A1	
RAC20, 30	**CATS30**	2.17	0.43	
RAC50	**CATS50**	2.80	0.55	
RAC100	**CATS150**	3.82	0.75	
RAC150	**CATS200**	4.96	0.71	



* Tilt saddle not available for 10 and 15 ton.

Optional Steel Base Plate	
Cylinder Model / Capacity (ton)	**Base Plate Model Number** [1]
RAC10	**JBA10**
RAC15	**JBA15**

[1] Base plate height of 0.25" included on all 20-150 ton models. Base Plate is optional on 10-15 ton cylinders.

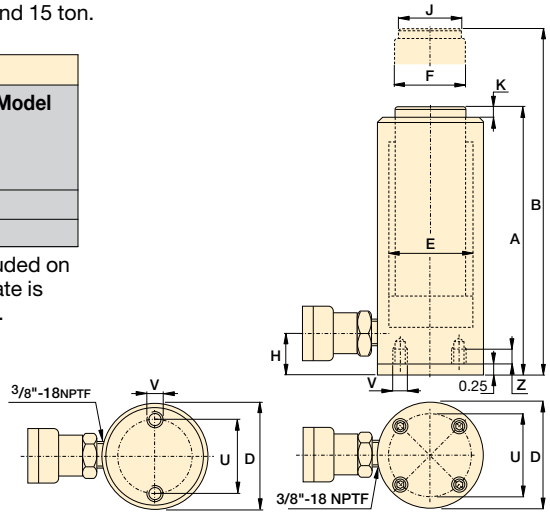

RAC102 to RAC156 **RAC202 to RAC15010**

RAC Series

Capacity:
10 -150 tons

Stroke:
1.97 - 9.84 inches

Maximum Operating Pressure:
10,000 psi

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed. See warning on page 11.

	Oil Capacity (in³)	**Collapsed Height** A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Bolt Circle U (in)	Thread V (mm)	Thread Depth [1] Z (in)	Wt. (lbs)	**Model Number**
	3.66	6.06	7.91	2.28	1.57	1.26	0.91	0.94	0.12	1.54	M6	0.47	2.7	**RAC102**
	7.93	8.03	11.97	2.28	1.57	1.26	0.91	0.94	0.12	1.54	M6	0.47	3.7	**RAC104**
	11.59	10.00	15.91	2.28	1.57	1.26	0.91	0.94	0.12	1.54	M6	0.47	4.4	**RAC106**
	6.10	6.34	8.31	2.76	1.97	1.57	0.91	1.14	0.12	1.89	M6	0.47	4.2	**RAC152**
	12.20	8.31	12.24	2.76	1.97	1.57	0.91	1.14	0.12	1.89	M6	0.47	5.3	**RAC154**
	17.69	10.28	16.18	2.76	1.97	1.57	0.91	1.14	0.12	1.89	M6	0.47	6.4	**RAC156**
	9.52	6.85	8.83	3.35	2.48	1.97	1.07	1.58	0.12	2.76	M6	0.47	7.9	**RAC202**
	19.03	8.82	12.76	3.35	2.48	1.97	1.07	1.58	0.12	2.76	M6	0.47	9.0	**RAC204**
	28.55	10.79	16.70	3.35	2.48	1.97	1.07	1.58	0.12	2.76	M6	0.47	10.1	**RAC206**
	38.01	12.76	20.64	3.35	2.48	1.97	1.07	1.58	0.12	2.76	M6	0.47	11.2	**RAC208**
	47.53	14.73	24.58	3.35	2.48	1.97	1.07	1.58	0.12	2.76	M6	0.47	12.3	**RAC2010**
	13.49	7.13	9.10	3.94	2.95	2.36	1.31	1.58	0.12	3.15	M6	0.47	9.9	**RAC302**
	26.99	9.09	13.04	3.94	2.95	2.36	1.31	1.58	0.12	3.15	M6	0.47	11.5	**RAC304**
	40.48	11.06	16.98	3.94	2.95	2.36	1.31	1.58	0.12	3.15	M6	0.47	13.0	**RAC306**
	53.91	13.04	20.91	3.94	2.95	2.36	1.31	1.58	0.12	3.15	M6	0.47	14.5	**RAC308**
	67.40	15.01	24.85	3.94	2.95	2.36	1.31	1.58	0.12	3.15	M6	0.47	16.1	**RAC3010**
	21.65	7.32	9.90	5.12	3.74	3.15	1.19	1.97	0.12	4.33	M6	0.47	18.7	**RAC502**
	43.30	9.29	13.24	5.12	3.74	3.15	1.19	1.97	0.12	4.33	M6	0.47	21.6	**RAC504**
	64.95	11.26	17.17	5.12	3.74	3.15	1.19	1.97	0.12	4.33	M6	0.47	24.5	**RAC506**
	86.49	13.24	21.11	5.12	3.74	3.15	1.19	1.97	0.12	4.33	M6	0.47	27.3	**RAC508**
	108.14	15.21	25.05	5.12	3.74	3.15	1.19	1.97	0.12	4.33	M6	0.47	30.2	**RAC5010**
	43.71	8.71	10.68	7.09	5.32	4.33	1.82	3.70	0.12	5.91	M10	0.47	38.1	**RAC1002**
	87.43	10.67	14.61	7.09	5.32	4.33	1.82	3.70	0.12	5.91	M10	0.47	43.2	**RAC1004**
	131.14	12.64	18.55	7.09	5.32	4.33	1.82	3.70	0.12	5.91	M10	0.47	48.3	**RAC1006**
	174.64	14.61	22.49	7.09	5.32	4.33	1.82	3.70	0.12	5.91	M10	0.47	53.4	**RAC1008**
	218.35	16.58	26.43	7.09	5.32	4.33	1.82	3.70	0.12	5.91	M10	0.47	58.4	**RAC10010**
	69.30	9.56	11.53	9.06	6.69	5.51	2.02	4.45	0.12	7.87	M10	0.47	55.8	**RAC1502**
	138.61	11.53	15.47	9.06	6.69	5.51	2.02	4.45	0.12	7.87	M10	0.47	64.6	**RAC1504**
	207.91	13.49	19.41	9.06	6.69	5.51	2.02	4.45	0.12	7.87	M10	0.47	73.4	**RAC1506**
	276.87	15.47	23.34	9.06	6.69	5.51	2.02	4.45	0.12	7.87	M10	0.47	82.2	**RAC1508**
	346.17	17.44	27.28	9.06	6.69	5.51	2.02	4.45	0.12	7.87	M10	0.47	91.1	**RAC15010**

▼ Shown from left to right: **RACL1006, RACL504 and RACL506**

- **Aluminum Lock Nut provides mechanical load holding for extended periods**
- **Hardened steel stop-ring increases cylinder life and resistance to side-loads of up to 5%**
- **Hard coat finish on all surfaces resists damage and extends cylinder life**
- **Composite bearings increase cylinder life and side load resistance**
- **Handles included on all models**
- **Steel base plate and saddle for protection against load-induced damage**
- **Integral stop-ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity**
- **High-strength return spring for rapid cylinder retraction**
- **CR400 coupler and dust cap included on all models**
- **All cylinders meet ASME B-30.1 standards**

◀ *The portable Lock Nut cylinder RACL1506 used for extended load support during epoxy injection for bridge reinforcement.*

To Secure Loads Mechanically

Saddles

All RACL cylinders are equipped with bolt-on removable saddles of hardened steel. For tilt saddles see next page.

Page: **15**

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **148**

Cylinder Capacity ton (maximum)	Stroke* (in)	Model Number	Cylinder Effective Area (in^2)
20 (24.2)	1.97	**RACL202**	4.83
	3.94	**RACL204**	4.83
	5.91	**RACL206**	4.83
	7.87	**RACL208**	4.83
	9.84	**RACL2010**	4.83
30 (34.2)	1.97	**RACL302**	6.85
	3.94	**RACL304**	6.85
	5.91	**RACL306**	6.85
	7.87	**RACL308**	6.85
	9.84	**RACL3010**	6.85
50 (54.9)	1.97	**RACL502**	10.99
	3.94	**RACL504**	10.99
	5.91	**RACL506**	10.99
	7.87	**RACL508**	10.99
	9.84	**RACL5010**	10.99
100 (110.9)	1.97	**RACL1002**	22.19
	3.94	**RACL1004**	22.19
	5.91	**RACL1006**	22.19
	7.87	**RACL1008**	22.19
	9.84	**RACL10010**	22.19
150 (175.9)	1.97	**RACL1502**	35.18
	3.94	**RACL1504**	35.18
	5.91	**RACL1506**	35.18
	7.87	**RACL1508**	35.18
	9.84	**RACL15010**	35.18

* Custom strokes available.

Single-Acting, Spring-Return, Lock Nut Cylinders

Optional Tilt Saddle Dimensions (in)				
For Cylinder Model / Capacity (ton)	**Tilt Saddle Model Number**	Tilt Saddle Diameter J1	Addition to Collapsed Height A1	
RACL20, 30	**CATS30**	2.17	0.43	
RACL50	**CATS50**	2.80	0.55	
RACL100	**CATS150**	3.82	0.75	
RACL150	**CATS200**	4.96	0.71	

Steel Base Plate Mounting Holes			
Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth [1] Z (in)
RACL20	2.76	M6	0.47
RACL30	3.15	M6	0.47
RACL50	4.33	M6	0.47
RACL100	5.91	M10	0.47
RACL150	7.87	M10	0.47

[1] Base plate height of 0.25" and (4) four base plate bolts.

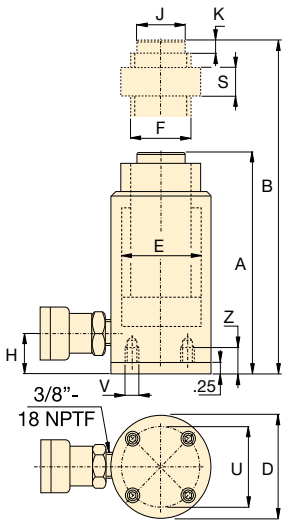

RACL Series

Capacity:
20 - 150 tons

Stroke:
1.97 - 9.84 inches

Maximum Operating Pressure:
10,000 psi

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed. See warning on page 11.

Oil Capacity (in³)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter (Threaded) F (in)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Lock Nut Height S (in)	Weight (lbs)	Model Number
9.52	8.83	10.80	3.35	2.48	2.17	1.07	1.58	0.12	1.97	8.8	**RACL202**
19.03	10.80	14.73	3.35	2.48	2.17	1.07	1.58	0.12	1.97	10.1	**RACL204**
28.55	12.76	18.67	3.35	2.48	2.17	1.07	1.58	0.12	1.97	11.4	**RACL206**
38.01	14.73	22.61	3.35	2.48	2.17	1.07	1.58	0.12	1.97	12.7	**RACL208**
47.53	16.70	26.54	3.35	2.48	2.17	1.07	1.58	0.12	1.97	14.1	**RACL2010**
13.49	9.10	11.07	3.94	2.95	2.36	1.31	1.58	0.12	1.97	11.9	**RACL302**
26.99	11.07	15.01	3.94	2.95	2.36	1.31	1.58	0.12	1.97	13.4	**RACL304**
40.48	13.04	18.95	3.94	2.95	2.36	1.31	1.58	0.12	1.97	14.9	**RACL306**
53.91	15.01	22.88	3.94	2.95	2.36	1.31	1.58	0.12	1.97	16.5	**RACL308**
67.40	16.98	26.82	3.94	2.95	2.36	1.31	1.58	0.12	1.97	18.0	**RACL3010**
21.65	9.29	11.27	5.12	3.74	3.15	1.19	1.97	0.12	2.95	20.5	**RACL502**
43.30	11.26	15.21	5.12	3.74	3.15	1.19	1.97	0.12	2.95	23.4	**RACL504**
64.95	13.23	19.14	5.12	3.74	3.15	1.19	1.97	0.12	2.95	27.8	**RACL506**
86.49	15.20	23.08	5.12	3.74	3.15	1.19	1.97	0.12	2.95	29.1	**RACL508**
108.14	17.17	27.02	5.12	3.74	3.15	1.19	1.97	0.12	2.95	31.9	**RACL5010**
43.71	11.65	13.63	7.09	5.32	4.33	1.82	3.70	0.12	2.95	48.2	**RACL1002**
87.43	13.62	17.57	7.09	5.32	4.33	1.82	3.70	0.12	2.95	53.3	**RACL1004**
131.14	15.59	21.50	7.09	5.32	4.33	1.82	3.70	0.12	2.95	58.4	**RACL1006**
174.64	17.57	25.44	7.09	5.32	4.33	1.82	3.70	0.12	2.95	63.4	**RACL1008**
218.35	19.54	29.38	7.09	5.32	4.33	1.82	3.70	0.12	2.95	68.5	**RACL10010**
69.30	12.72	14.68	9.06	6.69	5.51	2.02	4.45	0.12	3.15	71.0	**RACL1502**
138.61	14.69	18.62	9.06	6.69	5.51	2.02	4.45	0.12	3.15	79.8	**RACL1504**
207.91	16.65	22.56	9.06	6.69	5.51	2.02	4.45	0.12	3.15	88.6	**RACL1506**
276.87	18.62	26.49	9.06	6.69	5.51	2.02	4.45	0.12	3.15	97.4	**RACL1508**
346.17	20.59	30.43	9.06	6.69	5.51	2.02	4.45	0.12	3.15	106.3	**RACL15010**

▼ Shown from left to right: **RACH1508, RACH304 and RACH208**

The Lightweight Solution for Tensioning and Testing

Saddles
All RACH-cylinders are equipped with bolt-on removable hardened steel hollow saddles.

Lightweight Hand Pumps
Enerpac hand pumps **P392** or **P802** make the optimal lightweight set.

Page: **86**

- **Hollow plunger design allows for both pull and push forces**
- **Composite bearings increase cylinder life and side load resistance**
- **Hard coat finish on all surfaces resists damage and extends cylinder life**
- **Handles included on all models**
- **Floating center tube increases seal life**
- **Steel baseplate and saddle for protection against load-induced damage**
- **Integral stop-ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity**
- **High-strength return spring for rapid cylinder retraction**
- **CR400 coupler and dust cap included on all models**
- **All cylinders meet ASME B-30.1 standards**

Cylinder Capacity tons (maximum)	Stroke* (in)	Model Number	Cylinder Effective Area (in^2)
20 (25.4)	1.97	RACH202	5.07
	3.94	RACH204	5.07
	5.91	RACH206	5.07
	7.87	RACH208	5.07
	9.84	RACH2010	5.07
30 (39.6)	1.97	RACH302	7.92
	3.94	RACH304	7.92
	5.91	RACH306	7.92
	7.87	RACH308	7.92
	9.84	RACH3010	7.92
60 (65.6)	1.97	RACH602	13.13
	3.94	RACH604	13.13
	5.91	RACH606	13.13
	7.87	RACH608	13.13
	9.84	RACH6010	13.13
100 (127.5)	1.97	RACH1002	25.51
	3.94	RACH1004	25.51
	5.91	RACH1006	25.51
	7.87	RACH1008	25.51
	9.84	RACH10010	25.51
150 (175.0)	1.97	RACH1502	35.00
	3.94	RACH1504	35.00
	5.91	RACH1506	35.00
	7.87	RACH1508	35.00
	9.84	RACH15010	35.00

* Custom strokes available.

◀ *An RACH306, powered by a P392 hand pump, is used to extract corroded carriage pins from refuse collection vehicles.*

Single-Acting, Spring-Return, Hollow Plunger Cylinders

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate.

They will not withstand the capacity of the cylinder.

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.

RACH Series

Capacity:
20 - 150 tons

Stroke:
1.97 - 9.84 inches

Center Hole Diameter:
1.06 - 3.11 inches

Maximum Operating Pressure:
10,000 psi

Steel Base Plate Mounting Holes			
Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth [1] Z (in)
RACH20	3.15	M6	0.47
RACH30	4.33	M6	0.47
RACH60	6.30	M6	0.47
RACH100	8.66	M10	0.47
RACH150	9.65	M10	0.47

[1] Including Base Plate Height of 0.25 inches. Four (4) baseplate bolts included.

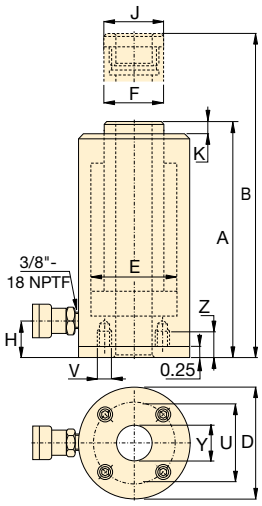

Oil Capacity (in³)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Center Hole Diameter Y (in)	Weight (lbs)	Model Number
9.98	7.41	9.38	3.93	2.95	2.17	1.14	2.17	0.40	1.06	11.5	**RACH202**
19.96	9.89	13.83	3.93	2.95	2.17	1.14	2.17	0.40	1.06	13.5	**RACH204**
29.94	12.41	18.32	3.93	2.95	2.17	1.14	2.17	0.40	1.06	15.6	**RACH206**
39.87	14.89	22.76	3.93	2.95	2.17	1.14	2.17	0.40	1.06	17.7	**RACH208**
49.90	17.41	27.25	3.93	2.95	2.17	1.14	2.17	0.40	1.06	19.8	**RACH2010**
15.59	8.20	10.17	5.12	3.74	2.76	1.14	2.76	0.40	1.34	17.6	**RACH302**
31.18	10.52	14.46	5.12	3.74	2.76	1.14	2.76	0.40	1.34	20.9	**RACH304**
46.77	13.12	19.02	5.12	3.74	2.76	1.14	2.76	0.40	1.34	24.6	**RACH306**
62.35	15.56	23.43	5.12	3.74	2.76	1.14	2.76	0.40	1.34	28.4	**RACH308**
77.94	18.04	27.88	5.12	3.74	2.76	1.14	2.76	0.40	1.34	31.9	**RACH3010**
25.84	9.89	11.86	7.09	5.12	3.94	2.41	3.94	0.47	2.13	35.6	**RACH602**
51.69	12.41	16.35	7.09	5.12	3.94	2.41	3.94	0.47	2.13	42.8	**RACH604**
77.53	14.97	20.87	7.09	5.12	3.94	2.41	3.94	0.47	2.13	50.3	**RACH606**
103.37	17.52	25.40	7.09	5.12	3.94	2.41	3.94	0.47	2.13	57.2	**RACH608**
129.21	20.09	29.93	7.09	5.12	3.94	2.41	3.94	0.47	2.13	65.1	**RACH6010**
50.21	10.16	12.13	9.84	7.28	5.71	2.41	5.71	0.55	3.11	74.6	**RACH1002**
100.43	12.80	16.74	9.84	7.28	5.71	2.41	5.71	0.55	3.11	87.8	**RACH1004**
150.64	15.40	21.31	9.84	7.28	5.71	2.41	5.71	0.55	3.11	101.9	**RACH1006**
200.85	18.08	25.95	9.84	7.28	5.71	2.41	5.71	0.55	3.11	115.7	**RACH1008**
251.07	20.76	30.60	9.84	7.28	5.71	2.41	5.71	0.55	3.11	129.3	**RACH10010**
66.08	11.03	13.00	10.83	8.07	5.91	2.41	5.71	0.55	3.11	107.7	**RACH1502**
132.17	14.18	18.12	10.83	8.07	5.91	2.41	5.71	0.55	3.11	122.8	**RACH1504**
206.72	16.93	22.84	10.83	8.07	5.91	2.41	5.71	0.55	3.11	138.9	**RACH1506**
275.62	19.69	27.57	10.83	8.07	5.91	2.41	5.71	0.55	3.11	154.5	**RACH1508**
344.53	22.45	32.29	10.83	8.07	5.91	2.41	5.71	0.55	3.11	170.2	**RACH15010**

▼ Shown from left to right: **RARH6010 and RARH306**

The Lightweight Solution for Double-Acting Applications

- **Lighter and shorter collapsed height than equivalent RACH single-acting models**
- **Double-acting for rapid retraction, regardless of hose lengths or system losses**
- **Built-in safety valve prevents accidental over pressurization**
- **Hollow plunger design allows for both pull and push forces**
- **Composite bearings increase cylinder life and side load resistance**
- **Hard coat finish on all surfaces resists damage and extends cylinder life**
- **Handles included on all models**
- **Floating center tube increases seal life**
- **Steel baseplate and saddle for protection against load-induced damage**
- **Integral stop-ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity**
- **All cylinders meet ASME B-30.1 standards**

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **148**

Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: **147**

4-Way Control Valve

P84 and **P464** pumps feature a manual 4-way control valve, designed for use with one double-acting or two single-acting cylinders. For system set-up information:

Page: **164**

Cylinder Capacity (ton)	Stroke* (in)	Model Number	Maximum Cylinder Capacity @ 10,150 psi (ton) Advance	Maximum Cylinder Capacity @ 10,150 psi (ton) Retract	Cylinder Effective Area (in^2) Advance	Cylinder Effective Area (in^2) Retract	Oil Capacity (in^3) Advance	Oil Capacity (in^3) Retract
30	1.97	RARH302	40.30	21.00	7.94	4.14	15.63	8.14
	5.91	RARH306	40.30	21.00	7.94	4.14	46.89	24.43
	9.84	RARH3010	40.30	21.00	7.94	4.14	78.15	40.72
60	1.97	RARH602	66.81	29.65	13.17	5.84	25.91	11.50
	5.91	RARH606	66.81	29.65	13.17	5.84	77.72	34.50
	9.84	RARH6010	66.81	29.65	13.17	5.84	129.54	57.49
100	1.97	RARH1002	112.40	63.80	22.16	12.57	43.60	24.73
	5.91	RARH1006	112.40	63.80	22.16	12.57	130.79	74.19
	9.84	RARH10010	112.40	63.80	22.16	12.57	217.99	123.66
150	1.97	RARH1502	167.20	84.00	32.96	16.56	64.86	32.58
	5.91	RARH1506	167.20	84.00	32.96	16.56	194.57	97.74
	9.84	RARH15010	167.20	84.00	32.96	16.56	324.28	162.89

* Intermediate strokes and other tonnages available upon request

Aluminium Double-Acting Hollow Plunger Cylinders

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.**

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.

RARH Series

Capacity:
30 - 150 ton

Stroke:
2 - 10 inches

Center Hole Diameter:
1.34 - 3.11 inches

Maximum Operating Pressure:
10,150 psi

Optional Threaded Hollow Saddles						
Saddle Type	Cylinder Model Number	Saddle Model No.	Saddle Dimensions (in) A	B	C	
Threaded Hollow	RARH302, 306, 3010	HP3015	2.49	1¼"-7	0.38	
	RARH602, 606, 6010	HP5016	3.61	1⅝"-5½	0.50	
	RARH1002, 1006, 10010	HP10016	4.96	2½"-8 UN	0.51	



Smooth hollow saddles are standard on all RARH-models.

Steel Base Plate Mounting Holes			
Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth [1] Z (in)
RARH30	4.33	M6	0.47
RARH60	6.30	M6	0.47
RARH100	7.87	M10	0.47
RARH150	9.84	M10	0.47

[1] Including Base Plate Height of 0.25 inches. Four (4) base plate bolts included.

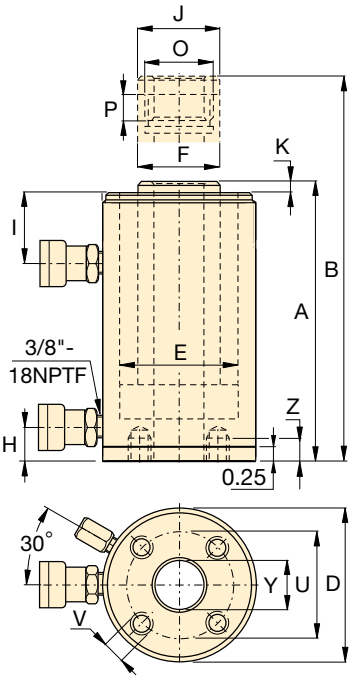

RACH-Series, Single-Acting, Spring-Return

To be used when a single-acting pump is available and retraction time is not critical.

Page: 16

Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 139

Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)	Cyl. Bore Diam. E (in)	Plngr. Diam. F (in)	Cyl. Base to Advance Port H (in)	Cyl. Top to Return Port I (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Plunger Internal Thread O (in)	Plunger Thread Length P (in)	Center Hole Diameter Y (in)	Weight (lbs)	Model Number
8.22	10.19	5.31	3.74	2.95	0.86	2.53	2.49	0.38	1 13/16"-16 UN	0.91	1.34	19.6	RARH302
12.16	18.07	5.31	3.74	2.95	0.86	2.53	2.49	0.38	1 13/16"-16 UN	0.91	1.34	26.2	RARH306
16.10	25.94	5.31	3.74	2.95	0.86	2.53	2.49	0.38	1 13/16"-16 UN	0.91	1.34	32.8	RARH3010
9.68	11.65	7.09	5.12	4.33	1.88	3.28	3.61	0.50	2¾"-16 UN	0.79	2.13	37.0	RARH602
13.62	19.52	7.09	5.12	4.33	1.88	3.28	3.61	0.50	2¾"-16 UN	0.79	2.13	48.8	RARH606
17.56	27.40	7.09	5.12	4.33	1.88	3.28	3.61	0.50	2¾"-16 UN	0.79	2.13	60.7	RARH6010
9.99	11.96	9.25	6.50	5.12	2.41	3.07	4.97	0.53	4"-16 UN	1.06	3.11	63.6	RARH1002
13.92	19.83	9.25	6.50	5.12	2.41	3.07	4.97	0.53	4"-16 UN	1.06	3.11	84.3	RARH1006
17.86	27.70	9.25	6.50	5.12	2.41	3.07	4.97	0.53	4"-16 UN	1.06	3.11	104.9	RARH10010
10.39	12.36	11.02	7.48	5.91	2.41	3.27	5.00	0.74	4¼"-12 UN	1.57	3.11	93.3	RARH1502
14.33	20.24	11.02	7.48	5.91	2.41	3.27	5.00	0.74	4¼"-12 UN	1.57	3.11	123.6	RARH1506
18.27	28.11	11.02	7.48	5.91	2.41	3.27	5.00	0.74	4¼"-12 UN	1.57	3.11	154.0	RARH15010

▼ Shown from left to right: **RAR506, RAR508, RAR302**

The Lightweight Solution for Double-Acting Applications

Saddles

All RAR-cylinders are equipped with bolt-on removable hardened steel saddles. For tilt saddles see next page.

Page: 21

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 148

- **Double-acting for rapid retraction, regardless of hose lengths and system losses**
- **Composite bearings increase cylinder life and side load resistance**
- **Hard coat finish on all surfaces resists damage and extends cylinder life**
- **Handles included on all models**
- **Steel base plate and saddle for protection against load-induced damage**
- **Integral stop-ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity**
- **Built-in safety valve prevents accidental over-pressurization**

Cylinder Capacity (ton)	Stroke* (in)	Model Number	Maximum Cylinder Capacity (ton)	Cylinder Effective Area (in^2)		Oil Capacity (in^3)	
			Push	Push	Pull	Push	Pull
20 (24.2)	1.97	RAR202	24.2	4.83	2.88	9.52	5.67
	3.94	RAR204	24.2	4.83	2.88	19.03	11.34
	5.91	RAR206	24.2	4.83	2.88	28.55	17.02
	7.87	RAR208	24.2	4.83	2.88	38.01	22.66
	9.84	RAR2010	24.2	4.83	2.88	47.53	28.34
30 (34.2)	1.97	RAR302	34.2	6.85	3.80	13.49	7.49
	3.94	RAR304	34.2	6.85	3.80	26.99	14.97
	5.91	RAR306	34.2	6.85	3.80	40.48	22.46
	7.87	RAR308	34.2	6.85	3.80	53.91	29.91
	9.84	RAR3010	34.2	6.85	3.80	67.40	37.39
50 (54.9)	1.97	RAR502	55	10.99	3.54	21.65	6.97
	3.94	RAR504	55	10.99	3.54	43.30	13.95
	5.91	RAR506	55	10.99	3.54	64.95	20.92
	7.87	RAR508	55	10.99	3.54	86.49	27.86
	9.84	RAR5010	55	10.99	3.54	108.14	34.83
100 (110.9)	1.97	RAR1002	111	22.19	12.33	43.71	24.29
	3.94	RAR1004	111	22.19	12.33	87.43	48.58
	5.91	RAR1006	111	22.19	12.33	131.14	72.87
	7.87	RAR1008	111	22.19	12.33	174.64	97.04
	9.84	RAR10010	111	22.19	12.33	218.35	121.33
150 (175.9)	1.97	RAR1502	176	35.18	20.45	69.30	40.29
	3.94	RAR1504	176	35.18	20.45	138.61	80.57
	5.91	RAR1506	176	35.18	20.45	207.91	120.86
	7.87	RAR1508	176	35.18	20.45	276.87	160.94
	9.84	RAR15010	176	35.18	20.45	346.17	201.23

* Custom strokes available.

◀ *An RAR506 was easy to position under a bulldozer for repair of frame member.*

Optional Tilt Saddle Dimensions (in)

Cylinder Model / Capacity (ton)	Tilt Saddle Model Number	Tilt Saddle Diameter J1	Addition to Collapsed Height A1
RAR20	CATS20	1.65	0.39
RAR30	CATS30	2.17	0.43
RAR50	CATS50	2.80	0.55
RAR100	CATS101	2.80	0.39
RAR150	CATS150	4.96	0.71



Steel Base Plate Mounting Holes

Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth [1] Z (in)
RAR20	3.66	M6	0.47
RAR30	4.13	M6	0.47
RAR50	4.33	M6	0.47
RAR100	6.10	M10	0.47
RAR150	7.87	M10	0.47

[1] Including Base Plate Height of 0.25 inches. Four (4) base plate bolts included.

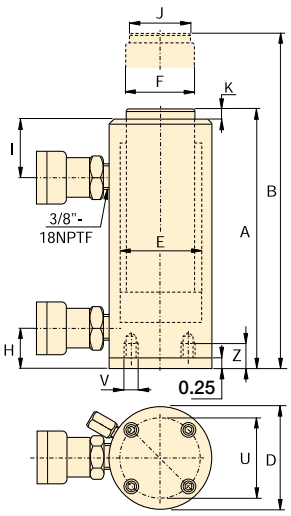

RAR Series

Capacity:
20 - 150 tons

Stroke:
1.97 - 9.84 inches

Maximum Operating Pressure:
10,000 psi

Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed. See warning on page 11.

Page: 11

Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Top to Retract Port I (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Weight (lbs)	Model Number
7.45	9.42	4.45	2.48	1.58	1.19	1.97	1.18	0.12	16.3	RAR202
9.42	13.35	4.45	2.48	1.58	1.19	1.97	1.18	0.12	17.6	RAR204
11.29	17.29	4.45	2.48	1.58	1.19	1.97	1.18	0.12	19.0	RAR206
13.35	21.23	4.45	2.48	1.58	1.19	1.97	1.18	0.12	20.3	RAR208
15.32	25.17	4.45	2.48	1.58	1.19	1.97	1.18	0.12	21.6	RAR2010
7.92	9.89	4.92	2.95	1.97	1.19	2.17	1.58	0.12	19.0	RAR302
9.89	13.83	4.92	2.95	1.97	1.19	2.17	1.58	0.12	20.9	RAR304
11.86	17.76	4.92	2.95	1.97	1.19	2.17	1.58	0.12	22.9	RAR306
13.83	21.70	4.92	2.95	1.97	1.19	2.17	1.58	0.12	24.9	RAR308
15.80	25.64	4.92	2.95	1.97	1.19	2.17	1.58	0.12	26.9	RAR3010
7.92	9.89	5.71	3.74	2.95	1.19	2.21	1.97	0.12	24.5	RAR502
9.89	13.83	5.71	3.74	2.95	1.19	2.21	1.97	0.12	28.0	RAR504
11.86	17.76	5.71	3.74	2.95	1.19	2.21	1.97	0.12	31.5	RAR506
13.83	21.70	5.71	3.74	2.95	1.19	2.21	1.97	0.12	35.1	RAR508
15.80	25.64	5.71	3.74	2.95	1.19	2.21	1.97	0.12	38.6	RAR5010
9.89	11.86	7.28	5.32	3.54	1.70	3.15	2.95	0.12	36.2	RAR1002
11.86	15.80	7.28	5.32	3.54	1.70	3.15	2.95	0.12	42.6	RAR1004
13.83	19.73	7.28	5.32	3.54	1.70	3.15	2.95	0.12	48.9	RAR1006
15.80	23.67	7.28	5.32	3.54	1.70	3.15	2.95	0.12	55.3	RAR1008
17.76	27.61	7.28	5.32	3.54	1.70	3.15	2.95	0.12	61.7	RAR10010
9.77	11.74	9.06	6.70	4.33	1.50	2.95	3.70	0.12	53.4	RAR1502
11.74	16.68	9.06	6.70	4.33	1.50	2.95	3.70	0.12	63.7	RAR1504
13.71	19.61	9.06	6.70	4.33	1.50	2.95	3.70	0.12	73.2	RAR1506
15.68	23.55	9.06	6.70	4.33	1.50	2.95	3.70	0.12	83.6	RAR1508
17.64	29.46	9.06	6.70	4.33	1.50	2.95	3.70	0.12	93.9	RAR15010

▼ **CULP50 Ultra-Flat Cylinder, with Stop-Ring**

CULP Series

Capacity:
10 - 100 tons

Stroke:
0.24 inches

Maximum Operating Pressure:
10,150 psi

- **Up to 4% side load of maximum capacity**
- **Stop-ring for maximum stroke limitation**
- **Extremely low collapsed height**
- **Nitrocarburized surface treatment for harsh conditions**

IMPORTANT!

All Ultra-Flat Cylinders require a solid lifting surface for correct support. The use of these flat cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.

INCORRECT! **CORRECT!**

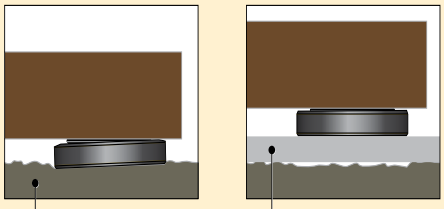

For more safety instructions see our Yellow Pages.

▼ *The Ultra-Flat cylinders are designed for applications where high lifting forces are required in confined spaces starting at 1.10 inch (CUSP200 is shown).*

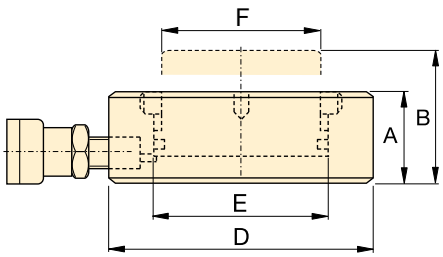

Hoses

Enperpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enperpac hydraulic hoses.

Page: **148**

Cylinder Capacity @ 10,150 psi ton (max.)	Stroke (in)	Model Number	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Weight (lbs)
10 (10.9)	0.24	**CULP10** [1]	2.15	0.51	1.08	1.32	2.83	1.65	1.49	2
20 (22.2)	0.24	**CULP20** [1]	4.38	1.04	1.26	1.50	3.54	2.36	2.16	4
30 (34.8)	0.24	**CULP30** [1]	6.85	1.62	1.38	1.61	4.13	2.95	2.64	6
50 (61.8)	0.24	**CULP50** [1]	12.17	2.88	1.75	1.99	5.51	3.94	3.54	11.9
100 (121.1)	0.24	**CULP100** [2]	23.85	5.63	2.55	2.79	7.67	5.51	4.92	25.3

[1] Coupler AR630 including dustcap: Use HB7206 hose including AH630 coupler to connect to your pump.
[2] Coupler CR400 including dustcap: Use HC-Series hose including CH604 coupler to connect to your pump.

CUSP-Series, High-Tonnage, Ultra-Flat Cylinders

▼ **CUSP-Series, Ultra-Flat, High-Tonnage Cylinders, integrated tilting function**

CUSP Series

Capacity:
10 - 1000 tons

Tilted Stroke / Straight Stroke:
0.24-0.39"/0.26-0.69"

Integrated:
Tilting Function

Maximum Operating Pressure:
10,150 psi

IMPORTANT!
CUSP Cylinders DO NOT have a stop-ring for stroke limitation!

IMPORTANT!
All Ultra-Flat Cylinders require a solid lifting surface for correct support. The use of these flat cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.

Page: 400

- **Up to 4% side load of maximum capacity**
- **Extremely low collapsed height**
- **Integrated tilting function up to 4 degrees to evenly distribute the load**
- **Nitrocarburized surface treatment for harsh conditions**
- **"Red Line" for visual maximum stroke indication**

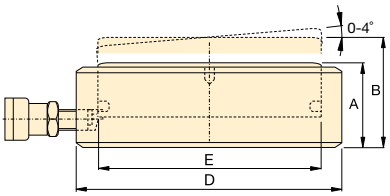

Cylinder Capacity @ 10,150 psi ton (max.)	Tilted Stroke (in)	Straight Stroke (in)	Model Number	Tilting +/- (degrees)	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Wt. (lbs)
10 (10.9)	0.24	0.26	**CUSP10** [1]	2	2.15	0.57	1.40	1.66	2.83	1.65	2.6
20 (22.2)	0.24	0.28	**CUSP20** [1]	2	4.39	1.21	1.59	1.87	3.54	2.36	4.2
30 (34.8)	0.24	0.29	**CUSP30** [1]	2	6.85	1.97	1.67	1.96	4.13	2.95	6.0
50 (61.8)	0.39	0.52	**CUSP50** [1]	4	12.17	6.37	2.24	2.77	5.12	3.94	12.3
75 (89.0)	0.39	0.55	**CUSP75** [1]	4	17.53	9.66	2.38	2.93	5.91	4.72	17.6
100 (121.1)	0.39	0.58	**CUSP100** [2]	4	23.85	13.81	2.50	3.08	6.69	5.51	23.8
150 (178.6)	0.39	0.56	**CUSP150** [2]	3	35.19	19.81	2.56	3.12	7.87	6.69	33.7
200 (235.0)	0.39	0.59	**CUSP200** [2]	3	46.28	27.15	2.72	3.30	9.02	7.68	47.4
250 (285.6)	0.39	0.61	**CUSP250** [2]	3	56.28	34.34	2.85	3.46	9.92	8.46	60.2
300 (355.9)	0.39	0.56	**CUSP300** [2]	2	70.12	38.93	2.85	3.41	11.10	9.45	75.8
400 (450.5)	0.39	0.57	**CUSP400** [2]	2	88.75	51.01	3.05	3.63	12.44	10.63	101.9
500 (574.8)	0.39	0.60	**CUSP500** [2]	2	113.24	67.77	3.25	3.85	14.02	12.01	138.2
600 (672.9)	0.39	0.61	**CUSP600** [2]	2	132.57	81.42	3.44	4.06	15.20	12.99	172.8
750 (846.0)	0.39	0.64	**CUSP750** [2]	2	166.66	106.95	3.68	4.32	17.01	14.57	231.9
1000(1142.6)	0.39	0.69	**CUSP1000**[2]	2	225.09	154.20	4.06	4.74	19.76	16.93	346.1

[1] Coupler AR630 including dustcap: Use HB7206 hose including AH630 coupler to connect to your pump.
[2] Coupler CR400 including dustcap: Use HC-Series hose including CH604 coupler to connect to your pump.

▼ LPL-Series, Low-height Lock Nut Cylinders

The Lowest Power Lifter

Integrated Tilt Saddles

All LPL-Series cylinders include integrated tilt saddles with maximum tilt angles up to 5°.

- **Lock nut provides mechanical load holding for a safe work environment**
- **Integrated tilt saddle allows for up to 5 degrees of misalignment**
- **Extreme low-height for use in confined areas**
- **Side-load resistance 5-10% of maximum capacity**
- **Overflow port as stroke limiter to prevent plunger blow-out**
- **Single-acting, load-return**

▼ *Only the extreme low-height LPL-cylinder fits in this confined area to lift the construction. The lock nut provides positive and safe mechanical load holding over a long period of time.*

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Cap. at 10,150 psi (ton)	Side-load Resistance of Maximum Capacity	Cylinder Effective Area (in^2)
60	1.97	**LPL602**	**68**	10%	13.42
100	1.97	**LPL1002**	**113**	10%	22.19
150	1.77	**LPL1602**	**179**	8%	35.18
200	1.77	**LPL2002**	**223**	8%	43.95
250	1.77	**LPL2502**	**286**	5%	56.27
400	1.77	**LPL4002**	**450**	5%	88.75
500	1.77	**LPL5002**	**575**	5%	113.25

Single Acting, Low-Height Lock Nut Cylinders

IMPORTANT!

All LPL-Series cylinders require a solid lifting surface for correct support. The use of these cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.

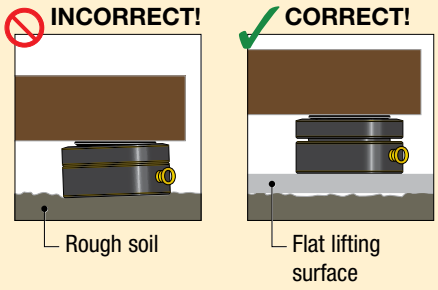

For more safety instructions see our 'Learning Center' on www.enerpac.com

LPL Series

Capacity:
60 - 500 ton

Stroke:
1.77 - 1.97 inches

Maximum Operating Pressure:
10,150 psi

Longer Stroke Lock Nut Cylinders

For longer stroke applications HCL-Series Lock Nut Cylinders are the perfect choice.

Page: 56

Split-Flow Pumps

SFP-Series pumps with multiple outlets with equal oil flow. For lifting and lowering applications on multiple points these pumps are a far better alternative than using separately operated pumps.

Page: 132

Synchronous Lifting Systems

Pumps for multiple lift-point capabilities. When increased stroke accuracy is required, use the multi-functional EVO-Series lifting system.

Page: 136

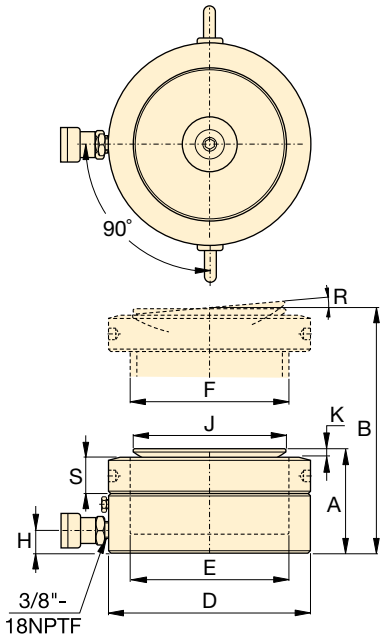

Oil Capacity (in³)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (mm)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Saddle Max. Tilt Angle R (degrees)	Lock Nut Height S (in)	Wt. (lbs)	Model Number
26.4	4.94	6.91	5.51	4.13	Tr 105 x 4	0.75	3.78	0.26	5°	1.10	33	**LPL602**
43.7	5.39	7.36	6.81	5.31	Tr 135 x 6	0.83	4.96	0.31	5°	1.22	54	**LPL1002**
62.3	5.83	7.60	8.66	6.69	Tr 170 x 6	1.06	6.30	0.35	5°	1.57	94	**LPL1602**
77.9	6.10	7.87	9.65	7.48	Tr 190 x 6	1.18	7.09	0.39	5°	1.69	121	**LPL2002**
99.7	6.24	8.01	10.83	8.46	Tr 215 x 6	1.26	7.87	0.45	5°	1.69	155	**LPL2502**
157.2	7.01	8.78	13.78	10.63	Tr 270 x 6	1.56	9.84	0.45	4°	2.17	284	**LPL4002**
200.6	7.56	9.33	15.75	12.01	Tr 305 x 6	1.91	11.42	0.39	3°	2.42	404	**LPL5002**

▼ Shown from left to right: **RSM1000, RSM300, RSM50, RCS1002, RCS302**

RSM-Series, Flat-Jac® Cylinders

- **Compact, flat design for use where other cylinders will not fit**
- **RSM750, 1000 and 1500 have handles for easy carrying**
- **Mounting holes permit easy fixturing**
- **Baked enamel finish for increased corrosion resistance**
- **CR400 coupler and dust cap included on all models[1)]**
- **Hard chrome plated high-quality steel plungers**
- **Grooved plunger ends require no saddle**
- **Single-acting spring-return**

RCS-Series, Low-Height Cylinders

- **Lightweight, low profile design for use in confined spaces**
- **Baked enamel finish for increased corrosion resistance**
- **Plunger wiper reduces contamination, extending cylinder life**
- **CR400 coupler and dust cap included on all models**
- **Grooved plunger end with threaded holes for mounting tilt saddles**
- **Integral handle on RCS1002 for easy carrying**
- **Plated steel plungers**
- **Single-acting spring-return**

Maximum Power to Height Ratio

Saddles

All **RCS-Series** cylinders have plunger mounting holes for installation of tilt saddles. See table for selection and dimensional information.

Page: **27**

Low Clearance Lifting

The **LW16** Lifting Wedge and **SOH-Series** Machine Lifts are the perfect choices for lifting loads that have low clearance.

Page: **212**

▼ *Only a couple of inches are needed for an RSM-cylinder to lift this large steel construction.*

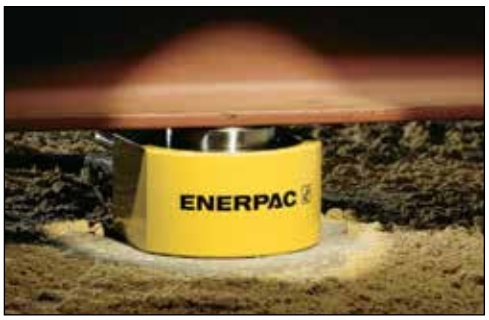

Cylinder Capacity (tons) [max.]	Stroke (in)	Model Number	Cyl. Effect. Area (in^2)	Oil Cap. (in^3)
5 [4.9]	0.25	**RSM50** [1)]	0.99	0.25
10 [11.2]	0.44	**RSM100**	2.24	0.98
20 [22.1]	0.44	**RSM200**	4.43	1.94
30 [32.4]	0.50	**RSM300**	6.49	3.25
50 [48.1]	0.63	**RSM500**	9.62	6.01
75 [79.5]	0.63	**RSM750**	15.90	9.94
100 [98.1]	0.63	**RSM1000**	19.63	12.27
150 [153.4]	0.63	**RSM1500**	30.68	19.17
10 [11.2]	1.50	**RCS101***	2.24	3.35
20 [22.1]	1.75	**RCS201***	4.43	7.75
30 [32.4]	2.44	**RCS302***	6.49	15.82
50 [48.1]	2.38	**RCS502***	9.62	22.85
100 [98.1]	2.25	**RCS1002***	19.63	44.18

[1)] RSM50 is fitted with an AR400 coupler.

* Available as a set. See note on next page.



Pump and Cylinder Sets

All cylinders marked with an ** are available as **sets** (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: 62

RSM RCS Series

Capacity:
5 - 150 tons

Stroke:
0.25 - 2.44 inches

Maximum Operating Pressure:
10,000 psi

Optional Tilt Saddle Dimensions (in)

For Cylinder Model /Capacity (ton)	Tilt Saddle Model Number	Tilt Saddle Diameter J1	Addition to Collapsed Height A1
RCS101	CATS13	1.38	0.79
RCS201	CATS53	1.97	1.02
RCS302	CATS53	1.97	1.02
RCS502	CATS53	1.97	1.02
RCS1002	CATS103	2.80	1.38



Portable Hydraulic Tool Box

Tool box with hand pump, gauge adaptor assembly, hose and choice of RC, RSM or RCS cylinder.

Page: 65

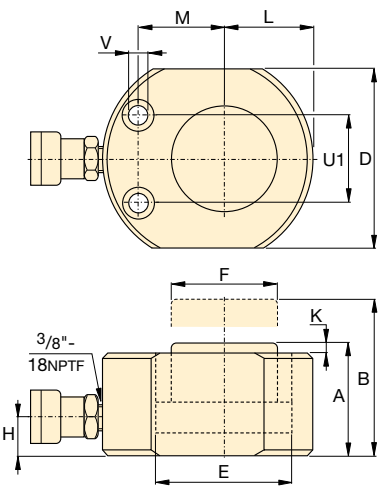

RSM-Series

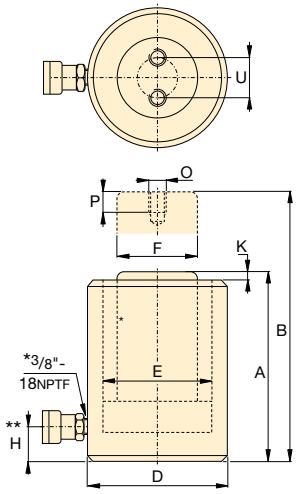

RCS-Series**

** 5° angle position of coupler on RCS101, 201, 302.

RSM Cylinder Mounting Hole Dimensions (in)

Model Number	Hole Pitch U1	Hole Diam. V	Counter Bore Diam.	Counter Bore Depth
RSM50	1.12	0.20	0.312	0.17
RSM100	1.44	0.28	0.422	0.31
RSM200	1.94	0.40	0.594	0.39
RSM300	2.06	0.40	0.625	0.44
RSM500	2.62	0.47	0.750	0.50
RSM750	3.00	0.53	0.812	0.56
RSM1000	3.00	0.53	0.812	0.56
RSM1500	4.62	0.53	0.812	0.56

Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Collapsed Height** K (in)	Plunger to Base L (in)	Plunger to Mtg. Hole M (in)	Thread O (mm)	Thread Depth P (in)	Bolt Circle U (in)	Weight (lbs)	Model Number
1.28	1.53	2.31 x 1.63	1.13	1.00	0.63	0.04	0.81	0.88	–	–	–	2.3	RSM50 [1]
1.69	2.13	3.25 x 2.19	1.69	1.50	0.75	0.04	1.09	1.34	–	–	–	3.1	RSM100
2.03	2.47	4.00 x 3.00	2.38	2.00	0.75	0.04	1.56	1.56	–	–	–	6.8	RSM200
2.31	2.81	4.63 x 3.75	2.88	2.50	0.75	0.08	1.88	1.75	–	–	–	10	RSM300
2.63	3.25	5.50 x 4.50	3.50	2.75	0.75	0.08	2.25	2.13	–	–	–	15	RSM500
3.13	3.75	6.50 x 5.50	4.50	3.25	0.75	0.08	2.75	2.63	–	–	–	25	RSM750
3.38	4.00	7.00 x 6.00	5.00	3.63	0.75	0.08	3.00	2.94	–	–	–	32	RSM1000
3.94	4.56	8.50 x 7.50	6.25	4.50	0.94	0.08	3.75	3.25	–	–	–	58	RSM1500
3.47	4.97	2.75	1.69	1.50	0.69	0.20	–	–	M4	0.32	1.03	6	RCS101*
3.88	5.63	3.63	2.38	2.00	0.69	0.12	–	–	M5	0.32	1.57	11	RCS201*
4.63	7.06	4.00	2.88	2.62	0.75	0.12	–	–	M5	0.32	1.57	15	RCS302*
4.81	7.19	4.88	3.50	2.75	0.94	0.08	–	–	M5	0.32	1.57	22	RCS502*
5.56	7.81	6.50	5.00	3.63	1.25	0.04	–	–	M8	0.40	2.17	46	RCS1002*

** Collapsed height with tilting saddle

▼ RLT-Series, Low-Height Telescopic Cylinder

Extended Stroke for Low-Clearance Applications

- **Single-acting, load-return**
- **Nitrocarburization surface treatment for improved load and wear-resistance and corrosion protection**
- **For use in confined spaces: machinery positioning, tool fastening**
- **Mounting bolt holes for easy fixturing**
- **Up to 3% side-load of maximum capacity**
- **Design safety factor complies with ASME B30.1 & EN1494**
- **CR400 coupler for compatibility with standard product**
- **High-alloy steel for maximum strength**

Internal Mechanics

RLT-Series, Low-Height Telescopic Cylinders

Enerpac compact, low-height telescopic cylinders are available with two or three pistons, and can lift loads up to 1.57 inches in a single movement.

Nitrocarburization surface treatment for improved wear-resistance and corrosion protection for increased safety and longer service life in harsh conditions. The longer stroke length of telescopic cylinders will save you time and simplify projects by moving a load a greater distance and eliminating the use of temporary cribbing.

Multi-Stage Cylinders

1st Stage: maximum load capacity at lower stroke.

2nd Stage: extended stroke with lower capacity than the 1st stage.

Final Stage: maximum stroke extension with lowest capacity.

Cylinder Capacity at Maximum Stroke (ton)	Maximum Stroke (in)	Model Number	Collapsed Height A (in)	Extended Height B (in)	Oil Capacity (in^3)
4.8	0.67	**RLT40**	1.77	2.44	1.29
4.8	0.91	**RLT41**	2.13	3.03	3.09
12.5	0.71	**RLT110**	2.15	2.85	2.90
12.5	1.57	**RLT111**	3.50	5.08	14.71
26.1	1.06	**RLT230**	2.95	4.02	9.15
26.1	1.26	**RLT231**	3.78	5.04	18.50
34.8	1.14	**RLT311**	3.50	4.65	13.64
55.8	1.02	**RLT501**	3.78	4.80	17.29
81.7	1.02	**RLT741**	4.49	5.51	25.97

Low-Height Telescopic Cylinders, Single-Acting

Assisted-Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4 and ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity- and spring-return cylinders. See enerpac.com for details.

Page: 141

4-Way Manifold Assembly Complete with Gauges

Offering ease of portability and convenience with an ergonomic robust design, ready for use. Enerpac's CR400 female couplers on all ports allow the manifold to be quickly connected to up to 4 cylinders. Glycerin-filled, 10,000 psi gauges allow operators to work safely. All protected by the robust protection frame.

Manifold Type (Used for cylinders)	Model Number
4x Single-acting	**AMGC41**
4x Double-acting	**AMGC42**

Page: 162

RLT Series

Capacity:
4.8 - 81.7 tons

Stroke:
0.67 - 1.57 inches

Maximum Operating Pressure:
10,150 psi

WARNING:

If several telescopic cylinders need to be controlled simultaneously, Enerpac recommends the use of Synchronous Lifting Pumps. Enerpac advises not to use SFP-Series Split-Flow Pumps unless outfitted with stroke sensors for direct feedback to operate several telescopic cylinders at one time due to the volume difference on the different stages.

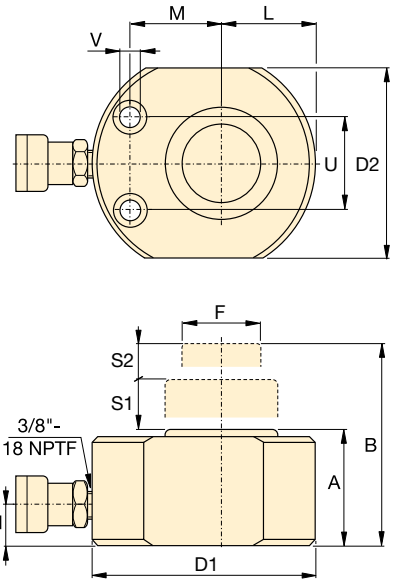

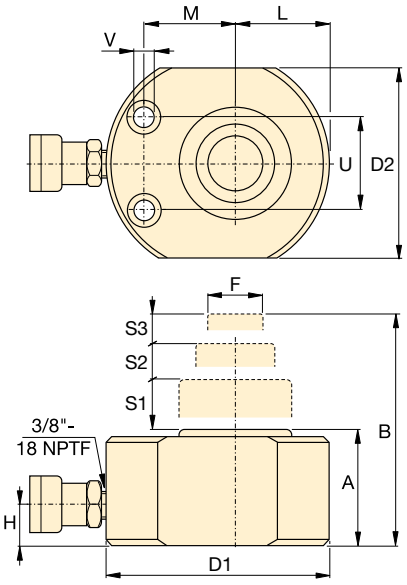

RLT-Cylinders
Mounting Hole Dimensions (in)

Model Number	Bolt Distance U	Hole Diameter V	Counter Bore Diameter	Counter Bore Depth
RLT40	1.46	0.26	0.43	0.28
RLT41	1.97	0.35	0.55	0.35
RLT110	1.97	0.35	0.55	0.35
RLT111	2.99	0.51	0.79	0.51
RLT230	2.64	0.51	0.79	0.51
RLT231	2.99	0.26	0.43	0.28
RLT311	2.99	0.51	0.79	0.51
RLT501	2.99	0.26	0.43	0.28
RLT741	4.61	0.35	0.55	0.35

1st Stage Capacity (ton)	1st Stage Stroke S1 (in)	2nd Stage Capacity (ton)	2nd Stage Stroke S2 (in)	3rd Stage Capacity (ton)	3rd Stage Stroke S3 (in)	Outside Diameter D1 x D2 (in)	Plunger Diameter F (in)	Bottom to Advance Port H (in)	Plunger to Base L (in)	Plunger to Mounting Hole M (in)	Weight (lbs)	Model Number
12.5	0.43	**4.8**	0.24	–	–	3.27 x 2.20	0.98	0.79	1.14	1.30	4.0	**RLT40**
26.1	0.43	**12.5**	0.28	**4.8**	0.20	4.02 x 3.15	0.98	0.79	1.61	1.54	6.8	**RLT41**
26.1	0.43	**12.5**	0.28	–	–	4.02 x 3.15	1.50	0.79	1.61	1.54	6.6	**RLT110**
81.7	0.63	**34.8**	0.51	**12.5**	0.43	6.50 x 5.51	1.50	0.98	2.78	2.60	28.9	**RLT111**
55.8	0.63	**26.1**	0.43	–	–	5.51 x 4.49	2.24	0.79	2.28	2.20	16.8	**RLT230**
104.4	0.63	**55.8**	0.39	**26.1**	0.24	7.01 x 6.38	2.24	1.14	3.50	2.76	38.1	**RLT231**
81.7	0.63	**34.8**	0.51	–	–	6.50 x 5.51	2.36	0.98	2.78	2.60	28.7	**RLT311**
104.4	0.63	**55.8**	0.39	–	–	7.01 x 6.38	3.07	1.14	3.50	2.76	38.1	**RLT501**
158.2	0.63	**81.7**	0.39	–	–	8.50 x 7.72	3.74	1.38	4.25	3.07	67.0	**RLT741**

▼ Shown: **RT3311 Telescopic Cylinder** (shown with plunger extended and retracted)

Moving a Load a Greater Distance

- **Nitrocarburized surface treatment inside and out provides corrosion protection**
- **3% side-load of full capacity**
- **Double or triple wear bearings support lifting stages**
- **Tilting saddles with 5 degrees of maximum tilt standard on all models**
- **Design Safety factor complies with ASME B30.1 & EN1494**
- **Certified lifting eyes for safe handling and positioning**
- **CR400 coupler for compatibility with standard product**
- **Steel cylinder base for maximum strength**

RT-Series, Multi-Stage Cylinders

Enerpac compact, multi-stage telescopic cylinders are available with two or three pistons, and can lift loads up to 24 inches in a single movement.

Nitrocarburized surface treatment inside and out provides unparalleled sideload resistance and corrosion protection for safe use in the harshest conditions. The longer stroke length of telescopic cylinders will save you time and simplify projects by moving a load a greater distance and eliminating the use of temporary cribbing.

Integrated Tilt Saddles

All RT-Series cylinders include integrated tilt saddles with maximum tilt angles up to 5 degree.

Lifting Eyes

All models standard with two lifting eyes for easy handling and positioning.

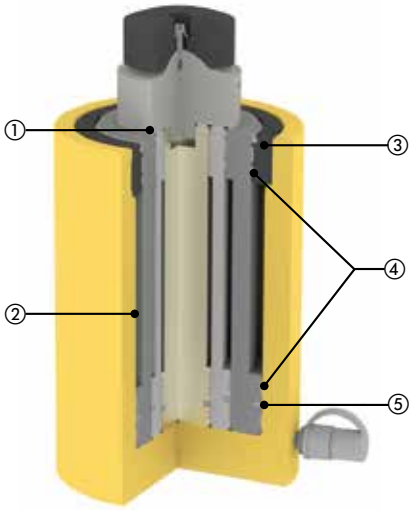

① **Wiper Ring** on each stage to minimize contamination.

② **Nitrocarburized Coating** for maximum corrision protection and surface hardness. Exterior in nitrided and Enerpac yellow epoxy.

③ **Stop-Ring** full load capable to prevent plunger overstroke.

④ **Wear Bearings**. Double or triple wear bearings for maximum sideload capability and wear-resistance.

⑤ **Seals** for maximum compliance and high wear-resistance.

Model No.	Maximum Stroke (in)	Capacity @ Maximum Stroke (ton)	Oil Capacity (in^3)
RT1510	10.63	15.4	57.61
RT1817	17.13	18.7	188.69
RT2111	11.81	22.2	90.74
RT2119	19.69	22.2	284.43
RT3311	11.81	34.8	143.96
RT3323	23.62	34.8	537.99

Multi-Stage Telescopic Cylinders, Single-Acting, Load-Return

About Telescopic Cylinders

Telescopic cylinders feature a multi-stage rod built of a series of nested steel tubes of progressively smaller diameter. These long stroke, multi-stage telescopic cylinders are particularly suitable for extended lift heights when clearance is limited.

Enerpac's Telescopic Cylinders are available with two or three pistons, and can lift loads up to 24 inches in a single movement.

Each piston rod is nitrocarburized for superior corrosion protection and enhanced durability.

RT Series

Capacity:
15.4 - 34.8 ton

Stroke:
10.63 - 23.62 inches

Maximum Operating Pressure:
10,150 psi

Multi-Stage Cylinders

1st Stage: maximum load capacity at lowest maximum stroke

2nd Stage: extended stroke but at lower maximum capacity than the 1st stage

Final Stage: maximum stroke extension but lowest maximum capacity

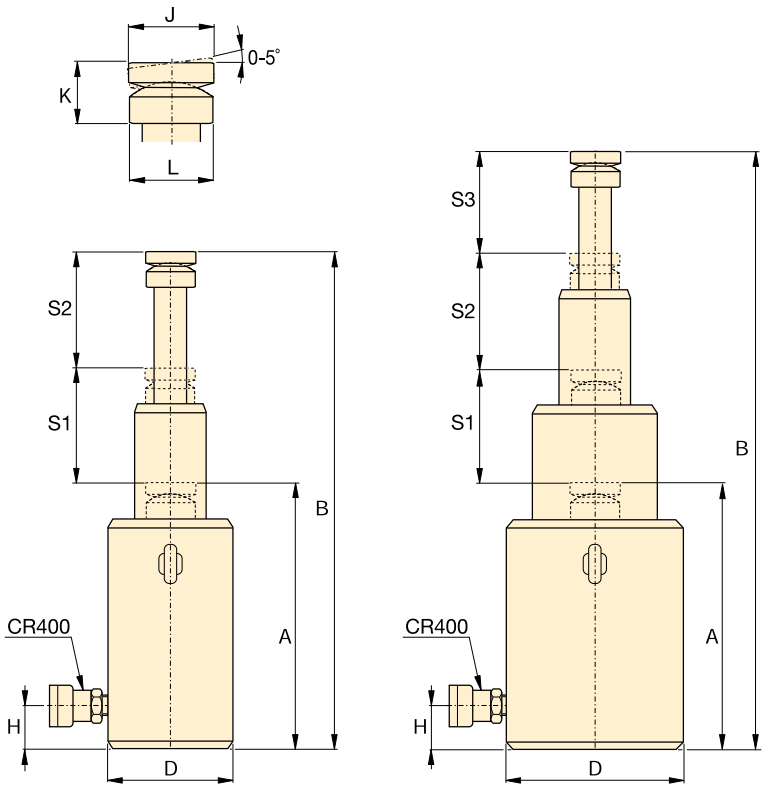

▼ *The longer stroke length of telescopic cylinders will save you time and simplify projects by moving a load a greater distance and eliminating the use of temporary cribbing.*

Stage 1 Capacity (ton)	Stage 1 Stroke S1 (in)	Stage 2 Capacity (ton)	Stage 2 Stroke S2 (in)	Stage 3 Capacity (ton)	Stage 3 Stroke S3 (in)	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Base to Adv. Port H (in)	Saddle Diam. J (in)	Saddle Protrusion from Plunger K (in)	Saddle Support L (in)	Wt. (lbs)	Model Number
40	5.31	**15**	5.31	**-**	-	11.14	21.77	4.33	0.79	2.36	1.93	2.36	33	**RT1510**
104	5.71	**45**	5.71	**19**	5.71	13.58	30.71	6.69	1.06	3.15	2.87	3.35	89	**RT1817**
56	5.91	**22**	5.91	**-**	-	12.48	24.29	4.92	0.91	2.36	2.09	2.60	48	**RT2111**
139	6.69	**56**	6.69	**22**	6.30	15.55	35.24	7.87	1.34	3.54	3.27	3.94	148	**RT2119**
89	5.91	**35**	5.91	**-**	-	13.86	25.67	6.30	0.98	3.15	2.60	3.50	88	**RT3311**
223	7.87	**89**	7.87	**34.7**	7.87	18.74	42.36	9.84	1.73	4.33	4.37	4.84	273	**RT3323**

▼ Shown from left to right: **BRC25, BRC46, BRP306, BRP606, BRP106C**

The Ultimate in Pulling Power

Gauges

Minimize the risk of over-loading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: **147**

Attachments and Accessories

The BRC25 and BRC46 units have base, collar and plunger threads to affix a range of optional attachments and accessories, such as chains, saddles and extension tubes.

Page: **206**

- **High-strength alloy steel construction**
- **Plunger blow-out protection to prevent over-extension**
- **Hard chrome-plated plunger for long life**
- **Baked enamel finish for increased corrosion resistance**
- **CR400 coupler and dust cap included on all models**
- **Plunger wiper reduces contamination, extending cylinder life**
- **Single-acting spring-return**
- **Replaceable links on BRP-models**

▼ *Ship building, welding and Enerpac pull cylinders go hand in hand.*

▼ *To lift a load bearing mast into place, BRP cylinders were used to tension the supporting cables.*

BRC Cylinder Mounting Dimensions (in)				
Model Number	Base Mounting Hole V	Collar Thread W	Collar Thread Length X	Mtg. Thread Length Z
BRC25	¾"-14 NPT	1½"-16 UN	0.98	0.67
BRC46	1¼"-11½" NPT	2¼"-14 UN	1.06	0.98
BRC106	M30 x 2	M85 x 2	1.02	0.98

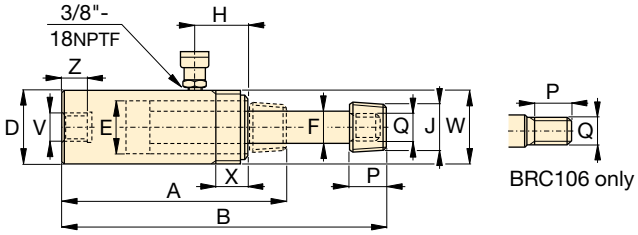

BRC25 to BRC106

BRC BRP Series

Capacity:
2.5 - 60 tons

Stroke:
5.00 - 6.06 inches

Maximum Operating Pressure:
10,000 psi

Cylinder Capacity (tons) [maximum]	Stroke (in)	Model Number	Cyl. Effect. Area (in^2)	Oil Cap. (in^3)	Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)	Cyl. Bore Diam. E (in)	Plgr. Diam. F (in)	Top to Inlet Port H (in)	Saddle Diameter J (in)	Plunger Thread Length P (in)	Plunger Outside Thread Q	Weight (lbs)
2.5 [2.7]	5.00	**BRC25**	0.55	2.76	10.44	15.44	1.89	1.13	0.75	1.77	¾"-14 NPT	1.13	11/16"-24	4
5 [5.6]	5.50	**BRC46**	1.13	6.21	11.88	17.38	2.25	1.69	1.19	1.69	1¼"-11½" NPT	1.25	1 3/16"-16	10
10 [11.6]	5.95	**BRC106**	2.32	13.80	11.38	17.33	3.35	2.13	1.25	1.57	–	1.02	M30x2	21

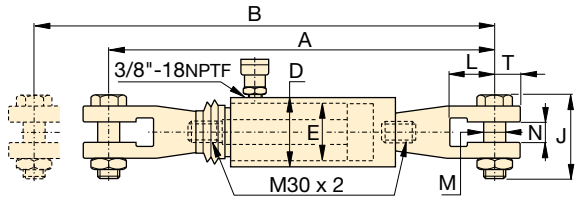

BRP106C

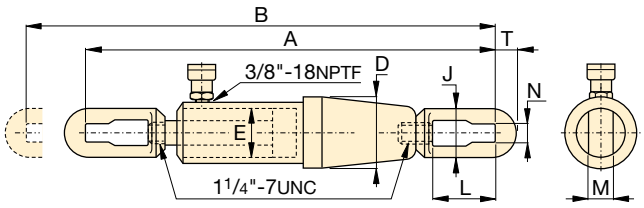

BRP306

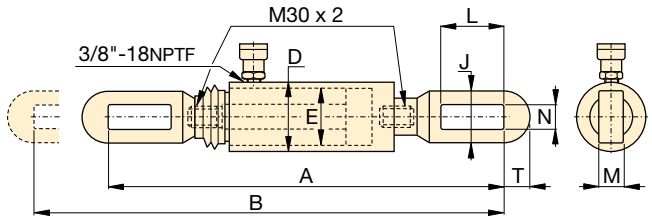

BRP106L

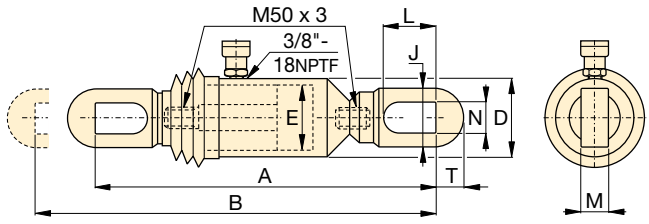

BRP606

Cylinder Capacity (tons) [maximum]	Stroke (in)	Model Number	Cyl. Effect. Area (in^2)	Oil Capacity (in^3)	Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)	Cyl. Bore Diam. E (in)	Link Height J (in)	Link Opening L (in)	Link Thickness M (in)	Link Width N (in)	Slot to Link End T (in)	Weight (lbs)
10 [11.6]	5.91	**BRP106C**	2.45	14.58	23.66	29.57	3.35	2.13	4.13	3.43	1.18	1.38	1.28	34
	5.91	**BRP106L**	2.45	14.58	22.56	28.46	3.35	2.13	2.52	4.69	0.87	1.19	1.26	29
30 [35.96]	6.06	**BRP306**	7.19	43.63	43.71	49.71	5.39	3.50	4.49	6.10	1.38	1.70	2.17	139
60 [55.8]	6.02	**BRP606**	11.17	67.02	28.28	34.28	5.51	4.33	5.12	5.93	1.58	1.89	2.56	129

Note: BRP106C, BRP106L and BRP606 are fitted with rubber bellows for rod protection.

▼ Shown from left to right: **RCH306, RCH120, RCH1003**

- **Hollow plunger design allows for both pull and push forces**
- **Single-acting spring-return**
- **Nickel-plated, floating center tube on models over 20 tons increases product life**
- **Baked enamel finish for increased corrosion resistance**
- **Collar threads for easy fixturing**
- **RCH120 includes AR630 coupler and has 1/4 NPTF port**
- **RCH121 and RCH1211 have FZ1630 reducer and AR630 coupler, all other models feature CR400 coupler**

▼ *Hollow plunger cylinder RCH1003 used in an application for intermediate boom suspension on a dragline.*

Versatility in Testing, Maintenance and Tensioning Applications



Pump and Cylinder Sets

All cylinders marked with an * are available as **sets** (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: **62**

Lightweight Aluminum Hollow Plunger Cylinders

If you need a higher cylinder capacity-to-weight ratio the lightweight **RACH-Series** Aluminum Hollow Plunger Cylinders are the perfect choice.

Page: **16**

Saddles

Most **RCH-Series** cylinders are equipped with smooth saddles. See table on next page for optional threaded saddles and all dimensional information.

Page: **35**

Cylinder Capacity (tons) [maximum]	Stroke (in)	Model Number	Cyl. Effect. Area (in^2)	Oil Cap. (in^3)
12 [13.8]	0.31	**RCH120**	2.76	0.86
	1.63	**RCH121***	2.76	4.49
	1.63	**RCH1211**	2.76	4.49
	3.00	**RCH123**	2.76	8.29
20 [23.6]	2.00	**RCH202***	4.72	9.46
	6.10	**RCH206**	4.72	28.67
30 [36.1]	2.50	**RCH302***	7.22	18.05
	6.13	**RCH306**	7.22	44.23
60 [63.6]	3.00	**RCH603***	12.73	38.20
	6.00	**RCH606**	12.73	76.41
100 [103.1]	3.00	**RCH1003***	20.63	61.88

* Available as a set. See note on this page.

Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 148

RCH Series



Capacity:
12 - 100 tons

Stroke:
0.31 - 6.13 inches

Center Hole Diameter:
0.77 - 3.11 inches

Maximum Operating Pressure:
10,000 psi

Optional Threaded Hollow Saddles						
Saddle Type	Cylinder Model No.	Saddle Model No.	Saddle Dimensions (in) A	B	C	
Threaded Hollow	RCH202, 206	HP2015	2.11	1"-8	0.38	
	RCH302, 306	HP3015	2.49	1¼"-7	0.38	
	RCH603, 606	HP5016	3.61	1⅝"-5½"	0.50	
	RCH1003	HP10016	4.97	2½"-8	0.51	



Smooth hollow saddles are standard on all RCH models (12-ton models are not equipped with saddles).

RCH121 and RCH1211 have a 1.88" diameter boss that protrudes 0.25" from base.

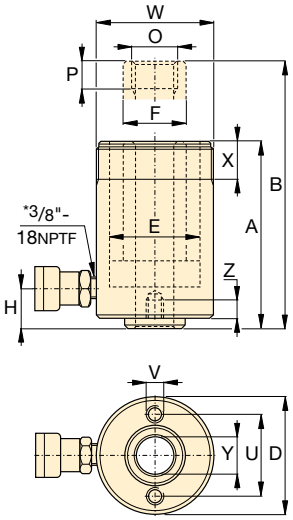

RCH120* to RCH123 models

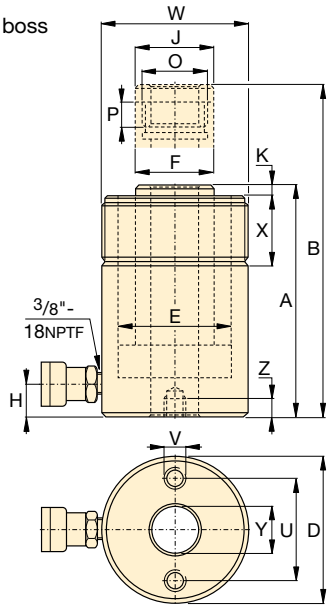

RCH202 to RCH1003 models

Base Mounting Hole Dimensions (in)			
Model Number	Bolt Circle U	Thread V	Thread Depth Z
RCH120	2.00	5/16"-18 UNC	0.35
RCH121	–	–	–
RCH1211	–	–	–
RCH123	2.00	5/16"-18 UNC	0.50
RCH202	3.25	3/8"-16 UNC	0.37
RCH206	3.25	3/8"-16 UNC	0.37
RCH302	3.63	3/8"-16 UNC	0.55
RCH306	3.63	3/8"-16 UNC	0.55
RCH603	5.13	½"-13 UNC	0.55
RCH606	5.13	½"-13 UNC	0.55
RCH1003	7.00	5/8"-11 UNC	0.75

* 1/4" NPT for RCH120 only

Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)	Cyl. Bore Diam. E (in)	Plngr. Diam. F (in)	Cyl. Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plngr. K (in)	Plunger Internal Thread O (in)	Plunger Thread Length P (in)	Collar Thread W (in)	Collar Thread Length X (in)	Center Hole Diam. Y (in)	Weight (lbs)	Model Number
2.19	2.50	2.75	2.13	1.38	0.38	–	–	¾"-16 UN	0.63	2¾"-16	1.19	0.77	3.2	RCH120
4.75	6.38	2.75	2.13	1.38	0.98	–	–	–	–	2¾"-16	1.19	0.77	6.2	RCH121*
4.75	6.38	2.75	2.13	1.38	0.98	–	–	¾"-16 UN	0.63	2¾"-16	1.19	0.77	6.2	RCH1211
7.25	10.25	2.75	2.13	1.38	0.98	–	–	–	–	2¾"-16	1.19	0.77	9.8	RCH123
6.38	8.38	3.88	2.88	2.13	0.75	2.13	0.27	1 9/16"-16 UN	0.75	3⅞"-12	1.50	1.06	17	RCH202*
12.05	18.11	3.88	2.88	2.13	0.75	2.13	0.27	1 9/16"-16 UN	0.75	3⅞"-12	1.50	1.06	31	RCH206
7.03	9.53	4.50	3.50	2.50	0.85	2.50	0.38	1 13/16"-16 UN	0.88	4½"-12	1.66	1.31	24	RCH302*
13.00	19.13	4.50	3.50	2.50	1.00	2.50	0.38	1 13/16"-16 UN	0.88	4½"-12	1.66	1.31	48	RCH306
9.75	12.75	6.25	4.88	3.63	1.25	3.61	0.50	2¾"-16 UN	0.75	6¼"-12	1.91	2.12	62	RCH603*
12.75	18.75	6.25	4.88	3.63	1.25	3.61	0.50	2¾"-16 UN	0.75	6¼"-12	1.91	2.12	78	RCH606
10.00	13.00	8.38	6.50	5.00	1.50	4.97	0.50	4"-16 UN	1.00	8⅜"-12	2.38	3.11	132	RCH1003*

▼ Shown from left to right: **RRH3010, RRH1001, RRH6010**

Versatility in Testing, Maintenance and Tensioning Applications

- **Relief valves prevent damage in case of over-pressurization**
- **Baked enamel finish for increased corrosion resistance**
- **Collar threads enable easy fixturing (except RRH1001 and RRH1508)**
- **Double-acting operation for fast retraction**
- **Nickel-plated, floating center tube increases product life**
- **Hollow plunger allows for both pull and push forces**
- **CR400 couplers and dust caps included on all models**
- **Plunger wiper reduces contamination, extending cylinder life**

Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 139

Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 147

Saddles

All **RRH-Series** cylinders are equipped with smooth saddles. See table on next page for optional threaded saddles and all dimensional information.

Page: 36

▼ *Double-acting hollow-plunger cylinders are applied for bridge launching systems.*

Cylinder Capacity (ton)	Stroke (in)	Model Number	Max. Cylinder Capacity (ton)		Cylinder Effective Area (in^2)		Oil Capacity (in^3)	
			Advance	Retract	Advance	Retract	Advance	Retract
30	7.00	RRH307	36	24	7.22	4.71	50.55	32.99
	10.13	RRH3010	36	24	7.22	4.71	73.12	47.71
60	3.50	RRH603	64	42	12.73	8.37	44.57	29.21
	6.50	RRH606	64	42	12.73	8.37	82.77	54.24
	10.12	RRH6010	64	42	12.73	8.37	128.94	84.49
100	1.50	RRH1001	103	68	20.63	13.54	30.94	20.32
	3.00	RRH1003	103	68	20.63	13.54	61.88	40.64
	6.00	RRH1006	103	68	20.63	13.54	123.76	81.29
	10.13	RRH10010	103	68	20.63	13.54	208.84	137.17
150	8.00	RRH1508	158	80	31.62	15.91	252.97	127.23

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 148

RRH Series

Capacity:
30 - 150 tons

Stroke:
1.50 - 10.13 inches

Center Hole Diameter:
1.31 - 3.13 inches

Maximum Operating Pressure:
10,000 psi

Optional Threaded Hollow Saddles						
Saddle Type	Cylinder Model Number	Saddle Model No.	Saddle Dimensions (in) A	B	C	
Threaded Hollow	RRH307, 3010	HP3015	2.49	1¼"-7	0.38	
	RRH603, 606, 6010	HP5016	3.61	1⅝"-5½	0.50	
	RRH1001, 1003, RRH1006, 10010	HP10016	4.97	2½"-8	0.51	



Smooth hollow saddles are standard on all RRH-models.

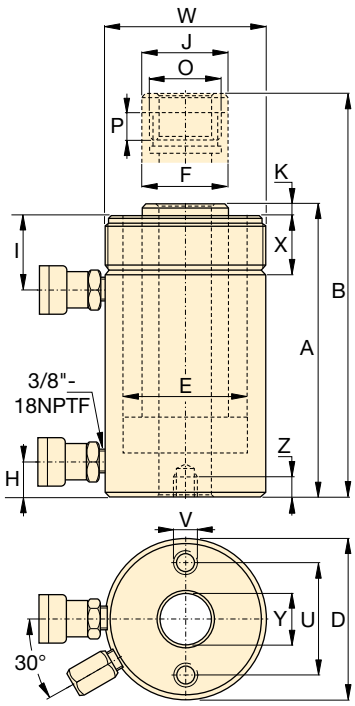

Base Mounting Hole Dimensions (in)			
Model Number	Bolt Circle U	Thread V	Thread Depth Z
RRH307	3.63	⅜"- 16	0.62
RRH3010	3.63	⅜"- 16	0.62
RRH603	5.12	½"- 13	0.55
RRH606	5.12	½"- 13	0.55
RRH6010	5.12	½"- 13	0.55
RRH1001	7.00	⅝"- 11	0.75
RRH1003	7.00	⅝"- 11	0.75
RRH1006	7.00	⅝"- 11	0.75
RRH10010	7.00	⅝"- 11	0.75
RRH1508	8.60	⅝"- 11	0.90

	Collap. Height A (in)	Ext. Height B (in)	Out. Diam. D (in)	Cyl. Bore Diam. E (in)	Plngr. Diam. F (in)	Cyl. Base to Adv. Port H (in)	Cyl. Top to Return Port I (in)	Saddle Diam. J (in)	Saddle Protrusion from Plngr. K (in)	Thread O (in)	Plunger Thread Length P (in)	Collar Thread W (in)	Collar Thread Length X (in)	Center Hole Diam. Y (in)	Wt. (lbs)	Model Number
	13.00	20.00	4.50	3.50	2.50	1.00	2.38	2.50	0.38	1 13/16"-16	0.88	4½"-12	1.66	1.31	48	RRH307
	17.00	27.13	4.50	3.50	2.50	1.00	2.38	2.50	0.38	1 13/16"-16	0.88	4½"-12	1.66	1.31	60	RRH3010
	9.75	13.25	6.25	4.88	3.63	1.25	2.63	3.61	0.50	2¾"-16	0.75	6¼"-12	1.91	2.13	62	RRH603
	12.75	19.25	6.25	4.88	3.63	1.25	2.63	3.61	0.50	2¾"-16	0.75	6¼"-12	1.91	2.13	78	RRH606
	17.25	27.38	6.25	4.88	3.63	1.25	2.63	3.61	0.50	2¾"-16	0.75	6¼"-12	1.91	2.13	101	RRH6010
	6.50	8.00	8.38	6.50	5.00	1.50	1.75	4.97	0.50	4"-16	1.00	–	–	3.13	85	RRH1001
	10.00	13.00	8.38	6.50	5.00	1.50	3.38	4.97	0.50	4"-16	1.00	8⅜"-12	2.38	3.13	135	RRH1003
	13.50	19.50	8.38	6.50	5.00	1.50	3.38	4.97	0.50	4"-16	1.00	8⅜"-12	2.38	3.13	175	RRH1006
	18.13	28.25	8.38	6.50	5.00	1.50	3.38	4.97	0.50	4"-16	1.00	8⅜"-12	2.38	3.13	235	RRH10010
	13.75	21.75	9.75	7.50	6.00	1.50	2.38	5.00	0.19	4¼"-12	1.00	–	–	3.13	245	RRH1508

▼ Shown from left to right: **RD2510, RD96, RD256, RD41, RD166**

High Precision and High Cycle Performance

Speed Chart

See the Enerpac Cylinder Speed Chart in our 'Yellow Pages' to determine your approximate cylinder speed.

Page: 409

- **Designed for long life, the best choice for production applications**
- **Unique mounting configurations simplify fixturing**
- **Baked enamel finish for increased corrosion resistance**
- **Double-acting operation develops force in both directions, providing maximum versatility**
- **Plunger wiper reduces contamination, extending cylinder life**

▼ *Clamping application using Enerpac RD cylinders (with clevis eye attachments on both ends) for their high-pressure capability and mounting flexibility.*

Cylinder Capacity (tons)	Stroke (in)	Model Number	Max. Cylinder Capacity (tons)		Cylinder Effective Area (in^2)		Oil Capacity (in^3)		Collap. Height A (in)	Ext. Height B (in)	Body Length C (in)	Outside Diam. D (in)	Cylinder Bore Diam. E (in)	Plunger Diam. F (in)
			Advance	Retract	Advance	Retract	Advance	Retract						
4	1.13	**RD41**	4	2	0.79	0.34	0.88	0.39	7.31	8.44	6.38	2.00	1.00	0.75
	3.13	**RD43**	4	2	0.79	0.34	2.45	1.07	9.31	12.44	8.38	2.00	1.00	0.75
	6.13	**RD46**	4	2	0.79	0.34	4.81	2.10	12.31	18.44	11.38	2.00	1.00	0.75
9	1.13	**RD91**	9	5	1.77	0.98	1.99	1.10	8.75	9.88	7.80	2.50	1.50	1.00
	3.13	**RD93**	9	5	1.77	0.98	5.52	3.07	10.78	13.91	9.80	2.50	1.50	1.00
	6.13	**RD96**	9	5	1.77	0.98	10.82	6.01	13.78	19.91	12.80	2.50	1.50	1.00
	10.13	**RD910**	9	5	1.77	0.98	17.89	9.94	17.78	27.91	16.81	2.50	1.50	1.00
16	6.25	**RD166**	16	8	3.14	1.66	19.63	10.35	15.31	21.56	14.13	3.00	2.00	1.38
	10.25	**RD1610**	16	8	3.14	1.66	32.20	16.98	19.31	29.56	18.11	3.00	2.00	1.38
25	6.25	**RD256**	25	11	4.91	2.15	30.68	13.42	16.69	22.94	15.63	3.63	2.50	1.88
	10.25	**RD2510**	25	11	4.91	2.15	50.31	22.01	20.69	30.94	19.61	3.63	2.50	1.88

▼ RD CYLINDER ATTACHMENTS



Retainer Nut
For locking foot or flange mountings. Tightens onto cylinder collar threads (included with foot and flange mounting kits)



Foot Mounting
Mounts onto cylinder collar. Mounting screws not included.



Flange Mounting
Mounts onto cylinder collar. Mounting screws not included.



Clevis Eye
Threads onto plunger or into cylinder base

Model Number	RD-Cyl: (tons)	Dimensions (in) A	B	C	D	E	F	H
Foot Mounting with Retainer Nut								
AD141	**4**	1.38	3.00	2.00	0.41	0.75	2.25	1.25
AD171	**9**	2.00	4.00	2.88	0.53	1.00	3.25	1.75
AD181	**16**	2.63	5.00	3.75	0.78	1.38	4.00	2.06
AD191	**25**	3.25	6.25	4.62	1.03	1.75	4.88	2.50
Flange Mounting with Retainer Nut								
AD142	**4**	1.38	3.88	3.09	0.41	0.75	–	–
AD172	**9**	2.00	4.75	3.88	0.41	1.00	–	–
AD182	**16**	2.63	5.63	4.56	0.53	1.38	–	–
AD192	**25**	3.25	6.50	5.34	0.66	1.75	–	–
Retainer Nut								
AD143	**4**	1.375-12 UNF	2.25	1.81	0.25	0.38	–	–
AD173	**9**	2.000-12 UN	3.00	2.50	0.27	0.50	–	–
AD183	**16**	2.625-16 UN	3.63	3.12	0.27	0.75	–	–
AD193	**25**	3.250-16 UN	4.25	3.75	0.27	1.00	–	–
Clevis Eye (See chart below for mounting dimensions L, L1 and M)								
AD150	**4**	0.500-20 UNF	1.125- 20 UN	2.06	0.63	0.62	0.75	0.94
AD151	**9**	0.750-16 UNF	1.688-18 UNEF	2.25	0.75	1.00	1.00	0.94
AD152	**16**	1.125-12 UNF	2.188-16 UNS	3.06	1.00	1.25	1.00	1.19
AD153	**25**	1.500-12 UNF	2.750-16	3.06	1.25	1.50	1.00	1.06

RD Series

Capacity:
4 - 25 tons

Stroke:
1.13 - 10.25 inches

Maximum Operating Pressure:
10,000 psi

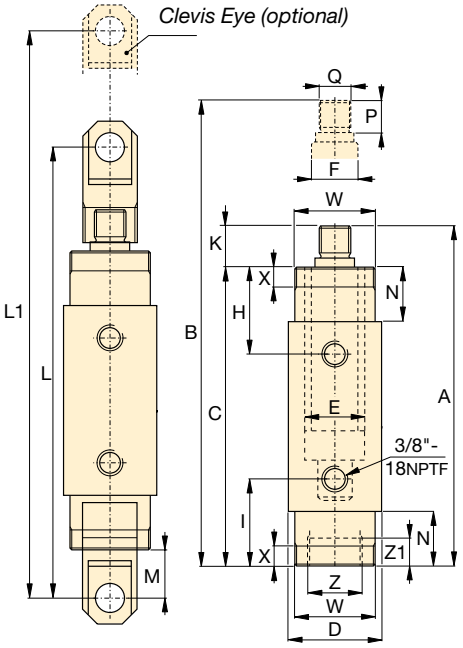

	Top to Ret. Port H (in)	Bottom to Adv. Port I (in)	Plunger Protrusion K (in)	Clevis Eye Mounting Dimensions L (in)	L1 (in)	M (in)	Neck Length N (in)	Plunger Thread Length P (in)	Plunger External Thread Q (in)	Cylinder Mounting Dimensions (in) Collar Thread W	Collar Thread Length X	Int. Base Thread Z	Int. Base Thread Length Z1	Wt. (lbs)	Model Number
	1.88	1.88	0.94	10.12	11.25	1.61	1.13	0.75	½"-20	1⅜"-12	0.44	1⅛"-20	0.35	4.8	**RD41**
	1.88	1.88	0.94	12.12	15.25	1.61	1.13	0.75	½"-20	1⅜"-12	0.44	1⅛"-20	0.35	6.4	**RD43**
	1.88	1.88	0.94	15.12	21.25	1.61	1.13	0.75	½"-20	1⅜"-12	0.44	1⅛"-20	0.35	9.0	**RD46**
	2.27	2.27	0.98	11.61	12.76	1.50	1.50	0.75	¾"-16	2"-12	0.56	1 11/16"-18	0.55	9.0	**RD91**
	2.27	2.27	0.98	13.66	16.79	1.50	1.50	0.75	¾"-16	2"-12	0.56	1 11/16"-18	0.55	11.0	**RD93**
	2.27	2.27	0.98	16.66	22.79	1.50	1.50	0.75	¾"-16	2"-12	0.56	1 11/16"-18	0.55	14.0	**RD96**
	2.27	2.27	0.98	20.66	30.79	1.50	1.50	0.75	¾"-16	2"-12	0.56	1 11/16"-18	0.55	19.0	**RD910**
	2.90	2.90	1.19	19.32	25.57	2.05	2.13	1.00	1⅛"-12	2⅝"-16	0.88	2 3/16"-16	0.94	22.0	**RD166**
	2.90	2.90	1.19	23.32	33.57	2.05	2.13	1.00	1⅛"-12	2⅝"-16	0.88	2 3/16"16	0.94	29.0	**RD1610**
	3.50	3.50	1.06	20.86	27.11	2.09	2.75	1.00	1½"-12	3¼"-16	1.13	2¾"-16	1.02	36.0	**RD256**
	3.50	3.50	1.08	24.86	35.11	2.09	2.75	1.00	1½"-12	3¼"-16	1.13	2¾"-16	1.02	46.0	**RD2510**

▼ Shown from left to right: **RR10013, RR1502, RR20013, RR1010, RR7513**

Most Versatile Performers

Rugged enough for the toughest job site uses and precision designed for high-cycle industrial uses.

- **Collar threads, plunger threads and base mounting holes for easy fixturing (on most models)**
- **Baked enamel finish for increased corrosion resistance**
- **Removable hardened saddles protect plunger during lifting and pressing**
- **Built-in safety valve prevents accidental over-pressurization**
- **CR400 couplers included on all models**
- **Plunger wiper reduces contamination, extending cylinder life**

Saddles

RR-Series cylinders up to 75-ton have plunger thread for installation of **CATS-Series** tilt saddles.

Tilt saddles are secured to the plunger, enabling horizontal and upside-down use.

Page: **41**

Optimum Performance

Enerpac's range of *Z-Class* electric pumps, fitted with manual or solenoid operated 4-way valves, offer optimum combinations with RR cylinders.

Page: **104**

▼ *These long stroke RR-cylinders are attached to a sliding and guiding system pulling the arched roof assembly of Athen's Olympic Stadium step-by-step into the final position.*

▼ *RR-cylinders provide power and precision in a special hydraulic press.*

Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 139

RR Series

Capacity:
10 - 500 tons

Stroke:
2.25 - 48.00 inches

Maximum Operating Pressure:
10,000 psi

▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity (tons)	Stroke (in)	Model Number	Cylinder Effective Area (in²) Push	Cylinder Effective Area (in²) Pull	Oil Capacity (in³) Push	Oil Capacity (in³) Pull	Collap. Height (in)
10	10.00	RR1010*	2.23	0.80	22.33	8.00	16.13
	12.00	RR1012*	2.23	0.80	26.80	9.00	18.00
30	8.25	RR308*	6.51	3.00	53.67	25.00	15.50
	14.50	RR3014*	6.51	3.00	92.70	43.00	21.63
50	6.13	RR506	11.06	3.40	67.77	21.00	13.06
	13.13	RR5013	11.06	3.40	145.17	44.00	20.06
	20.13	RR5020	11.06	3.40	222.56	68.00	28.88
75	6.13	RR756	15.92	4.90	97.58	29.00	13.69
	13.13	RR7513	15.92	4.90	209.00	64.00	20.69
100	6.63	RR1006	20.65	9.60	136.93	63.00	14.06
	13.13	RR10013	20.65	9.60	271.17	126.00	20.63
	18.13	RR10018	20.65	9.60	374.44	174.00	27.06
150	2.25	RR1502	30.71	14.80	69.11	33.00	7.19
	6.13	RR1506	30.71	14.80	188.28	91.00	15.19
	13.13	RR15013	30.71	14.80	403.27	194.00	22.20
	32.13	RR15032	30.71	14.80	986.84	475.00	43.94
200	6.00	RR2006	44.21	22.50	265.28	135.00	16.94
	13.00	RR20013	44.21	22.50	574.78	293.00	23.94
	18.00	RR20018	44.21	22.50	795.85	396.00	30.13
	24.00	RR20024	44.21	22.50	1,061	528.00	36.13
	36.00	RR20036	44.21	22.50	1,592	792.00	48.13
	48.00	RR20048	44.21	22.50	2,122	1,056	60.13
300	6.00	RR3006	70.93	38.00	425.56	228.00	19.13
	12.00	RR30012	70.93	38.00	851.12	456.00	25.13
	18.00	RR30018	70.93	38.00	1,277	684.00	31.13
	24.00	RR30024	70.93	38.00	1,702	912.00	37.13
	36.00	RR30036	70.93	38.00	2,553	1,368	49.13
	48.00	RR30048	70.93	38.00	3,405	1,824	61.13
400	6.00	RR4006	95.09	51.00	570.51	306.00	21.19
	12.00	RR40012	95.09	51.00	1,141	612.00	27.19
	18.00	RR40018	95.09	51.00	1,712	918.00	33.19
	24.00	RR40024	95.09	51.00	2,282	1,224	39.19
	36.00	RR40036	95.09	51.00	3,423	1,836	51.19
	48.00	RR40048	95.09	51.00	4,564	2,448	63.19
500	6.00	RR5006	113.15	63.00	678	378.00	22.75
	12.00	RR50012	113.15	63.00	1,358	756.00	28.75
	18.00	RR50018	113.15	63.00	2,037	1,134	34.75
	24.00	RR50024	113.15	63.00	2,716	1,512	40.75
	36.00	RR50036	113.15	63.00	4,074	2,264	52.75
	48.00	RR50048	113.15	63.00	5,431	3,024	64.75

HCR-Series Cylinders

If you do not have a high-cycle application, Enerpac **HCR-Series** cylinders may be the right alternative.

Page: 52

Speed Chart

See the Enerpac Cylinder Speed Chart in our **"Yellow Pages"** to determine your approximate cylinder speed.

Page: 409

Optional Snap-in Saddles

Optional snap-in saddles for RR-Series double-acting cylinders:

Saddle Type	Cylinder Model Number	Saddle Model Number
Flat	RR10	A102F
Tilt	RR10	CATS12
	RR30	CATS52
	RR50, RR75	CATS100

Standard Saddles

Grooved	RR10	A102G
	RR30	A252G

For additional information on saddles:

Page: 10

Cylinder retract capacity for certain RR cylinders may be less than theoretical values, as a result of reduced relief valve pressure settings:

RR308/3014:4000 psi
RR506/5013/5020:6950 psi
RR756/7513:7200 psi

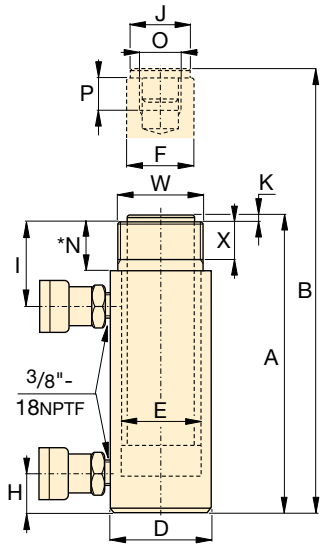

RR1010 to RR3014 models

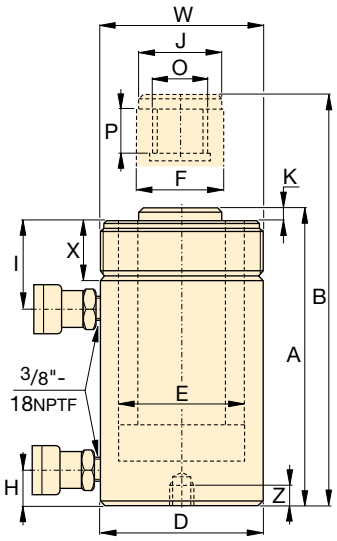

RR506 to RR50048 models



RR1006 to RR30048

No mounting holes:
RR506, 5013
RR756, 7513
RR1502, 15032

◀ **For full features see page 41.**

Cylinder Capacity (ton)	Stroke (in)	Model Number	Max. Cylinder Capacity (tons) Push	Max. Cylinder Capacity (tons) Pull	Cylinder Effective Area (in^2) Push	Cylinder Effective Area (in^2) Pull	Oil Capacity (in^3) Push	Oil Capacity (in^3) Pull	Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)
10	10.00	RR1010*	11.1	4.0	2.23	0.80	22.33	8.00	16.13	26.13	2.88
	12.00	RR1012*	11.1	4.0	2.23	0.80	26.80	9.00	18.00	30.00	2.88
30	8.25	RR308*	32.5	6.0	6.51	3.00	53.67	25.00	15.50	23.75	4.00
	14.50	RR3014*	32.5	6.0	6.51	3.00	92.70	43.00	21.63	36.13	4.00
50	6.13	RR506	55.3	11.8	11.06	3.40	67.77	21.00	13.06	19.19	5.00
	13.13	RR5013	55.3	11.8	11.06	3.40	145.17	44.00	20.06	33.19	5.00
	20.13	RR5020	55.3	11.8	11.06	3.40	222.56	68.00	28.88	49.00	5.00
75	6.13	RR756	79.6	17.6	15.92	4.90	97.58	29.00	13.69	19.81	5.75
	13.13	RR7513	79.6	17.6	15.92	4.90	209.00	64.00	20.69	33.81	5.75
100	6.63	RR1006	103.2	48.0	20.65	9.60	136.93	63.00	14.06	20.69	7.00
	13.13	RR10013	103.2	48.0	20.65	9.60	271.17	126.00	20.63	33.75	7.00
	18.13	RR10018	103.2	48.0	20.65	9.60	374.44	174.00	27.06	45.19	7.00
150	2.25	RR1502	153.5	74.0	30.71	14.80	69.11	33.00	7.19	9.44	8.00
	6.13	RR1506	153.5	74.0	30.71	14.80	188.28	91.00	15.19	21.31	8.00
	13.13	RR15013	153.5	74.0	30.71	14.80	403.27	194.00	22.20	35.31	8.00
	32.13	RR15032	153.5	74.0	30.71	14.80	986.84	475.00	43.94	76.06	8.00
200	6.00	RR2006	221.0	112.5	44.21	22.50	265.28	135.00	16.94	22.94	9.75
	13.00	RR20013	221.0	112.5	44.21	22.50	574.78	293.00	23.94	36.94	9.75
	18.00	RR20018	221.0	112.5	44.21	22.50	795.85	396.00	30.13	48.13	9.75
	24.00	RR20024	221.0	112.5	44.21	22.50	1,061	528.00	36.13	60.13	9.75
	36.00	RR20036	221.0	112.5	44.21	22.50	1,592	792.00	48.13	84.13	9.75
	48.00	RR20048	221.0	112.5	44.21	22.50	2,122	1,056	60.13	108.13	9.75
300	6.00	RR3006	354.6	190.0	70.93	38.00	425.56	228.00	19.13	25.13	12.25
	12.00	RR30012	354.6	190.0	70.93	38.00	851.12	456.00	25.13	37.13	12.25
	18.00	RR30018	354.6	190.0	70.93	38.00	1,277	684.00	31.13	49.13	12.25
	24.00	RR30024	354.6	190.0	70.93	38.00	1,702	912.00	37.13	61.13	12.25
	36.00	RR30036	354.6	190.0	70.93	38.00	2,553	1368	49.13	85.13	12.25
	48.00	RR30048	354.6	190.0	70.93	38.00	3,405	1824	61.13	109.13	12.25
400	6.00	RR4006	475.4	255.0	95.09	51.00	570.51	306.00	21.19	27.19	14.13
	12.00	RR40012	475.4	255.0	95.09	51.00	1,141	612.00	27.19	39.19	14.13
	18.00	RR40018	475.4	255.0	95.09	51.00	1,712	918.00	33.19	51.19	14.13
	24.00	RR40024	475.4	255.0	95.09	51.00	2,282	1224	39.19	63.19	14.13
	36.00	RR40036	475.4	255.0	95.09	51.00	3,423	1836	51.19	87.19	14.13
	48.00	RR40048	475.4	255.0	95.09	51.00	4,564	2448	63.19	111.19	14.13
500	6.00	RR5006	565.7	315.0	113.15	63.00	678.92	378.00	22.75	28.75	15.63
	12.00	RR50012	565.7	315.0	113.15	63.00	1,358	756.00	28.75	40.75	15.63
	18.00	RR50018	565.7	315.0	113.15	63.00	2,037	1134	34.75	52.75	15.63
	24.00	RR50024	565.7	315.0	113.15	63.00	2,716	1512	40.75	64.75	15.63
	36.00	RR50036	565.7	315.0	113.15	63.00	4,074	2268	52.75	88.75	15.63
	48.00	RR50048	565.7	315.0	113.15	63.00	5,431	3024	64.75	112.75	15.63

*N: For RR1010 and RR1012: N = 1.26 inch; for RR308 and RR3014: N = 2.20 inch.

Double-Acting Long Stroke Cylinders



Couplers Included!
CR400 couplers included on all models. Fits all HC-Series hoses.

Capacity:
10 - 500 tons

Stroke:
2.25 - 48.00 inches

Maximum Operating Pressure:
10,000 psi

RR Series

Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Adv. Port H (in)	Top to Return Port I (in)	Saddle Diameter J (in)	Saddle Protrusion from Plngr. K (in)	Plunger Internal Thread O (in)	Plunger Thread Length P (in)	Base Mounting Holes			Collar Thread W (in)	Collar Thread Length X (in)	Weight (lbs)	Model Number
								Bolt Cir. Diam. U (in)	Thread V (in)	Thread Depth Z (in)				
1.69	1.38	1.44	2.25	1.38	0.24	1-8	1.00	–	–	–	2¼-14	1.06	28	**RR1010***
1.69	1.38	1.44	2.25	1.38	0.24	1-8	1.00	–	–	–	2¼-14	1.06	31	**RR1012***
2.88	2.13	1.44	3.19	2.00	0.41	1½-16	1.00	–	–	–	3⁵⁄₁₆-12	1.94	40	**RR308***
2.88	2.13	1.56	3.19	2.00	0.41	1½-16	1.00	–	–	–	3⁵⁄₁₆-12	1.94	64	**RR3014***
3.75	3.13	1.13	3.00	2.81	0.11	1-12	1.00	–	–	–	5-12	2.00	67	**RR506**
3.75	3.13	1.13	3.00	2.81	0.11	1-12	1.00	–	–	–	5-12	2.00	115	**RR5013**
3.75	3.13	2.25	3.00	2.81	0.11	1-12	1.00	3.00	–	–	5-12	2.00	150	**RR5020**
4.50	3.75	1.19	3.00	2.81	0.25	1-12	1.10	–	–	–	5¾-12	1.97	92	**RR756**
4.50	3.75	1.19	3.19	2.81	0.25	1-12	1.10	–	–	–	5¾-12	1.97	150	**RR7513**
5.13	3.75	1.50	2.81	3.00	0.13	1¾-12	1.38	5.50	¾-10	1.00	6⅞-12	2.00	135	**RR1006**
5.13	3.75	1.50	2.81	3.00	0.13	1¾-12	1.38	5.50	¾-10	1.00	6⅞-12	2.00	205	**RR10013**
5.13	3.75	1.63	3.63	3.00	0.13	1¾-12	1.38	5.50	¾-10	1.00	6⅞-12	2.00	260	**RR10018**
6.25	4.50	0.88	2.63	3.67	0.06	–	–	–	–	–	–	–	110	**RR1502**
6.25	4.50	1.94	3.31	4.49	0.75	3⅜-16	1.38	6.25	¾-16	1.00	8-12	2.36	205	**RR1506**
6.25	4.50	1.94	3.31	4.49	0.75	3⅜-16	1.38	6.25	¾-16	1.00	8-12	2.36	275	**RR15013**
6.25	4.50	3.31	3.31	4.49	0.75	3⅜-16	1.38	–	–	–	8-12	2.36	525	**RR15032**
7.50	5.25	2.25	3.81	5.25	0.88	–	–	5.00	1-8	1.00	–	–	325	**RR2006**
7.50	5.25	2.25	3.81	5.25	0.88	2½-12	2.50	5.00	1-8	1.00	9¾-12	2.13	440	**RR20013**
7.50	5.25	3.38	4.00	5.25	0.88	2½-12	2.50	5.00	1-8	1.00	9¾ -12	2.13	450	**RR20018**
7.50	5.25	3.38	4.00	5.25	0.88	2½-12	2.50	5.00	1-8	1.00	9¾ -12	2.13	616	**RR20024**
7.50	5.25	3.38	4.00	5.25	0.88	2½ -12	2.50	5.00	1-8	1.00	9¾ -12	2.13	845	**RR20036**
7.50	5.25	3.38	4.00	5.25	0.88	2½-12	2.50	5.00	1-8	1.00	9¾ - 12	2.13	1065	**RR20048**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	441	**RR3006**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	608	**RR30012**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	776	**RR30018**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	1034	**RR30024**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	1385	**RR30036**
9.50	6.50	3.50	4.50	6.50	1.13	2½-12	3.25	6.25	1¼-7	1.75	12¼-12	2.31	1720	**RR30048**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	670	**RR4006**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	880	**RR40012**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	1000	**RR40018**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	1317	**RR40024**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	1746	**RR40036**
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1½-6	2.00	14⅛-8	2.56	2162	**RR40048**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	953	**RR5006**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	1300	**RR50012**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	1500	**RR50018**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	1800	**RR50024**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	2210	**RR50036**
12.00	8.00	4.75	6.00	8.00	1.13	3¼-12	4.25	8.00	1¾-5	2.12	15⅝-8	3.13	2700	**RR50048**

▼ HCL1006, HCG2006, HCR506

Reaching the Summit Edition:

- **Nitrocarburized hardened surfaces offers improved protection against side-load scoring and cyclic wear**
- **Weather protected, inside and out**
- **Low-friction locking rings spin easy, save time and effort [1)]**

Enclosed polymer bearing system

- **Upper and lower bearings enclose the cylinder plunger for support and are able to be replaced along with seals and other soft parts**
- **State-of-the-art bearing materials reduce wear and avoid bore damage even in high side-load conditions**

Low-wear, high-pressure seals

- **Improved geometry and material selection increases seal performance even in harsh conditions**
- **Low friction improves retraction times**

Versatile

- **Over 220 models in five configurations [1)]**
- **Certified lifting eyes, base mounting holes and collar threads are included for secure handling and cylinder mounting [1)]**

[1)] See specific model's technical data for more information.

Highest Level of Durability

The Summit Edition

Innovation is at the heart of the new *Summit Edition* of cylinders, delivering the high quality construction that you expect from Enerpac. The durability ensures your job gets done safely and reliably.

- Plunger support bearing adds support for eccentric loads [2)]
- Nitrocarburization surface treatment for improved wear resistance and corrosion protection
- Replaceable composite bearings surround the seal providing support for eccentric loads
- Low-wear, high-pressure seals provide longer service life

[2)] Eccentric load (or "side-load") is inevitable in heavy lifting. Our unique Summit Edition features provide the ultimate protection against side-load. Increased bearing surface maintains stability, and nitrocarburization treatment prevents scoring on the inside of the cylinder. Side-load poses a real problem.... our new cylinder features are the solution!

▼ *Bridge lifting and launching system. The load is balanced on groups of lock nut cylinders. The hydraulic movements are synchronized using the Enerpac PLC-controlled synchronous lift systems.*

High-Tonnage Cylinders

The Enerpac High-Tonnage Cylinders are particularly suitable for (multipoint) lifting applications.

HCG, HCR, HCL, HCRL-Series Cylinders

- 50 - 1000-ton lifting capacity
- 1.97 - 11.81 inch lifting stroke
- Designed to withstand up to 10% side-load of maximum capacity

HCG-Series - Single-Acting

- Load return
- Stop-ring to prevent plunger blow-out

HCR-Series - Double-Acting

- Hydraulic advance and retract for controlled movement

HCL-Series - Lock Nut, Single-Acting

- Load return
- Lock nut for mechanical load holding
- Overflow port to prevent plunger blow out

HCRL-Series - Lock Nut, Double-Acting

- 50 - 300 ton lifting capacity
- 5.91 - 11.81 inch stroke
- Hydraulic advance and retract
- Integrated tilt saddle
- Lock nut for mechanical load holding

LPL-Series - Lock Nut, Low-Height, Single-Acting

- 60 - 500 ton lifting capacity
- 1.77 - 1.97 inch lifting stroke
- Integrated tilt saddle
- Load return
- Lock nut for mechanical load holding
- 5-10% side-load of maximum capacity

In combination with our state-of-the-art power packs, you will have a world class hydraulic system to perform the most challenging lifting jobs in a safe and professional manner.

Page: 44

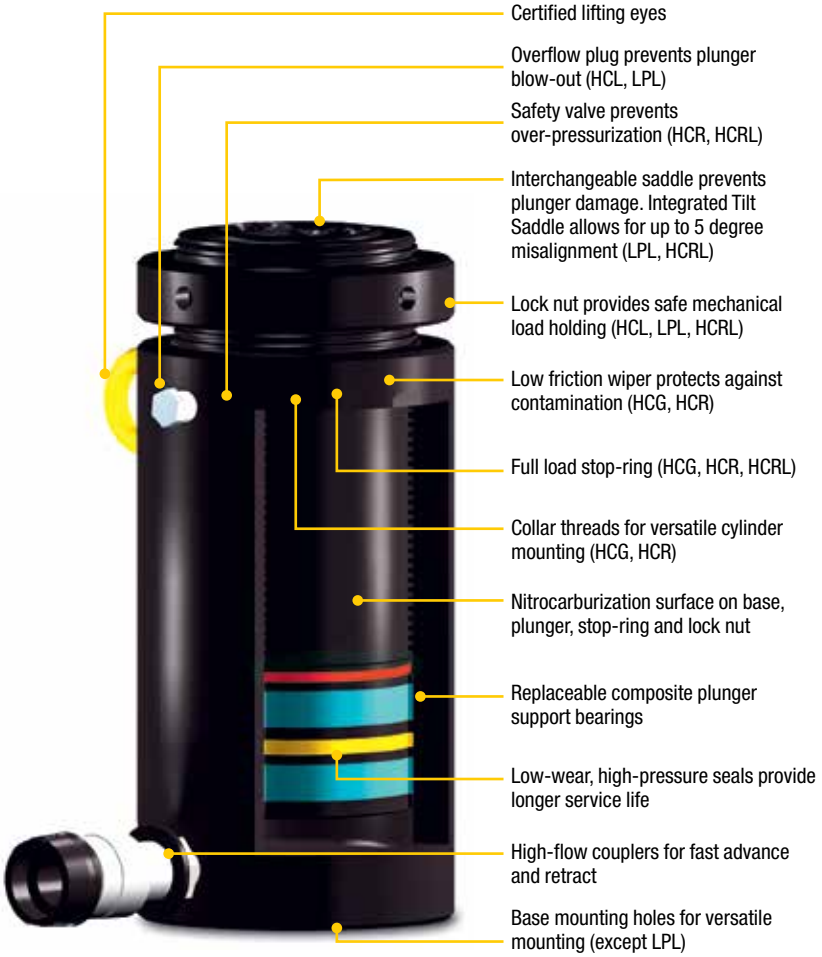

HCG HCR HCL HCRL Series

Capacity:
50 - 1000 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

Assisted-Return Pumps

Enerpac HCG, HCL and LPL-Series cylinders are hydraulic advance and load return. To improve productivity and plunger retraction Enerpac offers assisted return on ZU4 and ZE-Series pumps featuring Enerpac Venturi valve technology, specifically to facilitate the faster return of single-acting, load return cylinders. See **enerpac.com** for details.

Split-Flow Pumps

SFP-Series pumps with multiple outlets with equal oil flow. For lifting and lowering applications on multiple points, these pumps are a far better alternative than using separately operated pumps.

Page: 132

EVO-Series, Synchronous Lifting Systems

The EVO-system is the safest system for multi-point lifting, provided synchronized control over lifting stroke with a wide variety of features and functions.

Page: 136

QUICK SELECTION			HCG-Series		HCR-Series		HCL-Series		HCRL-Series*	
Cylinder Capacity (ton)	Stroke (in)	Maximum Cylinder Capacity at 10,150 psi (ton)	Model Number Single-Acting Page: 48	Collapsed Height (in)	Model Number Double-Acting Page: 52	Collapsed Height (in)	Model No. Single-Acting with Lock Nut Page: 56	Collapsed Height (in)	Model No. Double-Acting with Lock Nut Page: 60	Collapsed Height (in)
50	1.97	62	HCG502	7.20	HCR502	7.20	HCL502	6.46	—	—
	3.94		HCG504	9.17	HCR504	9.17	HCL504	8.43	—	—
	5.91		HCG506	11.14	HCR506	11.14	HCL506	10.39	HCRL506	12.20
	7.87		HCG508	13.62	HCR508	13.62	HCL508	12.36	HCRL508	14.84
	9.84		HCG5010	15.59	HCR5010	15.59	HCL5010	14.33	HCRL5010	16.81
	11.81		HCG5012	17.56	HCR5012	17.56	HCL5012	16.30	HCRL5012	18.77
100	1.97	113	HCG1002	7.95	HCR1002	7.95	HCL1002	7.36	—	—
	3.94		HCG1004	9.92	HCR1004	9.92	HCL1004	9.33	—	—
	5.91		HCG1006	11.89	HCR1006	11.89	HCL1006	11.30	HCRL1006	13.62
	7.87		HCG1008	14.92	HCR1008	14.92	HCL1008	13.27	HCRL1008	16.57
	9.84		HCG10010	16.89	HCR10010	16.89	HCL10010	15.24	HCRL10010	18.54
	11.81		HCG10012	18.86	HCR10012	18.86	HCL10012	17.20	HCRL10012	20.51
150	1.97	168	HCG1502	8.66	HCR1502	8.66	HCL1502	8.23	—	—
	3.94		HCG1504	10.63	HCR1504	10.63	HCL1504	10.20	—	—
	5.91		HCG1506	12.60	HCR1506	12.60	HCL1506	12.17	HCRL1506	14.13
	7.87		HCG1508	15.63	HCR1508	15.63	HCL1508	14.13	HCRL1508	17.09
	9.84		HCG15010	17.60	HCR15010	17.60	HCL15010	16.10	HCRL15010	19.06
	11.81		HCG15012	19.57	HCR15012	19.57	HCL15012	18.07	HCRL15012	21.02
200	1.97	223	HCG2002	9.09	HCR2002	9.09	HCL2002	9.37	—	—
	3.94		HCG2004	11.06	HCR2004	11.06	HCL2004	11.34	—	—
	5.91		HCG2006	13.03	HCR2006	13.03	HCL2006	13.31	HCRL2006	15.70
	7.87		HCG2008	16.06	HCR2008	16.06	HCL2008	15.28	HCRL2008	18.46
	9.84		HCG20010	18.03	HCR20010	18.03	HCL20010	17.24	HCRL20010	20.43
	11.81		HCG20012	20.00	HCR20012	20.00	HCL20012	19.21	HCRL20012	22.40
250	1.97	286	HCG2502	9.49	HCR2502	9.49	HCL2502	9.80	—	—
	3.94		HCG2504	11.46	HCR2504	11.46	HCL2504	11.77	—	—
	5.91		HCG2506	13.43	HCR2506	13.43	HCL2506	13.74	HCRL2506	16.38
	7.87		HCG2508	16.97	HCR2508	16.97	HCL2508	15.71	HCRL2508	19.33
	9.84		HCG25010	18.94	HCR25010	18.94	HCL25010	17.68	HCRL25010	21.30
	11.81		HCG25012	20.91	HCR25012	20.91	HCL25012	19.65	HCRL25012	23.27
300	1.97	341	HCG3002	11.65	HCR3002	11.65	HCL3002	10.94	—	—
	3.94		HCG3004	13.62	HCR3004	13.62	HCL3004	12.91	—	—
	5.91		HCG3006	15.59	HCR3006	15.59	HCL3006	14.88	HCRL3006	16.57
	7.87		HCG3008	17.56	HCR3008	17.56	HCL3008	16.85	HCRL3008	19.53
	9.84		HCG30010	19.53	HCR30010	19.53	HCL30010	18.82	HCRL30010	21.50
	11.81		HCG30012	21.50	HCR30012	21.50	HCL30012	20.79	HCRL30012	23.46

* The HCRL-Series Cylinders are available up to 2000-ton and additional stroke lengths available on request.

Capacity:
50 - 1000 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

HCG HCR HCL HCRL Series

QUICK SELECTION

Cylinder Capacity (ton)	Stroke (in)	Maximum Cylinder Capacity at 10,150 psi (ton)	HCG-Series Model Number Single-Acting Page: 48	HCG-Series Collapsed Height (in)	HCR-Series Model Number Double-Acting Page: 52	HCR-Series Collapsed Height (in)	HCL-Series Model Number Single-Acting With Lock Nut Page: 56	HCL-Series Collapsed Height (in)
400	1.97	450	HCG4002	12.64	HCR4002	12.64	HCL4002	12.48
	3.94		HCG4004	14.61	HCR4004	14.61	HCL4004	14.45
	5.91		HCG4006	16.57	HCR4006	16.57	HCL4006	16.42
	7.87		HCG4008	18.54	HCR4008	18.54	HCL4008	18.39
	9.84		HCG40010	20.51	HCR40010	20.51	HCL40010	20.35
	11.81		HCG40012	22.48	HCR40012	22.48	HCL40012	22.32
500	1.97	575	HCG5002	13.54	HCR5002	13.54	HCL5002	14.06
	3.94		HCG5004	15.51	HCR5004	15.51	HCL5004	16.02
	5.91		HCG5006	17.48	HCR5006	17.48	HCL5006	17.99
	7.87		HCG5008	19.45	HCR5008	19.45	HCL5008	19.96
	9.84		HCG50010	21.42	HCR50010	21.42	HCL50010	21.93
	11.81		HCG50012	23.39	HCR50012	23.39	HCL50012	23.90
600	1.97	673	HCG6002	13.86	HCR6002	13.86	HCL6002	14.96
	3.94		HCG6004	15.83	HCR6004	15.83	HCL6004	16.93
	5.91		HCG6006	17.80	HCR6006	17.80	HCL6006	18.90
	7.87		HCG6008	19.76	HCR6008	19.76	HCL6008	20.87
	9.84		HCG60010	21.73	HCR60010	21.73	HCL60010	22.83
	11.81		HCG60012	23.70	HCR60012	23.70	HCL60012	24.80
800	1.97	916	HCG8002	15.91	HCR8002	15.91	HCL8002	16.93
	3.94		HCG8004	17.87	HCR8004	17.87	HCL8004	18.90
	5.91		HCG8006	19.84	HCR8006	19.84	HCL8006	20.87
	7.87		HCG8008	21.81	HCR8008	21.81	HCL8008	22.83
	9.84		HCG80010	23.78	HCR80010	23.78	HCL80010	24.80
	11.81		HCG80012	25.75	HCR80012	25.75	HCL80012	26.77
1000	1.97	1196	HCG10002	17.40	HCR10002	17.40	HCL10002	19.06
	3.94		HCG10004	19.37	HCR10004	19.37	HCL10004	21.02
	5.91		HCG10006	21.34	HCR10006	21.34	HCL10006	22.99
	7.87		HCG10008	23.31	HCR10008	23.31	HCL10008	24.96
	9.84		HCG100010	25.28	HCR100010	25.28	HCL100010	26.93
	11.81		HCG100012	27.24	HCR100012	27.24	HCL100012	28.90

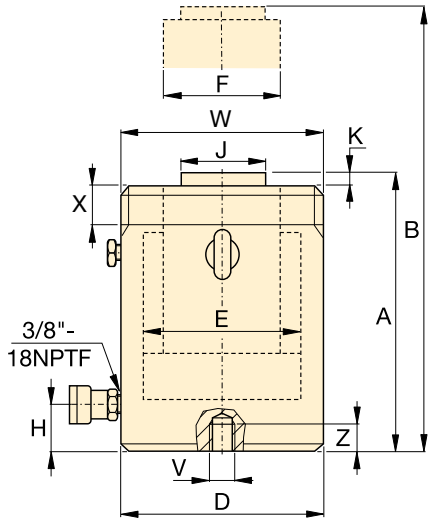



HCG50 - 150 ton



HCG200 - 300 ton

HCG-Series, Single-Acting, Load Return Cylinders

- **Hardened surface resists side-loading and cyclic wear**
- **Designed to withstand up to 10% side-load of maximum capacity [1)]**
- **Stop-ring to prevent plunger blow-out**
- **Weather protected, inside and out**
- **Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke**
- **Certified lifting eyes, base mounting holes and collar threads**
- **Standard collar thread up to 250 ton models. Collar thread is optional on 300 ton models and higher**

SELECTION CHART 50 – 300-TON HCG-MODELS

For 400 – 1000-ton models, see pages 50-51.

For full product features see pages 44-45.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)
50	1.97	HCG502	62	12.17	23.96	7.20
	3.94	HCG504			47.93	9.17
	5.91	HCG506 [1)]			71.89	11.14
	7.87	HCG508			95.86	13.62
	9.84	HCG5010			119.82	15.59
	11.81	HCG5012 [1)]			143.78	17.56
100	1.97	HCG1002	113	22.19	43.67	7.95
	3.94	HCG1004			87.35	9.92
	5.91	HCG1006			131.02	11.89
	7.87	HCG1008			174.70	14.92
	9.84	HCG10010			218.37	16.89
	11.81	HCG10012			262.05	18.86
150	1.97	HCG1502	168	33.14	65.24	8.66
	3.94	HCG1504			130.48	10.63
	5.91	HCG1506			195.73	12.60
	7.87	HCG1508			260.97	15.63
	9.84	HCG15010			326.21	17.60
	11.81	HCG15012			391.45	19.57
200	1.97	HCG2002	223	43.95	86.51	9.09
	3.94	HCG2004			173.02	11.06
	5.91	HCG2006			259.53	13.03
	7.87	HCG2008			346.04	16.06
	9.84	HCG20010			432.55	18.03
	11.81	HCG20012			519.06	20.00
250	1.97	HCG2502	286	56.27	110.77	9.49
	3.94	HCG2504			221.55	11.46
	5.91	HCG2506			332.32	13.43
	7.87	HCG2508			443.09	16.97
	9.84	HCG25010			553.87	18.94
	11.81	HCG25012			664.64	20.91
300	1.97	HCG3002	341	67.23	132.34	11.65
	3.94	HCG3004			264.68	13.62
	5.91	HCG3006			397.02	15.59
	7.87	HCG3008			529.36	17.56
	9.84	HCG30010			661.71	19.53
	11.81	HCG30012			794.05	21.50

[1)] HCG506 and HCG5012: 7% side-load of maximum capacity.

Collar Thread* (in)

Model / Capacity (ton)	Thread Size W	Thread Length X
HCG50	M130 x 2	1.18
HCG100	M175 x 3	1.81
HCG150	M215 x 3	2.17
HCG200	M250 x 3	2.48
HCG250	M280 x 3	2.52
HCG300*	M305 x 3	2.87

* Standard collar thread up to 250 ton models. Collar thread is optional on 300 ton models and higher. For collar thread on cylinder add suffix "**E002**"to model number. Example: **HCG3006E002**. The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes (in)

Model / Capacity (ton)	Bolt Circle U	Thread Size V	Minimum Thread Depth Z	Number of Holes	Angle from Coupler
HCG50	4.13	M12 x 1,75	0.87	2	90°
HCG100	5.91	M12 x 1,75	0.87	2	90°
HCG150	7.28	M12 x 1,75	0.87	2	90°
HCG200	8.46	M12 x 1,75	0.87	3	60°
HCG250	9.65	M12 x 1,75	0.87	3	60°
HCG300	10.24	M16 x 2	0.98	3	60°

Capacity:
50 - 300 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

HCG Series



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Weight (lbs)	Model Number	Optional Tilt Saddle		
									Saddle Diameter J1 (in)	Collap. Height* A1 (in)	Saddle Model Number
9.17	5.12	3.94	2.76	1.50	1.97	0.12	37	**HCG502**	2.80	7.75	**CATS50**
13.11							45	**HCG504**		9.72	
17.05							53	**HCG506** [1)]		11.69	
21.50							64	**HCG508**		14.17	
25.43							72	**HCG5010**		16.14	
29.37							80	**HCG5012** [1)]		18.11	
9.92	6.89	5.31	3.74	1.50	2.95	0.12	73	**HCG1002**	2.80	8.35	**CATS101**
13.86							88	**HCG1004**		10.31	
17.80							102	**HCG1006**		12.28	
22.80							128	**HCG1008**		15.31	
26.73							142	**HCG10010**		17.28	
30.67							157	**HCG10012**[1)]		19.25	
10.63	8.46	6.50	4.72	1.61	3.70	0.12	123	**HCG1502**	3.82	9.41	**CATS150**
14.57							145	**HCG1504**		11.38	
18.50							168	**HCG1506**		13.35	
23.50							207	**HCG1508**		16.38	
27.44							230	**HCG15010**		18.35	
31.38							253	**HCG15012**		20.31	
11.06	9.84	7.48	5.51	1.85	4.45	0.12	178	**HCG2002**	4.96	9.80	**CATS200**
15.00							209	**HCG2004**		11.77	
18.94							240	**HCG2006**		13.74	
23.94							300	**HCG2008**		16.77	
27.87							331	**HCG20010**		18.74	
31.81							363	**HCG20012**		20.71	
11.46	11.02	8.46	6.69	2.09	5.51	0.16	235	**HCG2502**	6.89	11.00	**CATS300**
15.39							277	**HCG2504**		13.00	
19.33							318	**HCG2506**		14.96	
24.84							401	**HCG2508**		18.50	
28.78							442	**HCG25010**		20.47	
32.72							484	**HCG25012**		22.44	
13.62	12.01	9.25	7.87	2.28	5.51	0.16	348	**HCG3002**	6.89	13.19	**CATS300**
17.56							401	**HCG3004**		15.16	
21.50							454	**HCG3006**		17.13	
25.43							507	**HCG3008**		19.00	
29.37							560	**HCG30010**		21.00	
33.31							613	**HCG30012**		23.00	

* A1 = Collapsed height including CATS-Series tilt saddle.

HCG-Series, Single-Acting, Load Return Cylinders

- **Hardened surface resists side-loading and cyclic wear**
- **Designed to withstand up to 10% side-load of maximum capacity**
- **Stop-ring to prevent plunger blow-out**
- **Weather protected, inside and out**
- **Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke**
- **Certified lifting eyes, base mounting holes and collar threads**
- **Optional collar threads on 300 ton models and higher capacities**

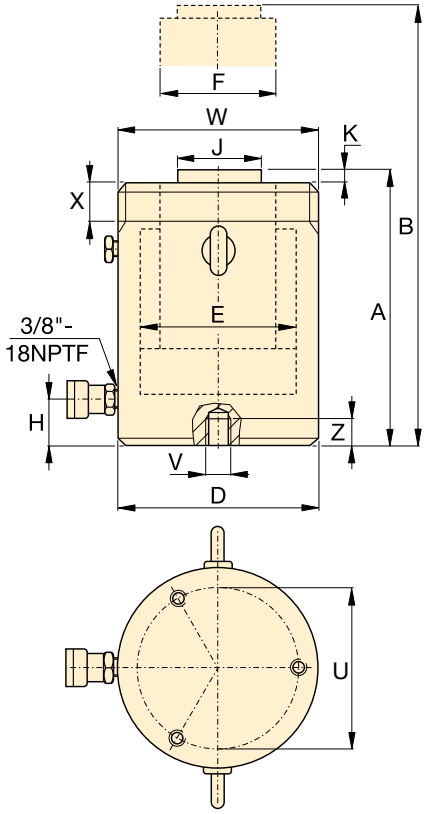

SELECTION CHART 400 – 1000-TON HCG-MODELS
For 50 – 300-ton models, see pages 48-49.
For full product features see pages 44-45.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)
400	1.97	HCG4002	450	88.75	174.70	12.64
	3.94	HCG4004			349.39	14.61
	5.91	HCG4006			524.09	16.57
	7.87	HCG4008			698.79	18.54
	9.84	HCG40010			873.49	20.51
	11.81	HCG40012			1,048.18	22.48
500	1.97	HCG5002	575	113.25	222.92	13.54
	3.94	HCG5004			445.85	15.51
	5.91	HCG5006			668.77	17.48
	7.87	HCG5008			891.70	19.45
	9.84	HCG50010			1,114.62	21.42
	11.81	HCG50012			1,337.55	23.39
600	1.97	HCG6002	673	132.57	260.97	13.86
	3.94	HCG6004			521.94	15.83
	5.91	HCG6006			782.90	17.80
	7.87	HCG6008			1,043.87	19.76
	9.84	HCG60010			1,304.84	21.73
	11.81	HCG60012			1,565.81	23.70
800	1.97	HCG8002	916	180.44	355.21	15.91
	3.94	HCG8004			710.41	17.87
	5.91	HCG8006			1,065.62	19.84
	7.87	HCG8008			1,420.82	21.81
	9.84	HCG80010			1,776.03	23.78
	11.81	HCG80012			2,131.24	25.75
1000	1.97	HCG10002	1196	235.68	463.94	17.40
	3.94	HCG10004			927.88	19.37
	5.91	HCG10006			1,391.83	21.34
	7.87	HCG10008			1,855.77	23.31
	9.84	HCG100010			2,319.71	25.28
	11.81	HCG100012			2,783.65	27.24

Collar Thread (in)

Model / Capacity (ton)	Thread Size W	Thread Length X
HCG400	M350 x 3	3.27
HCG500	M400 x 4	3.54
HCG600	M430 x 4	3.94
HCG800	M505 x 5	4.80
HCG1000	M570 x 5	5.39

Collar thread is optional on 300 ton models and higher. For collar thread on cylinder add suffix "**E002**"to model number. Example: **HCG4006E002**. The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes (in)

Model / Capacity (ton)	Bolt Circle U	Thread Size V	Minimum Thread Depth Z	Number of Holes	Angle from Coupler
HCG400	11.81	M16 x 2	0.98	3	60°
HCG500	13.39	M24 x 3	1.42	3	60°
HCG600	14.57	M24 x 3	1.42	3	60°
HCG800	17.32	M24 x 3	1.42	3	60°
HCG1000	19.69	M24 x 3	1.42	3	60°

▲ *Offshore wind turbine leveling: Enerpac's synchronous lifting system was the solution for leveling support cross pieces on 80 wind turbines.*

HCG Series

Capacity:
400 - 1000 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Weight (lbs)	Model Number	Optional Tilt Saddle: Saddle Diameter J1 (in)	Optional Tilt Saddle: Collap. Height* A1 (in)	Optional Tilt Saddle: Saddle Model Number
14.61	13.78	10.63	8.66	2.91	6.26	0.16	500	HCG4002	8.27	14.53	CATS400
18.54							566	HCG4004		16.50	
22.48							633	HCG4006		18.46	
26.42							699	HCG4008		20.43	
30.35							766	HCG40010		22.40	
34.29							833	HCG40012		24.37	
15.51	15.75	12.01	9.84	3.11	7.05	0.16	704	HCG5002	9.06	15.43	CATS500
19.45							792	HCG5004		17.40	
23.39							880	HCG5006		19.37	
27.32							968	HCG5008		21.34	
31.26							1,056	HCG50010		23.31	
35.20							1,144	HCG50012		25.28	
15.83	16.93	12.99	10.63	3.35	7.64	0.16	834	HCG6002	9.84	15.94	CATS600
19.76							935	HCG6004		17.91	
23.70							1,036	HCG6006		19.88	
27.64							1,137	HCG6008		21.85	
31.57							1,239	HCG60010		23.82	
35.51							1,340	HCG60012		25.79	
17.87	19.88	15.16	12.60	3.94	8.82	0.16	1,336	HCG8002	10.83	18.15	CATG800
21.81							1,479	HCG8004		20.12	
25.75							1,621	HCG8006		22.00	
29.69							1,763	HCG8008		24.00	
33.62							1,905	HCG80010		26.00	
37.56							2,047	HCG80012		28.00	
19.37	22.44	17.32	13.39	4.49	9.80	0.16	1,852	HCG10002	11.81	20.43	CATS1000
23.31							2,020	HCG10004		22.40	
27.24							2,188	HCG10006		24.37	
31.18							2,355	HCG10008		26.34	
35.12							2,523	HCG100010		28.31	
39.06							2,691	HCG100012		30.28	

* A1 = Collapsed height including CATS-Series tilt saddle..

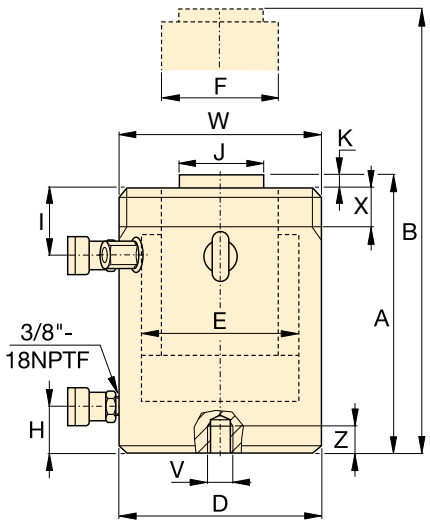



HCR50 - 150 ton



HCR200 - 300 ton

HCR-Series, Double-Acting Cylinders

- **Fast advance and retract**
- **Designed to withstand up to 10% side-load of maximum capacity [1)]**
- **Hardened surface resists side-loading and cyclic wear**
- **Weather protected, inside and out**
- **Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke**
- **Certified lifting eyes, base mounting holes and collar threads**
- **Standard collar thread up to 250 ton models. Collar thread is optional on 300 ton models and higher**

SELECTION CHART AND DETAILS OF 50 – 300-TON HCR-MODELS

For 400 – 1000-ton models, see pages 54-55.
For full product features see pages 44-45

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in²)	Oil Capacity (in³) Advance	Oil Capacity (in³) Retract	Collapsed Height A (in)
50	1.97	HCR502	62	12.17	23.96	12.22	7.20
	3.94	HCR504			47.93	24.44	9.17
	5.91	HCR506 [1)]			71.89	36.66	11.14
	7.87	HCR508			95.86	48.89	13.62
	9.84	HCR5010			119.82	61.11	15.59
	11.81	HCR5012 [1)]			143.78	73.33	17.56
100	1.97	HCR1002	113	22.19	43.67	22.05	7.95
	3.94	HCR1004			87.35	44.09	9.92
	5.91	HCR1006			131.02	66.14	11.89
	7.87	HCR1008			174.70	88.19	14.92
	9.84	HCR10010			218.37	110.23	16.89
	11.81	HCR10012			262.05	132.28	18.86
150	1.97	HCR1502	168	33.14	65.24	30.73	8.66
	3.94	HCR1504			130.48	61.47	10.63
	5.91	HCR1506			195.73	92.20	12.60
	7.87	HCR1508			260.97	122.94	15.63
	9.84	HCR15010			326.21	153.67	17.60
	11.81	HCR15012			391.45	184.40	19.57
200	1.97	HCR2002	223	43.95	86.51	39.54	9.09
	3.94	HCR2004			173.02	79.08	11.06
	5.91	HCR2006			259.53	118.62	13.03
	7.87	HCR2008			346.04	158.16	16.06
	9.84	HCR20010			432.55	197.70	18.03
	11.81	HCR20012			519.06	237.24	20.00
250	1.97	HCR2502	286	56.27	110.77	41.52	9.49
	3.94	HCR2504			221.55	83.04	11.46
	5.91	HCR2506			332.32	124.55	13.43
	7.87	HCR2508			443.09	166.07	16.97
	9.84	HCR25010			553.87	207.59	18.94
	11.81	HCR25012			664.64	249.11	20.91
300	1.97	HCR3002	341	67.23	132.34	36.49	11.65
	3.94	HCR3004			264.68	72.97	13.62
	5.91	HCR3006			397.02	109.46	15.59
	7.87	HCR3008			529.36	145.94	17.56
	9.84	HCR30010			661.71	182.43	19.53
	11.81	HCR30012			794.05	218.91	21.50

[1)] HCR506 and HCR5012: 7% side-load of maximum capacity.

Collar Thread* (in)

Model / Capacity (ton)	Thread Size W	Thread Length X
HCR50	M130 x 2	1.18
HCR100	M175 x 3	1.81
HCR150	M215 x 3	2.17
HCR200	M250 x 3	2.48
HCR250	M280 x 3	2.52
HCR300*	M305 x 3	2.87

* Standard collar thread up to 250 ton models. Collar thread is optional on 300 ton models and higher. For collar thread on cylinder add suffix "**E002**"to model number. Example: **HCR3006E002**. The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes (in)

Model / Capacity (ton)	Bolt Circle U	Thread Size V	Minimum Thread Depth Z	No. of Holes	Angle from Coupler
HCR50	4.13	M12 x 1,75	0.87	2	90°
HCR100	5.91	M12 x 1,75	0.87	2	90°
HCR150	7.28	M12 x 1,75	0.87	2	90°
HCR200	8.46	M12 x 1,75	0.87	3	60°
HCR250	9.65	M12 x 1,75	0.87	3	60°
HCR300	10.24	M16 x 2	0.98	3	60°

Double-Acting, High-Tonnage Cylinders

Capacity:
50 - 300 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

HCR Series



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Top to Retract Port I (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Retract Oil Volume (in^3)	Weight (lbs)	Model Number	Optional Tilt Saddle: Saddle Diameter J1 (in)	Optional Tilt Saddle: Collap. Height* A1 (in)	Optional Tilt Saddle: Saddle Model Number
9.17	5.12	3.94	2.76	1.50	1.77	1.97	0.12	12.22	37	**HCR502**	2.80	7.75	**CATS50**
13.11								24.44	46	**HCR504**		9.72	
17.05								36.66	54	**HCR506** [1)]		11.69	
21.50					2.17			48.89	68	**HCR508**		14.17	
25.43								61.11	76	**HCR5010**		16.14	
29.37								73.33	84	**HCR5012** [1)]		18.11	
9.92	6.89	5.31	3.74	1.50	2.56	2.95	0.12	22.05	74	**HCR1002**	2.80	8.35	**CATS101**
13.86								44.09	90	**HCR1004**		10.31	
17.80								66.14	105	**HCR1006**		12.28	
22.80					3.15			88.19	131	**HCR1008**		15.31	
26.73								110.23	146	**HCR10010**		17.28	
30.67								132.28	161	**HCR10012**		19.25	
10.63	8.46	6.50	4.72	1.61	2.76	3.70	0.12	30.73	124	**HCR1502**	3.82	9.41	**CATS150**
14.57								61.47	148	**HCR1504**		11.38	
18.50								92.20	172	**HCR1506**		13.35	
23.50					3.54			122.94	209	**HCR1508**		16.38	
27.44								153.67	233	**HCR15010**		18.35	
31.38								184.40	257	**HCR15012**		20.31	
11.06	9.84	7.48	5.51	1.85	3.11	4.45	0.12	39.54	179	**HCR2002**	4.96	9.80	**CATS200**
15.00								79.08	212	**HCR2004**		11.77	
18.94								118.62	244	**HCR2006**		13.74	
23.94					3.82			158.16	306	**HCR2008**		16.77	
27.87								197.70	338	**HCR20010**		18.74	
31.81								237.24	371	**HCR20012**		20.71	
11.46	11.02	8.46	6.69	2.09	3.11	5.51	0.16	41.52	236	**HCR2502**	6.89	11.00	**CATS300**
15.39								83.04	279	**HCR2504**		13.00	
19.33								124.55	322	**HCR2506**		14.96	
24.84					4.09			166.07	407	**HCR2508**		18.50	
28.78								207.59	457	**HCR25010**		20.47	
32.72								249.11	500	**HCR25012**		22.44	
13.62	12.01	9.25	7.87	2.28	3.98	5.51	0.16	36.49	350	**HCR3002**	6.89	13.19	**CATS300**
17.56								72.97	404	**HCR3004**		15.16	
21.50								109.46	458	**HCR3006**		17.13	
25.43								145.94	512	**HCR3008**		19.00	
29.37								182.43	566	**HCR30010**		21.00	
33.31								218.91	620	**HCR30012**		23.00	

* A1 = Collapsed height including CATS-Series tilt saddle.

HCR-Series, Double-Acting Cylinders

- **Fast advance and retract**
- **Designed to withstand up to 10% side-load of maximum capacity**
- **Hardened surface resists side-loading and cyclic wear**
- **Weather protected, inside and out**
- **Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke**
- **Certified lifting eyes, base mounting holes and collar threads**
- **Optional collar threads on 300 ton models and higher capacities**

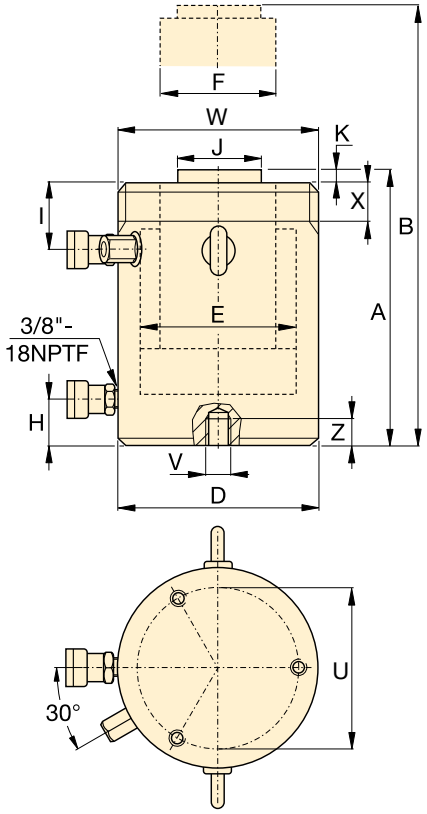

SELECTION CHART AND DETAILS OF 400 – 1000-TON HCR-MODELS
For 50 – 300-ton models, see pages 52-53.
For full product features see pages 44-45.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in^2)	Oil Capacity (in^3) Advance	Oil Capacity (in^3) Retract	Collapsed Height A (in)
400	1.97	HCR4002	450	88.75	174.70	58.71	12.64
	3.94	HCR4004			349.39	117.42	14.61
	5.91	HCR4006			524.09	176.14	16.57
	7.87	HCR4008			698.79	234.85	18.54
	9.84	HCR40010			873.49	293.56	20.51
	11.81	HCR40012			1048.18	352.27	22.48
500	1.97	HCR5002	575	113.25	222.92	73.15	13.54
	3.94	HCR5004			445.85	146.30	15.51
	5.91	HCR5006			668.77	219.45	17.48
	7.87	HCR5008			891.70	292.60	19.45
	9.84	HCR50010			1114.62	365.75	21.42
	11.81	HCR50012			1337.55	438.90	23.39
600	1.97	HCR6002	673	132.57	260.97	86.27	13.86
	3.94	HCR6004			521.94	172.54	15.83
	5.91	HCR6006			782.90	258.81	17.80
	7.87	HCR6008			1043.87	345.08	19.76
	9.84	HCR60010			1304.84	431.35	21.73
	11.81	HCR60012			1565.81	517.62	23.70
800	1.97	HCR8002	916	180.44	355.21	109.81	15.91
	3.94	HCR8004			710.41	219.63	17.87
	5.91	HCR8006			1065.62	329.44	19.84
	7.87	HCR8008			1420.82	439.26	21.81
	9.84	HCR80010			1776.03	549.07	23.78
	11.81	HCR80012			2131.24	658.89	25.75
1000	1.97	HCR10002	1196	235.68	463.94	186.92	17.40
	3.94	HCR10004			927.88	373.84	19.37
	5.91	HCR10006			1391.83	560.76	21.34
	7.87	HCR10008			1855.77	747.68	23.31
	9.84	HCR100010			2319.71	934.59	25.28
	11.81	HCR100012			2783.65	1121.51	27.24

Collar Thread (in)

Model / Capacity (ton)	Thread Size W	Thread Length X
HCR400	M350 x 3	3.27
HCR500	M400 x 4	3.54
HCR600	M430 x 4	3.94
HCR800	M505 x 5	4.80
HCR1000	M570 x 5	5.39

Collar thread is optional on 300 ton models and higher. For collar thread on cylinder add suffix "**E002**"to model number. Example: **HCR4006E002**. The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes (in)

Model / Capacity (ton)	Bolt Circle U	Thread Size V	Min. Thread Depth Z	Number of Holes	Angle from Coupler
HCR400	11.81	M16 x 2	0.98	3	60°
HCR500	13.39	M24 x 3	1.42	3	60°
HCR600	14.57	M24 x 3	1.42	3	60°
HCR800	17.32	M24 x 3	1.42	3	60°
HCR1000	19.69	M24 x 3	1.42	3	60°

▲ *The superlifting and launch of a 43,000-ton floating oil production system in Malaysia for the Gumusut-Kakap offshore field has set high benchmarks for safety through its use of sophisticated EVO-Series synchronous hydraulics to lift, balance, weigh and smoothly launch massive resource structures.*

HCR Series

Capacity:
400 - 1000 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Top to Retract Port I (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Retract Oil Volume (in^3)	Weight (lbs)	Model Number	Optional Tilt Saddle: Saddle Diameter J1 (in)	Optional Tilt Saddle: Collap. Height* A1 (in)	Optional Tilt Saddle: Saddle Model Number
14.61	13.78	10.63	8.66	2.91	4.37	6.26	0.16	58.71	501	**HCR4002**	8.27	14.53	**CATS400**
18.54								117.42	570	**HCR4004**		16.50	
22.48								176.14	638	**HCR4006**		18.46	
26.42								234.85	707	**HCR4008**		20.43	
30.35								293.56	775	**HCR40010**		22.40	
34.29								352.27	843	**HCR40012**		24.37	
15.51	15.75	12.01	9.84	3.11	4.76	7.05	0.16	73.15	706	**HCR5002**	9.06	15.43	**CATS500**
19.45								146.30	797	**HCR5004**		17.40	
23.39								219.45	887	**HCR5006**		19.37	
27.32								292.60	977	**HCR5008**		21.34	
31.26								365.75	1,067	**HCR50010**		23.31	
35.20								438.90	1,158	**HCR50012**		25.28	
15.83	16.93	12.99	10.63	3.35	4.76	7.64	0.16	86.27	836	**HCR6002**	9.84	15.94	**CATS600**
19.76								172.54	940	**HCR6004**		17.91	
23.70								258.81	1,044	**HCR6006**		19.88	
27.64								345.08	1,148	**HCR6008**		21.85	
31.57								431.35	1,252	**HCR60010**		23.82	
35.51								517.62	1,356	**HCR60012**		25.79	
17.87	19.88	15.16	12.60	3.94	5.63	8.82	0.16	109.81	1,340	**HCR8002**	10.83	18.15	**CATS800**
21.81								219.63	1,485	**HCR8004**		20.12	
25.75								329.44	1,631	**HCR8006**		22.00	
29.69								439.26	1,777	**HCR8008**		24.00	
33.62								549.07	1,922	**HCR80010**		26.00	
37.56								658.89	2,068	**HCR80012**		28.00	
19.37	22.44	17.32	13.39	4.49	6.02	9.80	0.16	186.92	1,858	**HCR10002**	11.81	20.43	**CATS1000**
23.31								373.84	2,031	**HCR10004**		22.40	
27.24								560.76	2,205	**HCR10006**		24.37	
31.18								747.68	2,379	**HCR10008**		26.34	
35.12								934.59	2,552	**HCR100010**		28.31	
39.06								1121.51	2,726	**HCR100012**		30.28	

* A1 = Collapsed height including CATS-Series tilt saddle.

HCL-Series, Single-Acting, Load-Return Cylinders

- **Lock nut provides positive and safe mechanical load holding**
- **Low-friction locking rings spin easy, save time and effort**
- **Designed to withstand 10% side-load up to 90% of maximum stroke**
- **Hardened surface resists side-loading and cyclic wear**
- **Overflow port as stroke limiter to prevent plunger blow-out**
- **Weather protected, inside and out**
- **Replaceable bearings enclose the plunger for support throughout the stroke**
- **Certified lifting eyes and base mounting holes**

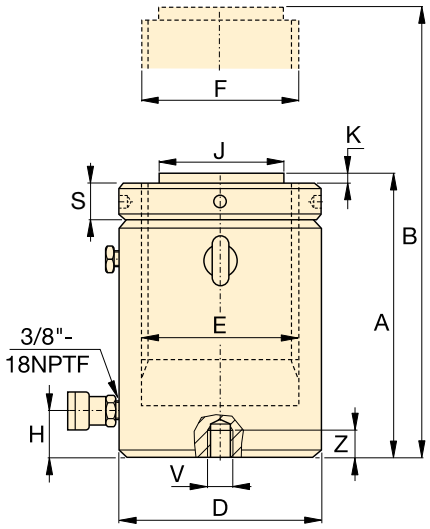



HCL50 - 150 ton



HCL200 - 300 ton

SELECTION CHART 50 – 300-TON HCL-MODELS

For 400 – 1000-ton models, see pages 58-59.
For full product features see pages 44-45.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in²)	Oil Capacity (in³)	Collapsed Height A (in)
50	1.97	HCL502	62	12.17	23.96	6.46
	3.94	HCL504			47.93	8.43
	5.91	HCL506			71.89	10.39
	7.87	HCL508			95.86	12.36
	9.84	HCL5010			119.82	14.33
	11.81	HCL5012			143.78	16.30
100	1.97	HCL1002	113	22.19	43.67	7.36
	3.94	HCL1004			87.35	9.33
	5.91	HCL1006			131.02	11.30
	7.87	HCL1008			174.70	13.27
	9.84	HCL10010			218.37	15.24
	11.81	HCL10012			262.05	17.20
150	1.97	HCL1502	168	33.14	65.24	8.23
	3.94	HCL1504			130.48	10.20
	5.91	HCL1506			195.73	12.17
	7.87	HCL1508			260.97	14.13
	9.84	HCL15010			326.21	16.10
	11.81	HCL15012			391.45	18.07
200	1.97	HCL2002	223	43.95	86.51	9.37
	3.94	HCL2004			173.02	11.34
	5.91	HCL2006			259.53	13.31
	7.87	HCL2008			346.04	15.28
	9.84	HCL20010			432.55	17.24
	11.81	HCL20012			519.06	19.21
250	1.97	HCL2502	286	56.27	110.77	9.80
	3.94	HCL2504			221.55	11.77
	5.91	HCL2506			332.32	13.74
	7.87	HCL2508			443.09	15.71
	9.84	HCL25010			553.87	17.68
	11.81	HCL25012			664.64	19.65
300	1.97	HCL3002	341	67.23	132.34	10.94
	3.94	HCL3004			264.68	12.91
	5.91	HCL3006			397.02	14.88
	7.87	HCL3008			529.36	16.85
	9.84	HCL30010			661.71	18.82
	11.81	HCL30012			794.05	20.79

Base Mounting Holes (in)

Model / Capacity (ton)	Bolt Circle U	Thread Size V	Minimum Thread Depth Z	Number of Holes	Angle from Coupler
HCL50	4.13	M8 x 1.25	0.39	2	90°
HCL100	5.91	M12 x 1.75	0.67	2	90°
HCL150	7.28	M12 x 1.75	0.87	2	90°
HCL200	8.46	M12 x 1.75	0.87	3	60°
HCL250	9.65	M12 x 1.75	0.87	3	60°
HCL300	10.24	M16 x 2	0.98	3	60°

Single-Acting, High-Tonnage Lock Nut Cylinders

Capacity:
50 - 300 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

HCL Series



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (mm)	Base to Advance Port H (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Lock Nut Height S (in)	Weight (lbs)	Model Number	Optional Tilt Saddle		
										Saddle Diameter J1 (in)	Collap. Height* A1 (in)	Saddle Model Number
8.43	5.12	3.94	Tr 100 x 4	0.94	2.80	0.08	0.98	37	HCL502	2.80	7.05	CATS100
12.36								48	HCL504		9.02	
16.30								60	HCL506		10.98	
20.24								71	HCL508		12.95	
24.17								83	HCL5010		14.92	
28.11								94	HCL5012		16.89	
9.33	6.89	5.31	Tr 135 x 6	1.30	2.80	0.08	1.30	77	HCL1002	2.80	7.95	CATS100
13.27								98	HCL1004		9.92	
17.20								118	HCL1006		11.89	
21.14								139	HCL1008		13.86	
25.08								160	HCL10010		15.83	
29.02								181	HCL10012		17.80	
10.20	8.46	6.50	Tr 165 x 6	1.61	5.12	0.08	1.57	130	HCL1502	4.96	8.86	CATS201
14.13								161	HCL1504		10.83	
18.07								192	HCL1506		12.80	
22.01								224	HCL1508		14.76	
25.94								255	HCL15010		16.73	
29.88								287	HCL15012		18.70	
11.34	9.84	7.48	Tr 190 x 6	1.85	5.12	0.08	1.77	188	HCL2002	4.96	10.00	CATS201
15.28								231	HCL2004		11.97	
19.21								273	HCL2006		13.94	
23.15								316	HCL2008		15.91	
27.09								358	HCL20010		17.87	
31.02								401	HCL20012		19.84	
11.77	11.02	8.46	Tr 215 x 6	2.09	5.51	0.08	2.05	262	HCL2502	6.89	11.34	CATS300
15.71								316	HCL2504		13.31	
19.65								369	HCL2506		15.28	
23.58								422	HCL2508		17.24	
27.52								476	HCL25010		19.21	
31.46								529	HCL25012		21.18	
12.91	12.01	9.25	Tr 235 x 6	2.28	5.51	0.08	2.20	348	HCL3002	6.89	12.48	CATS300
16.85								411	HCL3004		14.45	
20.79								474	HCL3006		16.42	
24.72								537	HCL3008		18.39	
28.66								601	HCL30010		20.35	
32.60								664	HCL30012		22.32	

* A1 = Collapsed height including CATS-Series tilt saddle.

HCL-Series, Single-Acting, Load Return Cylinders

- **Lock nut provides positive and safe mechanical load holding**
- **Low-friction locking rings spin easy, save time and effort**
- **Designed to withstand 10% side-load up to 90% of maximum stroke**
- **Hardened surface resists side-loading and cyclic wear**
- **Overflow port as stroke limiter to prevent plunger blow-out**
- **Weather protected, inside and out**
- **Replaceable bearings enclose the plunger for support throughout the stroke**
- **Certified lifting eyes and base mounting holes**

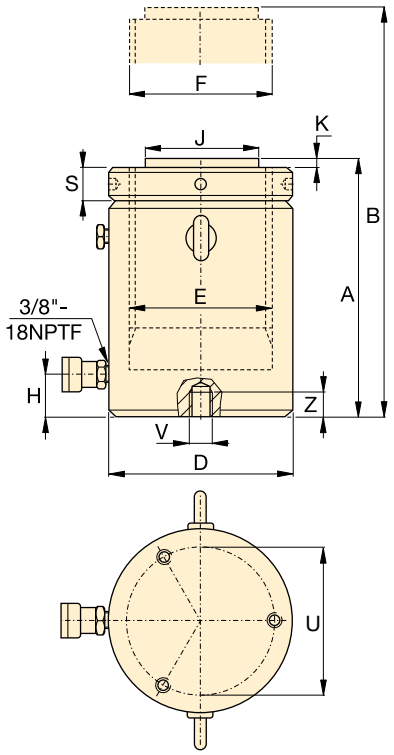

SELECTION CHART 400 – 1000-TON HCL-MODELS
For 50 – 300-ton models, see pages 56-57.
For full product features see pages 44-45.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Collapsed Height A (in)
400	1.97	**HCL4002**	450	88.75	174.70	12.48
	3.94	**HCL4004**			349.39	14.45
	5.91	**HCL4006**			524.09	16.42
	7.87	**HCL4008**			698.79	18.39
	9.84	**HCL40010**			873.49	20.35
	11.81	**HCL40012**			1,048.18	22.32
500	1.97	**HCL5002**	575	113.25	222.92	14.06
	3.94	**HCL5004**			445.85	16.02
	5.91	**HCL5006**			668.77	17.99
	7.87	**HCL5008**			891.70	19.96
	9.84	**HCL50010**			1,114.62	21.93
	11.81	**HCL50012**			1,337.55	23.90
600	1.97	**HCL6002**	673	132.57	260.97	14.96
	3.94	**HCL6004**			521.94	16.93
	5.91	**HCL6006**			782.90	18.90
	7.87	**HCL6008**			1,043.87	20.87
	9.84	**HCL60010**			1,304.84	22.83
	11.81	**HCL60012**			1,565.81	24.80
800	1.97	**HCL8002**	916	180.44	355.21	16.93
	3.94	**HCL8004**			710.41	18.90
	5.91	**HCL8006**			1,065.62	20.87
	7.87	**HCL8008**			1,420.82	22.83
	9.84	**HCL80010**			1,776.03	24.80
	11.81	**HCL80012**			2,131.24	26.77
1000	1.97	**HCL10002**	1196	235.68	463.94	19.06
	3.94	**HCL10004**			927.88	21.02
	5.91	**HCL10006**			1,391.83	22.99
	7.87	**HCL10008**			1,855.77	24.96
	9.84	**HCL100010**			2,319.71	26.93
	11.81	**HCL100012**			2,783.65	28.90

Base Mounting Holes (in)					
Model / Capacity (ton)	Bolt Circle U	Thread Size V	Minimum Thread Depth Z	Number of Holes	Angle from Coupler
HCL400	11.81	M16 x 2	0.95	3	60˚
HCL500	13.39	M24 x 3	1.42	3	60˚
HCL600	14.57	M24 x 3	1.42	3	60˚
HCL800	17.32	M24 x 3	1.42	3	60˚
HCL1000	19.69	M24 x 3	1.42	3	60˚

Single-Acting, High Tonnage, Lock Nut Cylinders

▲ *Heavy lifting and foundation levelling. The lock nut provides mechanical load holding over a long period of time.*

HCL Series

Capacity:
400 - 1000 ton

Stroke:
1.97 - 11.81 inches

Maximum Operating Pressure:
10,150 psi



CATS-Series Tilt Saddle

Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (mm)	Base to Advance Port H (in)	Standard Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Lock Nut Height S (in)	Weight (lbs)	Model Number	Optional Tilt Saddle: Saddle Diameter J1 (in)	Optional Tilt Saddle: Collap. Height* A1 (in)	Optional Tilt Saddle: Saddle Model Number
14.45	13.78	10.63	Tr 270 x 6	2.64	6.26	0.20	2.56	520	**HCL4002**	8.27	14.37	**CATS400**
18.39								603	**HCL4004**		16.34	
22.32								686	**HCL4006**		18.31	
26.26								770	**HCL4008**		20.28	
30.20								853	**HCL40010**		22.24	
34.13								936	**HCL40012**		24.21	
16.02	15.75	12.01	Tr 305 x 6	2.95	7.05	0.20	2.83	751	**HCL5002**	9.06	15.94	**CATS500**
19.96								860	**HCL5004**		17.91	
23.90								968	**HCL5006**		19.88	
27.83								1,077	**HCL5008**		21.85	
31.77								1,186	**HCL50010**		23.82	
35.71								1,294	**HCL50012**		25.79	
16.93	16.93	12.99	Tr 330 x 6	3.19	7.64	0.20	3.15	942	**HCL6002**	9.84	17.05	**CATS600**
20.87								1,067	**HCL6004**		19.02	
24.80								1,193	**HCL6006**		20.98	
28.74								1,319	**HCL6008**		22.95	
32.68								1,444	**HCL60010**		24.92	
36.61								1,570	**HCL60012**		26.89	
18.90	19.88	15.16	Tr 385 x 6	3.74	8.82	0.20	3.54	1,472	**HCL8002**	10.83	19.17	**CATS800**
22.83								1,646	**HCL8004**		21.14	
26.77								1,819	**HCL8006**		23.11	
30.71								1,992	**HCL8008**		25.08	
34.65								2,166	**HCL80010**		27.05	
38.58								2,339	**HCL80012**		29.02	
21.02	22.44	17.32	Tr 440 x 6	4.33	9.81	0.20	4.13	2,115	**HCL10002**	11.81	22.09	**CATS1000**
24.96								2,335	**HCL10004**		24.06	
28.90								2,556	**HCL10006**		26.02	
32.83								2,777	**HCL10008**		27.99	
36.77								2,998	**HCL100010**		29.96	
40.71								3,219	**HCL100012**		31.93	

* A1 = Collapsed height including CATS-Series tilt saddle.

▼ Shown: **HCRL2006, HCRL506**

- **Hydraulically controlled fast retraction**
- **Lock nut provides mechanical load holding for a safe work environment**
- **Designed to withstand up to 10% side-load of maximum capacity**
- **Integrated tilt saddle allows up to 5 degrees of misalignment**
- **Hardened surface resists side-loading and cyclic wear**
- **Weather protected, inside and out**
- **Replaceable bearings enclose the plunger externally and internally for support**
- **Certified lifting eyes, base mounting holes and collar thread as standard**
- **Stop-ring to prevent plunger blow-out**
- **Low friction lock nut, spin easy, save time and effort**

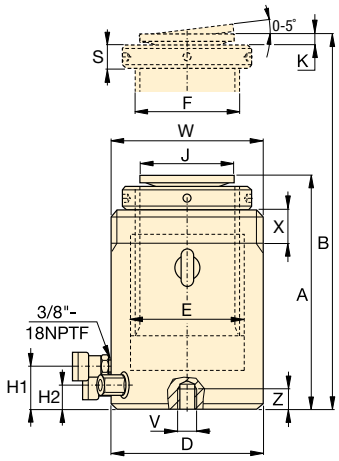



HCRL-50 - 150



HCRL-200 - 300

Collar Thread		
Model / Capacity (ton)	Thread Size W (mm)	Thread Length X (in)
HCRL50	M130 x 2	1.65
HCRL100	M185 x 2	2.24
HCRL150	M222 x 3	2.76
HCRL200	M260 x 3	3.09
HCRL250	M290 x 3	3.33
HCRL300	M315 x 3	3.68

The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes			
Model / Capacity (ton)	Bolt Circle U (in)	Thread Size V (mm)	Min. Thread Depth Z (in)
HCRL50	4.13	M12 x 1.75	0.87
HCRL100	5.90	M12 x 1.75	0.87
HCRL150	7.28	M12 x 1.75	0.87
HCRL200	8.46	M12 x 1.75	0.87
HCRL250	9.65	M12 x 1.75	0.87
HCRL300	10.24	M16 x 2.00	0.98

Cylinder Capacity* (ton)	Stroke* (in)	Model Number	Maximum Cylinder Capacity at 10,150 psi (ton)	Cylinder Effective Area (in^2)	Oil Capacity (in^3) Advance	Oil Capacity (in^3) Retract
50	5.91	**HCRL506**	54	10.60	62.55	5.24
	7.87	**HCRL508**			83.42	6.99
	9.84	**HCRL5010**			104.29	8.73
	11.81	**HCRL5012**			125.16	10.48
100	5.91	**HCRL1006**	111	21.91	129.41	14.38
	7.87	**HCRL1008**			172.54	19.17
	9.84	**HCRL10010**			215.68	23.96
	11.81	**HCRL10012**			258.81	28.76
150	5.91	**HCRL1506**	169	33.23	196.26	14.38
	7.87	**HCRL1508**			261.69	19.17
	9.84	**HCRL15010**			327.11	23.96
	11.81	**HCRL15012**			392.50	28.76
200	5.91	**HCRL2006**	225	44.31	261.62	32.35
	7.87	**HCRL2008**			348.87	43.14
	9.84	**HCRL20010**			436.06	53.92
	11.81	**HCRL20012**			523.31	64.70
250	5.91	**HCRL2506**	277	54.54	322.08	32.35
	7.87	**HCRL2508**			429.35	43.14
	9.84	**HCRL25010**			536.67	53.92
	11.81	**HCRL25012**			644.15	64.70
300	5.91	**HCRL3006**	334	65.74	388.23	32.35
	7.87	**HCRL3008**			517.60	43.14
	9.84	**HCRL30010**			647.03	53.92
	11.81	**HCRL30012**			776.41	64.70

* Up to 2000-ton and additional stroke lengths available on request.

Double Acting, High Tonnage, Lock Nut Cylinders

Higher Capacities, Longer Strokes

The HCRL-Series Cylinders are available up to 2000-ton and additional stroke lengths available on request. Contact Enerpac for more information.

HCRL Series

Capacity:
54 - 334 ton

Stroke:
5.91 - 11.81 inches

Maximum Operating Pressure:
10,150 psi

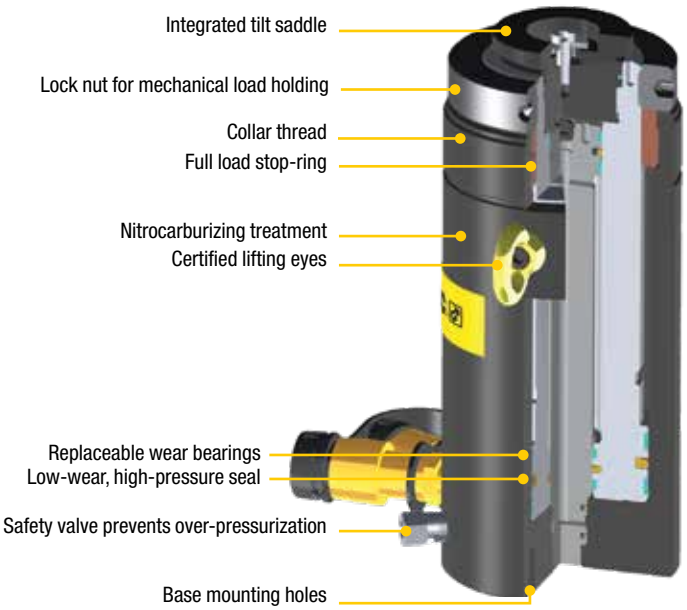

EVO-Series, Synchronous Lifting Systems

The EVO-system is the safest system for multi-point lifting, provided synchronized control over lifting stroke with a wide variety of features and functions.

Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (mm)	Base to Advance Port H1 (in)	Base to Retract Port H2 (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Lock Nut Height S (in)	Retract Oil Volume (in^3)	Weight (lbs)	Model Number
12.20	18.11	5.12	3.93	Tr90 x 4	1.61	1.04	3.02	0.59	1.02	1.75	65	HCRL506
14.84	22.71									3.49	79	HCRL508
16.81	26.65									5.24	88	HCRL5010
18.77	30.59									6.99	98	HCRL5012
13.62	19.52	7.28	5.51	Tr120 x 6	1.97	1.41	3.02	0.59	1.42	8.73	141	HCRL1006
16.57	14.44									10.48	170	HCRL1008
18.54	28.38									4.79	188	HCRL10010
20.51	32.32									9.59	207	HCRL10012
14.13	20.03	8.74	6.69	Tr150 x 6	1.81	1.24	4.96	0.51	1.77	14.38	213	HCRL1506
17.09	24.96									19.17	256	HCRL1508
19.06	28.90									23.96	284	HCRL15010
21.02	32.83									28.76	312	HCRL15012
15.70	21.61	10.24	7.87	Tr170 x 6	2.80	1.92	4.96	0.51	1.97	4.79	318	HCRL2006
18.46	26.34									9.59	370	HCRL2008
20.43	30.28									14.38	406	HCRL20010
22.40	34.21									19.17	440	HCRL20012
16.38	22.28	11.42	8.66	Tr190 x 6	2.80	1.92	6.30	0.59	2.17	23.96	419	HCRL2506
19.33	27.20									28.76	492	HCRL2508
21.30	31.14									10.78	538	HCRL25010
23.27	35.08									21.57	584	HCRL25012
16.57	22.48	12.40	9.45	Tr210 x 6	2.80	1.92	6.30	0.59	2.17	32.35	505	HCRL3006
19.53	27.40									43.14	592	HCRL3008
21.50	31.34									53.92	647	HCRL30010
23.46	35.28									64.70	702	HCRL30012

▼ Shown cylinder-pump set: **SCR1010H**

The Quickest and Easiest Way to Start Working Right Away

Speed Chart
See the Enerpac Cylinder Speed Chart in our "Yellow Pages" section.

Page: 409

LW16 Lifting Wedge
Hydraulic cylinders, jacks and lifting wedges can also be used to assist in positioning and aligning.

The LW16 only requires an access gap of 0.39 inch. See our "Specialty Tools" section on **www.enerpac.com**.

Page: 212

- **Optimum match of individual components**
- **All sets are ready to use and include single-acting cylinder, two-speed pump, 6-foot safety hose, calibrated gauge with gauge adaptor**

1 Cylinder Selection (See Cylinder Section of this catalog for full product descriptions)		Nominal Set Capacity (ton)	Cylinder Model No.	Stroke (in)	Collapsed Height (in)
	RC-Series, Single-Acting, General Purpose Cylinders For maximum versatility. 6	5	RC55	5.00	8.50
		10	RC102	2.13	4.78
			RC106	6.13	9.75
			RC1010	10.13	13.75
		15	RC154	4.00	7.88
			RC156	6.00	10.69
		25	RC252	2.00	6.50
			RC254	4.00	8.50
			RC256	6.25	10.75
			RC2514	14.25	18.75
		50	RC506	6.25	11.13
	RCS-Series, Single-Acting, Low-Height Cylinders Ideal where space is restricted. 26	10	RCS101	1.50	3.47
		20	RCS201	1.75	3.88
		30	RCS302	2.44	4.63
		50	RCS502	2.38	4.81
		100	RCS1002	2.25	5.56
	RCH-Series, Single-Acting, Hollow Cylinders For pushing and pulling applications. 34	12	RCH121	1.63	4.75
		20	RCH202	2.00	6.31
		30	RCH302	2.50	7.03
		60	RCH603	3.00	9.75
		100	RCH1003	3.00	10.00

Single-Acting, Cylinder Pump Sets

SELECTION EXAMPLE

Selected cylinder:

- RC106, Single-acting cylinder with 6.13" stroke

Selected pump:

- P392, Lightweight hand pump

Set model number:

- SCR106H

Included:

- HC7206 hose
- GF10P gauge
- GA2 adaptor

SET SELECTION:

1. **Select the cylinder**
2. **Select the pump**
3. **Find the set model number in the gray field of the matrix**

GA45GC Gauge Adaptor [3]

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 162

SC Series

Capacity:
5 - 100 tons

Stroke:
1.50 - 14.25 inches

Maximum Operating Pressure:
10,000 psi

Hydraulic Tool Box

Tool box with hand pump, gauge adaptor assembly, hose and RC-, RCS-, RSM-Series cylinder.

Page: 65

2 **Pump selection** (See Pump Section of this catalog for full product descriptions)						Accessories Included		
Hand Pump P142	Hand Pump P392	Hand Pump P80	Foot Pump P392FP	XA-Series Air Pump XA11	XC-Series Cordless Pump[2] [3] XC1202MB	Hose Model No.	Gauge Model No.	Gauge Adaptor Model No.
3 **SCR55H**	–	–	–	–	–	HC7206	GP10S	GA4
–	**SCR102H**	–	**SCR102FP**	**SCR102XA**	**SCR102XCB**	HC7206	GF10P	GA2
–	**SCR106H**	–	**SCR106FP**	**SCR106XA**	**SCR106XCB**	HC7206	GF10P	GA2
–	**SCR1010H**	–	**SCR1010FP**	**SCR1010XA**	**SCR1010XCB**	HC7206	GF10P	GA2
–	**SCR154H**	–	**SCR154FP**	**SCR154XA**	**SCR154XCB**	HC7206	GP10S	GA2
–	**SCR156H**	–	**SCR156FP**	**SCR156XA**	**SCR156XCB**	HC7206	GP10S	GA2
–	**SCR252H**	–	**SCR252FP**	**SCR252XA**	**SCR252XCB**	HC7206	GF20P	GA2
–	**SCR254H**	–	**SCR254FP**	**SCR254XA**	**SCR254XCB**	HC7206	GF20P	GA2
–	**SCR256H**	–	–	**SCR256XA**	**SCR256XCB**	HC7206	GF20P	GA2
–	–	**SCR2514H**	–	**SCR2514XA**[1]	–	HC7206	GF20P	GA2
–	–	**SCR506H**	–	**SCR506XA**[1]	–	HC7206	GF50P	GA2
–	**SCL101H**	–	**SCL101FP**	**SCL101XA**	–	HC7206	GF10P	GA2
–	**SCL201H**	–	**SCL201FP**	**SCL201XA**	–	HC7206	GF230P	GA2
–	**SCL302H**	–	**SCL302FP**	**SCL302XA**	**SCL302XCB**	HC7206	GF230P	GA2
–	**SCL502H**	–	**SCL502FP**	**SCL502XA**	**SCL502XCB**	HC7206	GF510P	GA2
–	–	**SCL1002H**	–	–	**SCL1002XCB**	HC7206	GF510P	GA2
SCH121H	–	–	–	–	–	HB7206	GF120P	GA4
–	**SCH202H**	–	**SCH202FP**	**SCH202XA**	**SCH202XCB**	HC7206	GF813P	GA3
–	**SCH302H**	–	**SCH302FP**	**SCH302XA**	**SCH302XCB**	HC7206	GF813P	GA3
–	–	**SCH603H**	–	**SCH603XA**[1]	**SCH603XCB**	HC7206	GF813P	GA3
–	–	**SCH1003H**	–	–	–	HC7206	GP10S	GA2

[1] With **XA12** air pump
[2] XC Cordless Pump includes 115 V charger, for 230 V charger replace the "B" in the model number with an "E".
[3] XC Pump Sets include only the HC7206 Hose and GA45GC Gauge Adaptor accessories

▼ Shown from left to right: **P142ALSS, P392ALSS, V152NV, V66NV, RC256NV, RC106NV, RC53NV**

RC, P, V Series

Cylinder Capacity:
5 - 25 tons

Stroke:
2 - 6 inches

Maximum Operating Pressure:
10,000 psi

- **Corrosion resistant, nickel-plated valves and cylinders**
- **Stainless steel pump inserts will not corrode**
- **Viton® Seals provide heat and chemical resistance**
- **Anodized aluminum pump reservoirs and plastic encapsulated pump bodies resist wet environments**
- **Two-speed operation reduces pump handle strokes 78% compared to single-speed pumps**
- **Pump handles lock for easy carrying**

Applications

Use Enerpac **Extreme Environment Products** in wet environments such as food processing, pulp and paper, mining, construction and applications in high temperature or in welding areas.

Multifluid Hand Pumps

MP-Series corrosion resistant hand pumps for low pressure filling and high pressure testing applications, suitable for a wide range of fluids.

Page: 93

▼ CYLINDER CHART

Cylinder Capacity (ton)	Stroke (in)	Model Number *	Oil Capacity (in^3)	Pressure Rating (psi)	Collapsed Height (in)	Extended Height (in)	Outside Diameter (in)	Weight (lbs)
5	3.0	**RC53NV**	2.98	10,000	6.50	9.50	1.50	3.3
10	2.0	**RC102NV**	4.75	10,000	4.78	6.91	2.25	5.1
10	6.0	**RC106NV**	13.70	10,000	9.75	15.88	2.25	9.8
25	6.0	**RC256NV**	32.23	10,000	10.75	17.00	3.38	22.0

▼ HAND PUMP CHART

Pump Type	Oil Capacity (in^3)	Model Number *	Pressure Rating (psi)	Oil Displacement per Stroke (in^3)	Port Dimension (in)	Piston Stroke (in)	Weight (lbs)
Two Speed	20	**P142ALSS**	200/10,000	0.221 / 0.055	1/4"-18 NPTF	0.50	4.5
	55	**P392ALSS**	200/10,000	0.687 / 0.151	3/8"-18 NPTF	1.00	9.0

▼ VALVE CHART

Valve Type	Model Number *	Pressure Function	Pressure Rating (psi)	Weight (lbs)
Manual Check Valve	**V66NV**	Check	10,000	4.5
Pressure Relief Valve	**V152NV**	+ 3% Repeatability	800-10,000	9.0

* For cylinder details see pages 7-9; for pump details see pages 84-85; for valve details see pages 168-169.

Portable Hydraulic Toolbox

▼ Shown: **SCR106TB**

SCR, SCL, SRS Series

Capacity:
5 - 50 tons

Stroke:
0.44 - 10.13 inches

Maximum Operating Pressure:
10,000 psi

- **Includes a single-acting cylinder, two-speed lightweight hand pump (P392), gauge adaptor assembly (GA45GC), and 6 ft. rubber hose with couplers (HC9206C)**
- **Complete and ready-to-use hydraulic system**
- **Easy to carry sturdy toolbox**
- **All components ship inside the toolbox as one package**

Gauge Adaptor Assembly

Toolbox sets include a 45 degree angled gauge adaptor assembly for improved operating ergonomics and safety.

Page: 162

	Cylinder Model	Stroke (in)	Capacity (tons)	Weight (lbs)	Toolbox Set Model Number
RC Series	**General Purpose Cylinders**				
	RC55	5.00	**5**	26	**SCR55TB**
	RC102	2.13	**10**	27	**SCR102TB**
	RC106	6.13	**10**	32	**SCR106TB**
	RC1010	10.13	**10**	36	**SCR1010TB**
	RC154	4.00	**15**	34	**SCR154TB**
	RC256	6.25	**25**	45	**SCR256TB**
RCS Series	**Low-Height Cylinders**				
	RCS101	1.50	**10**	28	**SCL101TB**
	RCS201	1.75	**20**	33	**SCL201TB**
	RCS302	2.44	**30**	37	**SCL302TB**
	RCS502	2.38	**50**	44	**SCL502TB**
RSM Series	**Flat-Jac® Cylinders**				
	RSM100	0.44	**10**	26	**SRS100TB**
	RSM200	0.44	**20**	28	**SRS200TB**
	RSM300	0.50	**30**	31	**SRS300TB**
	RSM500	0.63	**50**	37	**SRS500TB**

▼ *The Hydraulic Toolbox is a versatile tool and applicable everywhere.*

▼ Shown from left to right: **JHA356, JHA156**

JH, JHA
Series

Capacity:
7 - 100 tons

Stroke:
3.00 - 6.13 inches

Maximum Operating Pressure:
10,000 psi

- **All-directional operation on 7, 15 and 35-ton JHA-Series**
- **Internal relief valve to prevent overloading**
- **Machined flat front and bottom surfaces permit flush alignment in tight corners**
- **All models include pumping handle**
- **Chrome-plated plungers**
- **Automatic by-pass port to prevent over-extension (JH-Series)**

Lifting Wedge and Machine Lifts

Ideal to lift the load the first few inches. The **LW16** Lifting Wedge requires a very small access gap of only 0.39 inch.

Page: **212**

Load Skates

For moving heavy loads easily and safely.

Page: **214**

Style	Jack Capacity (ton)	Stroke (in)	Model Number	Jack Effective Area (in^2)	Collapsed Height (in)	Extended Height (in)	Bottom Plate Dimensions (W x L) (in)	Plunger Diameter (in)	Pump Speed	Weight (lbs)
Aluminum Jack	**7**	3.00	**JHA73**	1.49	5.25	8.25	2.88 x 6.25	1.19	Single	11
	15	6.06	**JHA156**	3.14	9.75	15.81	3.63 x 9.38	1.63	Single	29
	35	6.13	**JHA356**	7.07	10.13	16.25	4.63 x 10.00	2.13	Single	40
Steel Jack	**30**	6.13	**JH306**	5.94	10.00	16.13	3.75 x 9.56	2.75	Single	59
	50	6.09	**JH506**	9.62	10.25	16.34	5.00 x 10.19	3.50	2-Speed	90
	100	6.06	**JH1006**	20.63	11.31	17.37	7.13 x 12.94	5.12	2-Speed	184

Industrial Steel Bottle Jacks

▼ Shown: **GBJ010A, GBJ030A, GBJ003A**

GBJ
Series

Capacity:
2 - 110 tons

Stroke:
2.44 - 18.11 inches

Screw Feature
Heat treated, adjustable extension screw with cleated saddle on selected GBJ models helps adjusting and prevents slipping.

- **Lower handle effort reduces operator fatigue**
- **Fully serviceable**
- **High-strength beam and pump linkage for long life**
- **Pumping handle included on all models**
- **Safety relief valve to prevent overload**
- **Automatic by-pass port to prevent over-extension**
- **Wiper seal for extended life**
- **Thick base material with large area for increased strength and stability during lifting**



Pump and Cylinder Sets
As an alternative to Industrial Bottle Jacks where the operator is required to stand remote from the jacking point, see the range of pump and cylinder sets.
Page: **62**

Jack Cap. (ton)	Stroke (in)	Model Number	Screw Extension (in)	Min. Height (in)	Max. Height (in)	Plunger Dia. (in)	Saddle Dia. (in)	Base Dims. L x W (in)	Wt (lbs)
2	18.11	**GBJ002LA**	-	22.44	40.55	1.14	-	5.00 x 5.00	22.1
3	4.13	**GBJ003A**	2.56	6.61	13.31	0.94	0.93	2.95 x 4.57	8.1
5	5.91	**GBJ005A**	2.95	8.35	17.20	1.14	1.12	2.95 x 4.92	9.9
8	5.91	**GBJ008A**	2.95	8.62	17.48	1.46	1.50	3.54 x 5.67	13.6
11	5.91	**GBJ010A**	2.95	8.62	17.48	1.46	1.50	3.54 x 5.67	14.1
11	2.44	**GBJ010SA**	1.18	5.16	8.78	1.46	1.50	3.54 x 5.67	11
17	5.91	**GBJ015A**	2.95	8.98	17.83	1.75	1.77	4.41 x 6.42	19.4
22	5.91	**GBJ020A**	2.95	9.21	18.07	2.00	2.40	4.72 x 6.77	23.3
22	4.13	**GBJ020SA**	2.17	7.48	13.78	2.00	2.40	4.72 x 6.77	20.9
33	5.91	**GBJ030A**	2.95	9.53	18.39	2.27	2.72	5.67 x 7.72	34.2
55	5.51	**GBJ050A**	-	10.24	15.75	3.15	3.15	6.50 x 8.43	59.4
110	5.91	**GBJ100**	-	11.81	17.72	4.33	3.70	11.65 x 13.11	191.8

All GBJ Jacks meet or exceed: ANSI, PALD, CE

▼ *Enerpac heavy-duty hydraulic bottle jack makes lifting loads easier.*

▼ Shown: **PRASA10027L and Accessory Locking U-Rings**

Safe, Efficient, Mobile Load Lifting

- **60, 100, 150 and 200-ton capacities with pneumatic or electric pumps for the toughest jobs**
- **4-inch ground clearance for transport over rail and rough terrain**
- **Three-position handle provides easy tilt back and transport**
- **Complies with ASME/ANSI B30.1:2015 & CE specifications**
- **Easy-to-change external filter minimizes down time**
- **Rugged, fully enclosed 24-inch wide frame with no exposed fittings or hoses**
- **SUP-R-STACK™ Extension System allows lifting at all heights without blocking.**

Pendant Cord

Standard 12 ft. pendant cord for air driven units with pneumatic valves and 20 ft. pendant cord for electric driven units keeps operator away from the load.

POW'R LOCK – Self-Locking Mobile Lift System

A self-locking jack that performs automatic locking during lifting, lowering and holding. See the Enerpac PL-Series.

Page: **70**

◀ *Enerpac POW'R-RISER® used in mining operations to lift heavy equipment.*

Capacity (ton)	Stroke (in)	Electric Pump Model Number (115 VAC)	Weight (lbs)
60	14	**PREMB06014L**	390
	27	**PREMB06027L**	600
100	16	**PREMB10016L**	510
	27	**PREMB10027L**	600
	16	-	-
	27	-	-
150	15.5	-	-
	26.5	-	-
	15.5	**PREMB15016L**	570
	26.5	**PREMB15027L**	708
200	15.3	-	-
	24.3	-	-

(PR-Series not available in Canada. Contact Enerpac.)

SUP-R-STACK™ Extensions

Increase useful height from 5" to 18".

Model No.	Size (in)	Model No.	Size (in)
PRE5	5	PRE11	11
PRE7	7	PRE14	14
PRE9	9	PRE18	18
PRES6024	Extension set includes **PRE5, PRE7, PRE11PRE18**		

Spacers

Fine tune your Extension stack height.

Model No.	Size (in)	Model No.	Size (in)
PRS1	1	PRS3	3
PRS2	2	–	–
PRS4	Set includes (2) **PRS1,** (1) **PRS2** and (1) **PRS3**		

PR Series

Rated Lifting Capacity:
60 - 200 tons

Stroke:
14 - 27 inches

Maximum Operating Pressure:
10,000 psi

Cap. (ton)	Swivel Load Cap	Locking U-Rings 1 in.	3 in.	4¼ in.	5½ in.	10 in.	Set Model Number	Locking U-Ring Sets Include (quantity and model numbers) 2X	1X	2X	1X
60	PRTS60	PRU11	PRU13	PRU14	–	PRU110	[1] PRUS126	PRU11	PRU13	PRU14	–
							[2] PRUS137	PRU11	PRU13	PRU14	PRU10
100	PRTS60	PRU11	PRU13	PRU14	–	PRU110	[1] PRUS126	PRU11	PRU13	PRU14	–
							[2] PRUS137	PRU11	PRU13	PRU14	PRU110
150	PRTS150	PRU151	PRU153	–	PRU155	PRU1510	[3] PRUS1526	PRU151	PRU153	PRU155	–
							[2] PRUS1537	PRU151	PRU1510	PRU155	–
200	PRTS200	PRU201	PRU203	–	PRU205	PRU2010	[3] PRUS2026	PRU201	PRU203	PRU205	–
							[2] PRUS2037	PRU201	PRU2010	PRU205	–

[1] For 14 and 16" stroke models
[2] For 27" stroke models
[3] For 15.5" stroke models

WARNING!

Extensions: Any two Extensions may be stacked for loads up to 60 tons. For loads over 60 tons or strokes over 14" only one Extension and one Spacer can be used.

Spacers: Never exceed 3" in total Spacer height.

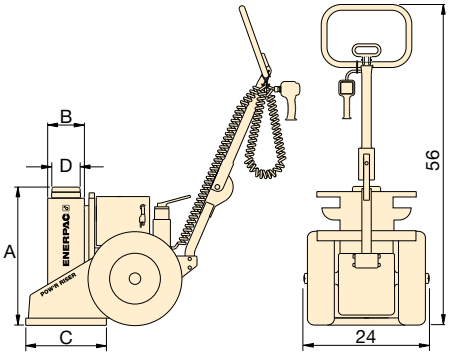

Locking U-Rings

For safe mechanical cribbing of a lifted load, accessory Locking U-Rings can be placed around an extended piston and come in four lengths for each POW'R-Riser® capacity, and are available individually or in sets. Locking U-Rings are accommodated by storage racks integral to the POW'R-Riser®.

	Air Pump	Weight (lbs)	A (in)	B (in)	C (in)	D (in)	Max. Additional Stack Height Using Optional Ext. System (in)	Valve Type
	PRAMA06014L	390	24	6.4	14	4	32*	Manual
	PRAMA06027L	600	37	6.4	14	4	11	
	PRAMA10016L	510	26	7.0	18	4	21**	
	PRAMA10027L	600	37	7.0	18	4	11	
	PRASA10016L	510	26	7.0	18	4	21**	Pneumatic
	PRASA10027L	600	37	7.0	18	4	11	
	PRASA15016L	570	26	8.0	18	5	21**	
	PRASA15027L	708	37	8.0	18	5	11	
	-	-	26	8.0	18	5	21**	Manual
	-	-	37	8.0	18	5	11	
	PRASA20016L	640	26	9.5	20	6	21**	Pneumatic
	PRASA20027L	825	37	9.5	20	6	11	

* Based on one 18" and one 11" Extension and one 3" Spacer.
** Based on one 18" Extension and one 3" Spacer.

For power source, the following characters should be inserted in the 5th space of the model number.

Ordering Example:
Model No. PREMI06014L is a 14" stroke, 60 ton model, with a manual valve and a 208-240 VAC, 1-ph electric motor.

A Air Pump, 50 scfm, 80 psi
B 115 VAC, 1ph., 50-60 Hz, 20 A
E 208-240 VAC, 1-ph., 50-60 Hz, Euro Plug, 10 A
I 208-240 VAC, 1-ph., 50-60 Hz, USA Plug, 10 A
G [1]208-240 VAC, 3-ph., 50-60 Hz
W [1]380-415 VAC, 3-ph., 50-60 Hz
J [1]440-480 VAC, 3-ph., 50-60 Hz
R [1]575 VAC, 3-ph., 50-60 Hz

[1] Not available for 60-ton capacity

▼ Shown: **PL20025-ASA and PL20014-ASA**

Efficient Lifting with Continuous, Automatic Load Locking

- **Provides continuous locking protection during lift, lower and hold functions**
- **Patent-pending control technology synchronizes cylinder and lock nut for smooth and efficient lifting and lowering**
- **Unique double-acting cylinder offers a low collapsed height to accommodate more lifting applications**
- **Simple 2-button pendant allows operation of raise and lower functions from up to 20 feet away**
- **All exposed load-bearing steel cylinder components utilize a nitrocarburizing treatment to reduce wear and resist corrosion**
- **Ergonomic handle has six positions for comfortable handling and folds when not in use**
- **Meets ANSI /ASME B30.1-2015, AS/NZS-2538, AS/NZS-2693 certification criteria**

Pow'R-LOCK™ Self-Locking Lift System

Only the **Pow'R-LOCK™** Lift System provides continuous positive locking of the load through all stages of lifting and lowering. No operator intervention is required to activate or de-activate the automatic locking system.

Two different stroke lengths are available. Both models are powered by an external compressed air system (user-supplied). A convenient two-button pendant controls operation of the Lift System's air motor and directional control valve.

Tilt Load Cap

All **Pow'R-LOCK™** Lift System models feature a Tilt Load Cap to reduce side-loading.

Enerpac declares that this product has been tested and conforms to applicable standards and is approved to carry the CE mark. An EU Declaration of Conformity is enclosed separately.

CE

◀ *The PL-Series Pow'R-LOCK Portable Lift System.*

Accessories

Flat Load Cap – Non-tilt load cap has lower profile for tight lifting spaces.

Spacers – Minimize gap between load cap and lifting point to maximize hydraulic stroke of the jack.

Extensions – Stackable, with large alloy steel locating studs to resist effects of side-loading.

Extension Base Adapter – Extension Base Adapter design eliminates risk of improper stacking when using more than one extension.

PL Series

Rated Lifting Capacity:
200 tons

Stroke:
14 or 24.5 inches

Maximum Operating Pressure:
10,000 psi

▼ ACCESSORIES

	Model Number	Description	Height (in)	PL20014-ASA	PL20025-ASA
	PLC1	Flat Load Cap	1.3	x	x
	PLS1	Spacer	1.0	x	x
	PLS2	Spacer	2.0	x	x
	**PLE5**	Extension	5.0	x	x
	PLE7	Extension	7.0	x	x
	PLE9	Extension	9.0	x	x
	PLE11	Extension	11.0	x	–
	PLE14	Extension	14.0	x	–
	PLB12	Extension base adapter	12.0	x	–

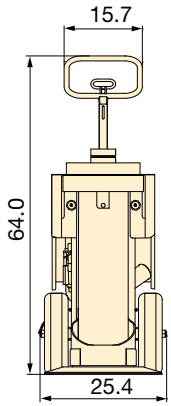

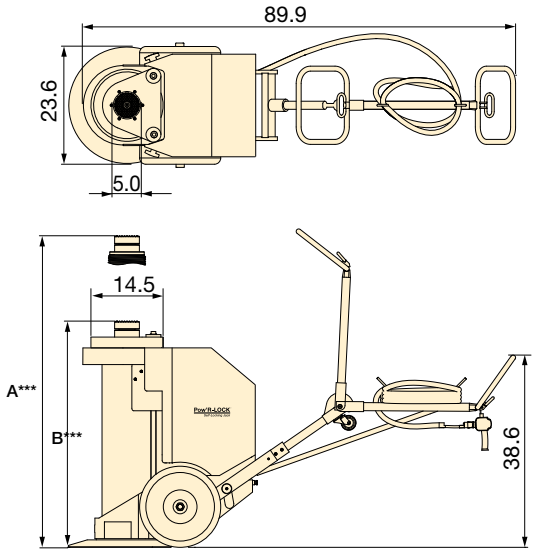

Capacity (ton)	Stroke (in)	Model Number	Cylinder Lifting Speed * in/min Load	Cylinder Lifting Speed * in/min No Load	Recommended Air Supply** (CFM)	Recommended Air Supply** (psi)	A *** (in)	B *** (in)	Wt. (lbs)
200	14.0	**PL20014-ASA**	2.0	2.4	130-150	55-100	48.0	34.0	1105
	24.5	**PL20025-ASA**	2.0	2.4			70.0	45.5	1320

* Depending on available airflow, regulator setting, pump speed and load weight.
** Minimum dynamic air pressure of 55-60 psi, 90-100 psi required to achieve 200-ton capacity.
*** Height of items A and B is with swivel load cap installed. Subtract 2-inches if flat load cap is used.

WARNING!

PLE11 and **PLE14** Extensions and **PLB12** Extension Base Adapter are to be used with the "short" model **PL20014-ASA** only.

Use of these extensions on the "tall" model **PL20025-ASA** will result in an excessive maximum lifting height. Load could become unstable and drop, resulting in possible personal injury and/or property damage.

Model No.	Max. Additional Stack Height* (in)
PL20014-ASA	28.0
PL20025-ASA	9.0

* Using optional PLB and PLE-Series extensions and PLS-Series spacers. Load cap height is NOT included in the stack height.

Safety First

When lifting large, heavy vehicles certain precautions must be followed. Follow your published safety directions for lifting and cribbing your loads.

The **Pow'R-LOCK™** Lift System provides load/lock protection, but you must follow the safety directions for load cribbing operations.

Pow'R-RISER® Lifting Jack

When automatic load-locking is not required, the Enerpac **Pow'R-RISER®** jack provides a mobile lifting solution.

For more information go to:
www.enerpac.com

Page: 68

▼ Shown: **BLS1006**

- **Climbing Jacks include integral tilt saddles with maximum tilt angles up to 5°**
- **Large base with anti-rotation rod for stability and safety**
- **Built-in safety valve prevents accidental over-pressurization**
- **Baked enamel finish for increased corrosion resistance**
- **CR400 couplers included on all cylinder models**

▼ *Synchronous Stage Lifting: 48 double-acting jacks (25 and 50 ton) are networked into a 16 point synchronous system to lift this 164-feet, 1100-ton building up to a height of 8-feet to construct a new floor level.*

A Simple Solution to Incremental Lifting

Lifting Height

Climbing Jacks overcome the usual limitation of lift height imposed by the jack's plunger stroke length. Large objects, such as oil tanks, can be lifted, held and lowered for maintenance without sending for a crane.

Split-Flow Pumps

SFP-Series Pumps with multiple outlets with equal oil flow. For lifting applications on multiple points Split-Flow Pumps are a far better alternative than using independently operated pumps.

Page: **132**

EVO-Series, Synchronous Lifting Systems

The EVO-system is the safest system for multi-point lifting, provided synchronized control over lifting stroke with a wide variety of features and functions.

Page: **136**

Jack-Up System

For incremental lifting with higher lifting capacities and up to 66 feet lifting height, see our JS-Series Jack-Up Systems.

Page: **366**

Cylinder Capacity (tons)	Stroke (in)	Model Number	Max. Cylinder Capacity (tons) Push	Pull
55	5.91	**BLS506**	55	12
105	6.34	**BLS1006**	105	48
154	5.94	**BLS1506**	154	74
220	5.94	**BLS2006**	220	113

Double-Acting Climbing Jacks

◀ *Typical stage-lift application using a custom built Enerpac system to lift the 360 ton Akkerwinde wooden bridge in the Netherlands.*

BLS Series

Capacity per Lifting Point:
55 - 220 tons

Stroke per Stage:
5.91 - 6.34 inches

Maximum Operating Pressure:
10,000 psi

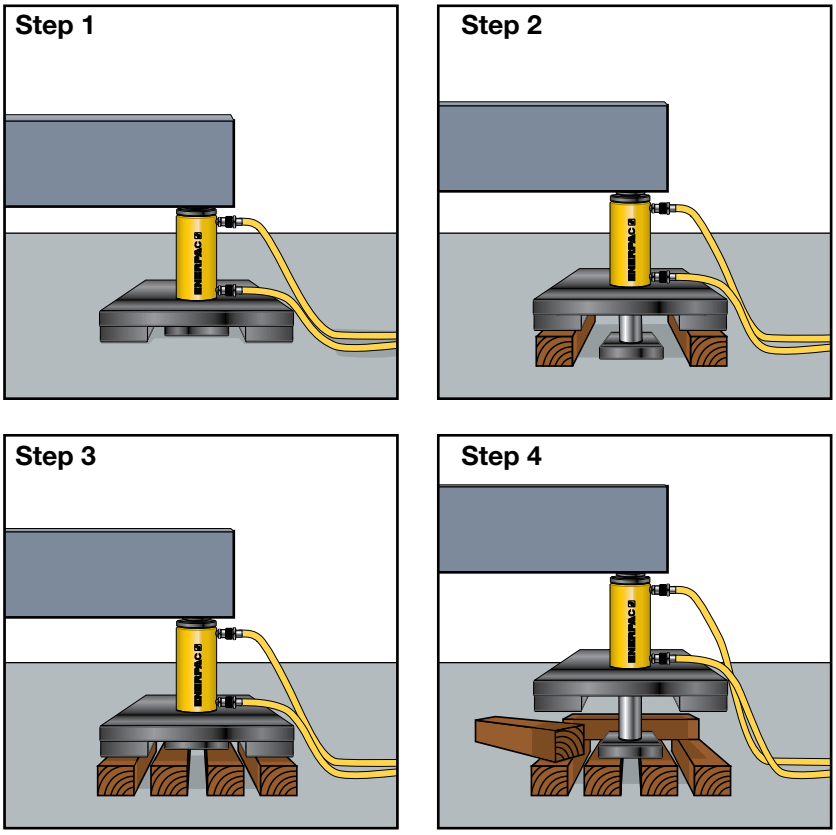

▲ **Stage Lifting Sequence**

Step 1: The Climbing Jack is placed on a solid support under the load (retracted plunger).

Step 2: Plunger extends, lifting the load and giving clearance to insert two outer blocks under the spreading plate.

Step 3: Plunger retracts, giving clearance to position the central blocks which will support the plunger plate for the next extension.

Step 4: Plunger extends, lifting the load, giving clearance to insert two new blocks, placed crosswise under the spreading plate.

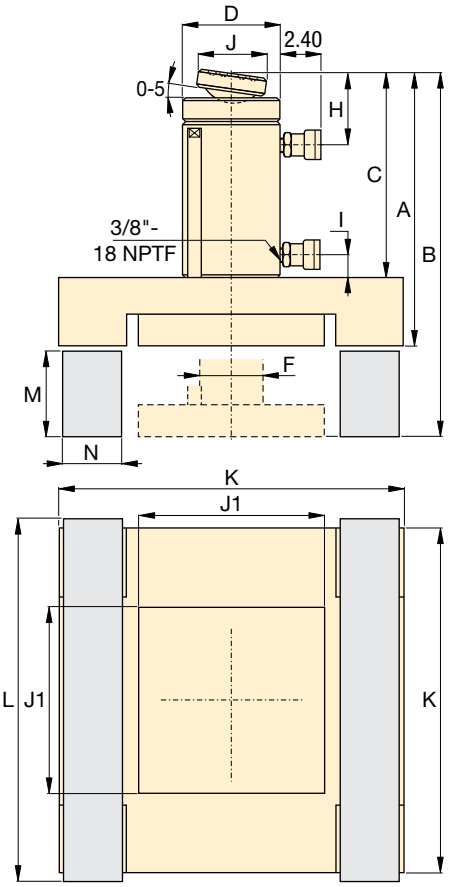

Cylinder Effective Area (in²)		Oil Capacity (in³)		Climbing Jack Dimensions (in)										Support Blocks * and Dimensions (in)				Wt.	Model Number
Push	Pull	Push	Pull	A	B	C	D	F	H	I	J	J1	K	Material	L	M	N	(lbs)	
11.04	3.33	67.80	20.44	15.98	21.89	12.52	5.00	3.11	2.24	1.42	1.97	9.45	20.28	Azobe Wood	22.24	5.51	4.72	375	**BLS506**
20.66	9.64	136.57	63.77	17.52	23.86	13.50	6.97	3.74	2.99	0.94	2.80	12.99	26.38		28.35	5.91	6.30	695	**BLS1006**
30.71	14.79	188.56	90.80	18.58	24.57	14.57	8.00	4.49	3.70	1.54	5.12	9.06	18.70	Solid aluminum or steel	19.69	5.51	4.53	710	**BLS1506**
44.21	22.50	264.35	134.80	20.08	26.02	15.24	9.76	5.24	4.02	1.46	5.12	10.63	21.65		22.64	5.51	5.31	825	**BLS2006**

* Support blocks are not supplied by Enerpac.

▼ SCJ50, Enerpac Self-Locking Cube Jack

Incremental Lifting System With Automatic Mechanical Locking

- **System is automatically mechanically locked after the lifting or lowering stroke**
- **Self-aligning steel cribbing blocks save time, improve side load resistance, and eliminate the need for wooden cribbing materials**
- **Jobs are completed more efficiently due to simplified operation sequence with 50% less cycles than climbing jacks**
- **End block with adjustable swivel saddle allows fine adjustment during set-up: 1.97-inch screw extension**
- **Can be operated with Enerpac's 10,000 psi hydraulic power units**
- **Maximum sideload 1.5% at full extension**
- **Lloyds witness tested to 125% of maximum working load**

Why use Self-Locking Cube Jacks?

The Self-Locking Cube Jack is a safer, more efficient alternative to the jack-and-pack method with wooden cribbing.

The Cube Jack is derived from the proven Enerpac Jack-up System. The Cube Jack has a small footprint and is usable in confined spaces, providing heavy lift contractors with a stable lift up to 118.3 inch. The cribbing blocks are lightweight and can be handled manually.

Markets & Applications

Applications with a minimum starting height of 19 or 22 inches and requirement to lift up to 81 or 118 inches.

- Power Generation transformer jacking
- Mining - equipment maintenance
- Heavy Transport - vehicle unloading
- Oil & Gas - module jacking
- Construction - bridge jacking
- Industrial Movers - lifting, lowering and levelling of heavy equipment.

▼ *Typical set-up with 4 Self-Locking Cube Jack and cribbing blocks to lift a transformer (hydraulic power pack and hoses not shown).*

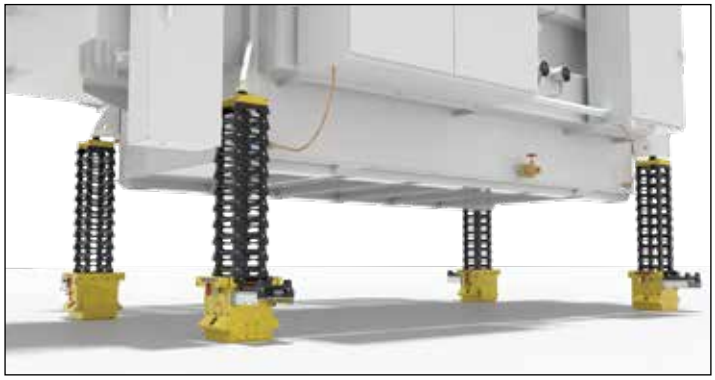

Self-Locking Cube Jacks

Easy-to-use, compact and portable jacking system that utilizes base lifting frames and self-aligning, lightweight steel cribbing blocks, instead of wooden cribbing materials.

Operation is simple:

1. Connect the Cube Jacks to the Enerpac Split-Flow Pump and select lifting mode on each base lifting frame.
2. Insert a cribbing block and actuate the Cube Jack until the cribbing block engages the lock mechanism.
3. Retract the jack and repeat the process until the desired lifting height is reached. For the lowering operation select lowering mode on each base lifting frame and reverse the process.

The Cube Jack End Block is equipped with an adjustable saddle for initial alignment with the load. All controls except for the main directional valve, which is on the hydraulic power unit, are included on the Cube Jack.

Manual cribbing block insertion

Cribbing blocks are easily managed by hand and the Cube Jack includes integrated fork pockets and lifting rings for effortless positioning.

Synchronous Lifting & Lowering

If synchronization is required, the Cube Jack can accommodate stroke sensors and be used with any Enerpac Computer Controlled Synchronous Lifting System.

SCJ Series

Capacity Per Cube Jack:
56 - 110 ton

Maximum Lifting Height:
81.4 - 118.3 inches

Maximum Operating Pressure:
10,000 psi

▲ *Cube Jack close-up of lifting and lowering valving mode and lock handle.*

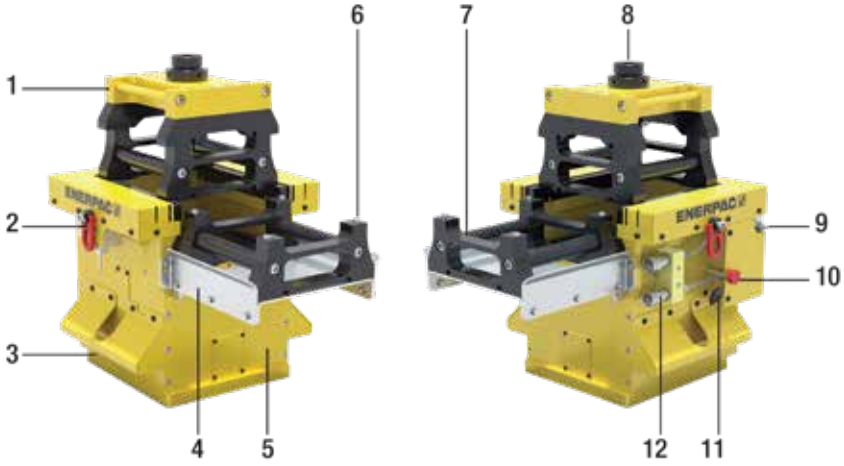

Self-Locking Cube Jacks

1	End block with tilting saddle
2	Eye-bolts for hoisting
3	Forklift tabs
4	Removable insert table
5	Cube Jack base frame
6	Locating pins
7	Steel cribbing blocks
8	Adjustable tilting saddle
9	Flow control
10	Mode locking pin
11	Mode selector lever
12	Hydraulic connections (Advance / Retract)

▼ *Optional wire stroke sensor can provide stroke feedback to pump control.*

▼ SCJ100, Enerpac Self-Locking Cube Jack

Incremental Lifting System With Automatic Mechanical Locking

- **Included with Cube Jack are:**
  - **Cube Jack Base Unit**
  - **End Block with Swivel Saddle**
  - **Multiple cribbing blocks: 11x on SCJ50**
    18x on SCJ100
  - **Transportation Frame**
- **Cribbing blocks can be manually inserted into Cube Jack by one person**

Transportation Frame

Provided with purchase of each Cube Jack.

Provides storage and transport for base unit, end block, and all included cribbing blocks.

Lightweight Cribbing Blocks

Provided with purchase of each Cube Jack.

Spare cribbing blocks can be ordered separately.

Description	Model No.
1x Cribbing Block	**SCJ5B**
1x Cribbing Block	**SCJ10B**

Split-Flow Pumps

Enerpac recommend to use the SFP-Series Pumps with multiple outlets with equal oil flow.

For lifting and lowering applications on multiple points, Split-Flow Pumps are a far better alternative than using separately operated pumps.

Page: 132

▼ *Forklift tabs on Cube Jacks for easy transportation and positioning with a pallet truck. See dimensions D and I to select the right pallet truck size.*

▼ **Self-Locking Cube Jacks**

Lifting Capacity per Base Unit (ton)	Lifting Stroke (in)	Model Number	Maximum Sideload at Full Extension	Oil Capacity per Base Unit (in^3) Advance	Oil Capacity per Base Unit (in^3) Retract
56	6.14	**SCJ50**	1.5%	75	38
110	6.14	**SCJ100**	1.5%	152	85

Self-Locking Cube Jack and Accessories

Basic Unit

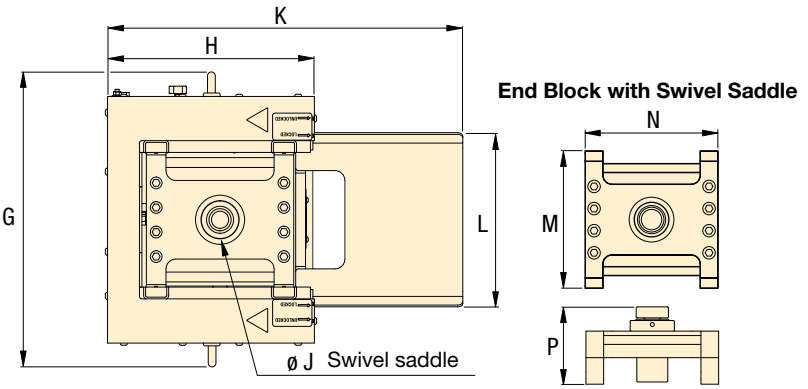

End Block with Swivel Saddle

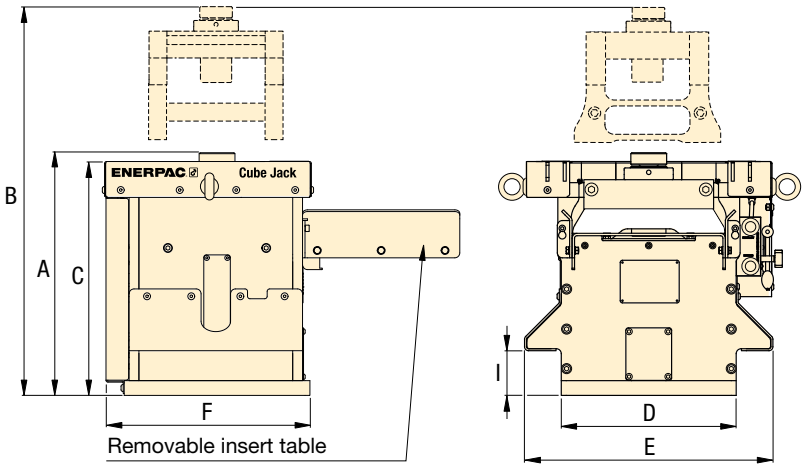

Cribbing Block



SCJ Series

Capacity Per Cube Jack:
56 - 110 ton

Maximum Lifting Height:
81.4 - 118.3 inches

Maximum Operating Pressure:
10,000 psi

▲ *SCJ100 Self-Locking Cube Jack at maximum height of 118.3 inches with 18 cribbing blocks.*

Base Unit		End Block		Cribbing Block		Transport Frame*	
Model Number	Weight (lbs)	Model Number	Weight (lbs)	Model Number	Weight (lbs)	Model Number	Weight (lbs)
SCJ50	794	**SCJ5EB**	88	**SCJ5B**	35	**SCJ5F**	243
SCJ100	1804	**SCJ10EB**	220	**SCJ10B**	51.7	**SCJ10F**	550

Dimensions (inches)																Model Number
A	B	C	D	E	F	G	H	I	J	K	L	M	N	P (min)	P (max)	Q	
19.4	81.4	18.7	14	19.9	17.4	21.9	16.9	3.6	4.92	28.6	13.8	11.8	12.2	6.9	8.9	4.9	**SCJ50**
22.0	118.3	20.7	19.9	25.8	25.0	30.4	23.5	4.0	6.69	41.2	19.8	17.7	18.1	7.4	9.4	4.9	**SCJ100**

* Dimensions Transport Frame L x W x H: **SCJ5F**: 36.25 x 33.5 x 34 inches
SCJ10F: 63 x 47.25 x 59 inches

▼ **LH-Series, Low-Height Skidding System**

Low Height Skidding System for Heavy Loads

The Ideal Low-Height Jack & Slide Solution

- **Low starting height saves time and increases versatility**
- **Portable design allows for easy transport and setup**
- **System can push or pull load without relocating skidding cylinder**
- **Skid track sections bolt together to allow each setup to be customized as needed**
- **Replaceable PTFE skid pads lower the total cost of ownership**

Skidding Systems

The Skidding System is comprised of a series of skid beams moved by hydraulic push-pull cylinders, travelling over a pre-constructed skid track.

A series of special PTFE-coated Teflon® pads are placed on the skid tracks to reduce friction. The push-pull cylinders are then connected by hydraulic hoses to our Split-Flow Pump. The Split-Flow Pump can be mounted on an optional pump cart for easy transport.

An optional storage and transport frame easily holds the equipment in between use.

▼ *LH400, Low-Height Skidding System provides the service team with the ability to maneuver and transport a press frame.*

Low-Height Skidding System, 400 Tons

Low-Height Skidding Jack Starter Kit - LH400SK

A complete starter kit is available to fit the needs of any jack and slide application.

This system comes with two skidding units that will support up to 400 tons in total. This kit will get the job done, but there are optional accessories available in addition (see pages 80-81).

Each skidding unit will have 1 push-pull unit, 2 skid beams and 5 skid tracks

LH400SK Starter Kit includes:	Model Number	Qty.
Push-Pull Unit (200 tons)	LHPP25	2x
Skid Beam A (3.3 feet)	LHSB1A	2x
Skid Beam B (3.3 feet)	LHSB1B	2x
Skid Track (3.3 feet)	LHST1	10x
Storage and Transport Frame	LHSF	1x

The Split-Flow Pump (to be ordered separately) has 2 outlets and can be easily towed on the pump cart. After the job is complete, components can be stowed on the included storage and transport frame.

LH Series

Skidding Capacity (with 2 push-pull units):
400 tons

Push-Pull Stroke:
23.5 inches

Maximum Operating Pressure:
10,000 psi

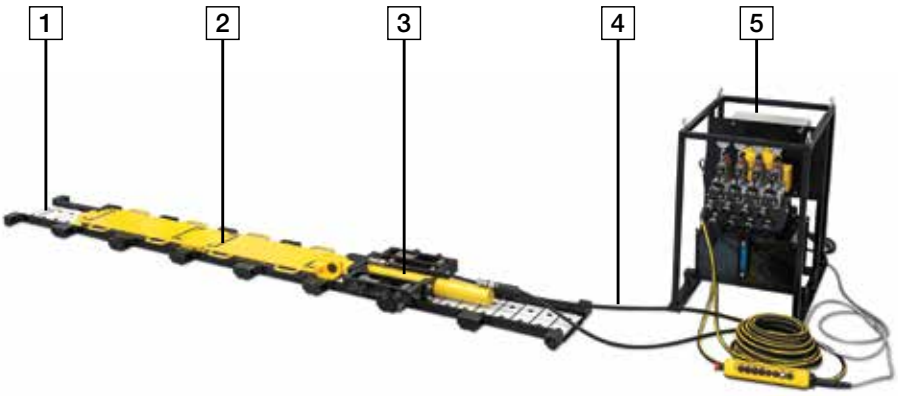

▼ LH-Series Skidding System Requirements

1	Skid Track - **LHST1**	Required
2	Skid Beam - **LHSB1A** and **LHSB1B**	Required
3	Push-Pull Cylinder Unit - **LHPP25**	Required
4	Hydraulic Hoses	Required
5	Split-Flow Electric Pump	Required
6*	Track Support	Application Dependent
7*	Storage and Transport Frame - **LHSF**	Optional
8*	Pump Cart - **LHPC**	Optional

* not shown

LH400 Low-Height Skidding System

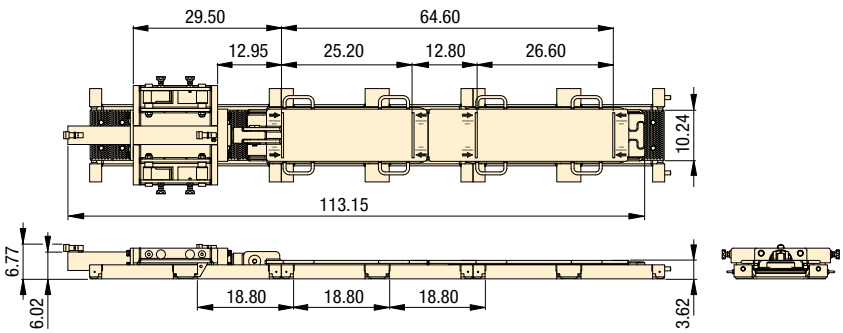

SFP-Series, Split-Flow Pump

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Page: 132

Hydraulic Power Packs

Enerpac offers a comprehensive range of hydraulic power packs that are optimized for use with Skidding Systems.

LHPC Pump Cart

The LHPC pump cart easily tows pump around jobsite and can be used with all models of Split-Flow Pumps.

▼ LHPP25 Low-Height Push-Pull Unit

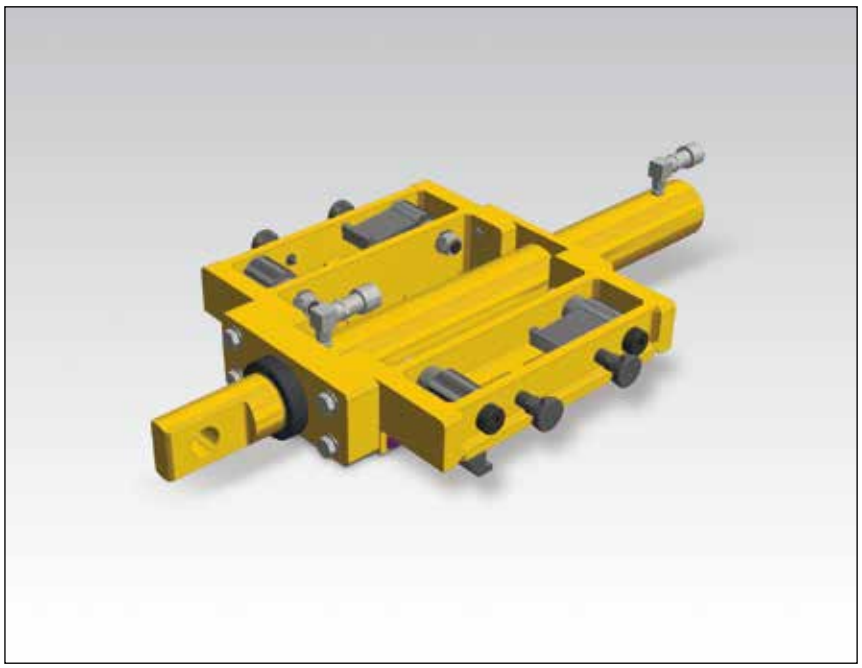

Push-Pull Unit

- Connects to first skid beam to push or pull load along skid track
- Easily reverse direction by switching reaction tabs
- Complies to ASME B30.1 and other safety standards

Maximum Capacity (tons)		Model Number	Stroke	Weight
Push	Pull		(inch)	(lbs)
25	11	**LHPP25**	23.5	224

▼ LHSB1A and LHSB1B Skid Beams

Skid Beams

- Interlocks without any fasteners to slide load over skid track; skid beam A (LHSB1A) attaches to the push-pull unit skid beam B (LHSB1B) attaches to skid beam A
- Polished stainless steel skid surface
- Carrying handles for easy transport

Capacity (tons)	Model Number	Weight (lbs)
100	**LHSB1A**	145
100	**LHSB1B**	139

▼ **LHST1 Skid Track**

- **Support the load for skidding operations**
- **Track sections bolt together**
- **Includes 9 pieces easily replaceable PTFE skid pads**

Max.Cap. (per skid track) (tons)	Model Number	Track Length (in)	Weight (including pads) (lbs)
100	**LHST1**	37.60	148

LH Series

Skidding Capacity (with 2 push-pull units):
400 tons

Push-Pull Stroke:
23.5 inches

Maximum Operating Pressure:
10,000 psi

Teflon® Pads

A series of special PTFE coated Teflon® pads are placed on the skid tracks. The PTFE surface is matched with the skid beam and designed to achive minimum friction coefficients. Replacement Teflon® pads come in packs of 12 pieces.
Order model number **HSKSPS1**.

LHSF Storage and Transport Frame

- For easy storage and transport.
- Fits following components:

2x LLPP25 Push-Pull Unit
2x LHSB1A Skid Beam A
2x LHBS1B Skid Beam B
10x LHST1 Skid Tracks

▼ *An LH400 Skidding System allows the maintenance team to transport transformers with access limitations.*

▼ *Details of push-pull unit of LH400.*

▼ *Low-Height Skidding System assembly (LH400).*

▼ ETT 400 Turntable

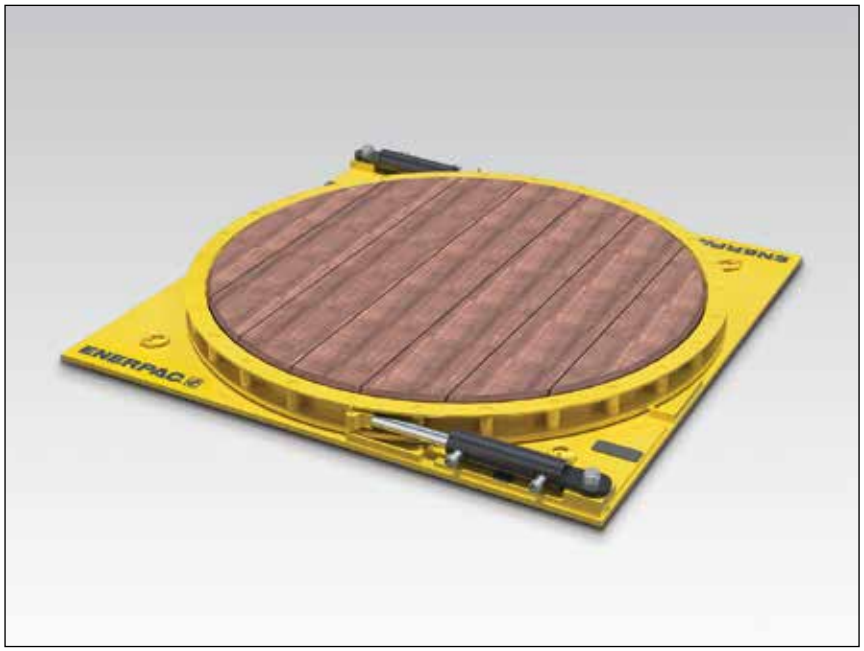

ETT
Series

Maximum Capacity:
225 - 450 tons

Cylinder Capacity:
25 tons

Maximum Operating Pressure:
10,000 psi

- **Safe and controlled rotation of heavy loads**
- **Easily change rotation direction**
- **Dual capacity: 225 ton with one cylinder, 450 ton with two cylinders**
- **Compact size for use in applications with limited space**
- **Compatible with standard Enerpac pumps**
- **Hardwood surface**

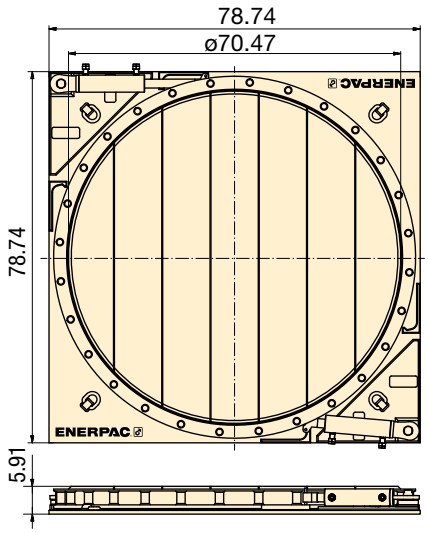

▼ **SELECTION CHART**

Maximum Load Capacity (ton)	Model Number	Cylinder Capacity * (ton)	Cylinder Oil Capacity * (in^3) advance	retract	Number of Cylinders*	Rotation per Stroke (degrees)	Platform Diameter (in)	Wt. (lb)
225	**ETT200**	25	48.31	21	1	12.5	70.47	3748
450	**ETT400**	25	48.31	21	2	12.5	70.47	3803

* Per cylinder. Cylinder model number: **BRD259-ETT**

Safe and Controlled Rotation

The ETT-Series is your solution for rotating heavy loads during, before or after a lifting and skidding operation.

SFP-Series, Split-Flow Pump

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Page: 132

LH-Series, Low-Height Skidding

The ETT-Series is ideal in combination with our skidding systems, particular the LH-Series. Skidding and rotating in confined spaces is simplified.

Page: 360

Telescopic Hydraulic Gantries

The ETT-Series in combination with our hydraulic gantry SL-Series makes load handling in the most demanding situations easy.

Page: 364

INFRASTRUCTURE

- Custom cylinders used for incremental bridge launching systems.

BUILDING CONSTRUCTION

- Custom cylinders for jack and slide operations.

INFRASTRUCTURE

- Custom SyncHoist cylinders for placement of stadium roof trusses.

POWERGEN

- Custom double-acting Lock Nut cylinders with internal stroke sensors and an integrated load holding valve for lifting nuclear components.

INFRASTRUCTURE

- Custom cylinders with embedded sensors for bridge construction.

POWERGEN

- One of three custom SyncHoist cylinders used to place a 1,140-ton nuclear plant module.

Enerpac hydraulic pumps are available in over 1,000 different configurations. Whatever your high pressure pump needs are… speed, control, intermittent or heavy-duty performance… you can be sure that Enerpac has the pump to suit the application.

Featuring Hand, Battery, Electric, Air and Gasoline powered models, with multiple reservoir and valve configurations, Enerpac offers the most comprehensive high pressure pump line available.

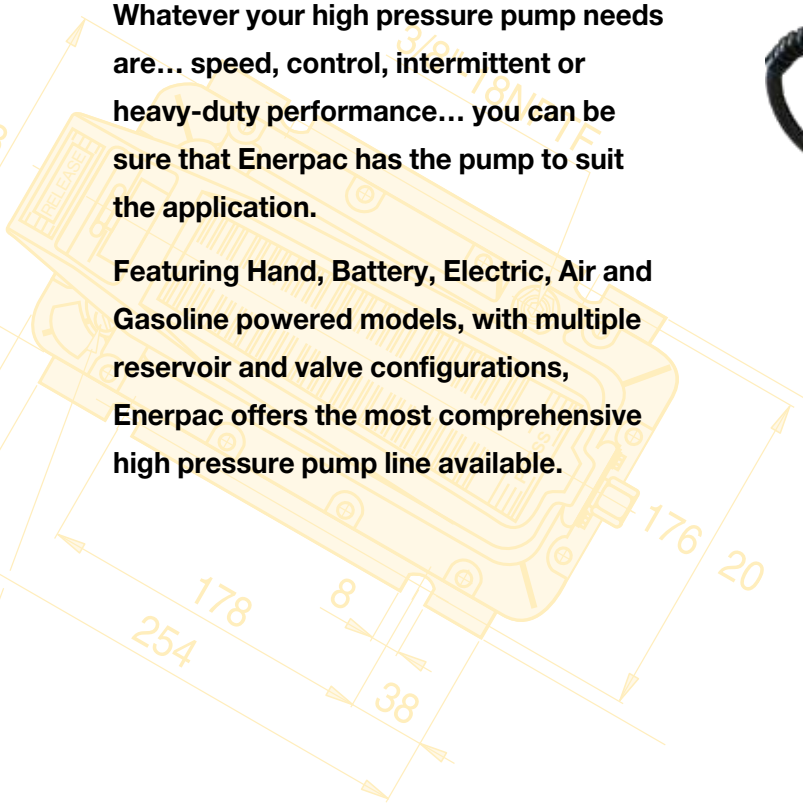

Pump Selection

For help in selecting the correct pump for your application, please review our **"Yellow Pages."**
If you require further assistance, contact the Enerpac office located near you.

Page: 406

Torque Wrench Pumps

System matched air and electric pumps provide control to operate Enerpac Torque Wrenches.

Page: 295

Pumps and Directional Control Valves Section Overview

Power Source	Pump Types	Maximum Reservoir Capacity	Max. Flow at Rated Pressure (in^3/min)	Series		Page
Manual	**Lightweight Hand Pumps** Exclusively from Enerpac	155 in^3	0.15 (in^3/stroke)	P		86 ▶
	ULTIMA Steel Hand Pumps **Low-Pressure Hand Pumps**	453 in^3 200 in^3	0.29 0.58 (in^3/stroke)	P P		88 ▶ 90 ▶
	Foot Pump For Hands-Free Operation	38 in^3	0.15 (in^3/stroke)	P		92 ▶
	Multifluid Hand Pumps Pumping Fluids up to 14,500 psi	–	1.28 (in^3/stroke)	MP		93 ▶
	Ultra-High Pressure Hand Pumps Pressure up to 40,000 psi	60 in^3	0.15 (in^3/stroke)	P, 11		94 ▶
Battery	**Battery Powered Hydraulic Pumps** Cordless Hydraulic Power	120 in^3	15	XC		96 ▶
	Cordless Hydraulic Pumps High-Performance Battery Power	60-120 in^3	32	ZC		98 ▶
Electric	**Economy Series** Compact and Portable	1 gal.	20	PU		100 ▶
	Electric Hydraulic Pumps, E-Pulse® The Heart of the System	0.8 gal.	32	E		102 ▶
	Z-Class Portable and Powerful	10 gal.	60 200	ZU4 ZE		104 ▶ 112 ▶
	8000-Series The Maximum Flow Pump	25 gal.	462	PEM PER		118 ▶
Air	**Air Hydraulic Pumps** Single and Twin-Air Motor	80 in^3 2 gal.	8 9	PA PAM		120 ▶ 121 ▶
	Turbo II Air Hydraulic Pumps Compact Air Over Hydraulic	305 in^3	10	PA		122 ▶
	XA-Series Air Hydraulic Pumps Control and Ergonomics	122 in^3	15	XA		124 ▶
	ZA4 Air Hydraulic Pumps The Standard for Air-Hydraulic Pumps	10 gal.	80	ZA		126 ▶
Gasoline	**ZG5/ZG6 Gasoline Hydraulic Pumps** Gas Powered High-Flow Pumps	10 gal.	200	ZG5 ZG6		128 ▶ 130 ▶
	8000-Series Gasoline Pumps For the Largest Jobs	25 gal.	1.5 (gal/min)	EGM		131 ▶
Controlled	**Split-Flow Pumps** Multi-point Lifting & Lowering	40 gal.	153	SFP		132 ▶
	Synchronized Lifting System Computer Controlled Monitoring for Precise Lifting	66 gal.	292	EVO		136 ▶
	Directional Control Valves					139 ▶

▼ Pumps shown, from top to bottom: **P802, P842, P202, P142**

- **Lightweight and compact design**
- **Durable glass-filled nylon reservoir and nylon encapsulated aluminum pump base for maximum corrosion resistance**
- **Two-speed operation on most models reduces handle strokes by as much as 78% over single speed pumps**
- **Lower handle effort to minimize operator fatigue**
- **Integral 4-way valve on P842 for operation of double-acting cylinders**
- **Handle lock and lightweight construction for easy carrying**
- **Large oil capacities to power a wide range of cylinders or tools**
- **Non-conductive fiberglass handle for operator safety**
- **Internal pressure relief valve for overload protection**

Exclusively from Enerpac

Cylinder Matching Chart

For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the "Yellow Pages".

Page: **402**

Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: **409**

Tank Kits

When a return-to-tank port is required, the Tank Kits provide a 7/16"-20 port at the rear of the reservoir.

PC20	Fits P141, P142
PC25	Fits P202, P391, P392

LX101 Hand Pump Oil

A medium viscosity oil specially formulated for hand pumps. Performs well in low temperatures and requires less pumping effort than standard Enerpac HF blue oil.

Page: **152**

▼ *P392 in action with RC256 cylinders.*

Pump Type	Usable Oil Capacity (in^3)	Model Number	Pressure Rating* (psi)		Oil Displacement per Stroke (in^3)		Max. Handle Effort (lbs)
			1st stage	2nd stage	1st stage	2nd stage	
Single speed	20	**P141**	N/A	10,000	N/A	0.055	72
	55	**P391**	N/A	10,000	N/A	0.151	85
Two speed	20	**P142****	200	10,000	0.221	0.055	78
	55	**P202**	200	10,000	0.221	0.055	63
	55	**P392****	200	10,000	0.687	0.151	93
	155	**P802**	400	10,000	2.40	0.151	95
	155	**P842*****	400	10,000	2.40	0.151	95

* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.
** Available as set, see note on top of next page.
*** For use with double-acting cylinders.



Pump and Cylinder Sets

Pumps marked with an ** are available as **sets** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 62

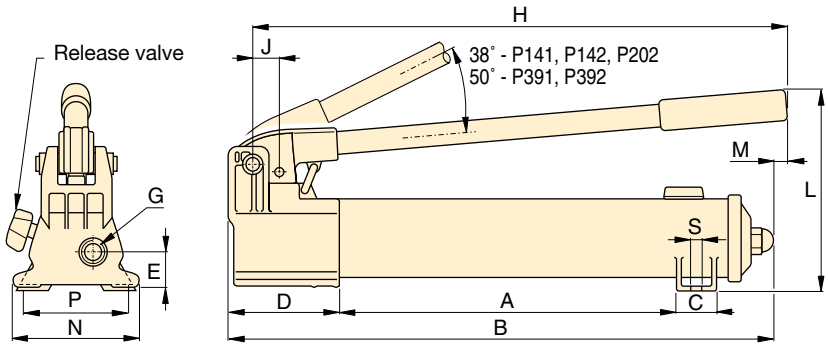

P141, P142, P202, P391, P392

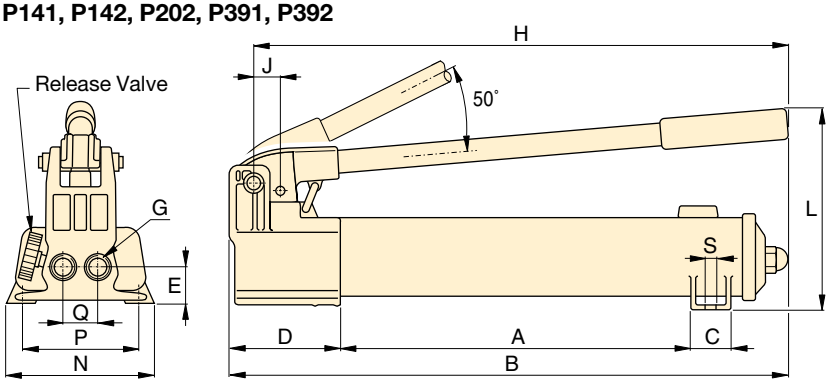

P802

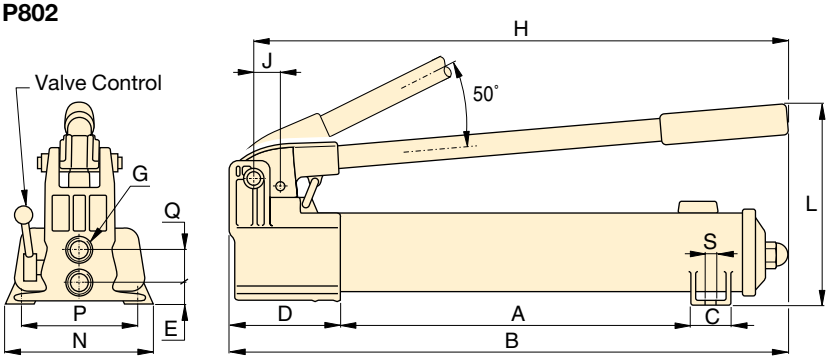

P842

P Series

Reservoir Capacity:
20 - 155 in³

Flow at Rated Pressure:
0.055 - 0.15 in³/stroke

Maximum Operating Pressure:
10,000 psi

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 162

Aluminum Reservoir

For applications where composite reservoirs may not be suitable, the **P392AL** utilizes an extruded aluminum reservoir. Also included is a second handle for two-hand use. Contact Enerpac for details.

Piston Stroke	Dimensions (in)														Weight	Model Number
(in)	A	B	C	D	E	G	H	J	L	M	N	P	Q	S	(lbs)	
0.50	7.31	13.25	1.13	3.37	1.13	¼"-18 NPTF	12.56	0.75	5.63	–	3.75	3.25	–	0.28	4.5	**P141**
1.00	13.56	21.00	1.44	3.93	1.31	⅜"-18 NPTF	20.56	1.19	7.00	0.63	4.75	–	–	–	9.0	**P391**
0.50	7.31	13.25	1.13	3.37	1.13	¼"-18 NPTF	12.56	0.75	5.63	–	3.75	3.25	–	0.28	5.3	**P142****
0.50	13.56	20.06	1.44	3.37	1.13	¼"-18 NPTF	15.75	0.75	5.69	0.63	3.75	–	–	–	7.5	**P202**
1.00	13.56	21.00	1.44	3.93	1.31	⅜"-18 NPTF	20.56	1.19	7.00	0.63	–	–	–	–	9.0	**P392****
1.00	13.30	21.75	1.78	5.25	1.39	⅜"-18 NPTF	20.75	2.19	9.00	–	7.12	6.02	1.40	0.41	18.0	**P802**
1.00	13.30	21.75	1.78	5.25	0.81	⅜"-18 NPTF	20.75	2.19	9.00	–	7.12	6.02	1.44	0.41	22.0	**P842*****

▼ Shown from left to right: **P77, P80, P84, P801, P39**

The Solution for Tough Jobs

Two-Speed Pumps
Recommended for applications where cylinder plunger must advance rapidly to contact load, and applications where greater oil capacities are required, such as multiple cylinder hook-ups.

Foot Pump Conversion Kits
Convert your **P39, P77, P80,** or **P801** to foot power with the **PC11** Kit.
Includes instructions for easy conversion.

GA45GC Gauge Adaptor
Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 162

4-Way Control Valve
P84 and P464 feature a manual 4-way control valve, designed for use with one double-acting or two single-acting cylinders. For system set-up information:

Page: 404

- **Reduced handle effort and ergonomic grip for less operator fatigue**
- **Two-speed operation for fast and easy operation (except P39)**
- **Vent free reservoir eliminates spills**
- **Quick grip handle allows for easy transport**
- **Integral reservoir over-pressurization protection**
- **All steel construction, chrome plated plunger and wiper system for durable, long lasting performance**
- **4-way valving on the P84 and P464 for operation of double-acting cylinders**

▼ *In the absence of a power supply, the P80 Hand Pump offers a powerful solution.*

Pump Type	Usable Oil Capacity (in^3)	Model Number	Pressure Rating* (psi)		Oil Displacement per Stroke (in^3)		Max. Handle Effort (lbs)
			1st stage	2nd stage	1st stage	2nd stage	
Single	41	**P39**	N/C	10,000	N/C	0.15	85
Two-speed	41	**P77**	500	10,000	1.00	0.15	88
	134	**P80****	500	10,000	1.00	0.15	77
	250	**P801**	500	10,000	1.00	0.15	77
	134	**P84*****	500	10,000	1.00	0.15	77
	453	**P462**	200	10,000	7.69	0.29	110
	453	**P464*****	200	10,000	7.69	0.29	110

* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.
** Available as a set, see note on next page.
*** For use with double-acting cylinders.

Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

P Series

Reservoir Capacity:
41 - 453 in³

Flow at Rated Pressure:
0.15 - 0.29 in³/stroke

Maximum Operating Pressure:
10,000 psi

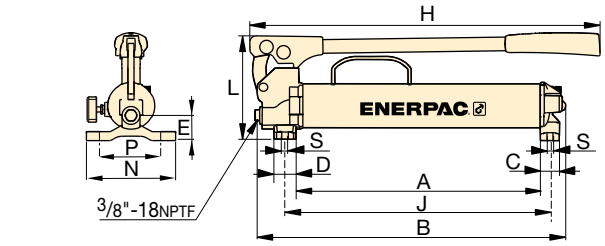

P39, P77

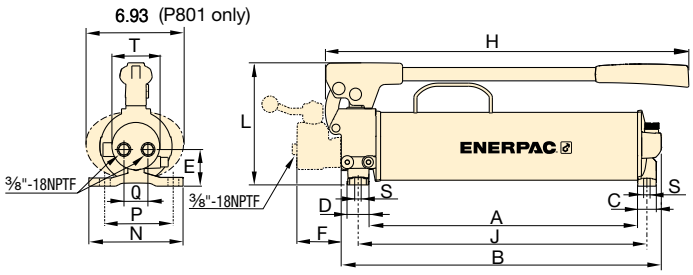

P80, P801, P84

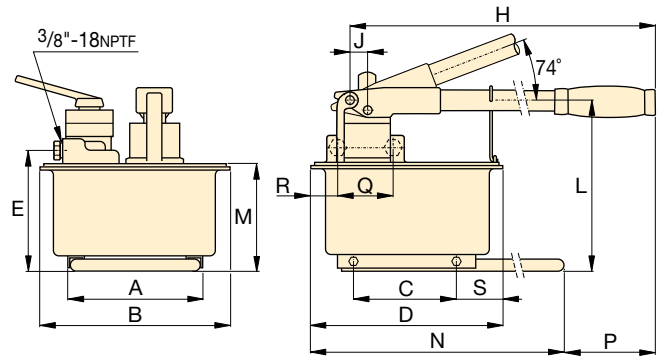

P462, P464

Extra Capacity Hand Pumps

P462 and **P464** feature extra-large reservoirs and a high first-stage flow rate. These pumps are ideally suited for powering high-capacity cylinders.



Pump and Cylinder Sets

P80 is also available as a **set** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 62

Cylinder Matching Chart

For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the "Yellow Pages."

Page: 402

Piston Stroke	Dimensions (in)																Weight	Model Number
(in)	A	B	C	D	E	F	H	J	L	M	N	P	Q	R	S	T	(lbs)	
1.00	15.09	18.91	1.18	1.38	1.48	–	21.63	16.37	6.39	–	5.51	4.37	–	–	0.33	–	13.6	**P39**
1.00	15.39	19.19	1.18	1.38	1.86	–	21.63	16.67	6.39	–	5.51	4.37	–	–	0.33	–	15.6	**P77**
1.00	16.83	20.12	1.18	1.38	2.17	–	23.50	18.11	7.65	–	5.91	4.76	1.65	–	0.33	2.93	23.6	**P80****
1.00	16.83	20.12	1.18	1.38	2.17	–	23.50	18.11	7.65	–	5.91	4.76	1.65	–	0.33	2.93	31.0	**P801**
1.00	16.83	20.06	1.18	1.38	2.30	2.77	22.78	18.11	7.65	–	5.91	4.76	1.50	–	0.33	2.93	26.0	**P84*****
1.50	8.25	12.13	6.42	12.63	7.68	–	26.44	.98	10.63	6.89	25.6	3.63	–	–	3.13	–	61.0	**P462**
1.50	8.35	12.13	6.42	12.63	7.68	–	26.44	.98	10.63	6.89	25.6	3.63	3.50	2.68	3.13	–	61.0	**P464*****

▼ Shown from left to right: **P25, P51, P18**

When Less Than 10,000 psi is All You Need

- **P25 and P50 pump oil in both forward and reverse handle movement improving overall efficiency, ideal when mounting space is restricted**
- **External load-release valve**
- **Internal pressure-relief valve for overload protection**
- **For use with single-acting cylinders and tools**
- **P18 vertical operation requires pump head facing down**
- **P25, P50 vertical operation requires pump vent side facing up**
- **P51 for horizontal operation only**

LX101 Hand Pump Oil

A medium viscosity oil specially formulated for hand pumps. Performs well in low temperatures and requires less pumping effort than standard Enerpac HF blue oil.

Page: **152**

GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: **162**

▼ *P18 hand pump used for locking the rotating table for marble polishing.*

Pump Type	Usable Oil Capacity (in^3)	Model Number	Pressure Rating (psi)	Oil Displacement per Stroke (in^3)	Max. Handle Effort (lbs)
Single-speed	18	**P18**	2,850	0.16	34
	200	**P25**	2,500	0.58	60
	200	**P50**	5,000	0.29	60
	50	**P51**	3,000	0.25	61

P Series

Reservoir Capacity:
18 - 200 in³

Flow at Rated Pressure:
0.16 - 0.58 in³/stroke

Maximum Operating Pressure:
2,500 - 5,000 psi

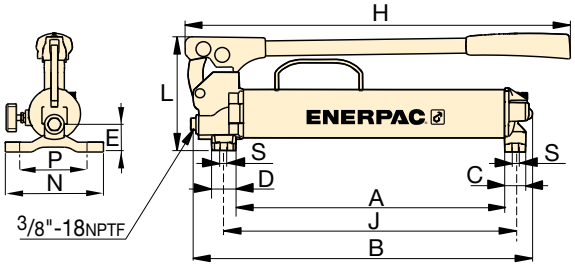

P18

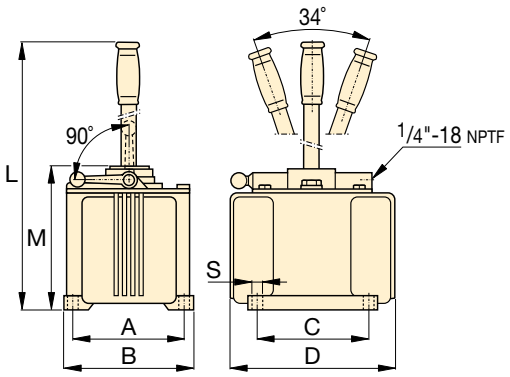

P25, P50

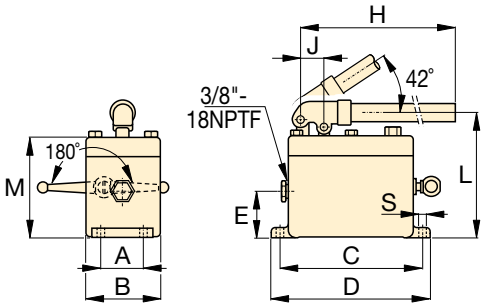

P51

Hoses
Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

MP-Series Multifluid Hand Pumps
Corrosion resistant hand pumps for low pressure filling and high pressure testing applications, suitable for a wide range of fluids.

Page: 93

P51 hand pumps used with RC-series cylinders to keep wooden layers under pressure during lamination of plates. ▶

Piston Stroke	Dimensions (in)												Weight	Model Number
(in)	A	B	C	D	E	H	J	L	M	N	P	S	(lbs)	
1.00	8.70	12.44	1.18	1.38	1.48	15.17	9.98	6.39	–	5.51	4.37	0.33	11	**P18**
1.50	6.00	6.82	6.00	9.43	–	–	–	26.94	7.88	–	–	0.40	36	**P25**
1.50	6.00	6.82	6.00	9.43	–	–	–	26.94	7.88	–	–	0.40	37	**P50**
1.00	2.06	3.63	7.12	7.88	2.25	24.00	1.16	6.31	5.06	–	–	0.34	12	**P51**

Lightweight Hydraulic Foot Pump

ENERPAC

▼ Shown: **P392FP**

P
Series

Reservoir Capacity:
38 in³

Flow at Rated Pressure:
0.151 in³/stroke

Maximum Operating Pressure:
10,000 psi



Pump and Cylinder Sets

The **P392FP** is available as **sets** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: **92**

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **148**

- **Robust, durable and compact**
  - **Steel frame for maximum stability**
  - **Steel pumping handle**
  - **Aluminum reservoir**
- **Foot pedal lock and lightweight construction for portability**
- **Two-speed operation reduces foot pedal strokes**
- **Large foot-pad release valve for controlling load descent**
- **Internal pressure relief valve for overload protection**

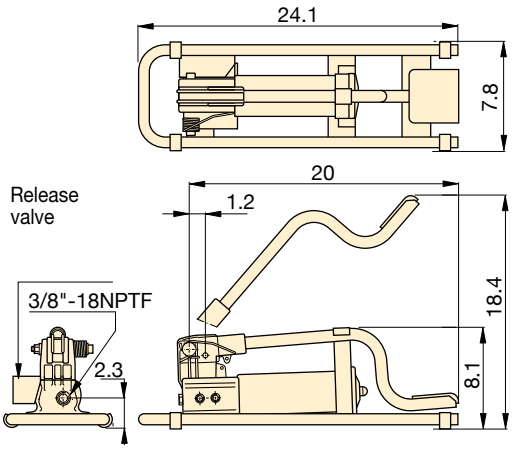

▼ *P392FP offers the advantage of hands-free operation to handle and control the tool or cylinder.*

Usable Oil Capacity (in³)	Model Number	Pressure Rating (psi) 1st stage	Pressure Rating (psi) 2nd stage	Oil Displacement per Stroke (in³) 1st stage	Oil Displacement per Stroke (in³) 2nd stage	Max. Handle Effort (lbs)	Piston Stroke (in)	Weight (lbs)
30	**P392FP ***	200	10,000	0.687	0.151	125	1	16

* Available as set, see note on this page.

MP-Series, Multifluid Hand Pumps

▼ Shown: **MP110**

MP Series

Reservoir Capacity:
2 gallon (optional)

Flow at Rated Pressure:
0.12 - 1.28 in³/stroke

Maximum Operating Pressure:
1,500 - 14,500 psi

Optional Reservoir Kit

The two-gallon reservoir kit **MP10T*** includes tank with skid frame, top plate with reservoir seal, suction pipe and mounting bolts. Useable oil capacity is 1.5 gal.

*For use with mineral oil applications only.

Also available is model number **11-400.**

Page: 94

- **Superior corrosion resistance**
- **Impregnated aluminum anodized pump housing with stainless steel internal pumping components**
- **Standard Nitrile seals – excellent for demineralized water, oil/water emulsions, water glycols, mineral oils, hydraulic fluids**
- **Custom EPDM seals available for use with Skydrol® or brake fluids**
- **Two-speed pumps up to 14,500 psi pressure**
- **Externally adjustable pressure-relief valve**
- **1/4" NPTF gauge port**

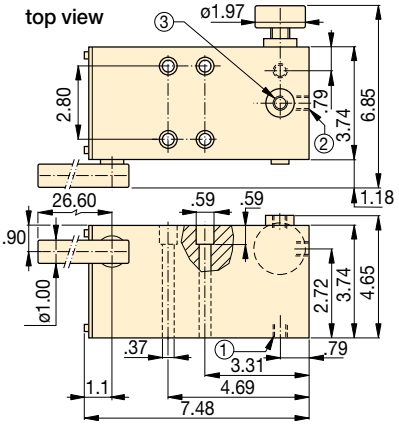

MP110, 350, 700, 1000

① Suction / Tank return port 3/8"-18 NPTF
② Pressure port 3/8"-18 NPTF
③ Gauge port 1/4"-18 NPTF

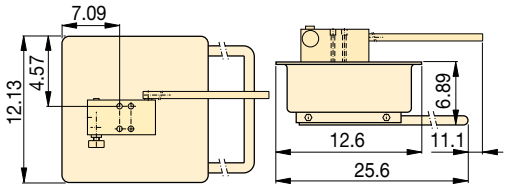

MP10T

▼ *MP-Series pumps are ideal for testing and filling applications.*

Pump Type	Usable Oil Capacity (in³)	Model Number	Pressure Rating (psi)		Oil Displacement per Stroke (in³)		Max. Handle Effort (lbs)	Piston Stroke (in)	Weight (lbs)
			1st stage	2nd stage	1st stage	2nd stage			
Two Speed	*	**MP110**	500	1500	3.2	1.28	99	1.04	14.5
	*	**MP350**	500	5000	3.2	0.43	99	1.04	14.5
	*	**MP700**	500	10,000	3.2	0.18	99	1.04	14.5
	*	**MP1000**	500	14,500	3.2	0.12	99	1.04	14.5

Note: MP-Pump includes 0.060 in. thick gasket for reservoir mounting.
* MP-Series pumps require the use of an external reservoir.

▼ Shown from left to right: **11-100, P2282**

Ultra-High Pressure up to 40,000 psi

2-Way Shut-Off Valve 72-750

For 40,000 psi applications requiring a shut-off valve or gauge snubber. Made of 318 Stainless Steel and utilizing 0.38-inch cone fittings, it is the perfect selection for use with your Ultra-High Pressure Hand Pump.

Test System Gauges

Ideal for monitoring pressure in your hydraulic circuit, Test System Gauges, such as the **T6010L**, are available with cone threads or NPTF threads and in a variety of pressure ranges.

Page: **160**

- **Two-speed operation on the P2282 allows for faster fill, reducing cycle times for many testing applications**
- **303 Stainless steel construction on the 11-100 and 11-400 models enable use with many different fluids, such as distilled water, alcohol, diesters, silicones, soluble oils and petroleum**
- **Large release knob for improved control of pressure release**
- **Outlet ports are 3/4"-16 cone for 40,000 psi rating**

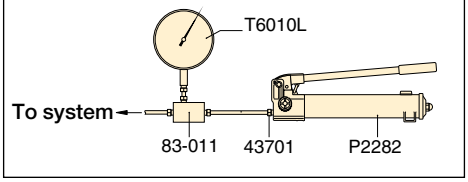

▲ *Typical Test System*

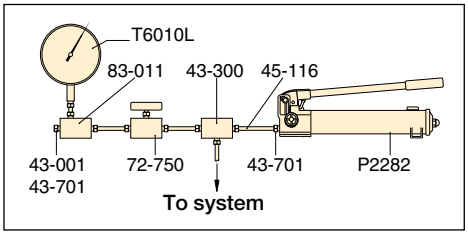

▲ *Test System with Gauge and Snubber*

Cone Seal

Stainless Steel High Pressure fittings seal on a "cone" surface and do not require pipe sealer. The Gland Nut holds the sleeve and tubing tight against the cone surface to provide a 40,000 psi seal.

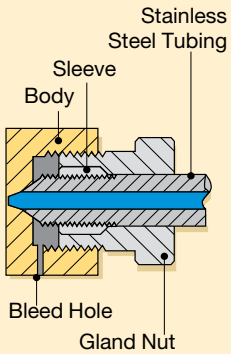

Pump Type	Usable Oil Capacity (in³)	Model Number	Pressure Rating* (psi) 1st stage	Pressure Rating* (psi) 2nd stage	Oil Displacement per Stroke (in³) 1st stage	Oil Displacement per Stroke (in³) 2nd stage	Max. Handle Effort (lbs)
Two-speed	60	**P2282**	200	40,000	0.99	0.037	106
Single-speed	45	**11-100**	N/C	10,000	N/C	0.152	120
	45	**11-400**	N/C	40,000	N/C	0.038	120

* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.

▼ Optional Ultra-High Pressure Fittings and Tubing

Description		Connection	Model No.
		40,000 psi	
Gland Nut Plug		0.38" cone	43-001
Elbow		0.38" cone	43-200
Tee		0.38" cone	43-300
Gauge Tee		0.38" cone side/ 0.25" cone gauge port	43-301
Gauge Adaptor		0.38" cone side/ 0.25" cone gauge port	83-011
Coupling		0.38" cone	43-400
Cross		0.38" cone	43-600
Gland Nut with Sleeve		0.38" cone	43-701
Gauge Connector		0.25" cone	43-704
Tubing		4" tube, O.D. 0.38" * 8" tube, O.D. 0.38" * 12" tube, O.D. 0.38" *	45-116 45-126 45-136
⚠ WARNING: Maximum working pressure: 10,000 psi only			
Adaptor		0.38" F cone to ¼" M NPTF 0.38" F cone to ⅜" M NPTF	41-146 41-166
Adaptor		0.38" F cone to ¼" F NPTF 0.38" F cone to ⅜" F NPTF	41-246 41-266
Adaptor		0.38" M cone to ⅜" F NPTF	41-366

Note: 0.25" cone fittings use 9⁄16"-18 threads, ⅜" cone fittings use ¾"-16 threads.

* Actual tubing lengths are 0.75" less than nominal size shown. These dimensions make distance between centers of valves and fittings multiples of 4" spaces.

P/11 Series

Reservoir Capacity:
45 - 60 in³

Flow at Rated Pressure:
0.037 - 0.152 in³/stroke

Maximum Operating Pressure:
10,000 - 40,000 psi

Ultra-High Pressure pumps DO NOT have an internal safety pressure relief valve.

Stainless Steel Construction

Ultra-high pressure fittings feature all stainless-steel construction except adaptor **41-366**, which features nickel plated carbon steel construction.

11-100*, 11-400

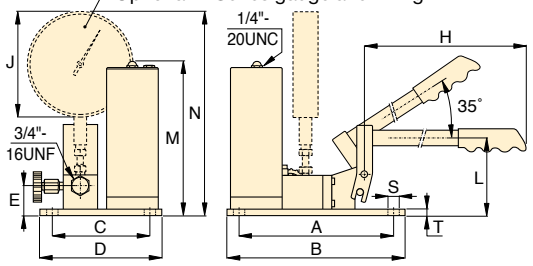

*NOTE: Maximum operating pressure for model **11-100** is 10,000 psi.

P2282

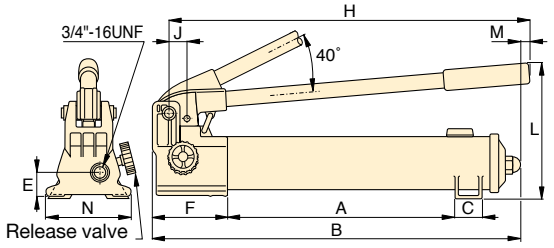

Piston Stroke	Dimensions (in)													Weight	Model Number
(in)	A	B	C	D	E	F	H	J	L	M	N	S	T	(lbs)	
1.00	13.56	22.00	1.40	–	1.24	5.25	20.75	1.16	9.00	0.28	4.74	–	–	14	P2282
0.78	9.45	10.50	5.98	7.00	1.77	–	25.00	6.41	4.50	9.33	12.38	0.31	0.37	22	11-100
0.78	9.45	10.50	5.98	7.00	1.77	–	25.00	6.41	4.50	9.33	12.38	0.31	0.37	22	11-400

▼ Shown: **XC1201M**

Performance of a Powered Pump

Portability of a Hand Pump

- **Lightweight design with integrated handle and carrying strap for portability**
- **Bladder reservoir prevents contamination and allows pump usage in any position**
- **Powerful ½ horsepower motor and 28-volt Lithium-Ion battery deliver exceptional speed and run time**
- **High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments**
- **Cordless technology eliminates tripping hazards found in other electric or air powered pumps**
- **Available in torque wrench, dump and hold, single-acting and double-acting valve configurations**

◀ *Power and simplicity for the toughest jobs.*

GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 162

28-Volt Battery

The XC28V with Lithium-Ion technology for maximum battery performance.

Roll Cage

Optional Roll Cage XC-Series pumps. Please order model number **XCRCTK**.

Interactive Pendant

An interactive pendant is available on the **XC1302S** dump and hold models and **XC1502T** torque wrench models. Operation, programming, and diagnostic status are provided to the user with yellow, green, and red LED as well as vibration pulses.

The **XC1302S** models can easily toggle between "jog operation" to "dump system pressure" and the **XC1502T** models allow "manual" and "auto cycle" mode.

Cordless Hydraulic Pump

XC-Series Cordless Hydraulic Pump

The XC-Series cordless pump is ideal for jobs that require a combination of portability, speed, and safety. These cordless pumps are perfect for remote locations without access to power, but also indoors where trip hazards, ergonomics or size is a concern. The XC-Series cordless pump is compatible with all Enerpac hydraulic tools and small to medium sized cylinders.

The Lithium-Ion battery provides superior run time.*

- 279 cuts of 3/8 inch reinforcing bar using the WHC750 Cutter
- 112 lifts with the WR5 Spreader
- 44 splits on 1-inch, grade 8 nuts using the NC3241 Nut Splitter
- 28 lifts of an RC104

*Actual number of cycles per charge will vary depending on condition of tool, battery and ambient conditions. Battery life with double-acting tools is approximately 75% of that for comparable, single-acting tools.

XC Series

Reservoir Capacity:
60 - 120 in³

Flow at Rated Pressure:
15 in³/min.

Maximum Operating Pressure:
10,000 psi

① Outlet "Advance" Port
② Oil Fill *(must use funnel)*
③ User Adjustable Relief Valve Access Port
④ Directional Control Valve *
⑤ Shoulder Strap Connection Points
⑥ Safety Lock Feature *
⑦ On/Off Switch *
⑧ Inlet "Retract" Port (double-acting models only)

* Single-acting and double-acting models only

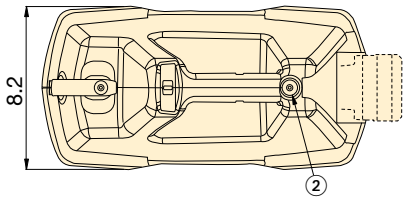

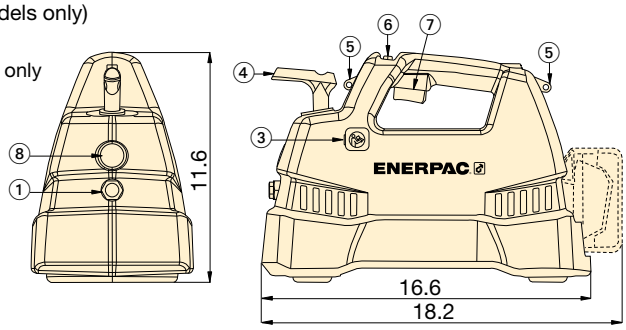

OIL FLOW vs. PRESSURE

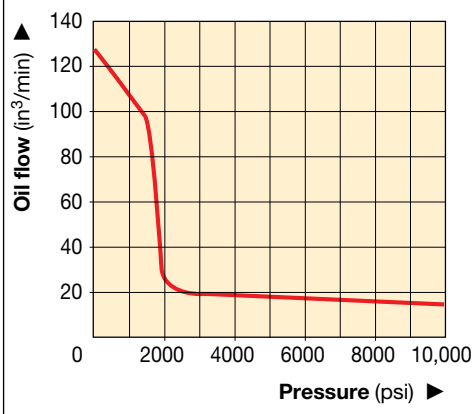

Battery Charger

1-hour quick charger.

XC115VC	115 VAC
XC230VC	230 VAC

▼ *Take the battery pump anywhere without power cords or air hoses.*

Pump Types (Used with Cylinder)	Oil Capacity (in³)	Model Number*	Output Flow Rate (in³/min) No Load	2000 psi	10,000 psi	Valve Function	Charger Voltage (VAC)	Wt. 3) (lbs)
Single-acting	60	XC1201MB 1)	125	30	15	3-way, 2-pos.	115	21.9
	120	XC1202MB	125	30	15			23.8
	60	XC1201ME 1)	125	30	15	3-way, 2-pos.	230	21.9
	120	XC1202ME	125	30	15			23.8
	60	XC1201M 2)	125	30	15	3-way, 2-pos.	–	21.9
	120	XC1202M 2)	125	30	15			23.8
Single-acting	120	XC1302SB	125	30	15	Dump and Hold	115	25
	120	XC1302SE	125	30	15		230	25
	120	XC1302S 2)	125	30	15		–	25
Double-acting	60	XC1401MB	125	30	15	4-way, 3-pos.	115	22.3
	120	XC1402MB	125	30	15			24.2
	60	XC1401ME	125	30	15	4-way, 3-pos.	230	22.3
	120	XC1402ME	125	30	15			24.2
	60	XC1401M 2)	125	30	15	4-way, 3-pos.	–	22.3
	120	XC1402M 2)	125	30	15			24.2

1) Available as a cylinder-pump set, see page 62. 2) Batteries and charger not included.
3) Includes oil and battery
* "E" suffix indicates pumps have 230V chargers with European plug and CE CMC compliant.

▼ Shown: **ZC3308JE**

Tough.
Dependable.
Innovative.
ZCLASS

High-Performance Battery Power

Productivity, Performance, Safety

- **High-flow cordless solution saves users time and money by eliminating the need for using a generator and extension cords**
- **Brushless 1.4 hp motor and 3-stage pump maximizes pump and tool productivity while minimizing heat buildup and downtime**
- **The Lithium-Ion battery provides superior run time, even under extreme job site conditions, running approximately 50 cycles on a RC1006 and approximately 90 cycles on a RC504 cylinder on a single charge**
- **Convenient 10 ft. pendant cord for hassle-free operation**
- **Reduce noise level, 80 dba maximum**
- **Zero emission hydraulic power pack**

Charger	
ZC115VC	115V
ZC230VC	230V
Battery*	
ZC82V4NA	82V
ZC82V4EUAU	82V

*NA is North America and EUAU is European and Australia

Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment.

Page: 147

High-Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

◄ *Special Enerpac ZC3-Series pump used for rail stressing applications.*

ZC-Series Cordless Hydraulic Pump

The Enerpac ZC-Series pump combines the performance of an electric pump with the convenience and portability of a battery pump. This quiet, cordless solution is ideal for applications where emission and noise are a concern, or when electricity or air is not readily available.

Power for the pump is supplied by a rechargeable 82V Lithium-ion battery. The Lithium-ion battery is capable of providing impressive run times, even under extreme job site conditions.

Valve Options

- 4-way/3-position manual control valve used with double-acting cylinders
- 3-way/3-position manual control valve used with single-acting cylinders
- 4-way/3-position manual control valve with locking and power seat functions used in post tensioning concrete applications

Applications

- High-flow cordless solution for industrial applications
- Foundation repair
- Rail industry
- Post-tensioning concrete

ZC Series

Oil Capacity:
1.75 gallon

Flow at Rated Pressure:
32 in³/min.

Motor Size:
1.36 hp

Maximum Operating Pressure:
10,000 psi

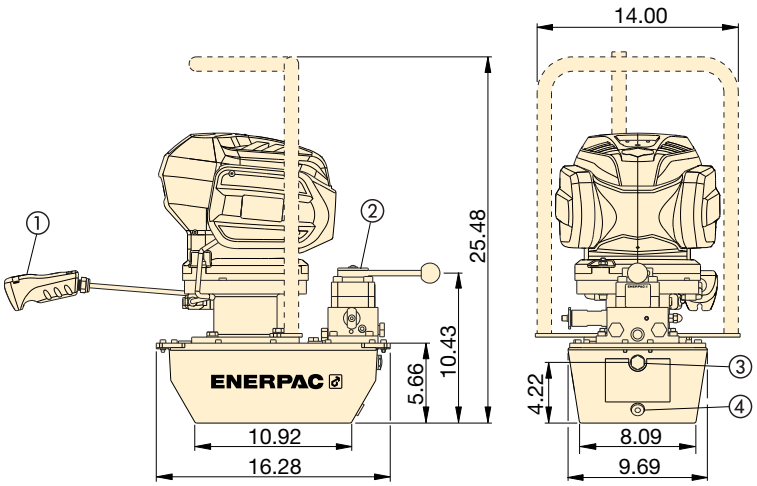

① Motor On/Off Remote Pendant
② VM43-LPS Valve Shown
③ Sight Glass
④ Oil Drain ½" NPTF

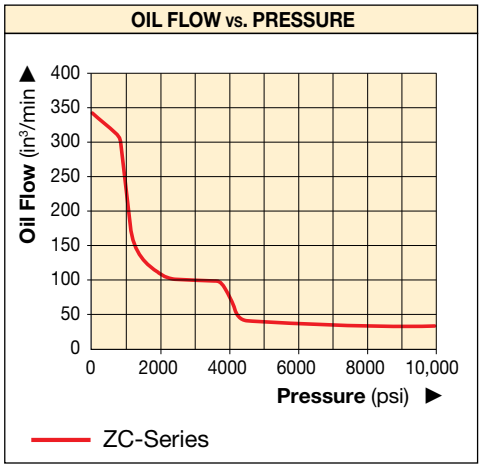

Used with	Oil Capacity (gal)	Manual Valve Model Number	Valve Function	Model Number*	Output Flow Rate (in³/min) @ no load	@ 4000 psi	@ 10,000 psi	Charger Voltage (VAC)	Weight with Oil** (lbs)
Single-Acting Cylinder	1.75	VM33	Advance/Neutral/Retract	**ZC3308JB**	310	80	32	115	65.5
				ZC3308JE				230	
Double-Acting Cylinder	1.75	VM43	Advance/Neutral/Retract	**ZC3408JB**	310	80	32	115	65.5
				ZC3408JE				230	
Power Seater Post-Tensioning Tools	1.75	VM43LPS	Advance/Hold/Retract	**ZC3908JB**	310	80	32	115	73.4
				ZC3908JE				230	

* **All models meet CE safety requirements and all** TUV **requirements.** Pump includes one charger and battery.
** Weight including oil and battery. Battery weight = 5.7 lbs.

▼ Shown: **PUJ1200B**

Heavy on Performance, Light on Weight

- **Lightweight and compact design**
- **Large easy-carry handle for maximum portability**
- **Two-speed operation reduces cycle times for improved productivity**
- **115 VAC 50/60-cycle universal motor will operate on voltages as low as 60 volts**
- **24 VAC remote motor control, 10-ft length for operator safety**
- **Starts under full load**
- **High-strength molded shroud with integral handle, protects motor from contamination and damage**
- **Designed for intermittent duty cycle**

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 148

Gauges

Minimize the risk of over-loading and ensure long, dependable service from your equipment. For use with the Economy pump, the **G2535L** gauge and **GA3** gauge adaptor are suggested.

For a full range of gauges, please refer to the System Components section.

Page: 147

Speed Chart

To determine how the 0.5 hp Economy pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

▼ *An Economy Pump, PUJ1200B, is used with an RCS302 to reposition a Scissor lift to simplify maintenance.*

Used with Cylinder	Oil Capacity (gal)	Model Number *	Pressure Rating (psi)	
			1st stage	2nd stage
Single-acting	0.50	**PUD1100B**	200	10,000
	1.00	**PUD1101B**	200	10,000
	0.50	**PUD1300B**	200	10,000
	1.00	**PUD1301B**	200	10,000
	0.50	**PUJ1200B**	200	10,000
	1.00	**PUJ1201B**	200	10,000
Double-acting	0.50	**PUJ1400B**	200	10,000
	1.00	**PUJ1401B**	200	10,000

About the Economy Pump

The Economy pump is best suited to power small to medium size cylinders or hydraulic tools. Its lightweight and compact design makes it ideal for applications which require easy transport of the pump.

The Universal motor works well on long extension cords or generator-driven electrical power supplies.

For further application assistance refer to the “Yellow Pages”.

PUD1100-Series
- Provides advance/auto-retract of single-acting cylinders
- Ideal for punching applications
- For applications not requiring load holding
- 10-ft pendant controls motor and valve operation

PUD1300-Series
- Provides advance/hold/retract of single-acting cylinders
- 10-foot pendant controls motor and valve operation
- Ideal for applications requiring remote valve operation.

PUJ-Series
- Available with 3- and 4-way valves for single- or double-acting cylinders
- 10-ft cord controls the motor operation
- Manual valves provide advance/retract tool control

Page: 399

PU Series

Reservoir Capacity:
0.5 - 1.0 gallon

Flow at Rated Pressure:
20 in³/min.

Motor Size:
0.5 hp

Maximum Operating Pressure:
10,000 psi

* NOTE: CE conformity marking only applies to pumps with an "E" suffix.

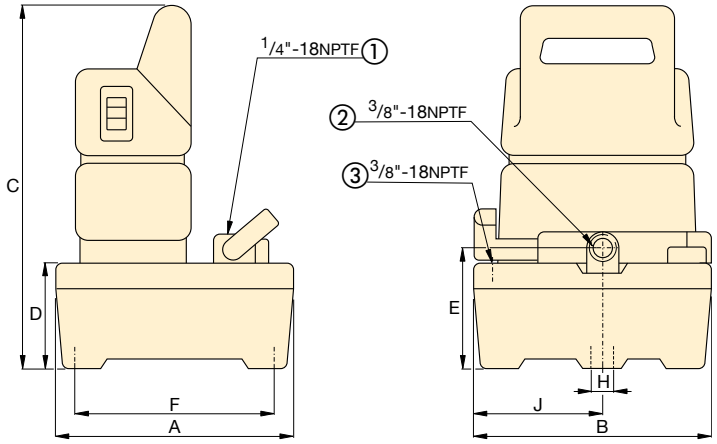

① Gauge Port (PUJ1200/1201 only)
② Outlet Port
③ Tank Port

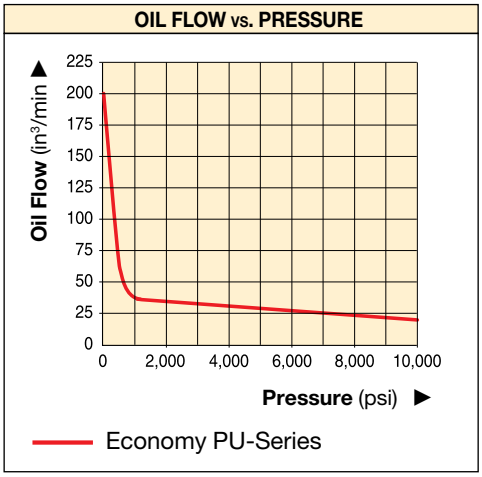

Output Flow Rate (in³/min) 1st stage	Output Flow Rate (in³/min) 2nd stage	Valve Type	Current Draw (Amps)	Motor Voltage (VAC)	Sound Level (dBA)	Dimensions (in) A	B	C	D	E	F	H	J	Weight (lbs)	Model Number*
200	20	Dump **	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	0.40	5.25	26	PUD1100B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	0.40	5.62	35	PUD1101B
200	20	Dump and Hold	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	0.40	5.25	26	PUD1300B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	0.40	5.62	35	PUD1301B
200	20	3-way, 2-pos.	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	0.40	5.25	24	PUJ1200B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	0.40	5.62	31	PUJ1201B
200	20	4-way, 3-pos.	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	0.40	5.25	29	PUJ1400B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	0.40	5.62	36	PUJ1401B

* For 230 volt applications replace “B” suffix with “E”. (CE conformity marking only applies to pumps with an "E" suffix.)
** Electric dump valve for auto-retract of cylinders.

▼ Shown: **EP3404JE-G**

The Heart of the System

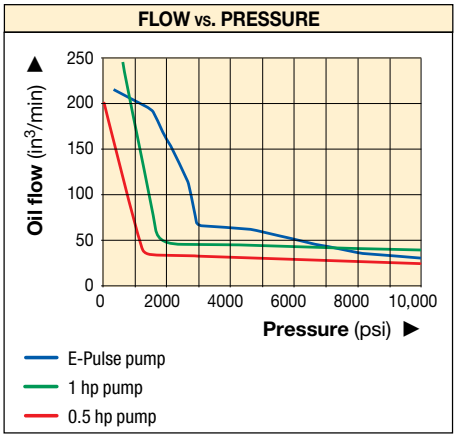

Performance

- **Smart controls enable motor to maintain constant power across the pressure range**
- **Speed control with dial adjustment for precise operation ***
- **24V DC power regulator minimizes effects of poor power supply**
- **Six-piston block design provides even flow for smooth operation of tool**

Durability

- **High-efficiency permanent magnet, direct drive motor enables continuous use and long service life**
- **System components enclosed for protection**
- **Built-in thermal protection**
- **IP Rating: 54 on the Pump, 67 on the Pendant**

Convenience

- **Pendant and cord management system**
- **Draining oil not required for pump element maintenance**
- **Convenient oil fill port, oil level indicator, and automatic breather**

Four Valve Options

- 3/2 manual
- 4/3 manual
- 3/2 dump
- 3/2 dump and hold

Typical E-Pulse Pump Applications

- Lifting
- Spreading
- Cutting
- Pulling
- Crimping
- Pressing
- Bending
- Punching

E-Pulse® Pumps

The Enerpac E-Pulse drives high productivity through its innovative design. Smart controls enable the motor to maintain constant power providing higher flow than "traditional" ½ hp pumps. Adjustable speed control enables precision as required *.

E-Pulse is designed for convenience. Features include a cord management system and integrated pendant control with a magnet that fits securely into the handle of the pump. The durable aluminum housing is designed to give easy access for serviceability. E-Pulse is the heart to any hydraulic system, ensuring high performance and providing ultimate convenience.

E Series

Useable Reservoir Capacity:
0.8 gallon

Flow at Rated Pressure:
32 in³/min.

Motor Size:
0.85 hp

Maximum Operating Pressure:
10,000 psi

3/2 Jog, 3/2 Dump, 4/3 Jog
10-ft. cord

3/2 Dump and Hold
10-ft. cord

Interactive Pendant

- Operation, programming and diagnostics status provided to operator with yellow, green, and red LED as well as vibration pulses
- Fault codes warn operators of any issues related to voltage, temperature, button controls, or if professional service is required

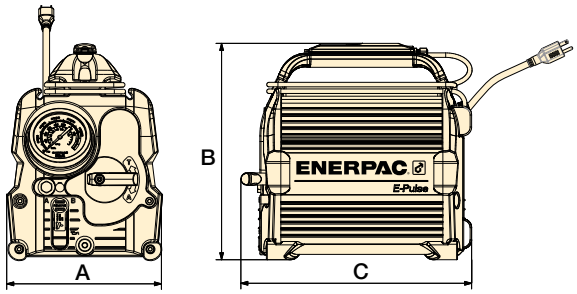

FLOW vs. PRESSURE

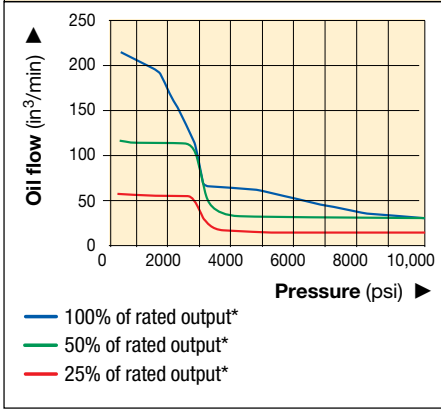

* Flow at alternate speed settings

Used With	Useable Oil Capacity (gal)	Model Number	Output Flow Rate (in³/min) 14.5 psi	2538 psi	5075 psi	10,000 psi	Valve Type	Plug Type	Motor Voltage (VAC)	Current Draw (Amps)	Sound Level (dBA)	Dimensions (in) A	B	C	Wt. (lbs)
S/A 1)	0.8	EP3104DB-G	220	130	58	32	Dump	NEMA 5-15	100-120	12	70-85	10.2	14.2	14.0	40.9
	0.8	EP3104DI-G	220	130	58	32		NEMA 6-15	200-250	7	70-85	10.2	14.2	14.0	40.9
	0.8	EP3104DE-G	220	130	58	32		Schuko CEE 7/7	200-250	7	70-85	10.2	14.2	14.0	40.9
	0.8	EP3204JB-G *	220	130	58	32	3-way, 2-pos.	NEMA 5-15	100-120	12	70-85	10.2	14.2	15.2	40.5
	0.8	EP3204JI-G *	220	130	58	32		NEMA 6-15	200-250	7	70-85	10.2	14.2	15.2	40.5
	0.8	EP3204JE-G *	220	130	58	32		Schuko CEE 7/7	200-250	7	70-85	10.2	14.2	15.2	40.5
	0.8	EP3304SB-G *	220	130	58	32	Dump & Hold	NEMA 5-15	100-120	12	70-85	10.2	14.2	14.0	41.2
	0.8	EP3304SI-G *	220	130	58	32		NEMA 6-15	200-250	7	70-85	10.2	14.2	14.0	41.2
	0.8	EP3304SE-G *	220	130	58	32		Schuko CEE 7/7	200-250	7	70-85	10.2	14.2	14.0	41.2
D/A 2)	0.8	EP3404JB-G *	220	130	58	32	4-way, 3-pos.	NEMA 5-15	100-120	12	70-85	10.2	14.2	15.2	41.1
	0.8	EP3404JI-G *	220	130	58	32		NEMA 6-15	200-250	7	70-85	10.2	14.2	15.2	41.1
	0.8	EP3404JE-G *	220	130	58	32		Schuko CEE 7/7	200-250	7	70-85	10.2	14.2	15.2	41.1

1) S/A = Single-acting cylinder
2) D/A = Double-acting cylinder

* Adjustable speed control only applies to EP3204, EP3304 and EP3404 pump models.

Z-Class hydraulic pumps from Enerpac—pumps that run cooler, use less electricity and are easy to service.

Enerpac has used the latest metallurgical, bearing and seal technologies to produce a pump whose features and benefits far surpass the electric pumps that are available today. By reducing the number of moving parts, improving flow dynamics and decreasing friction, Z-Class pumps will stay on the job longer, require less energy to operate and when needed, have lower service costs.

Z-Class electric pumps from Enerpac — simply the best pump you will ever use.

Z Tough. Dependable. Innovative. CLASS

Z-Class Pumping Element — The Heart of Your Hydraulic System

Highly efficient design provides increased flow rates, reduced heat generation and a decrease in power consumption. This means improved tool speed and increased service life — which results in higher productivity and lower operating costs.

Heavy-duty bearings extend pump life by reducing friction, reducing surface-loading and lowering bearing stresses.

Pump cavity oil bath extends pump life by reducing heat, improving lubrication and reducing wear.

Self-priming, high-flow 1st stage pump increases pump performance by super-charging the 2nd stage piston pump — improving oil flow in both hot and cold weather operation.

Balanced rotating components reduce vibration creating a smoother running pump — reducing wear, friction and sound levels.

Replaceable piston check-valves increase service life of major pump components.

Ergonomic low-voltage pendant features sealed switches and operates at 24 VDC for improved operator safety.

Back-lit LCD on Pro *Z-Class* pumps

- pump usage information, hour and cycle counts
- low-voltage warning and recording
- offers self-test and diagnostic capabilities
- information displayed in six languages
- pressure read-out (when used with pressure transducer)
- adjustable pressure setting (when used with pressure transducer)

Back-lit LCD available on ZU and ZE-Series Electric Pumps ▶

Z-Class accessories

Extensive list of accessories including heat exchanger, roll-bar, skid bar, pressure transducer, return-line filter and level and temperature switches, allow complete pump control over a wide range of industrial applications.

Z-Class electric pumps for your application

Available in one flow range for universal motor and four flow ranges for induction motor.

ZU4 Series Pump Applications

- **Mobile:** when frequent pump transport is required and/or on remote locations
- **Universal motor:** 1-phase, runs well under poor voltage supply, using generator power supply or using long extension cord
- **Duty-cycle:** for intermittent applications
- **Cylinders and tools:** for medium to large size single and double-acting applications and high speed

ZE Series Pump Applications

- **Stationary:** when pump remains in one location
- **Induction motor:** 1 and 3-phase for high-cycle usage
- **Duty-cycle:** for heavy-duty, extended cycle application
- **Cylinders and tools:** for medium to large size single- and double-acting applications and high speed

Oil Flow Rate @ 10,000 psi (in^3/min)	*Z-Class* Pump Series*	Electric Motor Size (hp)	Air Motor Consump-tion (scfm)	Gasoline Engine Size** (ft.lbs)	Page:
32	**ZC3***	1.4	—	—	**98**
40	**ZE3**	1.0	—	—	**112**
60	**ZE4(T)**	1.5	—	—	**112, 302**
60	**ZU4(T)**	1.7	—	—	**106, 300**
80	**ZA4(T)**	—	100	—	**126, 306**
100	**ZG5****	—	—	**	**128**
120	**ZE5(T)**	3.0	—	—	**112, 302**
200	**ZE6**	7.5	—	—	**112**
200	**ZG6**	—	—	17	**130**

* ZC3 battery powered cordless pumps. ZU4T, ZE4T, ZE5T and ZA4T-Series are Torque Wrench Pumps.
** ZG5 is available in two 4-cycle engine sizes: 7.1 Ft.lbs Honda and 8.5 Ft.lbs Briggs & Stratton.

▼ Shown from left to right: **ZU4304MB, ZU4420SBH**

ZU
Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
60 in³/min.

Motor Size:
1.7 hp

Maximum Operating Pressure:
10,000 psi

- **Features *Z-Class* high-efficiency two-stage pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps**
- **Powerful 1.7 hp universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics**
- **High-strength, molded composite shroud protects motor and electronics, while providing an ergonomic, non-conductive handle for easy transport**
- **Low-voltage pendant provides additional safety for the operator (remote control units)**

Pro-Series pumps only

- **LCD readout provides pressure and a number of diagnostic and readout capabilities on a portable electric pump**
  - **pump usage information, hour and cycle counts**
  - **self-test, diagnostic and read-out capabilities**
  - **pressure readout and auto-mode pressure settings**

Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4-Series pumps feature Venturi Valve Technology to facilitate the faster return of single-acting gravity return cylinders.

See details in the "Directional Control Valve" section.

Page: **141**

Speed Chart

To determine how a "Z" pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the “Yellow Pages”.

Page: **409**

◀ *Designed to be tough, the ZU4-Series with steel reservoirs will take the abuse of today’s construction sites.*

ZU-Series Specifications and Dimensions

ZU4 Performance							
Motor Size	Output Flow Rate (in³/min)				Motor Electrical Specification	Sound Level	Relief Valve Adjustment Range
(hp)	100 psi	700 psi	5000 psi	10,000 psi	(volts-ph-Hz)	(dBA)	(psi)
1.7	700	535	76	60	115-1-50/60 230-1-50/60	85-90	2,000-10,000

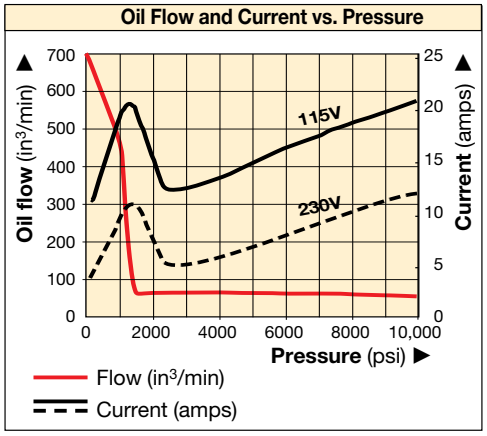

ZU4 Series with 1.2 and 1.8 gallon reservoirs

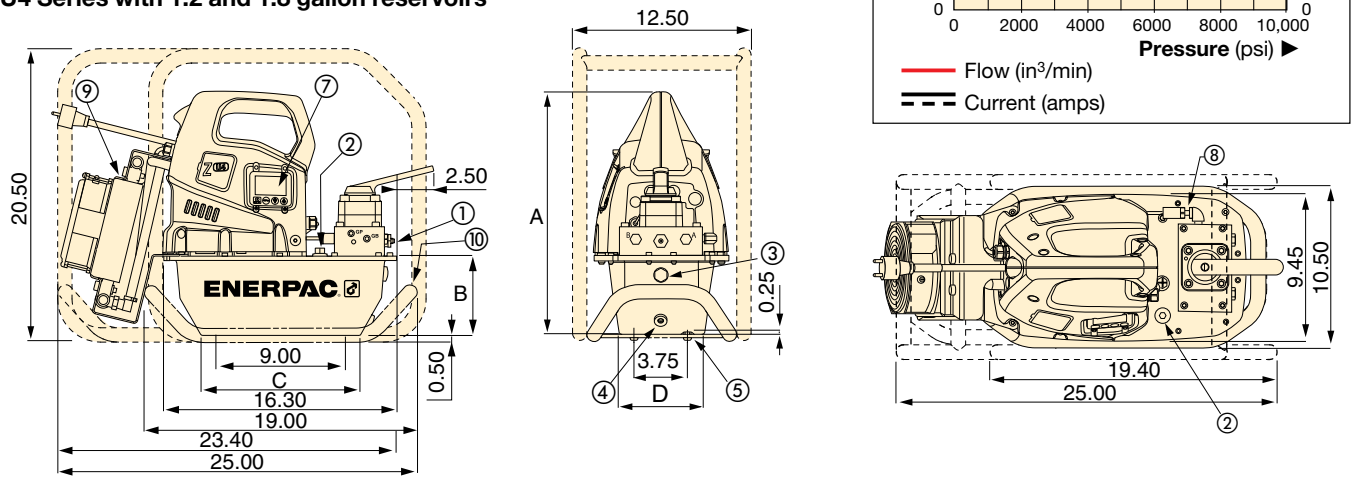

ZU-4 Series with 5.2 and 10.3 gallon reservoirs

(Left view shown without side handle)

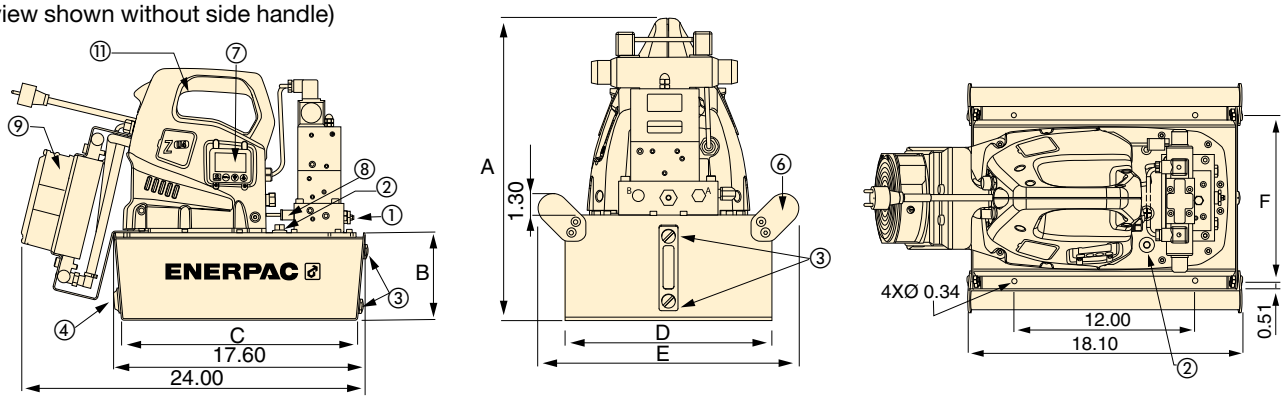

① User adjustable relief valve
② Oil fill port, SAE#10
③ Oil level sight gauge
④ Oil Drain, 1/2" NPTF
⑤ M8 x 1.25
⑥ Handles on all 5.2 and 10.3 gallon reservoirs
⑦ Back-lit LCD Electric
⑧ Pressure transducer
⑨ Heat exchanger
⑩ Skid bar
⑪ Handle guard installed on all 5.2 and 10.3 gallon reservoirs
⑫ Reservoir handles (not shown) included on all 5.2 and 10.3 gallon pumps

◀ *Increased output flow and extended brush life increase productivity for post-tensioning applications.*

Pump Dimensions (in)						
Reservoir Capacity (gal)	A	B	C	D	E	F
1.2	16.7	5.6	11.0	6.0	-	-
1.8	16.7	5.6	11.0	8.1	-	-
5.2	18.3	7.1	16.5	16.6	19.7	15.6
10.3	21.7	10.6	15.7	19.9	22.7	18.9

▼ STEP 1: Select a pump from the Pump Ordering Matrix.

The functionality of the pump can be determined by the model number. Utilize the guide below to select the best pump for the application from the pump matrix.

Z	U	4	4	08	J	B	-	H	R
1 Product Type	2 Motor Type	3 Flow Group	4 Valve Type	5 Reservoir Size	6 Valve Operation	7 Voltage		8 Factory Installed Accessories	

1 Product Type

Z = Pump Series

2 Motor Type

U = Universal electric motor

3 Flow Group

4 = 60 in^3/min @ 10,000 psi

4 Valve Type

1 = Dump (VE32D)
2 = 3 way/2 position manual or electric (VM32 or VE32)
3 = 3 way/3 position manual or electric (VM33 or VE33)
4 = 4 way/3 position manual or electric (VM43 or VE43)
6 = 3 way/3 position locking manual w/po check (VM33L)
7 = 3 way/2 position manual (VM22)
8 = 4 way/3 position locking manual w/po check (VM43L)
9 = 4 way/3 position manual w/power seating (VM43LPS)
10 = 3 way/3 position manual, Venturi-Valve (VM33VAC)
11 = 3 way/3 position electric, Venturi-Valve (VE33VAC)

5 Reservoir Capacity

04 = 1.2 gallon
08 = 1.8 gallon
20 = 5.2 gallon (includes side handles)
40 = 10.3 gallon (includes side handles)

6 Valve Operation

D = Dump solenoid valve with pendant and LCD Electric
J = Jog manual valve with pendant (w/o LCD)
L = Manual valve w/LCD Electric (w/o pendant)
M = Manual valve (without pendant and LCD)
P = Manual valve with pendant (w/o LCD)
S = Solenoid valve with pendant and LCD Electric

7 Voltage

B = 115V, 1 ph, 50/60Hz
E = 208-240V, 1 ph, 50/60 Hz (w/European plug and CE EMC compliant)
I = 208-240V, 1 ph, 50/60 Hz (w/NEMA 6-15 plug)

▼ STEP 2 Factory Installed Accessories

Select factory installed accessories and add to the pump model number after the hyphen. The example above shows that a **Roll Cage (R)** and **Heat Exchanger (H)** have been added to the pump.

8 Factory installed accessories include the following:

F = Return Line Filter
G = Pressure Gauge [1)]
H = Heat Exchanger
L = Level/Temperature Switch [2)]
N = Lifting Eyes (no reservoir handles)
R = Roll cage
K = Skid Bar
T = Pressure Transducer
U = Foot Switch

[1) + 2)]: See the notes about Pressure Gauge and Level/Temperature Switch in right column.

ZU Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
60 in^3/min.

Motor Size:
1.7 hp

Maximum Operating Pressure:
10,000 psi

***Z-Class* – A Pump For Every Application**

Patented *Z-Class* pump technology provides high by-pass pressures for increased productivity—important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4 Hydraulic Pumps are built to power small to large-sized cylinders or hydraulic tools, or wherever high-speed, intermittent duty, remote hydraulic power is needed.

Pro Electric Pump

Digital (LCD) display features a built-in hour meter and shows self-diagnostic, cycle-count and low voltage warning information.

Pressure can also be displayed when the pump is equipped with a pressure transducer.

Pressure Gauge, Level/Temperature Switch

[1)] Pressure Gauge (**G**) not available on pump models with pressure transducer (**T**). The pressure transducer provides digital pressure read-out on LCD-display.

[2)] Level/Temperature Switch (**L**) requires electric package. Not available on reservoirs 04 and 08.

ZU-Series Pump Ordering Matrix

▼ ZU-SERIES MANUAL PUMP MODELS

	S/A or D/A[1]	Hold	Valve Type[2]	Reservoir Capacity (gal)	Unit Weight w/ oil[5] (lbs)	Model Number 115 VAC, 1 Phase[3]		
						Manual Only	Standard Electric w/ Pendant	Classic Electric w/ Pendant[4]
• Ideal choice for most applications • Manual valve control, for single-acting or double-acting applications • Motor control on shroud • Venturi Valve technology (VM33VAC) for faster retract of single acting cylinders • Pendant models ideal for light production and lifting applications • Locking valves provide hydraulic locking of cylinder until valve is shifted into retract position	S/A		VM22	1.2	59	ZU4704MB (I, E)		ZU4704PB (I, E)
	S/A		VM22	1.8	65	ZU4708MB (I, E)		ZU4708PB (I, E)
	S/A		VM22	5.2	108	ZU4720MB (I, E)		ZU4720PB (I, E)
	S/A		VM32	1.2	55	ZU4204MB (I, E)	ZU4204JB (I, E)	
	S/A		VM32	1.8	61	ZU4208MB (I, E)	ZU4208JB (I, E)	
	S/A		VM32	5.2	104	ZU4220MB (I, E)	ZU4220JB (I, E)	
	S/A		VM32	10.3	155	ZU4240MB (I, E)	ZU4240JB (I, E)	
	S/A	●	VM33	1.2	56	ZU4304MB (I, E)		
	S/A	●	VM33	1.8	62	ZU4308MB (I, E)	ZU4308JB (I, E)	ZU4308PB (E)
	S/A	●	VM33	5.2	106	ZU4320MB (I, E)	ZU4320JB (I, E)	ZU4320PB (E)
	S/A	●	VM33	10.3	156	ZU4340MB (I, E)	ZU4340JB (I, E)	ZU4340PB (E)
	S/A	●	VM33VAC	1.8	63	ZU41008MB (E)	ZU41008JB (E)	
	S/A	●	VM33VAC	5.2	106	ZU41020MB (E)	ZU41020JB (E)	
	S/A	●	VM33L	1.8	66	ZU4608MB (E)	ZU4608JB, (E)	
	S/A	●	VM33L	5.2	109	ZU4620MB (E)	ZU4620JB, (E)	
	D/A	●	VM43	1.8	63	ZU4408MB (I, E)	ZU4408JB (I, E)	ZU4408PB (E)
	D/A	●	VM43	5.2	106	ZU4420MB (I, E)	ZU4420JB (I, E)	ZU4420PB (E)
	D/A	●	VM43	10.3	156	ZU4440MB (I, E)	ZU4440JB (I, E)	ZU4440PB (E)
	D/A	●	VM43L	1.8	67	ZU4808MB (E)	ZU4808JB (E)	
	D/A	●	VM43L	5.2	110	ZU4820MB (E)	ZU4820JB (E)	

▼ ZU-SERIES PRO SOLENOID VALVE MODELS WITH PENDANT AND LCD ELECTRIC

	S/A or D/A[1]	Neutral	Valve Type[2]	Reservoir Capacity (gal)	Unit Weight w/ oil (lbs)	Model Number 115 VAC, 1 Phase[3]
DUMP VALVE MODELS • Ideal for punching, crimping and cutting • For use when load-holding is not required	S/A		VE32D	1.2	63	ZU4104DB (I, E)
	S/A		VE32D	1.8	69	ZU4108DB (I, E)
	S/A		VE32D	5.2	112	ZU4120DB (I, E)
SINGLE AND DOUBLE ACTING MODELS • Ideal for lifting applications and where remote control is required • Motor runs continuously on pumps with VE33 and VE43 valves. • With VE32 valve, motor only runs during the advance function, while holding and retracting, the motor is off • Venturi Valve technology (VE33VAC) for faster retract of single-acting cylinders	S/A	●	VE32	1.2	63	ZU4204SB (I, E)
	S/A	●	VE32	1.8	69	ZU4208SB (I, E)
	S/A	●	VE32	5.2	112	ZU4220SB (I, E)
	S/A	●	VE33	1.8	81	ZU4308SB (I, E)
	S/A	●	VE33	5.2	124	ZU4320SB (I, E)
	S/A	●	VE33	10.3	174	ZU4340SB (I, E)
	S/A	●	VE33VAC	1.8	74	ZU41108SB (E)
	S/A	●	VE33VAC	5.2	117	ZU41120SB (E)
	S/A	●	VE33VAC	10.3	168	ZU41140SB (E)
	D/A	●	VE43	1.8	81	ZU4408SB (I, E)
	D/A	●	VE43	5.2	124	ZU4420SB (I, E)
	D/A	●	VE43	10.3	174	ZU4440SB (I, E)

[1] S/A or D/A = Single acting or double-acting pumps
[2] Additional details can be found in the Directional Control Valve section
[3] "I" indicates pump is available in 208-240V, 1-phase, 50/60 Hz with NEMA 6-15 plug. Model number order example: ZU4208MI.
"E" indicates pump is available in 208-240V, 1-phase, 50/60 Hz with European plug and CE CMC compliant. Model number order example: ZU4208ME.
[4] Classic Electric Pump has traditional electro-mechanical components (transformers, relays, switches) in place of solid-state electronics.
[5] Manual weights given, Standard Electric w/pendant add 1lb and Classic Electric w/pendant add 3 lbs.
Note: Valve Operation L available on Manual Pumps. Substitute "L" for "M" Valve Operation

Roll Cage (R)

- Protects and stabilizes the pump

Popular Pump Models with Factory Installed Roll Cages	
ZU4108DBR (I, E)	ZU4308MBR (I, E)
ZU4208JBR (I, E)	ZU4320MBR (I, E)
ZU4220JBR (I, E)	ZU4408MBR (I, E)
ZU4208SBR (I, E)	ZU4420MBR (I, E)
ZU4308JBR (I, E)	ZU4408JBR (I, E)
ZU4320JBR (I, E)	ZU4420JBR (I, E)
ZU4308SBR (I, E)	ZU4408SBR (I, E)
ZU4320SBR (I, E)	ZU4420SBR (I, E)

Accessory Kit No.	Fits on Reservoir
ZRC-04	1.2 and 1.8 gallon[1)]
ZRC-04H	1.2 and 1.8 gallon[2)]
ZRB-20	5.2 gallon
ZRB-40	10.3 gallon

[1)] Without heat exchanger [2)] With heat exchanger

Foot Switch (U)

- 10 ft. cord, hands-free control

Popular Pump Models with Factory Installed Foot Switch
ZU4108DBU (I, E)
ZU4208SBU (I, E)
ZU4220SBU (I, E)
ZU4320SBU (I, E)
ZU4408SBU (I, E)
ZU4420SBU (I, E)

Accessory Kit No.	Can be used on ZU4 Pumps with solenoid dump and 3-position valves, LCD electric
ZCF-2	Solenoid VE-Series valves

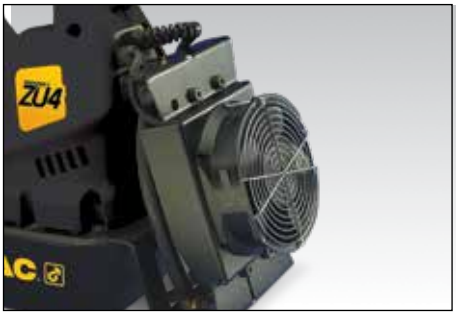

Heat Exchanger (H)

- Removes heat from bypass oil
- Increases oil life, reduces wear on hydraulic components

Popular Pump Models with Factory Installed Heat Exchanger
ZU4108DBH (I, E)
ZU4208SBH (I, E)
ZU4308SBH (I, E)
ZU4408SBH (I, E)
ZU4420SBH (I, E)

Accessory Kit No.	Can be used on
ZHE-U115	115V pumps
ZHE-U230	230V pumps

Pressure Transducer (T)

- More durable than analog gauges
- Displays psi, bar or Mpa
- Motor shutoff or shift to neutral at set pressure

Popular Pump Models with Factory Installed Pressure Transducer, Requires LCD Electric Pump
ZU4108DBT (I, E)
ZU4208SBT (I, E)
ZU4308SBT (I, E)
ZU4408SBT (I, E)
ZU4420SBT (I, E)

Accessory Kit No.	Adjustable Pressure Range (psi)	Switch-Point Repeatability	Dead-band (psi)
ZPT-U4	50-10,000	± 0.5%	50

Note: The pressure transducer provides digital pressure read-out on LCD-display.

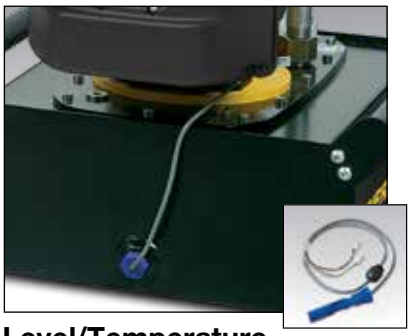

Level/Temperature Switch (L)

- Shuts off pump when high operating temperature or low oil is reached
- Plugs directly into pump electrical enclosure
- Easy installation to pump reservoir
- Requires LCD electric

Model Number	Operating Temperature (° F)	Maximum Pressure (psi)	Wt. (lbs)
ZLS-U4	40-230	150	0.11

Return Line Filter (F)

- 25 micron filter removes contaminants from return oil flow
- Internal by-pass valve prevents damage if filter is dirty
- Features maintenance indicator

Accessory Kit Model Number	Maximum Pressure (psi)	Maximum Oil Flow (GPM)	By-pass Setting (psi)
ZPF	200	12.0	25

Skidbar (K)

- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces
- Cannot be used in combination with roll cage

Accessory Kit No.	For ZU-Series Pumps with 1.2 and 1.8 Gallon Reservoir	Wt. (lbs)
SBZ-4	1.2-1.8 gal. w/o heat exchanger	4.9
SBZ-4L	1.2-1.8 gal. with heat exchanger	5.5

Pressure Gauge (G)

- Minimize risk of overloading to ensure long life of equipment
- 2.5" face diameter, glycerin filled
- Dual Scale, PSI and Bar

Model No.	Description
G2536L	15,000 psi, Ø 2.5 inches

Note: Pressure Gauge not available on pump models with pressure transducer. The pressure transducer provides digital pressure read-out on LCD-display.

ZU Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
60 in³/min.

Motor Size:
1.7 hp

Maximum Operating Pressure:
10,000 psi

Heat Exchanger

- Stabilizes oil temperature at a maximum of 130° F at 70° F ambient temperature.

Not suitable for water-glycol or water based fluid.

Thermal Transfer * Btu/h	Maximum pressure (psi)	Maximum oil flow (GPM)	Voltage (VDC)
900	300	7.0	12

* At GPM at 70 °F ambient temperature.

▼ Shown from left to right: **ZE3304MBK, ZE4110DBFHR**

ZE Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
40 - 200 in³/min

Motor Size:
1.0 - 7.5 hp

Maximum Operating Pressure:
10,000 psi

- **Features *Z-Class* high-efficiency pump design; higher oil flow and by-pass pressure, cooler running and requires 18% less current draw than comparable pumps**
- **Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments**
- **Low-voltage pendant, on certain models, provides additional safety for the operator**
- **Multiple valve and reservoir configurations provide application specific models to match the most demanding industrial applications**
- **High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh industrial environments**
- **LCD readout on electric valve models provides a number of diagnostic and readout capabilities**
- **IP54 Rating for superior dust and water protection**

The Standard for Industrial Applications

Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZE-Series pumps feature Venturi Valve Technology to facilitate the faster return of single-acting gravity return cylinders. See valve type in ordering matrix and details in the "Directional Control Valve" section.

Page: **141**

User Adjustable Relief Valve

All VM and VE-Series have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.

Locking Valves

For applications requiring positive load holding, VM-Series valves (except VM32) are available with a pilot-operated check valve. This provides hydraulic locking of the load until the valve is shifted into the retract position. To order this feature on your ZE-series pump see the valve type in the order matrix.

Page: **140**

◀ *Rail wheel pulling using RACH aluminum cylinder powered by ZE-Series pump.*

ZE-Series, Specifications and Dimensions

ZE3 and ZE4 Oil Flow and Current vs. Pressure

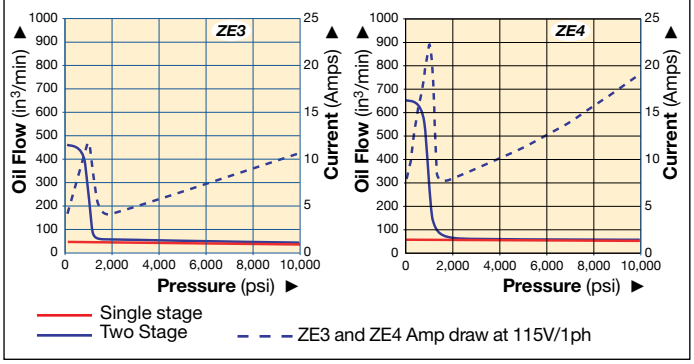

ZE5 and ZE6 Oil Flow and Current vs. Pressure

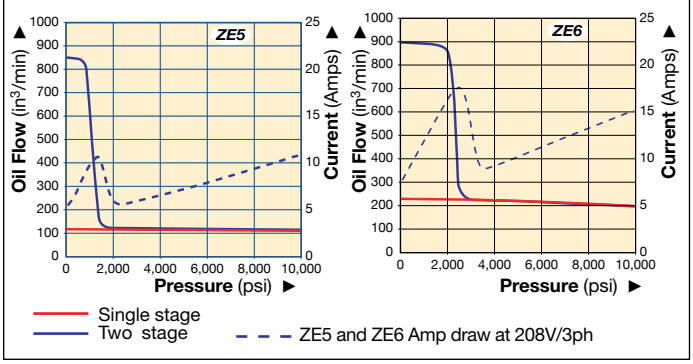

▼ PERFORMANCE CHART

Pump Series	Operation	Output Flow Rate (in³/min) 100 psi	700 psi	5,000 psi	10,000 psi	Available Reservoir Sizes (gal)	Motor Size hp	RPM	Relief Valve Adjustment Range (psi)	Sound Level (dBA)
ZE3	Single-stage	43	43	42	40	1.2, 1.8, 2.6, 5.2, 10.3	1.0	1750	1000-10,000	75
	Two-stage	450	385	42	40					
ZE4	Single-stage	64	64	62	60	1.2, 1.8, 2.6, 5.2, 10.3	1.5	1750	1000-10,000	75
	Two-stage	650	600	62	60					
ZE5	Single-stage	128	126	123	120	2.6, 5.2, 10.3	3.0	1750	1000-10,000	75
	Two-stage	850	825	123	120					
ZE6	Single-stage	220	215	210	200	2.6, 5.2, 10.3	7.5	3450	1000-10,000	80
	Two-stage	900	890	210	200					

Output flow rate is listed at 60 Hz. Flow rate will be approximately 5/6 of these values at 50 Hz.

Single-Stage or Two-Stage Pumps

Choose single-stage pumps for applications that require constant flow regardless of pressure, such as testing or clamping.

Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity.

ZE-Series Pumps with 1.2 and 1.8 gallon reservoir

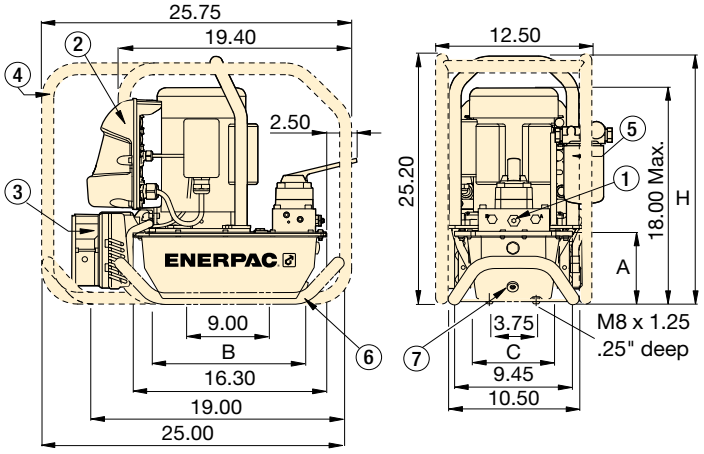

ZE-Series Pumps with 2.6, 5.2, 10.3 gallon reservoir

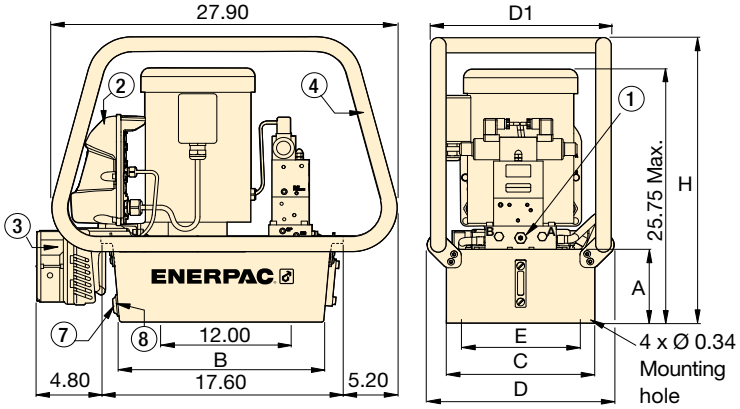

① User-adjustable relief valve on all manual and solenoid valves:
3/8" NPTF on A and B ports
1/4" NPTF on auxiliary ports
② Electric Box
③ Heat Exchanger
④ Roll Bar
⑤ Return Line Filter
⑥ Skid Bar
⑦ Oil Drain
⑧ Oil Level/Temperature Switch

Reservoir Capacity (gal)	ZE-Series Pump Dimensions (in) A	B	C	D	D1	E	H
1.2	5.6	11.0	6.0	–	–	–	20.2
1.8	5.6	11.0	8.1	–	–	–	20.2
2.6	6.2	16.5	12.0	15.1	14.6	11.0	23.6
5.2	7.1	16.5	16.6	19.7	19.2	15.6	24.6
10.3	10.6	15.7	19.9	22.7	22.5	18.9	28.1

▼ STEP 1: Select a Pump from the Pump Ordering Matrix.

The functionality of the pump can be determined by the model number. Utilize the guide below to select the best pump for the application from the pump matrix.

Z	E	4	4	20	L	B	-	F	H
1 Product Type	2 Motor Type	3 Flow Group	4 Valve Type	5 Reservoir Capacity	6 Valve Operation	7 Voltage		8 Factory Installed Accessories	

1 Product Type

Z = Pump Class

2 Motor Type

E = Induction Electric Motor

3 Flow Group

3 = 40 in³/min @ 10,000 psi
4 = 60 in³/min @ 10,000 psi
5 = 120 in³/min @ 10,000 psi
6 = 200 in³/min @ 10,000 psi

4 Valve Types

0 = No valve w/cover plate
1 = Dump (VE32D)
2 = 3-way/2-position manual (VM32)
3 = 3-way/3-position manual or electric (VM33 or VE33)
4 = 4-way/3-position manual or electric (VM43 or VE43)
6 = 3-way/3-position locking manual w/po check (VM33L)
7 = 3-way/2-position manual (VM22)
8 = 4-way/3-position locking manual w/po check (VM43L)
10 = 3-way/3-position manual, Venturi-Valve (VM33VAC) [6]
11 = 3-way/3-position electric, Venturi-Valve (VE33VAC) [6]

5 Reservoir Capacity

04 = 1.2 gallon *
08 = 1.8 gallon *
10 = 2.6 gallon
20 = 5.2 gallon
40 = 10.3 gallon
* not available on ZE5 or ZE6

6 Valve Operation

D = Dump valve (w/ pendant and LCD)
L = Manual valve (w/o pendant, w/ LCD)
M = Manual valve [3] (w/o pendant or LCD)
N = No valve [3] (no electrical box)
S = Solenoid valve (w/ pendant and LCD)

7 Voltage

Single Phase (not on ZE5 or ZE6)

B = 115V 1 ph 50-60Hz [1]
E = 208-240V 1 ph 50-60 Hz European Plug
I = 208-240V 1 ph 50-60 Hz USA Plug

Three Phase [3]

G = 208-240V 3ph 50-60Hz
J = 460-480V 3ph 50-60Hz
W = 380-415V 3ph 50-60Hz

▼ STEP 2: Factory Installed Accessories

Select factory installed accessories and add to the pump model number after the hyphen. The example above shows that a **Return Line Filter (F)** and **Heat Exchanger (H)** have been added to the pump.

8 Factory installed accessories include the following:

F = Return Line Filter
G = 0-15,000 psi gauge (2 1/2") [4]
H = Heat exchanger [2]
K = Skid bar (1.2 and 1.8 gal. reservoirs only)
L = Level/temperature switch [2]
N = No reservoir handles (includes lifting eyes) [7]
R = Roll cage
S = Single stage [5]
T = Pressure transducer [2] [4]
U = Foot switch [2]

1) 115-volt pumps are supplied with 15-amp plug for intermittent use. 20-amp circuit recommended for frequent full pressure use.
2) These accessories require LCD electrical package. Pressure switch option only available on manual valves without locking valve. The LCD electrical package can accept either a pressure switch or pressure transducer, but not both.
3) Standard Electric models with 3-phase motors without electric boxes are shipped without cord, motor starter or overload protection.
4) Pressure gauge not available on pump models with pressure transducer. Pressure transducer provides digital pressure readout on LCD display.
5) Not available on Valve Types 10, 11
6) Not available on ZE3
7) Lifting eyes (N) not available on reservoir capacities 04 or 08.

▼ ZE-SERIES PUMP MODELS

No Valve with coverplate, no electric box

Manual Valve without electric box or LCD

- Ideal choice for most applications
- Manual valve control, for both single-acting or double-acting applications
- Venturi Valve Technology (VM33VAC) for faster retract of single-acting cylinders
- Manual motor control
- On/off switch on 1-phase electric motor

Solenoid Dump Valve with electric box and LCD

- Ideal for punching, crimping and cutting
- For use when load holding is not required
- Push-button control pendant with 10-ft. cord controls the valve and motor

Solenoid 3-position Valve with Electric Box

- Ideal for production and lifting applications
- All valves are 3-position for Advance-Hold-Retract
- Venturi Valve Technology (VE33VAC) for faster retract of single-acting cylinders
- Push-button control pendant with 10-ft. cord controls the valve and motor

ZE-Series Pump Ordering Matrix

S/A or D/A [1]	Hold	Valve Type [2]	Reservoir Capacity (gal)	ZE3 Series (1.0 hp) Output Flow Rate at 10,000 psi: 40 in³/min Model Number [3]	Wt. (lbs)	ZE4 Series (1.5 hp) Output Flow Rate at 10,000 psi: 60 in³/min Model Number [3]	Wt. (lbs)	ZE5 Series (3.0 hp) Output Flow Rate at 10,000 psi: 120 in³/min Model Number [3]	Wt. (lbs)	ZE6 Series (7.5 hp) Output Flow Rate at 10,000 psi: 200 in³/min Model Number [3]	Wt. (lbs)
			1.8	ZE3008NB (I, E, W, J, G)	99	ZE4008NB (I, E, W, J, G)	95				
			2.6	ZE3010NB (I, E, W, J, G)	99	ZE4010NB (I, E, W, J, G)	108	ZE5010NW (J, G)	119	ZE6010NW (J, G)	158
			5.2	ZE3020NB (I, E, W, J, G)	126	ZE4020NB (I, E, W, J, G)	135	ZE5020NW (J, G)	146	ZE6020NW (J, G)	185
			10.3	ZE3040NB (I, E, W, J, G)	177	ZE4040NB (I, E, W, J, G)	186	ZE5040NW (J, G)	197	ZE6040NW (J, G)	236
S/A		VM22	5.2			ZE4720MB (E, W)	143				
S/A		VM32	1.2	ZE3204MB (E)	85						
S/A		VM32	1.8	ZE3208MB (I, E, W, J, G)	91	ZE4208MB (I, E, W, J, G)	100				
S/A		VM32	2.6	ZE3210MB (I, E, W, J, G)	104	ZE4210MB (I, E, W, J, G)	113	ZE5210MW (J, G)	124	ZE6210MW (J, G)	163
S/A		VM32	5.2	ZE3220MB (I, E, W, J, G)	131	ZE4220MB (I, E, W, J, G)	140	ZE5220MW (J, G)	151	ZE6220MW (J, G)	190
S/A	●	VM33	1.2	ZE3304MB (E)	86						
S/A	●	VM33	1.8	ZE3308MB (I, E, W, J, G)	92	ZE4308MB (I, E, W, J, G)	101				
S/A	●	VM33	2.6	ZE3310MB (I, E, W, J, G)	105	ZE4310MB (I, E, W, J, G)	114	ZE5310MW (J, G)	125	ZE6310MW (J, G)	164
S/A	●	VM33	5.2	ZE3320MB (I, E, W, J, G)	132	ZE4320MB (I, E, W, J, G)	141	ZE5320MW (J, G)	152	ZE6320MW (J, G)	191
S/A	●	VM33	10.3	ZE3340MB (I, E, W, J, G)	183	ZE4340MB (I, E, W, J, G)	192	ZE5340MW (J, G)	203	ZE6340MW (J, G)	242
S/A	●	VM33VAC	1.8			ZE41008MB (I, E, W, J, G)	101				
S/A	●	VM33VAC	5.2			ZE41020MB (I, E, W, J, G)	141	ZE51020MW (J, G)	153	ZE61020MW (J, G)	192
S/A	●	VM33VAC	10.3					ZE51040MW (J, G)	203	ZE61040MW (J, G)	242
S/A	●	VM33L	1.8	ZE3608MB (I, E, W, J, G)	92						
S/A	●	VM33L	5.2	ZE3620MB (I, E, W, J, G)	136	ZE4620MB (I, E, W, J, G)	145				
S/A	●	VM33L	10.3	ZE3640MB (I, E, W, J, G)	187	ZE4640MB (I, E, W, J, G)	196				
D/A	●	VM43	1.2	ZE3404MB (E)	86						
D/A	●	VM43	1.8	ZE3408MB (I, E, W, J, G)	92	ZE4408MB (I, E, W, J, G)	101				
D/A	●	VM43	2.6	ZE3410MB (I, E, W, J, G)	106	ZE4410MB (I, E, W, J, G)	114	ZE5410MW (J, G)	125	ZE6410MW (J, G)	164
D/A	●	VM43	5.2	ZE3420MB (I, E, W, J, G)	132	ZE4420MB (I, E, W, J, G)	141	ZE5420MW (J, G)	152	ZE6420MW (J, G)	191
D/A	●	VM43	10.3	ZE3440MB (I, E, W, J, G)	183	ZE4440MB (I, E, W, J, G)	192	ZE5440MW (J, G)	203	ZE6440MW (J, G)	242
D/A	●	VM43L	1.8	ZE3808MB (I, E, W, J, G)	96						
D/A	●	VM43L	5.2	ZE3820MB (I, E, W, J, G)	136	ZE4820MB (I, E, W, J, G)	145	ZE5820MW (J, G)	156	ZE6820MW (J, G)	195
D/A	●	VM43L	10.3	ZE3840MB (I, E, W, J, G)	187	ZE4840MB (I, E, W, J, G)	196	ZE5840MW (J, G)	207	ZE6840MW (J, G)	246
S/A		VE32D	1.2	ZE3104DB (I, E, W, J, G)	94						
S/A		VE32D	1.8	ZE3108DB (I, E, W, J, G)	100	ZE4108DB (I, E, W, J, G)	109				
S/A		VE32D	2.6	ZE3110DB (I, E, W, J, G)	114	ZE4110DB (I, E, W, J, G)	122	ZE5110DW (J, G)	136	ZE6110DW (J, G)	175
S/A		VE32D	5.2	ZE3120DB (I, E, W, J, G)	140	ZE4120DB (I, E, W, J, G)	149	ZE5120DW (J, G)	163	ZE6120DW (J, G)	202
S/A		VE32D	10.3			ZE4140DB (I, E, W, J, G)	199	ZE5140DW (J, G)	213	ZE6140DW (J, G)	252
S/A	●	VE33	1.2	ZE3304SB (I, E, W, J, G)	106						
S/A	●	VE33	1.8	ZE3308SB (I, E, W, J, G)	112	ZE4308SB (I, E, W, J, G)	121				
S/A	●	VE33	2.6	ZE3310SB (I, E, W, J, G)	125	ZE4310SB (I, E, W, J, G)	134	ZE5310SW (J, G)	148	ZE6310SW (J, G)	186
S/A	●	VE33	5.2	ZE3320SB (I, E, W, J, G)	152	ZE4320SB (I, E, W, J, G)	161	ZE5320SW (J, G)	174	ZE6320SW (J, G)	213
S/A	●	VE33	10.3	ZE3340SB (I, E, W, J, G)	203	ZE4340SB (I, E, W, J, G)	212	ZE5340SW (J, G)	225	ZE6340SW (J, G)	264
S/A	●	VE33VAC	1.8			ZE41108SB (I, E, W, J, G)	115				
S/A	●	VE33VAC	5.2			ZE41120SB (I, E, W, J, G)	155	ZE51120SW (J, G)	168	ZE61120SW (J, G)	207
S/A	●	VE33VAC	10.3					ZE51140SW (J, G)	219	ZE61140SW (J, G)	258
D/A	●	VE43	1.2	ZE3404SB (I, E, W, J, G)	106						
D/A	●	VE43	1.8	ZE3408SB (I, E, W, J, G)	112	ZE4408SB (I, E, W, J, G)	121				
D/A	●	VE43	2.6	ZE3410SB (I, E, W, J, G)	125	ZE4410SB (I, E, W, J, G)	134	ZE5410SW (J, G)	148	ZE6410SW (J, G)	186
D/A	●	VE43	5.2	ZE3420SB (I, E, W, J, G)	152	ZE4420SB (I, E, W, J, G)	161	ZE5420SW (J, G)	174	ZE6420SW (J, G)	213
D/A	●	VE43	10.3	ZE3440SB (I, E, W, J, G)	203	ZE4440SB (I, E, W, J, G)	212	ZE5440SW (J, G)	225	ZE6440SW (J, G)	264

1) S/A = Single acting / D/A = Double acting
2) See Valve Section for technical information.
3) "B" suffix model numbers shown are 115 VAC, 1-phase, 50/60 Hz
Other voltages available as shown. Replace “B” voltage suffix with selected voltage character. Model number order example: ZE4108DI is 208-240V, 1 phase, 50/60 Hz.
See Ordering Guide page for voltage descriptions
Note: Voltage options K (440V, 3-phase, 50/60HZ) and R (575V, 3-phase, 60 Hz) are available on select models. Contact your local representative for availability.
Note: Valve Operation L available on Manual Pumps. Substitute "L" for "M" Valve Operation

Electric Box [1]

- **Back-lit LCD**
- **Pump usage information, hour and cycle counts**
- **Low-voltage warning and recording**
- **Self-test and diagnostic capabilities**
- **Pressure read-out [2]**
- **Auto-mode pressure setting [2]**
- **Information can be displayed in six languages [3]**

[1] Included on pumps with solenoid valves
[2] When used with pressure transducer
[3] English, French, German, Italian, Spanish and Portuguese

Level/Temperature Switch [4]

- **Shuts down pump before oil level reaches an unsafe level, avoiding damage due to cavitation**
- **Shuts down pump when unsafe oil temperature is reached**
- **Ideal if pump is used in remote area without visual access to oil level**

[4] 24V, requires Electric Box. Available for 2.6, 5.2 and 10.3 gallon reservoirs

Accessory Kit Model Number	Fixed Temperature Signal (° F)	Operating Temperature (° F)	Max. Pressure (psi)
ZLS-U4	75	40 - 230	150

Return Line Filter

- **25 micron nominal filter removes contaminants from return oil flow before allowing it back into tank**
- **Internal by-pass valve prevents damage if filter is dirty**
- **With maintenance indicator**
- **Replaceable filter element PF25**

Accessory Kit Model Number	Maximum Pressure (psi)	Maximum Oil Flow (GPM)	By-pass Setting (psi)
ZPF	200	12.0	25

Roll Cage

- **For easy portability**
- **Protects pump and electric box**
- **Available for all reservoir sizes**

Accessory Kit Number	Fits on Reservoir
ZRC-04	1.2 and 1.8 gallon[1]
ZRC0-4H	1.2 and 1.8 gallon[2]
ZRB-10	2.6 gallon
ZRB-20	5.2 gallon
ZRB-40	10.3 gallon

[1] Without heat exchanger
[2] With heat exchanger

Skid Bar

- **Provides easy two-hand lift**
- **Provides greater pump stability on soft or uneven surfaces**

Accessory Kit Number	For ZE-Series Pumps with Reservoir	Wt. (lbs)
SBZ-4	1.2 & 1.8 gal. w/o heat exchanger	4.9
SBZ-4L	1.2 & 1.8 gal. with heat exchanger	5.5

Foot Switch [5]

- **Hands-free remote control on solenoid dump and 3-position valves**
- **With 10-foot cord**

[5] 15V, requires Electric Box

Accessory Kit Number	Can be used on ZE-Series Pumps with
ZCF-2	Solenoid VE-Series valves

Pressure Transducer [1]

- **Displays pressure on LCD in bar, MPa or psi**
- **More accurate than analog gauge**
- **Calibration can be fine-tuned for certification**
- **Easy-viewing variable rate display**
- **"Set pressure" feature turns off motor at user defined pressure (or shifts valve to neutral on models with VE33/ VE43 valves)**

[1] 24V, requires Electric Box

Accessory Kit Model number	Adjustable Pressure Range (psi)	Switch-point Repeat-ability	Dead-band (psi)
ZPT-U4	50-10,000	± 0.5%	50

Pressure Switch [2] [3] [4]

- **Controls pump, monitors system**
- **Adjustable pressure 500-10,000 psi**
- **Includes glycerin filled, 15,000 psi pressure gauge, G2536L**
- **Accuracy ± 1.5% of full scale**

[2] 24V, requires Electric Box. Not available in combination with pressure transducer.
[3] Not available on LCD electronics
[4] Only available on locking valves without pressure transducer

Accessory Kit Model number	Switch-point Repeat-ability	Deadband (psi)	Oil Ports (NPT)
ZPS-E3	± 2%	115-550	3/8"

Heat Exchanger [5]

- **Removes heat from bypass oil to provide cooler operation**
- **Stabilizes oil viscosity, increasing oil life, and reduces wear of pump and other hydraulic components**

[5] 24V DC, requires electric box

Accessory Kit Model number	Fits on Reservoir	Weight (lbs)
ZHE-E04	1.2 and 1.8 gallon	9.0
ZHE-E10	2.6, 5.2 and 10.3 gallon	9.0

Pressure Gauge (G)

- **Minimize risk of overloading to ensure long life of equipment**
- **2.5" face diameter, glycerin filled**
- **Dual Scale, PSI and Bar**

Note: Pressure Gauge not available on pump models with pressure transducer. The pressure transducer provides digital pressure read-out on LCD-display.

Model No.	Description
G2536L	15,000 psi, Ø 2.5 inches

ZE Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
40 - 200 in³/min

Motor Size:
1.0 - 7.5 hp

Maximum Operating Pressure:
10,000 psi

ZPT-U4 Pressure Transducer

More durable against mechanical and hydraulic shock than analog gauges.

- Digital pressure read-out provides accuracy of 5% of full scale.
- Easy-viewing variable rate display automatically varies increments between 44, 203, 508 and 2103 psi as rate of pressure change increases.
- "Set pressure" feature turns off motor at user defined pressure (or shifts valve to neutral on VE33 and VE43 valves).

ZHE-Series Heat Exchangers

Heat exchanger stabilizes oil temperature at 130° F at 70° F ambient temperature. Thermal transfer at 5 GPM and 70° F ambient temperature: 900 Btu/hour.

Do not exceed maximum oil flow of 7.0 GPM and maximum pressure of 300 psi. Not suitable for water-glycol or high water based fluids.

▼ Shown: **PEM8418**

The Largest Pump for the Largest Jobs

- **Panel-mounted pressure gauge and adjustable relief valve for system pressure control**
- **Two-speed pump design, with high by-pass pressure, for rapid cylinder advance**
- **Dual-voltage motor (230/460 VAC, 3-phase, 60 Hz)**
- **Full length reservoir sight tube with integral thermometer for ease in monitoring oil level and temperature**
- **Low voltage controls to protect the pump operator**

Locking Valves

Pumps with VM4 manual valves are available with VM4L manual valves for positive load holding. Add suffix **"L"** to pump model number.

Page: **140**

FS34 Foot Control Switch

This 3-position switch allows hands-free control of the solenoid valve on the pump. Operates 24V and 115V valves that use the square electrical connector.

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **148**

◀ *With similar specifications, a gasoline-powered EGM8000 Series is shown here performing a synchronized lift.*

About the 8000 Series

The 8000 Series is the largest pump in the Enerpac line and the best choice to power most large size cylinders, multiple cylinder circuits, and applications where the need for high speed requires high flow rates.

The 8000 Series, with its large reservoir capacity, is best suited for large jobs and may be the only solution because of the required oil capacity.

For further application assistance see our "Yellow Pages", or consult your local Enerpac office.

PEM PER Series

Reservoir Capacity:
25 gallon

Flow at Rated Pressure:
2.0 gal/min.

Motor Size:
12.5 hp

Maximum Operating Pressure:
10,000 psi

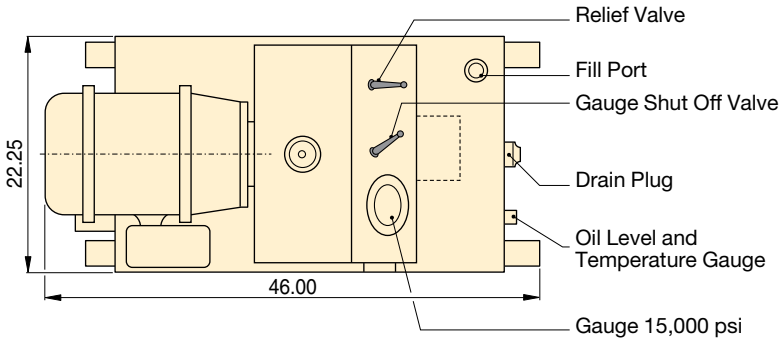

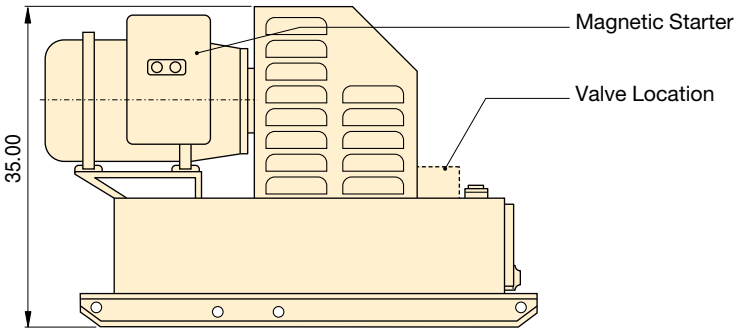

Dimensions shown in inches.

Speed Chart

To determine how an 8000-Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

OIL FLOW vs. PRESSURE

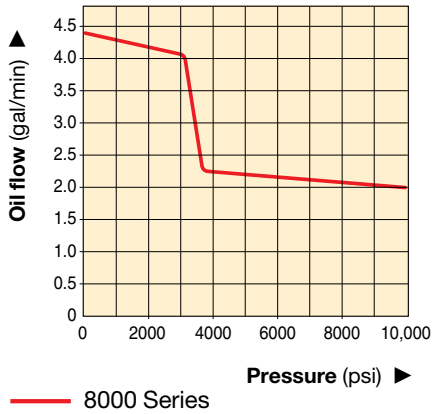

Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Pressure Rating (psi) 1st stage	Pressure Rating (psi) 2nd stage	Output Flow Rate (gal/min) 1st stage	Output Flow Rate (gal/min) 2nd stage	Valve Type	Valve Function	Current Draw (Amps)	Motor Voltage* (VAC)	Sound Level (dBA)	Weight (lbs)
Single-acting	18	PEM8218	3,700	10,000	4.4	2.0	Manual (VM-2)	3-way, 2-pos.	33.0	230	78-84	720
	18	PEM8218C	3,700	10,000	4.4	2.0			16.5	460	78-84	720
Double-acting	18	PEM8418	3,700	10,000	4.4	2.0	Manual (VM-4)	4-way, 3-pos.	33.0	230	78-84	720
	18	PEM8418C	3,700	10,000	4.4	2.0			16.5	460	78-84	720
	18	PER8418	3,700	10,000	4.4	2.0	Solenoid (VE43)	4-way, 3-pos.	33.0	230	78-84	765
	18	PER8418C	3,700	10,000	4.4	2.0			16.5	460	78-84	765

* Consult Enerpac for availability of other voltages.

▼ Shown from top to bottom: **PA1150, PA133**

PA Series

Reservoir Capacity:
36 - 80 in³

Flow at Rated Pressure:
8 in³/min.

Maximum Operating Pressure:
10,000 psi

PC66 Reservoir Conversion Kit

Double the reservoir capacity of your existing PA133 with this easy to install conversion kit.

Model number	PC66

- **Rugged construction – built for long life and easy service**
- **Swivel coupling simplifies hydraulic connection and pump operation**
- **Three-position treadle provides cylinder advance, hold and retract operation**
- **PA133 operates in all positions for increased versatility in use and mounting**
- **Base mounting slots provided on PA133**

OIL FLOW vs. PRESSURE

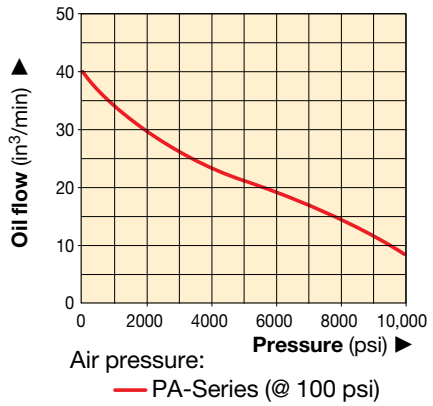

Dimensions shown in inches.

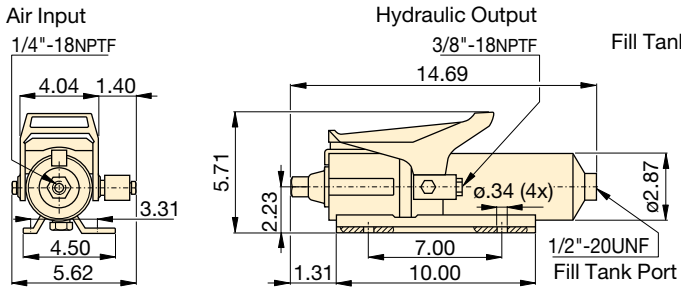

PA133

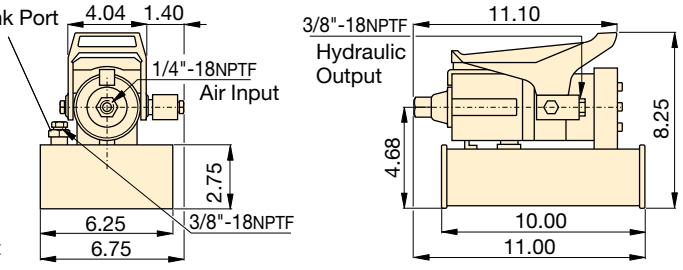

PA1150

Used with Cylinder	Usable Oil Capacity (in³)	Model Number	Pressure Rating (psi)	Output Flow Rate (in³/min) No load	Output Flow Rate (in³/min) Load	Valve Function	Air Pressure Range* (psi)	Air Consumption (scfm)	Sound Level (dBA)	Weight (lbs)
Single-acting	36	**PA133**	10,000	40	8	Advance/Hold/Retract	60-120	9	85	12
	80	**PA1150**	10,000	40	8	Advance/Hold/Retract	60-120	9	85	18

* Recommended Regulator-Filter-Lubricator: RFL102.

▼ Shown: **PAM1041**

PAM Series

Reservoir Capacity:
1.0 - 2.0 gallon

Flow at Rated Pressure:
9 in³/min.

Maximum Operating Pressure:
10,000 psi

Locking Valves

Pumps with VM4 manual valves are available with VM4L manual locking valves instead.
Add suffix **"L"** to pump model number.

Page: **140**

Remote Air Valve

For remote operation of PAM10 series air pumps. Permits either hand or foot operation.

Model number [1]	VA2

- **Twin air motor configuration delivers high-flow performance in first stage, up to 200 psi, for rapid cylinder advance**
- **1 and 2-gallon reservoirs for use with a wide range of cylinders**
- **Integral shroud protects air motors and provides easy portability**

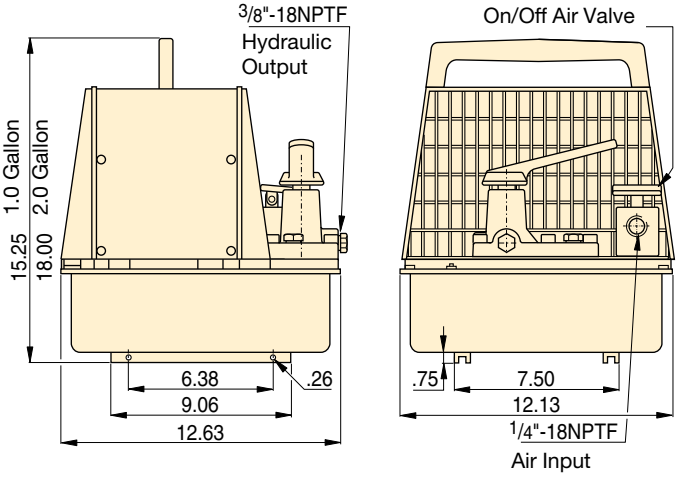

OIL FLOW vs. PRESSURE

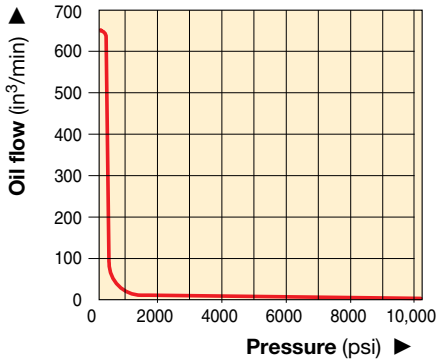

Used with Cylinder	Usable Oil Capacity (gal)	Model Number (with Shroud)	Pressure Rating (psi)	Output Flow Rate (in³/min) 1st stage	Output Flow Rate (in³/min) 2nd stage	Valve Function	Valve Model	Air Pressure Range* (psi)	Air Consumption (scfm)	Sound Level (dBA)	Weight (lbs)
Single-acting	0.7	**PAM1021**	10,000	650	9	Adv/Hold/Ret	VM2	60-120	18	87	50
	2.0	**PAM1022**	10,000	650	9	Adv/Hold/Ret	VM2	60-120	18	87	60
Double-acting	0.7	**PAM1041**	10,000	650	9	Adv/Hold/Ret	VM4	60-120	18	87	50
	2.0	**PAM1042**	10,000	650	9	Adv/Hold/Ret	VM4	60-120	18	87	60

* Recommended Regulator-Filter-Lubricator: RFL102

▼ Shown left to right: **PAMG1402N, PATG1102N, PARG1102N, PATG1105N**

Compact Air Over Hydraulic

- **High efficiency cast aluminum air motor for increased life and reduced air consumption**
- **Fully serviceable air motor assembly**
- **Reinforced heavy-duty reservoir for applications in tough environments**
- **New generation air-saver piston with rugged one-piece design reduces air consumption and operating costs**
- **Return-to-tank port for use in remote valve applications**
- **Quiet – only 76 dBA with low air consumption of 12 scfm**
- **Operating air pressure: 40-125 psi, enables pump to start at extremely low pressure**
- **Internal pressure-relief valve provides overload protection**
- **Mounting Bracket Kit (MTB1) available to mount pumps to horizontal or vertical surfaces**

RFL102
Regulator-Filter-Lubricator

Recommended for use with all air pumps. Provides clean, lubricated air and allows for air pressure adjustment. Steel bowl guards are standard.

Order model number [1]	RFL102

Large Reservoir Models

The Turbo II Air Pump is also available with a larger reservoir: **PATG1105N, PAMG1405N,** and **PARG1105N.**

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

▼ *Easily operated by hand or by foot.*

Used with Cylinder	Usable Oil Capacity (in³)	Model Number
Single-acting	127	PATG1102N
	230	PATG1105N
	127	PARG1102N
	230	PARG1105N
Double-acting	127	PAMG1402N
	230	PAMG1405N

The **PATG**-models use a foot or hand-operated treadle to control air and valve functions.

The **PAMG**-models use a treadle with a locking feature and a 4-way manual valve.

The **PARG**-models use a 15-ft. pendant hose for convenient one-man operation.

OIL FLOW vs. PRESSURE

Turbo II Air Pump (@ 100 psi)

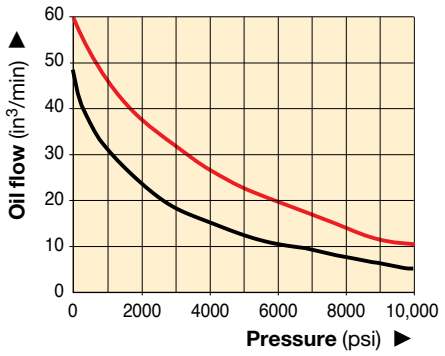

PATG PARG PAMG Series

Reservoir Capacity:
150 - 305 in³

Flow at Rated Pressure:
5 - 10 in³/min.

Maximum Operating Pressure:
10,000 psi

Pressure Rating (psi)	Output Flow Rate (in³min) No load	Output Flow Rate (in³min) Load	Model Number	Valve Function	Air Pressure Range (psi)	Air Consumption (scfm)	Sound Level (dBA)
10,000	60	10	**PATG & PAMG**	Advance/ Hold/ Retract	40-115	12	76
10,000	51 1)	6 1)	**PARG**		40-115	12	76
10,000	48 2)	5 2)			40-115	8	76

1) Air supply connected at pendant. 2) Air supply connected at pump shown on flow curve.

Speed Chart

To determine how an 8000-Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

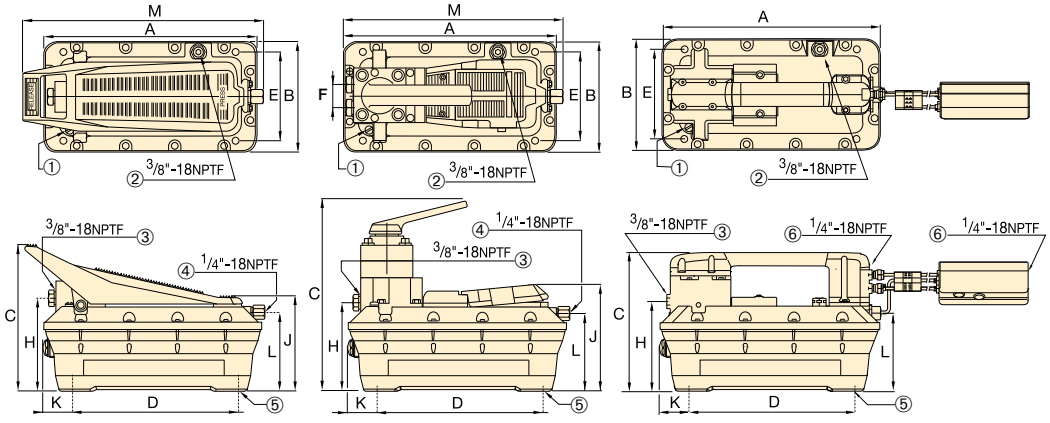

PATG1102N
PATG1105N

PAMG1402N
PAMG1405N

PARG1102N
PARG1105N

① Filtered "Permanent" Tank Vent

② Return-to-Tank/Auxiliary Vent/Fill Tank Port

③ Hydraulic Output

④ Swivel Air Input with Filter

⑤ 4 Mounting Holes for #10 thread forming screw. Max. depth into reservoir = 0.75"

⑥ Air Input Options

Dimensions (in) A	B	C	D	E	F	H	J	K	L	M	Weight (lbs)	Model Number
12.33	6.49	8.29	9.04	4.00	–	5.15	5.75	1.65	4.43	13.62	18	**PATG1102N**
15.60	7.92	8.22	9.04	4.00	–	5.08	5.75	3.28	4.41	17.20	22	**PATG1105N**
12.33	6.49	7.88	9.04	4.00	–	5.15	–	1.65	4.43	–	22	**PARG1102N**
15.60	7.92	7.88	9.04	4.00	–	5.08	–	3.28	4.41	–	26	**PARG1105N**
12.33	6.49	10.50	9.04	4.00	1.42	5.23	6.00	1.65	4.43	12.60	24	**PAMG1402N**
15.60	7.92	10.50	9.04	4.00	1.42	5.19	6.00	3.28	4.41	15.94	28	**PAMG1405N**

▼ Shown: **XA11G**

- **Higher oil flow for increased productivity**
- **Variable oil flow and fine metering for precise control**
- **Ergonomic design for less operator fatigue**
- **Closed hydraulic system prevents contamination and allows pump usage in any position**
- **Pedal lock function for retract position**
- **External adjustable pressure setting valve**
- **ATEX Certified.* Includes ground screw for explosion protection**

* See explanation of ATEX Certification in "Yellow Pages".

▼ *Easily operated by foot. No need to fully lift up foot - rest body weight on heel, resulting in a hands-free and stable working position.*

Control and Ergonomics

Optional Pressure Gauge
Integrated gauge with calibrated scale reading in psi, bar and MPa for actual pressure reading.

Optional 4-Way 3-Position Valve
For powering double-acting hydraulic cylinders and tools.

Optional 1/2 Gallon Reservoir
Double oil capacity for powering larger hydraulic cylinders and tools.

"Joy-stick" Lever Kit
Customer installed set of handles for manual operation of both pedals.

Order model number [1]	XLK1

Hydraulic Swivel Connector
Customer installed swivel connector for optimal orientation of the hydraulic hose.

Order model number [1]	XSC1

[1] Accessories must be ordered separately.

PRODUCTION APPLICATION

XA11 pump is used with a 13-ton hollow cylinder to compress and position diesel engine valve springs.

The operator benefits from the fine metering capabilities to apply the mandatory precise stroke and force.

XA Series

Reservoir Capacity:
61 - 122 in³

Flow at Rated Pressure:
15 in³/min.

Air Consumption:
10 - 35 scfm

Maximum Operating Pressure:
10,000 psi

▼ XA-SERIES PERFORMANCE CHART

Maximum Pressure (psi)	Output Flow Rate (in³/min) No load	Output Flow Rate (in³/min) Load	Pump Series	Valve Function	Dynamic Air Pressure (psi)	Sound Level (dba)
10,000	120	15	**XA1**	Advance/Hold/Retract	30-125	88

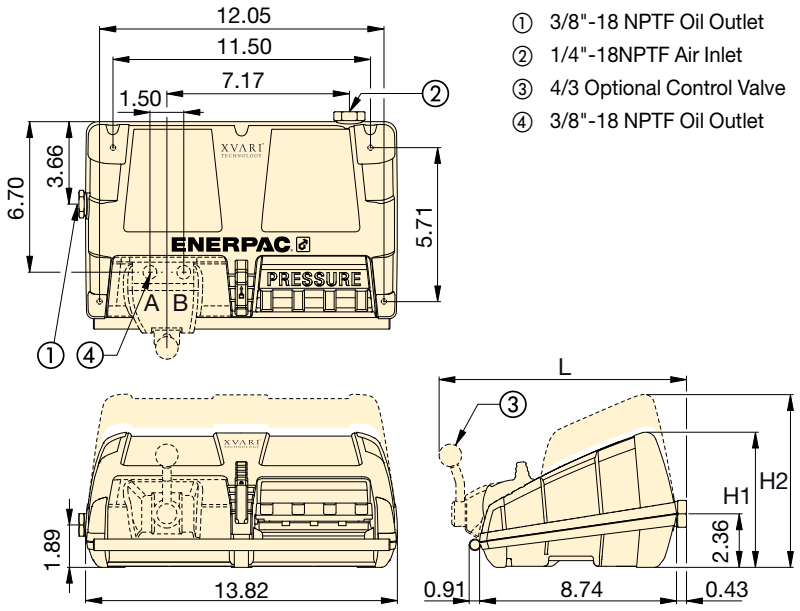

① 3/8"-18 NPTF Oil Outlet
② 1/4"-18NPTF Air Inlet
③ 4/3 Optional Control Valve
④ 3/8"-18 NPTF Oil Outlet

OIL FLOW vs. PRESSURE

at 100 psi dynamic air pressure

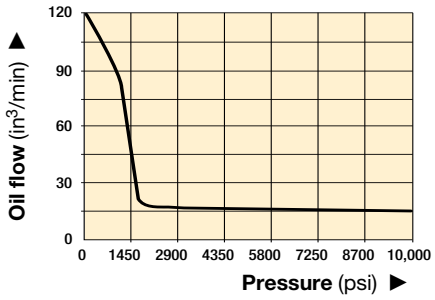

Regulator-Filter-Lubricator

Recommended for use with all XA-Series Air pumps. Provides clean, lubricated air and allows for air pressure adjustment.

Order model number [1]	RFL102

▼ SELECTION CHART

For Use With Cylinder Tool	Usable Oil Capacity (in³)	Model No. [1]	Pressure Gauge	3-Way, 3-Position Valve	4-Way, 3-Position Valve	Dimensions (in) H1	Dimensions (in) H2	Dimensions (in) L	Weight (lbs)
Single-acting	61	**XA11** [2]	–	•	–	5.98	–	–	19.0
	122	**XA12** [2]	–	•	–	–	6.69	–	22.4
Single-acting	61	**XA11G**	•	•	–	5.98	–	–	19.4
	122	**XA12G**	•	•	–	–	6.69	–	22.9
Double-acting	61	**XA11V**	–	–	•	5.98	–	10.98	22.3
	122	**XA12V**	–	–	•	–	6.69	10.98	25.7
Double-acting	61	**XA11VG**	•	–	•	5.98	–	10.98	22.7
	122	**XA12VG**	•	–	•	–	6.69	10.98	26.2

[1] High-flow coupler CR400 and accessories must be ordered separately.
[2] Available as cylinder pump set, see page 63.

▼ Shown: **ZA4208MX, ZA4420MX**

Z Tough. Dependable. Innovative. CLASS

- **Features Z-Class high efficiency pump design, higher oil flow and bypass pressure**
- **Two-speed operation and high by-pass pressure reduces cycle time for improved productivity**
- **Internal relief valves. One is factory set for overload protection while the second is user adjustable for pre-setting maximum system pressure**
- **Sight gauge on 1.2 and 1.8-gallon and level gauge on 2.6, 5.2 and 10.3-gallon reservoirs allow quick and easy oil level monitoring**
- **Optional heat exchanger warms exhaust air to prevent freezing and cools the oil**

ATEX Certified

See explanation of ATEX certification in the "Yellow Pages."

Ex II 2 GD ck T4 DEKRA 0602 CE

Page: 399

Speed Chart

To determine how a ZA Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

ZA4 Performance		
Dynamic Air Pressure Range (psi)	Air Consumption (scfm)	Sound Level (dBA)
60-100	20-100	94-97

Used with Cylinder	Usable Oil Capacity (gal)	Valve Model Number[2]	Valve Function	Model Number	Output Flow Rate[1] (in³/min)			
					100 psi	700 psi	5,000 psi	10,000 psi
Single-acting	1.2	Manual VM32	Advance/ Retract	ZA4204MX	850	675	110	80
	1.8			ZA4208MX	850	675	110	80
	5.2			ZA4220MX	850	675	110	80
Double-acting	1.2	Manual VM43	Advance/ Hold/ Retract	ZA4404MX	850	675	110	80
	1.8			ZA4408MX	850	675	110	80
	2.6			ZA4410MX	850	675	110	80
	5.2			ZA4420MX	850	675	110	80
	10.3			ZA4440MX	850	675	110	80

1) Actual flow will vary with air supply
2) See valve section for hydraulic symbols and details

ZA-Series, Air Hydraulic Pump Ordering Matrix

CUSTOM BUILD YOUR ZA4 AIR PUMP

▼ This is how a ZA-Series Pump model number is built up:

Z	A	4	2	08	M	X	-	F	H	K	
1 Product Type	2 Motor Type	3 Flow Group	4 Valve Type	5 Usable Oil Capacity	6 Valve Operation	7 Voltage		8 Options			

1 Product Type
Z = Pump class

2 Motor Type
A = Air motor

3 Flow Group
4 = 80 in³/min@10,000 psi

4 Valve Type
0 = No valve with cover plate
2 = 3-way, 2-position (VM32)
3 = 3-way, 3-position (VM33)
4 = 4-way, 3-position (VM43)
6 = 3-way, 3-position, locking (VM33L)
7 = 3-way, 2-position (VM22)
8 = 4-way, 3-position, locking (VM43L)

5 Usable Oil Capacity
04 = 1.2 gallon
08 = 1.8 gallon
10 = 2.6 gallon
20 = 5.2 gallon
40 = 10.3 gallon

6 Valve Operation
M = Manual valve
N = No valve

7 Voltage
X = Not applicable

8 Options
(Specify in alphabetical order)
F = Filter
G = 0-15,000 psi gauge (2 1/2")
H = Heat exchanger*
K = Skid bar*
N = No reservoir handles (includes lifting eyes; 2.5, 5, 10 gallon only)
R = Roll bars
* (1 and 2 gallon reservoirs only)

Ordering Example

Model Number: ZA4208MXFHK

ZA4208MXFHK is an air operated pump with a 3-way, 2-position manual valve, a 1.8 gallon reservoir, filter, heat exchanger and skid bar.

ZA Series

Reservoir Capacity:
1.2 - 10.3 gallon

Flow at Rated Pressure:
80 in³/min.

Maximum Operating Pressure:
10,000 psi

① User adjustable relief valve on all manual valves
② Air inlet 1/2" NPTF
③ Return Line Filter (optional)
④ Oil Sight Gauge
⑤ Roll Cage (optional)
⑥ Oil Drain
⑦ Lifting eyes (4) (optional)
⑧ Handles
Skid Bar (Model No. SBZ4) (optional)

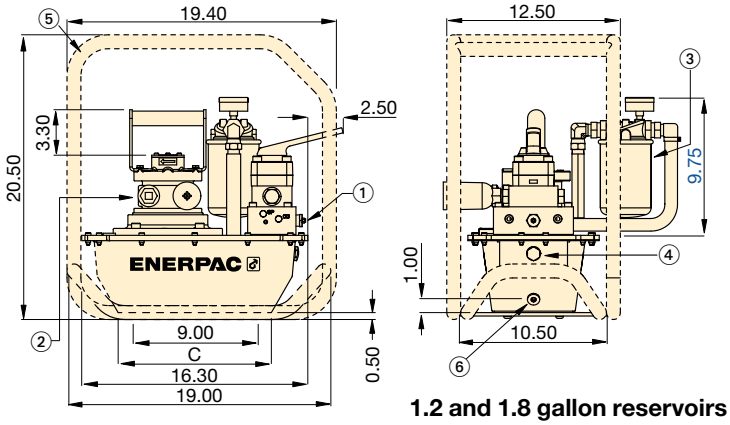

1.2 and 1.8 gallon reservoirs

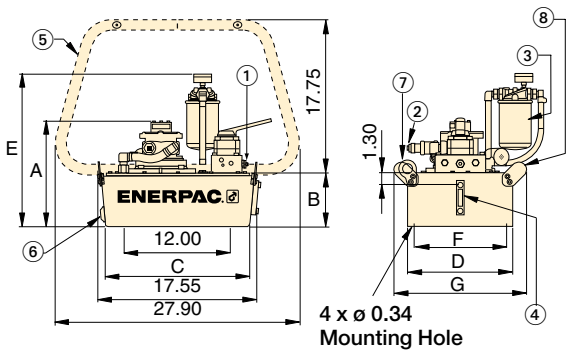

2.6, 5.2, 10.3 gallon reservoirs

	Dimensions (in)							Weight (incl. oil)
	A	B	C	D	E	F	G	(lbs)
	11.6	5.6	11.0	6.0	15.4	-	-	65.5
	11.6	5.6	11.0	8.1	15.4	-	-	75.7
	13.0	7.1	16.5	16.6	16.0	15.6	18.4	112.7
	11.6	5.6	11.0	6.0	15.4	-	-	66.7
	11.6	5.6	11.0	8.1	15.4	-	-	76.9
	12.0	6.1	16.5	12.0	16.0	11.0	15.1	87.1
	13.0	7.1	16.5	16.6	16.9	15.6	18.4	113.9
	16.5	10.6	15.7	19.9	20.4	18.9	23.0	164.6

OIL FLOW vs. PRESSURE

100 psi Dynamic Air Pressure at 70 scfm

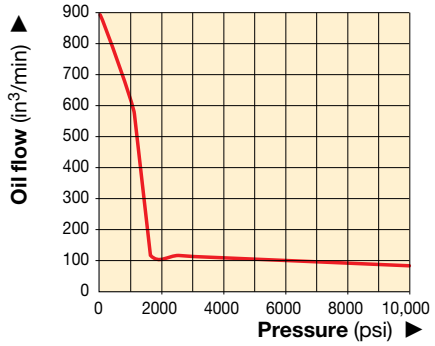

▼ Shown: **ZG5420MX-R**

Z Tough. Dependable. Innovative. CLASS

- **Features *Z-Class* high-efficiency pump design, higher oil flow and bypass pressure**
- **Two-speed operation reduces cycle time for improved productivity**
- **Full-sight oil level glass on all reservoirs allow quick and easy oil level monitoring**
- **ZG5 is available in two 4-cycle engine sizes: 7.1 ft.lbs Honda and 8.5 ft.lbs Briggs & Stratton**

Speed Chart

To determine how a ZG Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 409

ZG-Series, Gasoline Pump Performance

Elevation can affect the performance of any gasoline engine. ZG-Series pumps are designed to develop rated performance at elevations up to 4921 ft.

For applications above this elevation please consult your Enerpac office.

User-Adjustable Relief Valve

All VM-Series directional valves have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.

▼ **SELECTION CHART**

Used with Cylinder	Usable Oil Capacity (gal)	Valve Model Number	Valve Function	Model Number with Roll Cage	Output Flow Rate (in^3/min) at 100 psi	at 700 psi	at 5000 psi	at 10,000 psi	Sound Level (dBA)
Single-Acting	2.6	VM33	Advance/ Hold/ Retract	ZG5310MX-R	700	650	110	100	88 - 93
	5.2			ZG5320MX-R	700	650	110	100	88 - 93
Double-Acting	2.6	VM43		ZG5410MX-R	700	650	110	100	88 - 93
	5.2			ZG5420MX-R	700	650	110	100	88 - 93
Single-Acting	2.6	VM33		ZG5310MX-BR	400	380	110	100	91 - 95
	5.2			ZG5320MX-BR	400	380	110	100	91 - 95
Double-Acting	2.6	VM43		ZG5410MX-BR	400	380	110	100	91 - 95
	5.2			ZG5420MX-BR	400	380	110	100	91 - 95
	10.3	VM43L		ZG5840MX-BR	400	380	110	100	91 - 95

*To order Briggs & Stratton motor, place a "B" suffix in the model number.

CUSTOM BUILD YOUR ZG AIR PUMP

▼ This is how a ZG-Series Pump model number is built up:

Z	G	5	4	10	M	X	-	F	R		
1 Product Type	2 Motor Type	3 Flow Group	4 Valve Type	5 Usable Oil Capacity	6 Valve Operation	7 Voltage		8 Options			

1 Product Type
Z = Pump class

2 Motor Type
G = Gasoline Engine

3 Flow Group
5 = 100 in³/min@10,000 psi
6 = 200 in³/min@10,000 psi (see page 130)

4 Valve Type
0 = No valve with coverplate [1]
2 = 3-way, 2-position (VM32)
3 = 3-way, 3-position (VM33)
4 = 4-way, 3-position (VM43)
6 = 3-way, 3-position, locking (VM33L)
8 = 4-way, 3-position, locking (VM43L)

[1] For remote valve mounting order **BSS1090** high pressure connecting plate.

5 Usable Oil Capacity (Reservoir Size)
10 = 2.6 gallon
20 = 5.2 gallon
40 = 10.3 gallon

6 Valve Operation
M = Manual valve
N = No valve

7 Voltage
X = Not applicable

8 Options
(Specify in alphabetical order)
B = Briggs & Stratton gasoline engine
F = Return Line Filter
G = 15,000 psi gauge
N = No reservoir handles (includes lifting eyes; 2.5, 5, 10 gallon only)
R = Roll bars

Ordering Example

Model Number: **ZG5420MXFR**

This is a 10,000 psi hydraulic pump, with a 4/3 manual valve, 2.6 gallon reservoir, with a 7.1 ft-lbs Honda gasoline engine pump, return-line filter and roll bar.

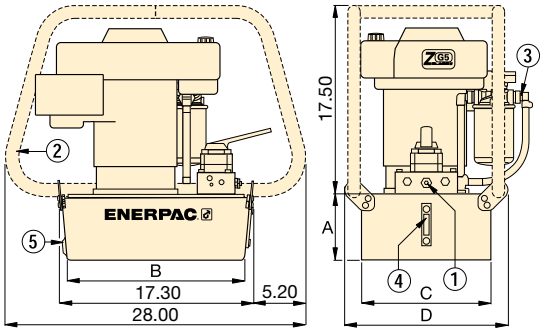

① User-adjustable relief valve on all manual valves. 3/8" NPTF on A and B ports; 1/4" NPTF on auxiliary ports.
② Roll Bar (optional)
③ Return Line Filter (optional)
④ Oil Level Gauge
⑤ Oil Drain

	Motor Manufacturer*	Relief Valve Adjustment Range	ZG5 Dimensions (in)				Wt.	Model Number with Roll Cage
	(ft-lbs)	(psi)	A	B	C	D	(lbs)	
	Honda	1000-10,000	6.1	16.5	12.0	15.1	113.6	**ZG5310MX-R**
			7.1	16.3	16.6	19.7	140.9	**ZG5320MX-R**
			6.1	16.5	12.0	15.1	113.6	**ZG5410MX-R**
			7.1	16.3	16.6	19.7	141.0	**ZG5420MX-R**
	Briggs & Stratton *	1000-10,000	6.1	16.5	12.0	15.1	111.0	**ZG5310MX-BR**
			7.1	16.3	16.6	19.7	138.3	**ZG5320MX-BR**
			6.1	16.5	12.0	15.1	111.1	**ZG5410MX-BR**
			7.1	16.3	16.6	19.7	138.4	**ZG5420MX-BR**
			10.6	15.7	19.8	21.9	189.6	**ZG5840MX-BR**

ZG5 Series

Reservoir Capacity:
2.6 - 5.2 - 10.3 gallon

Flow at Rated Pressure:
100 in³/min.

Engine Size:
7.1 and 8.5 Ft.lbs

Maximum Operating Pressure:
10,000 psi

High-Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

ZG6-Series 17.0 Ft-lb Pump

The ZG6 pump has a 200 in³/min. oil flow at 10,000 psi, Briggs & Stratton 4-cycle gasoline engine with electric start and 12 volt charge output for accessories.

Page: 130

OIL FLOW vs. PRESSURE

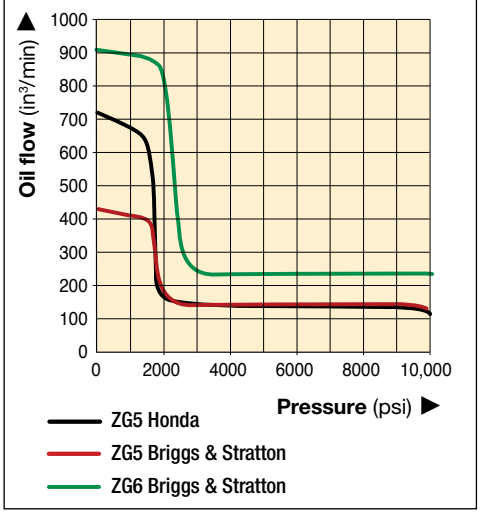

▼ Shown: **ZG6440MXBCFH**

ZG6 Series

Reservoir Capacity:
10.3 gallon

Flow at Rated Pressure:
200 in^3/min.

Engine Size:
17.0 Ft.lbs

Sound Level:
88 - 93 dBA

Maximum Operating Pressure:
10,000 psi

- **Features *Z-Class* high-efficiency pump design:**
  - **higher oil flow and bypass pressure**
  - **patented balanced rotating pump components to reduce vibration**
  - **replaceable piston check valves that increase service life of pump components**
- **Two-speed operation reduces cycle time for improved productivity**
- **Full-sight oil level glass on all reservoirs allow quick and easy oil level monitoring**
- **Sturdy wheeled cart allows transport over uneven terrain and features collapsible handles**
- **Dual forced-air heat exchangers stabilizes hydraulic oil temperature**
- **Roll cage for easy portability and hoisting, protects pump**
- **Briggs & Stratton 17 ft.lbs engine with electric start, pressurized oil and 16-amp charge output for accessories**

Other Options Available

The ZG5/ZG6 pumps are available in a wide range of configurations and options. Contact Enerpac for further information.

User Adjustable Relief Valve

All VM-Series directional valves have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.

Used with Cylinder	Usable Oil Capacity (gal)	Valve Model Number	Valve Function	Model Number	Motor Manufacturer*	Motor Size (Ft.lbs)	Weight (lbs)
Double-Acting	10.3	VM43	Advance/Hold/Retract	**ZG6440MX-BCFH**	Briggs & Stratton	17.0	334.0

▼ Shown: **EGM8418**

EGM
Series

Reservoir Capacity:
25 gallon

Flow at Rated Pressure:
1.5 gal/min.

Motor Size:
18 hp

Maximum Operating Pressure:
10,000 psi

Locking Valves

Pumps with VM4 manual valves are available with VM4L manual valves for positive load holding. Add suffix "L" to pump model number.

Page: 140

- **Industrial grade 18 hp twin-cylinder motor**
- **Panel mounted pressure gauge and adjustable relief valve for system pressure control**
- **Two-speed pump design with high by-pass pressure for rapid cylinder advance**
- **Built in oil temperature and oil level gauge**
- **External adjustable relief valve (1,200-10,000 psi) allows control of operating pressure without opening the pump**
- **Integral priming circuit guarantees quick starts after transport**

OIL FLOW vs. PRESSURE

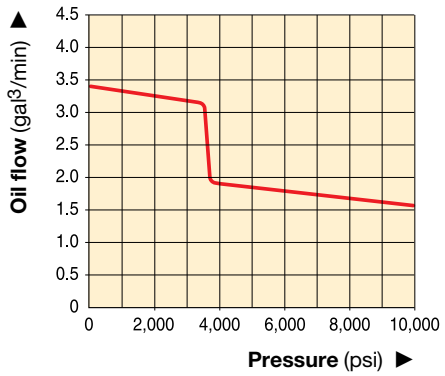

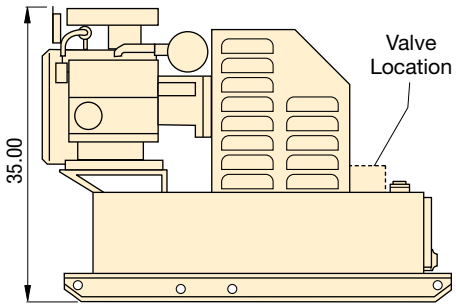

Side View

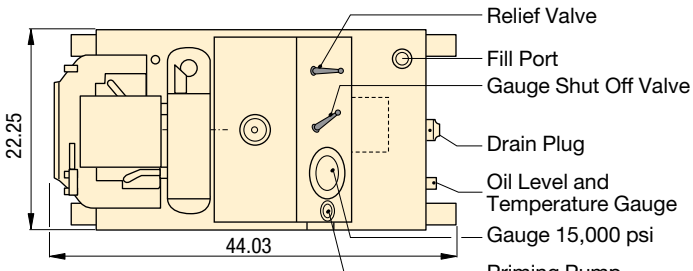

Top View

Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Pressure Rating (psi)		Output Flow Rate (gal/min)		Valve Type	Valve Function	Sound Level (dBA)	Weight (lbs)
			1st stage	2nd stage	1st stage	2nd stage				
Single-acting	18	**EGM8218**	3,700	10,000	3.4	1.5	3-way, 2-pos.	Adv./Retr.	94	890
Double-acting	18	**EGM8418**	3,700	10,000	3.4	1.5	4-way, 3-pos.	Adv./Hold/Retr.	94	890

▼ **SFP414SJ and SFP403SJ** (Gauges and retract valves not shown)

Multiple Outlets with Equal Flow for Lifting and Lowering

- **2, 4, 6 or 8 split-flow outlets**
- **Individual or simultaneously operation of valves, with advance/hold/retract function**
- **Joystick (manual) controlled or pendant (solenoid) controlled valves**
- **Flow per outlet ranging from 20 to 153 in^3/min at 10,000 psi**
- **For double- and single-acting cylinders**
- **Adjustable pressure relief valve per circuit**
- **Reservoir sizes: 5, 10 or 40 gallons**
- **All models include pressure gauges**

Typical Split-Flow Pump Applications

For lifting and lowering applications on multiple points, Split-Flow Pumps are a far better alternative than using independently operated pumps. Where synchronization of maximum 4% is acceptable, Split-Flow Pumps are a safe and economical solution.

The SFP-Series pumps feature both single and synchronized multiple outlet control either through joystick or pendant operation.

Application examples:

- Bridge deck lifting for bearing maintenance
- Stage lifting in construction and shipbuilding
- Skidding to move structures and buildings
- Levelling of constructions like wind turbines

▼ *Step-by-step stage lifting an old windmill using double-acting RR506 cylinders powered by a Split-Flow Pump.*

Remote Control Pendant

Split-Flow Pumps with solenoid valves include a remote pendant with selector switches for each individual outlet, allowing single or multiple cylinder operation.

Hoses and Couplers

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac System Components.

Page: **148**

SFP Series

Reservoir Capacity:
5, 10 or 40 gallon

Split-Flow Outlets:
2, 4, 6 or 8 outlets

Flow at Rated Pressure:
20 - 153 in³/min

Motor Size:
1 - 20 hp

Maximum Operating Pressure:
10,000 psi

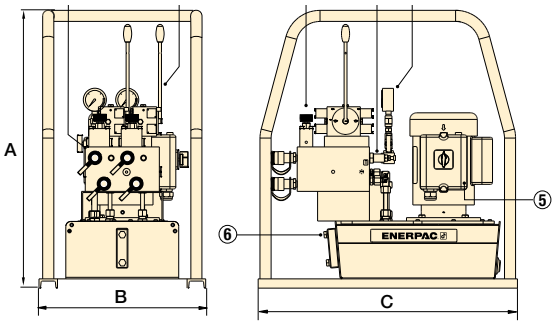

◀ **SFP-Series with 5-gallon reservoir (shown with 2 split-flow outlets)**

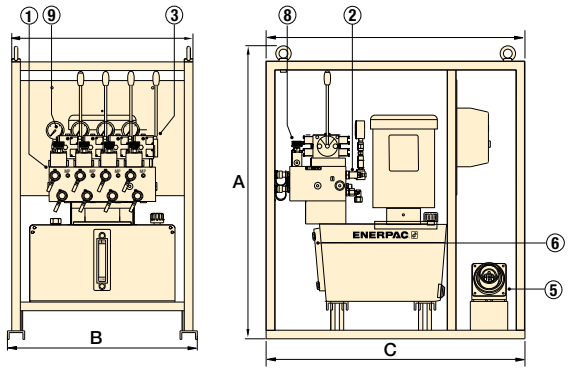

◀ **SFP-Series with 10-gallon reservoir (shown with 4 split-flow outlets)**

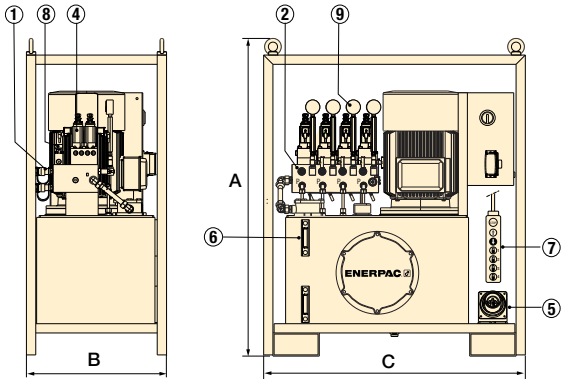

◀ **SFP-Series with 40-gallon reservoir (shown with 4 split-flow outlets)**

Lifting Cylinders

For a complete line of Enerpac cylinders, see the Cylinder and Lifting Products in our catalog.

Page: **5**

① Manifold with split-flow outlets and CR400 couplers
② Adjustable pressure relief valve per circuit
③ Manual 4/3 control valves with joysticks
④ Solenoid 4/3 control valves (24 VDC)
⑤ Power Socket
⑥ Oil sight gauge(s)
⑦ Remote control pendant with 16 ft. cord
⑧ Flow control valve
⑨ Hydraulic gauge

Number of Split-Flow Outlets	Reservoir Size (gal)	Oil Flow per Outlet @ 10,000 psi (in³/min)	Pump Model Number 4/3 Valve Operation Advance/Hold/Retract Manual (Joystick)	24 V Solenoid (Pendant)	Motor Size 460 V, 3ph 60 Hz (hp)	Dimensions (inch) A	B	C	(lbs)
2	5	20	**SFP202MB**	–	1.0 *	29.4	17.7	27.6	253
4	10	22	**SFP403MJ**	**SFP403SJ**	3.0	40.0	25.2	38.2	565
	40	65	–	**SFP409SJ**	7.5	53.4	23.8	45.7	1045
	40	101	–	**SFP414SJ**	10	53.4	23.8	45.7	1078
	40	153	–	**SFP421SJ**	15	53.4	23.8	45.7	1311
6	40	94	–	**SFP613SJ**	15	53.4	31.7	47.2	1236
8	10	22	–	**SFP803SJ**	7.5	45.8	32.7	43.8	990
	40	94	–	**SFP813SJ**	20	53.4	31.7	47.2	1364

* 115V-1 ph, 60 Hz

Motor Voltage

Motor voltage is specified by the last letter in the model number.

Other motor voltages are available from Enerpac. Change "**J**" in the model as follows for other options:

G = 208-240V, 3 ph, 50-60 Hz
W = 380-415V, 3 ph, 50-60 Hz

▼ **SFP-Series Split-Flow Pump Kit Components**

Connecting Split-Flow Pumps for more lift points and greater accuracy

- **Control multiple Split-Flow Pumps with one control unit**
- **Pumps can be closer to the lifting points, requiring shorter hoses and increasing accuracy**
- **Synchronize all lift points to within 0.04 inch (1.0 mm)**
- **Network control boxes expand the number of lifting points by combining up to four split-flow pumps together, simplifying lifting operations by using a single operator station**
- **Plug and play synchronous lift upgrade kits limit initial investment and provide everyday flexibility to tailor the controls to the applications needs**

Split Flow Pumps Kits

SFP Series kits are customized from standard components to meet the needs of your unique applications. On the next page is the guide to help you choose the right components to upgrade or expand your equipment based on your application needs.

Contact your regional Enerpac representative / territory manager for support with your specific project.

Split-Flow Pump Network Kits

Split-Flow Pump Network Kits connect multiple Split-Flow Pumps under one control system.

Split-Flow Pump Synchro Kits

Split-Flow Pump Synchro Kits connect and electronically synchronize each lift point of a single Split-Flow Pump or multiple Split-Flow Pumps under one control system.

Junction Box

SFPKSS4 and **SFPKSS8** junction boxes consolidate the signals from pressure and stroke sensors, allowing the master control box to synchronize the lifting operation.

SFPKMN, Master Control Box

All SFP-Series Synchro Kits include a master control box to allow the operator to easily monitor and control a multi-point synchronized lift and adjust individual lift points as needed.
All master control boxes feature an industrial grade touch screen and a user-friendly interface.

Stroke Sensor Cable,

Can be connected together for additional length. Ordered separately, requires one for each stroke sensor.

Model Number	Length (ft)	Model Number	Length (ft)
EVO-SC-6	19.7	EVO-SC-25	82

EVO-WSS, Wire Stroke Sensors

Provides stroke feedback to controls. Includes magnets for mounting. Ordered separately, requires one sensor for each lifting point. Available in measuring range from 14.8 to 39.4 inch.

Model Number	Range (in)	Model Number	Range (in)
EVO-WSS-375	14.8	EVO-WSS-1000	39.4
EVO-WSS-500	19.7	–	–

Communication Cables

EVO-COMM-Series communication cables transfer information about the synchronized lift operation from the master control panel to each of the connected split-flow pumps.

Model Number	Length (ft)	Model Number	Length (ft)
EVO-COMM-25	82	EVO-COMM-75	246
EVO-COMM-50	164	EVO-COMM-100	328

Upgrading Split-Flow Pumps

To network multiple SFP-pumps together with standard function see drawing and table ①.

To upgrade a single SFP-pump to synchronous lift capability, see drawing and table ②.

To upgrade and network multiple SFP-pumps together with synchronous lift capabilities, see drawing and table ③.

SFP Series

Multiple Pumps in Network System:
1 - 4 Pumps

Maximum Lifting Points:
32x Cylinders

① Networked SFP-Pumps in Standard Operation

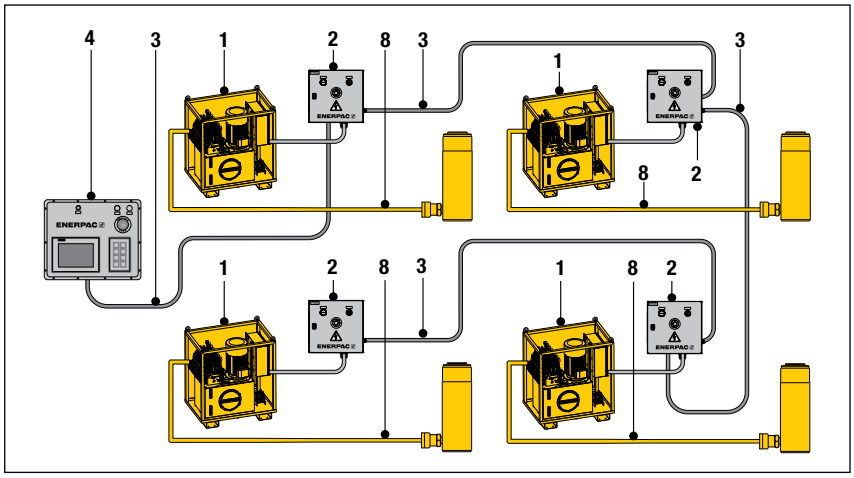

① Networked SFP-Pumps in Standard Operation

No.	Qty.	Model No. & Description
1	4x	**SFP...SW** Pumps with solenoid valves
2	4x	**SFPKSN** Junction Box, 1x per pump
3	4x	**SFPCOMM25** Communication Cable, 1x per pump
4	1x	**SFPKMN** Master Control Box
8		HC-700-Series, Hydraulic Hoses

② Single SFP-Pump in Multiple-Point Synchronous Lifting Operation

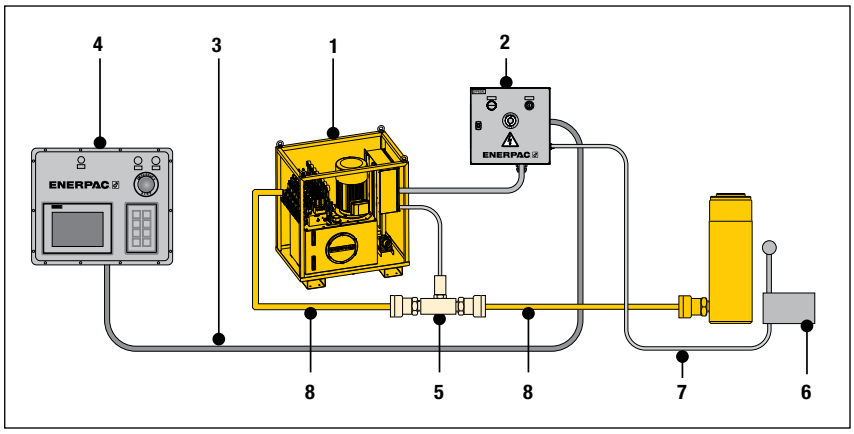

② Single SFP-Pump in Multiple-Point Synchronous Lifting Operation

No.	Qty.	Model No. & Description
1	1x	**SFP...SW** Pump with solenoid valves
2	1x	**SFPKSS4** Junction Box for 2-4 lifting points or **SFPKSS8** for 6-8 lifting points
3	1x	**SFPCOMM25** Communication Cable
4	1x	**SFPSSC** Single Slave Control Box
5		**SFPKPT** Pressure Transducer Kit (1x per cylinder A-port)
6		**EVO-WSS-XXX** Stroke Sensor, 1x per cylinder
7		**EVO-SC25** Stroke Sensor Cable, 1x per cylinder
8		HC-700-Series, Hydraulic Hoses

③ Networked Pumps in Multiple-Point Synchronous Lifting Operation

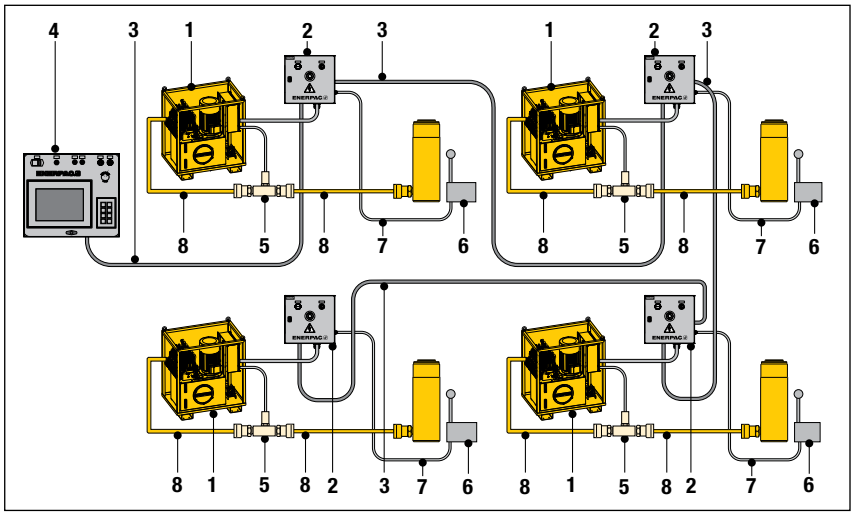

③ Networked SFP-Pumps in Multiple-Point Synchronous Lifting Operation

No.	Qty.	Model No. & Description
1	4x	**SFP...SW** Pump with solenoid valves
2	4x	**SFPKSS4** Junction Box, 1x per pump, for 2-4 lifting points or **SFPKSS8** Junction Box for 6-8 lifting points)
3	4x	**EVO-COMM-XXX** Communication Cable, 1x per pump
4	1x	**EVOMASTER** Master Control Box
5		**SFPKPT** Pressure Transducer Kit, 1x per cylinder A-port)
6		**EVO-WSS-XXX** Stroke Sensor, 1x per cylinder
7		**EVO-SC25** Stroke Sensor Cable, 1x per cylinder
8		HC700-Series, Hydraulic Hoses

▼ **EVO8** (shown with 4 cylinders and stroke sensors, (sold separately)

The Multi-Functional Synchronous Lifting System

- **Modular lifting pumps to control 4, 8 or 12 lifting points**
- **Can be connected to single- or double-acting cylinders with the same or different lifting capacities**
- **PLC-controlled system with integrated 10,000 psi hydraulic power unit and 66-gallon reservoir**
- **Network capability to link up to 4 EVO units (HPUs) to a separate EVO master-control box via wireless control**
- **Intuitive user interface providing easy set up, control and navigation**
- **Data storage and recording capabilities**
- **Variable frequency drive motor (VFD) and PLC for precise synchronization and oil flow control**

EVO-System Work Modes

The application possibilities are infinite with the standard EVO-System, powering interlinked hydraulic cylinders – single or double-acting, push or pull, stage lift, hollow plunger or lock nut cylinders. The EVO-System has 9 work modes. The operator can navigate to any of these menus:

1. Manual
2. Pre-Load
3. Automatic
4. Retract Fast
5. Depressurize
6. Tilting
7. Stage Lift
8. Weighing *
9. Center of Gravity determination *

* Available in the **EVO-W-models.**

Typical Synchronous Lifting Applications

- Bridge lifting and repositioning
- Bridge launching
- Bridge maintenance
- Incremental launching and box jacking
- Lifting and lowering of heavy equipment
- Lifting, lowering, levelling and weighing of heavy structures and buildings
- Structural and pile testing
- Lifting and weighing of oil platforms
- Foundation levelling of onshore and offshore wind turbines
- De-propping/load transfer from temporary steel work
- Foundation shoring

▼ *Shown: 3600-ton tunnel boring machine lowered and tilted into its starting position with the EVO-Series Synchronous Lifting System.*

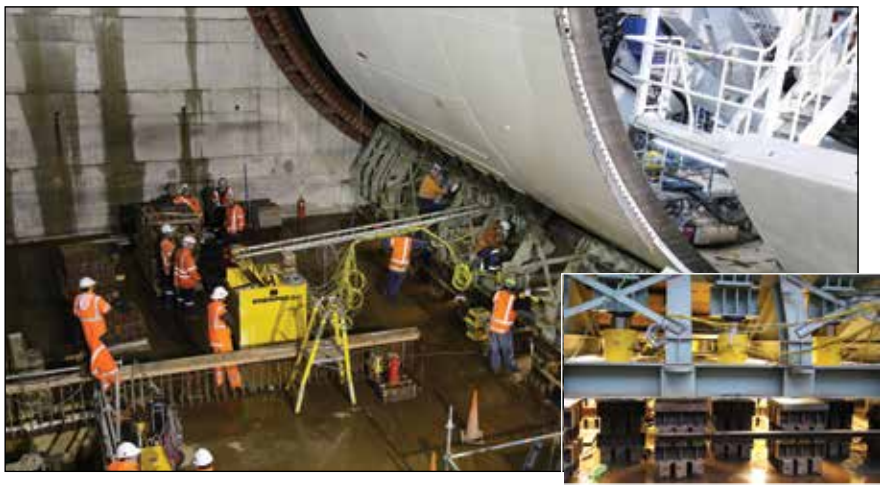

Benefits of the EVO-Series System

Precise control of multiple lift points
- Comprehensive understanding and management of a lifting operation from a central control system improves safety and operational productivity
- Programmable synchronized lifting
- Automatic stop at pre-set cylinder stroke or load limit

Safe and efficient movement of loads
- System secured with warning and stop features to realize optimal safety

High accuracy
- Variable frequency drive (VFD) and PLC for precise synchronization and control of oil flow, stroke and speed
- Depending the cylinder capacities used, an accuracy of 0.040 inches between lifting points is achieved

Ease of operation
- User friendly interface: visual screens, icons, symbols and color coding
- A single operator controls the entire operation

Monitoring and Data Recording
- Displays data of the operation.
- Data recording at user-defined intervals
- Data storage and read-out for reporting

Network capability
- Ethernet IP protocol for communication between hydraulic power units, allow easy “plug and play”

EVOW Weighing System
Weighing applications with 1% accuracy
- Includes calibrated sensors and auto-calibration of external load cells
- Center of gravity determination functionality
- Parameters for “waiting time for stabilization” and “number of cycles”.

Global standardized system
- Enerpac global coverage ensures local support

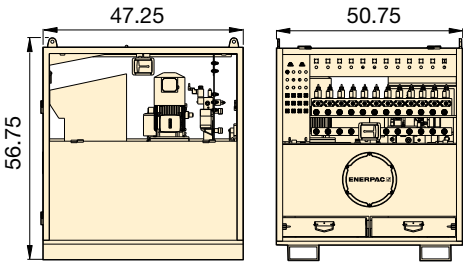

EVO-Series (Standard)

Lifting Points	Variable Oil Flow (in³/min) (< 1,800 psi)	Variable Oil Flow (in³/min) (> 1,800 psi)	Model Number 460-480V, 3ph, 50-60Hz	Usable Oil Capacity (gal)	Motor Size (hp)	Motor Speed [2]	Wt. (lbs)
4	243-812	46-153	**EVO 421460**	66	4	VFD	2000
4	243-812	46-153	**EVO 421460 W** [1]	66	4	VFD	2000
4	285-951	88-292	**EVO 440460**	66	10	VFD	2210
4	285-951	88-292	**EVO 440460 W** [1]	66	10	VFD	2210
8	243-812	46-153	**EVO 821460**	66	4	VFD	2000
8	243-812	46-153	**EVO 821460 W** [1]	66	4	VFD	2000
8	285-951	88-292	**EVO 840460**	66	10	VFD	2000
8	285-951	88-292	**EVO 840460 W** [1]	66	10	VFD	2000
12	243-812	46-153	**EVO 1221460**	66	4	VFD	2025
12	243-812	46-153	**EVO 1221460 W** [1]	66	4	VFD	2025
12	285-951	88-292	**EVO 1240460**	66	10	VFD	2250
12	285-951	88-292	**EVO 1240460 W** [3]	66	10	VFD	2250

[1] Model numbers with suffix **W** are pumps for weighing systems.
[2] VFD = Variable Frequency Drive18-60 Hz.

EVO Series

Number of Lifting Points:
4, 8, 12 (up to 48)

Reservoir Capacity:
66 gallon

Flow at Rated Pressure:
46 - 292 in³/min.

Motor Size:
4 - 10 hp

Maximum Operating Pressure:
10,000 psi

Stroke Sensors and Cables

Optional accessories required for each lifting point and stroke sensor.

Page: 134

EVO-Master Control Box

Required to link up to 4 standard EVO-pumps together to achieve a maximum of 48 lifting points. Contact Enerpac for more information.

▼ *Precision levelling caisson pier box: 3 EVO-Systems connected with 32 jacks lowered the 1100-ton bascule pier box.*

Enerpac offers a wide variety of hydraulic pumps for all your custom needs.

Hydraulic pumps are at the heart of any hydraulic system. Different systems require different flow, pressure and control. Enerpac offers a wide variety of hydraulic pumps from small hand-operated pumps to large gasoline powered pumps. Still many applications require a customized pump to operate the system. These may include larger reservoir capacity, custom valve configurations or added electrical controls.

Enerpac also specializes in power units and controls used for synchronous lifting/lowering of multiple jacking points.

Private labeled electric torque wrench pumps for OEMs.

Custom pumps with control packages.

Pumps with custom valve manifolds and circuits.

OVERVIEW

Custom hydraulic pump for a bridge deck launching system.

CUSTOMIZABLE FEATURES:

- Reservoir and Frame
- Valve Configurations
- Controls
- Oil Types
- Seals
- Pressure and Flow
- Coolers and Heaters
- Paint
- Motor Type
- Human Machine Interface (HMI)

Directional Control Valves Section Overview

Enerpac hydraulic valves are available in a wide variety of models and configurations.

Whatever your requirements… directional control, flow control, or pressure control… you can be sure that Enerpac has the correct valve to match your application exactly.

Designed and manufactured for safe operation up to 10,000 psi, the range of Enerpac valves allows for direct pump mounting, remote mounting, manual or solenoid actuation, and in-line installation, giving you flexible solutions to control your hydraulic system.

Valve Type	Series		Page
Pump-Mounted Directional Control Valves	VM, VE		140 ▶
Remote-Manual Directional Control Valves	VC		142 ▶
Valve Dimensions	VC, VM, VE		143 ▶
Modular/Solenoid Operated Directional Control Valves	VE		144 ▶

Pressure and Flow Control Valves

For more hydraulic system control with pressure relief valves, shut-off valves, check valves and sequence valves see our "System Components" section.

Page: 147

Valving Help

See Basic System Set-Up and Valve Information in our 'Yellow Pages'

Page: 404

▼ Shown from left to right: **VM32, VE33, VM33, VM43L, VE43**

For Reliable Control of Single and Double-Acting Cylinders

- **Advance/Retract and Advance/Hold/Retract operation of single-acting and double-acting cylinders**
- **Manual or solenoid operation**
- **Pump mounting will retrofit on most Enerpac pumps**
- **Available "locking" option on VM Series valves for load-holding applications**
- **Standard "locking" feature on VE Series 3-position valves**
- **User adjustable relief valves allow the operator to easily set the working pressure**

Venturi Valve Technology

- **For fast return of single-acting gravity and spring-return cylinders**
- **Available as manual or solenoid valve on ZU4- and ZE-Series electric pumps**
- **Retrofit Venturi valve kits for field installation on existing ZU4- and ZE-Series electric pumps**

Adjustable Relief Valve
All valves feature several gauge ports for "system", A port and B port pressure monitoring. User-adjustable relief valves are included on all models to allow the operator to easily set the optimum working pressure for each application. VM33 and VE43 valves include "System Check" feature, for more precise pressure holding and improved system control. The VM33 has improved porting which provides faster cylinder retraction while motor is running.

Locking Valves
For applications that require positive load holding, VM-Series valves (except VM22 and VM32) are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.

Valve Operation	Used with Cylinder	Valve Type
Manual	Single-acting	3-Way 2 Position
Manual	Single-acting	3-Way 2 Position
Manual	Single-acting	3-Way 3 Position, Tandem Center
Manual	Single-acting ONLY	3-Way 3 Position, Tandem Center, Venturi Return Assist
Manual	Double-acting	4-Way 3 Position, Tandem Center
Manual	Single-acting	3-Way 3 Position, Tandem Center, Locking
Manual	Double-acting	4-Way 3 Position, Tandem Center, Locking
Solenoid 24 VDC	Single-acting	3-Way 2 Position
Solenoid 24 VDC	Single-acting	3-Way 2 Position, Dump
Solenoid 24 VDC	Single-acting ONLY	3-Way 3 Position, Tandem Center, Venturi Return Assist
Solenoid 24 VDC	Single-acting	3-Way, 3 Position, Tandem Center
Solenoid 115 VAC	Single-acting	3-Way, 3 Position, Tandem Center
Solenoid 24 VDC	Double-acting	4-Way, 3 Position, Tandem Center
Solenoid 115 VAC	Double-acting	4-Way, 3 Position, Tandem Center

For remote valve applications, see page 142.

Pump Mounted Directional Control Valves



Assisted Return Pumps

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds. ZU4 and ZE-Series pumps feature Venturi valve technology to facilitate the faster return of single-acting gravity return cylinders.
See details on **www.enerpac.com**

VM, VE Series

Flow Capacity:
4.5 gal/min.

Maximum Operating Pressure:
10,000 psi

Model Number	Hydraulic Symbol	Schematic Flowpath			Weight
		Advance	Neutral	Retract	(lbs)
VM22					5.6
VM32					5.6
VM33					6.7
VM33VAC					7.5
VM43					6.8
VM33L					10.7
VM43L					10.8
VE32 [1]					8.7
VE32D [1]					8.7
VE33VAC [1]					22
VE33 [1]					20.3
VE33-115					20.3
VE43 [1]					20.3
VE43-115					20.3

[1] When ordering Enerpac VE-Series solenoid valves, the pendant must be ordered separately for Z-Class Pumps
See page 143 for product dimensions.

Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4 and ZE-Series pumps feature Venturi Valve Technology to facilitate the faster return of single-acting gravity return cylinders. See valve type in ZU4 and ZE-pump ordering matrix on pages 109 and 115.

Venturi Valve Retrofit Kits

For field installation on existing ZU4, ZE and ZA-Series pumps, Retrofit Kits are available for manual and solenoid operated valves.

For Valve Model	For Valve Operation	Pendant
VM33, VM33L	Manual	**VM33RVK**
VE33	Solenoid	**VUV5**

▼ Shown from left to right: **VC20, VC4L**

Reliable Remote Control

Locking Valves

For applications that require positive load holding, VC and VM Series valves are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.

- **Advance/Hold/Retract operation for use with single-acting or double-acting cylinders**
- **Return line kit included with remote valves**

Valve Operation	Used with Cylinder	Valve Type	Model Number	Hydraulic Symbol	Schematic Flowpath			Weight (lbs)
					Advance	Hold	Retract	
Manual	Single Acting	3-Way, 3 Position, Tandem Center	**VC3**					6.4
Manual	Single Acting	3-Way, 3 Position, Tandem Center, Locking	**VC3L**					10.3
Manual	Single Acting	3-Way, 3 Position, Closed Center	**VC15**					6.4
Manual	Single Acting	3-Way, 3 Position, Closed Center, Locking	**VC15L**					10.3
Manual	Double Acting	4-Way, 3 Position, Tandem Center	**VC4**					6.4
Manual	Double Acting	4-Way, 3 Position, Tandem Center, Locking	**VC4L**					10.3
Manual	Double Acting	4-Way, 3 Position, Closed Center	**VC20**					6.4
Manual	Double Acting	4-Way, 3 Position, Closed Center, Locking	**VC20L**					10.3

Return line kit included with remote valves

Pump Mounted Directional Control Valves

Valve dimensions in inches.

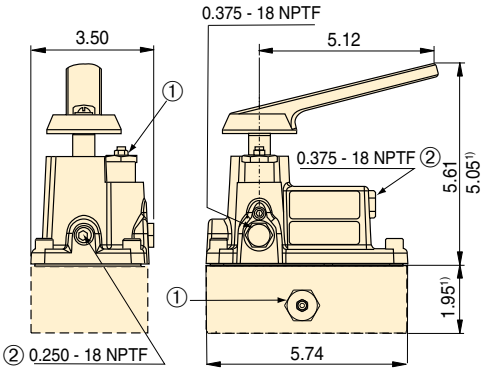

① User Adjustable Relief Valve

② Auxiliary Port

VM22, VM32

[1] VM22 only

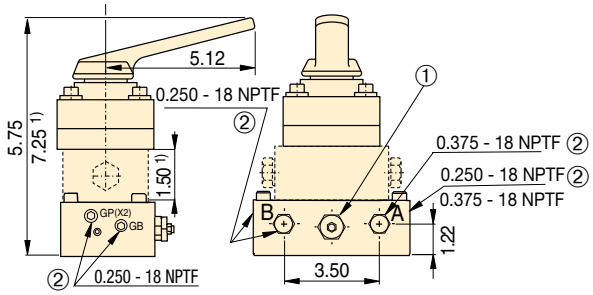

VM33, VM33L, VM43, VM43L

[1] VM33VAC, VM33L and VM43L only

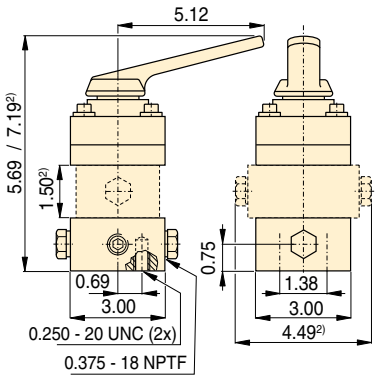

VC3, VC3L, VC15, VC15L
VC4, VC4L, VC20, VC20L

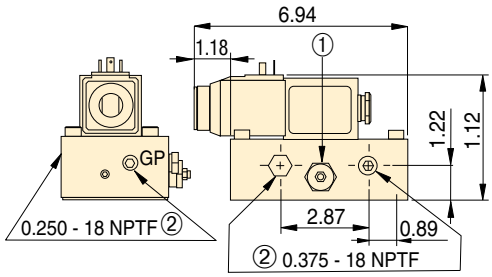

VE32, VE32D

[2] VC3L, VC15L, VC4L and VC20L only

Remote Manual Directional Control Valves

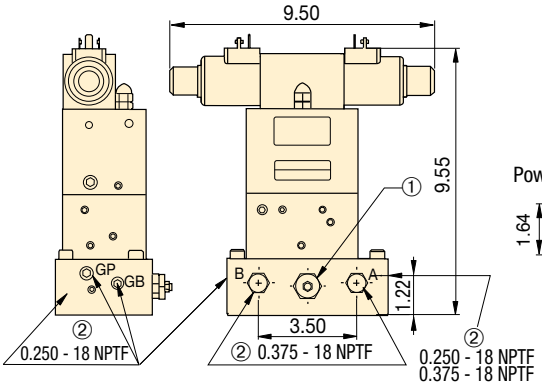

VE33, VE43

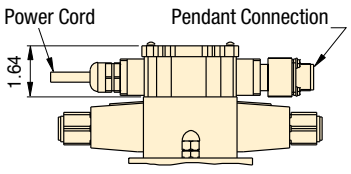

VE33-115
VE43-115

VC, VM, VE Series

Flow Capacity:
4.5 gal/min.

Maximum Operating Pressure:
10,000 psi

Gauges

Minimize the risk of over-loading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 147

Fittings

For additional fittings see the fitting page of the System Components section.

Page: 153

Valving Help

See Basic System Set-Up and Valve Information in our 'Yellow Pages'

Page: 399

▼ Shown top to bottom: **VEC15600D, VEK15000B, VEC15000B**

- **Ideal for independent control of multiple cylinders or functions**
- **Relief valve and pilot-operated check accessory valves are stackable between manifold and valve body**
- **Remote and pump mounting**

Valve Flow Path	Used with Cylinder	Valve Code	Hydraulic Symbol
4-Way, 3-Position (4/3) Open Center	Double-acting	**A**	
4-Way, 3-Position (4/3) Closed Center	Double-acting	**B**	
4-Way, 3-Position (4/3) Tandem Center	Double-acting	**C**	
4-Way, 3-Position (4/3) Float Center	Double-acting	**D**	
4-Way, 2-Position (4/2) Crossover Offset	Double-acting	**E**	
3-Way, 3-Position (3/3) Tandem Center	Single-acting	**F**	
3-Way, 3-Position (3/3) Closed Center	Single-acting	**G**	
2-Way, 2-Position (2/2) Normally Closed	System Un-loading	**H***	
2-Way, 2-Position (2/2) Normally Open		**K***	
4-Way, 2-Position (4/2) Float Offset	Double-acting	**M**	
3-Way, 2-Position (3/2) Normally Open	Single-acting	**P**	

* Requires use of tank port for dump or unloading.

Unmatched Combinations and Possibilities

3-Way Check Valve

Use a **VS51** 3-way pilot operated check valve assembly to convert your 3-way modular valve into a load-holding valve.

4-Way Check Valve

Use a **VS61** 4-way pilot operated check valve assembly to convert your 4-way modular valve into a load-holding valve.

System Pressure Control

To add system pressure control to your modular valve, order **VS11 Relief Valve** assembly.



Bolt Kits for Accessory Valves With No Manifold

Order Bolt Kit **BK2** when adding one of the accessory valves. Order Bolt Kit **BK3** when adding any combination of two accessory valves.

How to order one of the 1,300 possible model numbers?

With over 1,300 possible model numbers, Enerpac has the perfect valve for you. Use the “chart” to build your own valve for the specific application you require. This is the complete guide to all the Modular valves that are available.

VE-Series Solenoid Operated Valves Ordering Matrix

CUSTOM BUILD YOUR MODULAR VALVES

▼ **This is how a Modular Valve Model Number is built up:**

VE	A	1	5	600	D
1 Solenoid Operated Valve	2 Valve Flow Path	3 Flow Capacity	4 Voltage	5 Accessory Valves	6 Manifold

1 Product Type
- **VE** = Solenoid Operated Valve

2 Valve Code
- **A** = 4/3 Open Center
- **B** = 4/3 Closed Center
- **C** = 4/3 Tandem Center
- **D** = 4/3 Float Center
- **E** = 4/2 Crossover Offset
- **F** = 3/3 Tandem Center
- **G** = 3/3 Closed Center
- **H** = 2/2 Normally Closed
- **K** = 2/2 Normally Open
- **M** = 4/2 Float Offset
- **P** = 3/2 Normally Open

3 Flow Capacity
- **1** = 4 gallons per minute

4 Voltage
- **1** = 24 VDC
- **2** = 220/240 V, 1 ph, 50 Hz
- **5** = 115 V, 1 ph, 60 Hz

5 Accessory Valves
- **000** = No accessory valves
- **100** = Relief Valve only
- **150** = Relief Valve and 3-way pilot operated check valve **Only for VEF/VEG**
- **160** = Relief Valve and 4-way pilot operated check valve **Only for VEA/VEB/VEC/VED**
- **500** = 3-way pilot operated check valve **Only for VEF/VEG**
- **600** = 4-way pilot operated check valve **Only for VEA/VEB/VEC/VED**

6 Manifold
- **A** = No manifold**
- **B** = Remote Mounted
- **D** = Pump Mounted*

* Only for valve code: **VEA/VEC/VEF**
** Must order Bolt Kit separately.

Example: VEA15600-D

VEA15600-D is a Modular Valve with a 4-way, 3-position open center flowpath, 115 VAC, and an integral pilot-operated check valve, for mounting on an Enerpac pump.

VE Series

Flow Capacity:
4 gal/min.

Maximum Operating Pressure:
10,000 psi

Pressure Drop versus Oil Flow

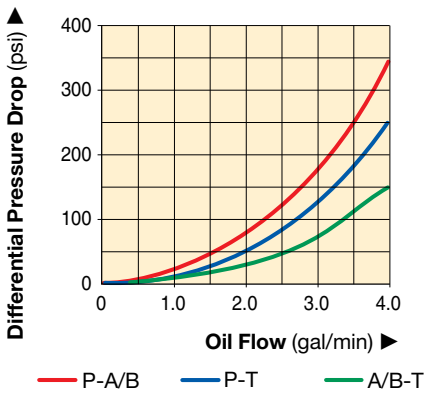

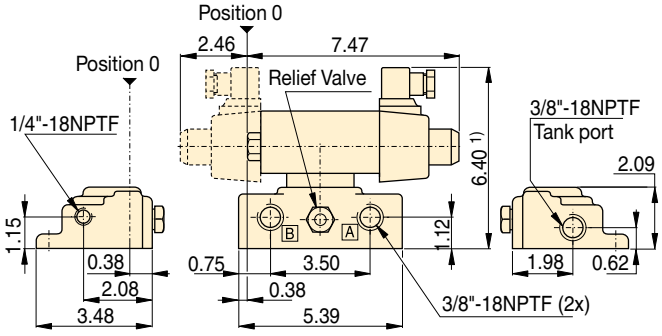

Modular Valve Pump Mounted 1) add 1.85 inch for each Accessory Valve

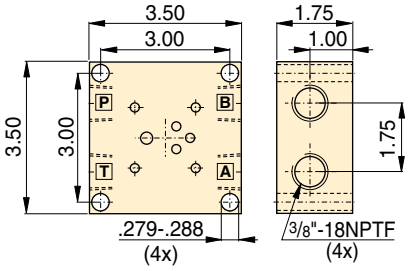

Modular Valve Remote Mount Manifold

Maximum Operating Pressure (psi)	Amperage Draw			Seal Material	Valve Plug
	24 VDC	115 VAC 60 Hz	230 V 60 Hz		
0 - 10,000	N/A Inrush	3.6 A Inrush	1.8 A Inrush	Buna-N, Polyure-thane	DIN 43650
	2.5 A Holding	1.0 A Holding	0.5 A Holding		

All the additional components you need to complete your high pressure hydraulic system. Engineered to work with your Enerpac cylinders, pumps and tools. All Enerpac components are designed and manufactured to the most exacting standards.

With this complete line of hydraulic hoses, couplers, fittings, manifolds, oil and gauges Enerpac has the accessories to compliment your system and ensure the efficient operation, long life, and safety of your hydraulic equipment.

Yellow Pages

For sample system set-ups and how to correctly specify your system components, please view the Enerpac ***Yellow Pages***.

Page: **399**

Maintain System Integrity

Use Enerpac System Components, designed to interface with Enerpac Cylinders, Pumps and Tools to ensure your system operates at peak performance.

System Components and Control Valves Section Overview

Component Type	Series		Page
Hoses	H700 H900		148 ▶
Couplers	A, C, F, Z		150 ▶
Hydraulic Oil	HF LX		152 ▶
Manifolds	A		152 ▶
Control Manifolds	AM		152 ▶
Fittings	FZ		153 ▶
Split Flow Pump Manifolds	SFM		154 ▶
Hydraulic Force & Pressure Gauges	GF GP		156 ▶
Hydraulic Pressure Gauges	G, H		158 ▶
Test System Gauges	T		160 ▶
Digital Gauges	DGR		161 ▶
Gauge Adaptor Assembly	GA45		162 ▶
Gauge Accessories	GA NV V		163 ▶
Flow and Pressure Control Valves	V		164 ▶

▼ Shown from top to bottom: **HC7206, HC7210, HC9206**

Emphasize Safety and Quality

To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

WARNING !

- **Do not exceed 10,000 psi maximum pressure.**
- **Do not handle hoses while under pressure.**

More safety instructions in our “Yellow Pages”.

Page: **400**

Vinyl strain relief guard on both ends of hose to improve life and durability on all models.

Thermo-plastic Hoses (700-Series)

- **For demanding applications, featuring a 4:1 design factor**
- **Maximum working pressure of 10,000 psi**
- **Two layers of steel wire braids**
- **Outside jacket is polyurethane, to provide maximum abrasion resistance**
- **Exhibits low volumetric expansion under pressure to enhance overall system efficiency**

Heavy-duty Rubber Hoses (900-Series)

- **The most complete offering: 35 models up to 50 feet in length**
- **Rubber coated with two layers of steel wire braids**
- **Designed to comply with Material Handling Institute IJ100 hose specification**
- **Flexible, with little “memory”, is the best choice for long hose runs**

◀ *To prevent back pressure and to increase cylinder retraction speed, when using long hoses, the Enerpac HC7300 range of hoses with increased internal diameter is the best choice.*

▼ **Hose End Couplings**

¼" NPTF	
⅜" NPTF	
A604	
A630	
AH604	
AH630	
C604	
CH604	

Hose Oil Capacity

When using long hose lengths, it is sometimes necessary to fill the pump reservoir after filling the hoses. To determine the hose oil capacity, use the following:

For 0.25" internal diameter hoses:
Capacity (in^3) = .5892 x Length (ft)

For 0.38" internal diameter hoses:
Capacity (in^3) = 1.3608 x Length (ft)

H700 H900 Series

Inside Diameter:
0.25 and 0.38 inch

Length:
2 - 50 feet

Maximum Operating Pressure:
10,000 psi

Internal Dia.	Hose End Assemblies and Couplers*		Hose Length	700-Series Thermo-plastic		900-Series Heavy-duty Rubber	
(in)	End one	End two	(ft)	Model Number	Wt. (lbs)	Model Number	Wt. (lbs)
0.25	¼" NPTF	¼" NPTF	6	–		H9206Q	2.6
		⅜" NPTF	6	–		H9206S	2.6
		A630	6	HB7206QB	2.4	HB9206QB	3.1
		AH630	6	–		HB9206Q	2.9
		CH604	6	HC7206Q	2.3	HC9206Q	3.0
	⅜" NPTF	⅜" NPTF	2	H7202	1.2	H9202	1.6
			3	H7203	1.5	H9203	1.9
			6	H7206	2.0	H9206	2.6
			10	H7210	3.0	H9210	3.9
			20	H7220	6.2	H9220	8.0
			30	H7230	10.0	H9230	13.0
			50	H7250	15.4	H9250	22.0
		A604		–		–	
			6	HA7206B	2.5	HA9206B	3.2
			10	–		HA9210B	4.5
		AH604		–		–	
			3	–		HA9203	2.1
			6	HA7206	2.2	HA9206	2.9
			10	HA7210	3.2	HA9210	4.2
		AH630	6	HB7206	2.2	HB9206	2.9
		C604	3	HC7203B	2.2	HC9203B	2.9
			6	HC7206B	2.8	HC9206B	3.7
			10	HC7210B	3.9	HC9210B	5.0
		CH604	3	HC7203	1.7	HC9203	2.2
			6	HC7206	2.3	HC9206	3.0
			10	HC7210	3.3	HC9210	4.3
			20	HC7220	6.4	HC9220	8.3
	CH604	CH604	6	HC7206C	2.4	HC9206C	3.1
			50	HC7250C	15.4	HC9250C	20.0
0.38	⅜" NPTF	⅜" NPTF	6	H7306	3.5	H9306	4.6
			10	H7310	5.4	H9310	7.0
			20	H7320	10.0	H9320	13.0
			30	H7330	16.2	H9330	21.0
			50	H7350	15.2	H9350	33.0
		CH604	6	HC7306	3.4	HC9306	4.9
			8	–		HC9308	6.2
			10	HC7310	5.6	HC9310	7.3

* For technical information on couplers see next page.

GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 162

Torque Wrenches Hoses

Use Enerpac 3.5:1 twin safety hoses with double-acting wrenches to ensure the integrity of your hydraulic system. See Selection Matrix.

Page: 303

Fittings

For additional fittings see the fitting page of the System Components section.

Page: 153

Premium Hydraulic Oil

Use only genuine Enerpac hydraulic oil. The wrong oil can destroy seals and pump.

Page: 152

▼ Shown: **FH604, FR400, A630 disassembled, C604, AH604, AR400**

⅜" High Flow Couplers

- **Standard equipment on most Enerpac cylinders**
- **Recommended for use on all Enerpac pumps and cylinders where space and porting permits**
- **Include "2-in-1" dust cap for use on male and female coupler halves**

⅜" High Flow "Flush-face" Couplers

- **Featuring "Push-to-connect" operation, to guarantee good connection every time**
- **Flush-face, zero-leak operation for minimal spillage**
- **HTMA* recognized for safety and performance**

⅜" Regular Spee-D-Coupler®

- **For medium-duty applications; for use with hand pumps**
- **Includes female steel dust cap**

¼" Regular Coupler

- **For use with small cylinders and hand pumps**
- **Includes female steel dust cap**

¼" Spin-on Torque Wrench Couplers

- **For use with 10,000 psi S-, W-, RSL-, DSX- and HMT-Series torque wrenches, THQ-Series hoses and 10,000 psi torque wrench pumps**

* Hydraulic Tool Manufacturers Association

Quick Connection of Hydraulic Lines

Thread Sealer

To seal NPTF threads use one of the new anaerobic thread sealers or Teflon® paste. When using Teflon® tape, apply the tape one thread back from the end of a fitting to prevent it from entering the hydraulic system.

WARNING!

Couplers should be pressurized only when completely connected, and should not be coupled or uncoupled when pressurized.

More safety instructions in our "Yellow Pages".

Page: 400

Torque Wrench Couplers

S-, W-, RSL-, DSX- and HMT-Series Torque Wrenches require 1/4" spin-on couplers and THQ hoses.

Page: 239

▼ *With the use of Enerpac High Flow Couplers, hoses are easily installed for multiple hydraulic line connections in this 34 points PLC-controlled lifting system.*

CT604 Safety Tool

Use the Enerpac CT604 to relieve hydraulic back pressure by safely bleeding the hydraulic coupler. Minimize injuries from projectile parts and under-skin hydraulic fluid injections by eliminating unsafe coupler bleeding practices. The CT604 is Enerpac-engineering safe for use at 10,000 psi (700 bar).

NOTE: C-Series only.

A, C, F, T Series

Maximum Flow Capacity:
462 - 2,500 in³/min.

Thread:
¼" and ⅜" NPTF

Maximum Operating Pressure:
10,000 psi

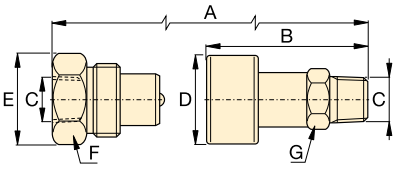

C604

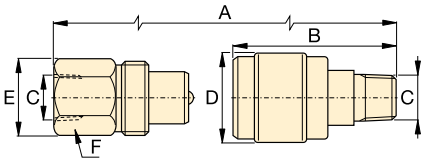

A604
A630

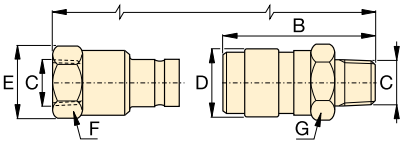

F604

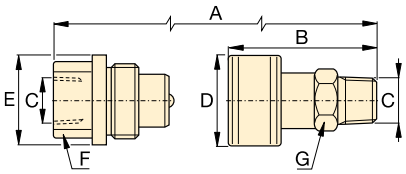

T630

Metal Dust Caps

Steel dust caps are available for the C604 series couplers. Order model number:
CD411M for female half
CD415M for male half

Maximum Flow Capacity (in³/min)	Coupler Type	Model Numbers			Dimensions (in)							Dust Cap(s)
		Complete Set	Female Half	Male Half	A*	B	C	D	E	F	G	
2,100	**10,000 psi High Flow Coupler**	C604	CR400	CH604	3.26	2.87	⅜" NPTF	1.38	1.38	1.25	1.00	(2x) CD411 Included
2,500	**10,000 psi Flush-face coupler**	F604	FR400	FH604	4.36	2.85	⅜" NPTF	1.23	1.23	1.06	1.12	–
462	**10,000 psi Regular Spee-D-Coupler®**	A604	AR400	AH604	3.09	2.53	⅜" NPTF	1.12	0.94	0.94	0.73	Z410 female only Included
462	**10,000 psi Regular Coupler**	A630	AR630	AH630	2.61	1.72	¼" NPTF	0.87	0.81	0.75	0.57	Z640 female only Included
695	**10,000 psi Spin-on Coupler**	T630	TR630	TH630	2.87	2.36	¼" NPTF	1.14	1.14	0.74	0.82	–

* Value A is total length when male and female halves are connected.

▼ Shown top to bottom: **HF101, HF100, HF102, LX101, A65, and FZ1055**

Hydraulic Oil

Contents	Model Number	
1 Quart	**HF100**	High viscosity index ensures maximum lubricity over a wide range of operation temperatures.
1 Gallon	**HF101**	
5 Gallons*	**HF102**	
55 Gallons	**HF104**	
1 Gallon**	**LX101**	

* Packed in two 2½ gallon cans.
** Hand pump oil.

HF Oil

- **Specially formulated for power pumps**
  - **maximum volumetric efficiency**
  - **maximum heat transfer**
  - **prevents cavitation**
  - **anti-sludge, anti-rust, anti-foam additives**
- **Maximum film protective lubricity**
  - **anti-oxidation additives**

LX Hand Pump Oil

- **Specially formulated for hand pumps**
  - **anti-sludge, anti-rust additives**
- **Reduced handle effort over HF blue oil**
  - **good low temperature performance**
- **Not for use in power pumps**

▼ Oil Specifications Chart

	HF Oil	LX Oil
ISO Viscosity Grade	32	15
API Gravity, ASTM D1298	32	34
Viscosity, ASTM D445		
SUS @ 212° F	43.7	38
SUS @ 104° F	151	77.5
Viscosity Index, ASTM D2270	95	100
Pour Point, °F, ASTM D97	-36.5	-47.5
Flash Point, °F, ASTM D92	375	370
Color	Blue	Yellow

NOTE: SAE grades do not apply to hydraulic oil.

Manifolds

Description		Model No.	Dimensions (in)
7" Long Manifold with 7 female ports.		**A64**	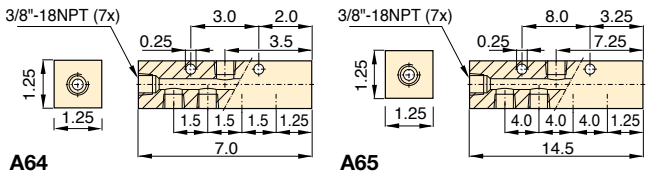
14" Long Manifold that allows direct mounting of control valves to the manifold. 7 female ports.		**A65**	
6-Port Hexagon Manifold Plugs furnished for all ports ⅜"-18 NPTF.		**A66**	
Premounted Manifold Functions as split-flow valve to control 2 to 4 single-acting cylinders simultaneously. All ports ⅜"-18 NPTF.		**AM21** **AM41**	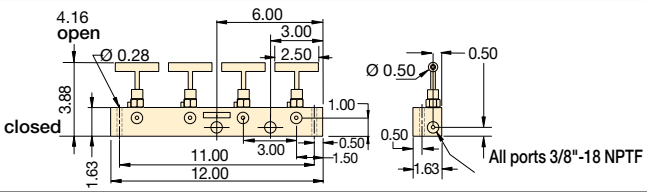
4-Way Single- and Double-Acting Manifold Assemblies with female couplers on all ports allowing the manifold to be quickly connected to up to 4 cylinders.		**AMGC41** **AMGC42**	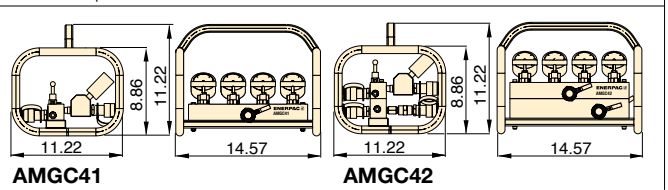

3/8" Swivel Connector

360° swivel coupler for optimal orientation of the hydraulic connection on cylinders, pumps and hoses. Order Model No. **XSC1**.



A, AM FZ, BFZ, HF, LX Series

10,000 psi Fittings

		Model Number	Dimensions (in)				
			A	B	C	D	
Street Elbow From: ⅜"-NPTF Male To: ⅜"-NPTF Female		**FZ1616**	0.94	1.30	⅜"-18 NPTF	⅜"-18 NPTF	
Reducing Connector From: ⅜"-NPTF Female To: ¼"-NPTF Female		**FZ1615**	1.13	1.00	⅜"-18 NPTF	¼"-18 NPTF	
From: ½"-NPTF Female To: ⅜"-NPTF Female		**FZ1625**	1.38	1.25	½"-14 NPTF	⅜"-18 NPTF	
Hexagon Nipple From: To: ¼"-NPTF ¼"-NPTF ⅜"-NPTF ⅜"-NPTF ⅜"-NPTF ⅜"-NPTF		**FZ1608**	1.50	0.63	¼"-18 NPTF	¼"-18 NPTF	
		FZ1619	2.00	0.75	⅜"-18 NPTF	⅜"-18 NPTF	
		FZ1617	1.47	0.75	⅜"-18 NPTF	⅜"-18 NPTF	
Coupling From: To: ⅜"-NPTF ⅜"-NPTF ¼"-NPTF ¼"-NPTF		**FZ1614**	1.14	1.00	⅜"-18 NPTF	⅜"-18 NPTF	
		FZ1605	1.14	0.75	¼"-18 NPTF	¼"-18 NPTF	
Cross From: ⅜"-NPTF Female To: ⅜"-NPTF Female		**FZ1613**	1.77	1.00	⅜"-18 NPTF	–	
Street Tee From: To: ⅜"-NPTF ⅜"-NPTF ¼"-NPTF ¼"-NPTF		**FZ1612**	1.77	1.00	⅜"-18 NPTF	–	
		FZ1637	1.77	0.94	¼"-18 NPTF	–	
Street Tee From: ⅜"-NPTF Female To: ⅜"-NPTF Male		**BFZ16312**	2.20	1.02	⅜"-18 NPTF	⅜"-18 NPTF	
Elbow From: To: ⅜"-NPTF ⅜"-NPTF ¼"-NPTF ¼"-NPTF		**FZ1610**	1.38	0.88	⅜"-18 NPTF	–	
		FZ1638	1.41	0.94	¼"-18 NPTF	–	
Reducer From: To: ⅜"- NPTF ¼"-NPTF ¼"- NPTF ½"-NPTF ⅜"- NPTF G¼"		**FZ1630**	0.75	0.75	¼"-18 NPTF	⅜"-18 NPTF	
		BFZ1630	1.10	0.86	¼"-18 NPTF	½"-14 NPTF	
		BFZ16301	0.75	0.75	G¼"	⅜"-18 NPTF	
Adaptor From: To: G¼" ¼"-NPTF G¼" ⅛"-NPTF G⅜" ¼"-NPTF G⅜" ⅜"-NPTF		**BFZ16411**	1.37	0.75	¼"-18 NPTF	G¼"	
		BFZ16421	1.22	0.75	⅛"-27 NPTF	G¼"	
		BFZ16323	1.69	0.94	¼"-18 NPTF	G⅜"	
		BFZ16324	1.69	0.94	⅜"-18 NPTF	G⅜"	
Adaptor From: To: ¼"-18 NPTF ⅜"-18 NPTF ½"-14 NPTF ¼"-18 NPTF ½"-14 NPTF ⅜"-18 NPTF		**FZ1055**	1.75	0.94	¼"-18 NPTF	⅜"-18 NPTF	
		FZ1633	1.18	0.75	½"-27 NPTF	¼"-18 NPTF	
		FZ1634	1.75	1.13	⅜"-18 NPTF	½"-18 NPTF	
Swivel Fitting From: ⅜"-NPTF Male To: ⅜"-NPTF Female		**FZ1660**	1.59	0.88	⅜"-18 NPTF	⅜"-18 NPTF	

▼ Shown from left to right: **SFM41, SFM42 Split-Flow Manifolds**

Improved safety on basic simultaneous lifting applications

- **Split-Flow Manifolds improve safety, precision and control in lifting and lowering operations**
- **Pressure gauge, flow control valve in each outlet port; CR400 couplers installed in each inlet and outlet port**
- **Regulates both advance and retract speeds: lifting and lowering**
- **1 inlet, 4 outlets. Maximum of 4 cylinders per manifold: SFM41 for single-acting cylinders, SFM42 for double-acting cylinders**
- **Minimum pump oil flow: 85 in^3/min to deliver 9.1-15 in^3/min per cylinder**
- **Maximum difference among outlets: 10% of the stroke (in 6 inch stroke)**
- **More cylinders can be controlled simultaneously by connecting several SFM-models parallel**

Pressure Gauges G2535L

Glycerin filled pressure gauges are installed in each outlet pressure line to monitor the pressure of each cylinder.

Page: 162

Optimum Performance

Minimum pump oil flow must be 85 in^3/min to deliver 9.1-15 in^3/min per cylinder. Enerpac recommends to use Z-Class electric or gasoline pumps from the ZE5 and ZG-Series.

SFP-Series, Split-Flow Pumps

When a higher accuracy is required across cylinder strokes in a multi-point lifting or lowering application Enerpac recommends using the SFP-Series Split-Flow Pumps.

Page: 132

Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lifting System or visit us at: www.enerpac.com.
Or ask Enerpac for assistance: enerpac.com/contact-us

◀ *To repair the foundation, silos needed to be lifted, levelled and structurally supported. Powered by a ZE5-Series electric pump the split-flow manifold used to operate multiple hydraulic cylinders.*

Split-Flow Manifolds

The SFM-Series offer an economical solution for basic multi-point simultaneous lifting applications and enables a single operator to control a maximum of 4 lifting points from one manifold.

The Split-Flow Manifolds are equipped with pressure compensated flow control valves, to preset and limit advance and retract speed of each cylinder, allowing to move up to 4 cylinders simultaneously.

The SFM-Series provide more lifting and lowering control compared to AM-Series Control Manifolds. See flow control valve adjustments table below.

Minimum pump oil flow must be 85 in^3/min (ZE5-Series pumps) to deliver 9.1-15 in^3/min per cylinder. Several SFM-models can be connected parallel to the same pump to allow simultaneous operation of 8, 12 or 16 cylinders.

Higher flow pumps are required to achieve faster advance speeds. A 20% higher oil flow must be considered for a proper speed compensation.

Example : when using 4 cylinders: if oil flow of 28 in^3/min is required per cylinder, the pump oil flow must be: 4 x 28 = 112 + 20% = 134 in^3/min.

The maximum stroke deviation between the cylinders can reach up to 10% (in 6 inch stroke) depending on the cylinder pressure.

Oil flow adjustment is also possible during cylinder operation by fine tuning using the flow control valves.

All cylinders connected to the SFM-manifold must have the same capacity (effective area). Both advance and retract speed are limited by the same valves. Use hoses of the same lengths to improve the accuracy of the hydraulic system. Improved precision when difference of pressures among the cylinders is within 2900 psi.

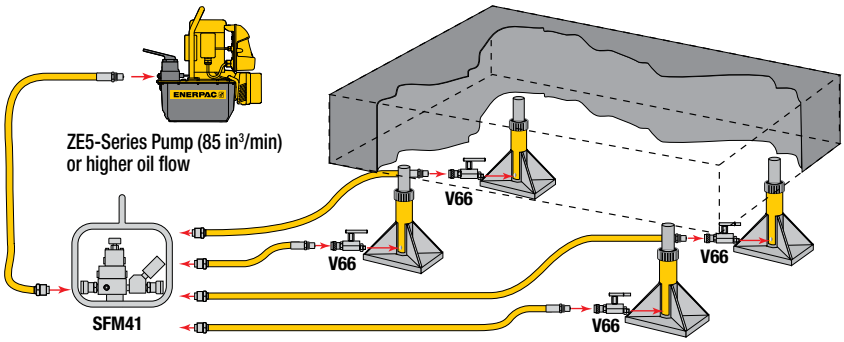

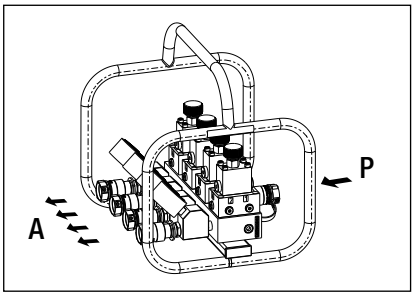

SFM41

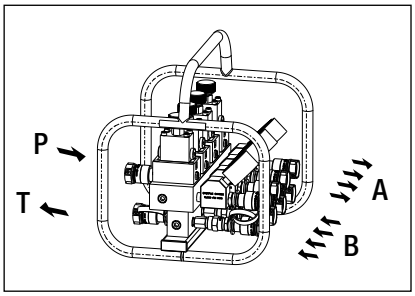

SFM42

▼ SPLIT-FLOW MANIFOLDS

For use with Cylinders	Model Number	Minimum Oil Flow to each Cylinder (in^3/min)	Female Couplers Included	Dimensions L x W x H (in)	Wt. (lbs)
4x single-acting	**SFM41**	9.1	CR400	14.6 x 13.2 x 14.8	53
4x double-acting	**SFM42**	9.1	CR400	14.6 x 13.2 x 14.8	66

SFM Series

Inlet Connection:
1x Power Pump

Outlet Connections:
Max. 4 Cylinders

Minimum Pump Flow Required:
85 in^3/min.

Maximum Operating Pressure:
10,000 psi

Load Holding

Use **V66 Check Valves** for load holding applications with single-acting cylinders.

Page: 165

Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses. Enerpac recommends using hoses of the same lengths between the SFM and cylinders to improve system accuracy.

Page: 148

Flow Control Valves

The Split-Flow Manifold has pressure compensated flow control valves installed in each outlet line. The oil flow from the SFM-Manifold to each cylinder can be adjusted by turning the knob on the valve.

Flow Control Valve Adjustments			
Number of Knob Turns	Oil Flow (in^3/min)	Number of Knob Turns	Oil Flow (in^3/min)
½	9.1	3	115.9
1	27.4	3½	219.6
1½	45.8	4	341.6
2	54.9	4½	506.3
2½	79.3	Open	628.3

▼ Shown: **GF230P, GF835P, GP10S**

- **GF-Series gauges are calibrated with dual scale reading for pressure and force**
- **Excellent readability; 4-inch diameter gauge face**
- **Fast, easy installation**
- **GF-Series gauges are glycerin filled**
- **Stainless steel gauge cases for corrosion resistance**
- **GP-Series gauges are calibrated with dual scale reading for psi and bar**

▼ *A GP10S gauge is used on this press to check the hydraulic pressure required to bend a steel plate.*

Visual References for System Pressure and Force

Auto-Damper Valve V10

For automatic control of gauge fluctuations, the **V10** Auto-Damper Valve controls the movement of the gauge needle by restricting oil flow in and out of the gauge. No adjustments needed.

Page: 164

Snubber Valve V91

Infinitely adjustable for metering oil out of a gauge. The **V91** Snubber Valve is also suitable as a shut-off valve to protect the gauge during high cycle applications.

Page: 163

Used With

All 10-ton cylinders
All 15-ton cylinders
All 5-ton RC, RSM cylinders
All 10-ton RC, RCS, RSM cylinders
All 25-ton RC cylinders
All 50-ton RC, RR cylinders
12-ton RCH-Series
RCH, RRH20, 30 and 60-ton
RCS201, 302
RCS502, 1002
25, 30, 50-ton RC, RCS, RSM, RR
75 and 95-ton RC, RR cylinders
150 and 200-ton RR cylinders

10-ton presses
25-ton presses
50-ton presses
100-ton presses
150-200 ton presses

Hydraulic Force and Pressure Gauges

Load Gauges

To measure external load supported by a cylinder or jack. For pressing parts together under pre-determined loads, weighing, testing, etc.

Pressure Gauges

To measure the input pressure into cylinders, jacks or high pressure systems. Also for all testing applications.

GP-Series gauges are dry gauges.
GF-Series gauges are glycerin filled.

Force Gauges

To measure external load supported by a cylinder or jack in tons. For pressing parts together under pre-determined loads, weighing, testing, etc.

GF GP Series

Pressure Range:
0 - 15,000 psi

Face Diameter:
4 inches

Accuracy, % of full scale:
± 1%

All Models

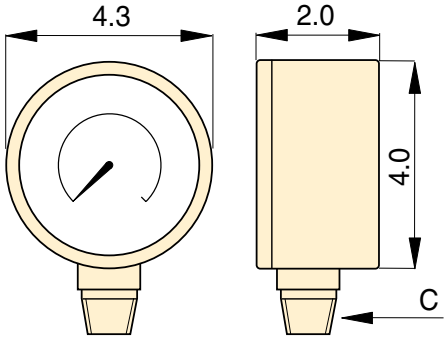

Maximum Indicator Pointer

Indicator retains peak readings of pressure or force generated by the system.

Order model number: **H4000G**.

Can easily be installed on GP-Series dry gauges.

Gauge Type and Calibration					Units per Division	Model Number*	Thread C	Gauge Adaptor		
								163		
								Required		
psi	bar	psi	lbs	tons			(in)	GA1	GA2	GA3
0-10,000	0-700	–	–	–	100 psi, 10 bar	GP10S	½ NPTF	●	●	
0-15,000	0-1000	–	–	–	200 psi, 10 bar	GP15S	½ NPTF	●	●	
–	–	0-10,000	0-10,000	0-5	100 psi, 100 lbs, 0.1 ton	GF5P	½ NPTF	●	●	
–	–	0-10,000	0-22,200	0-11	100 psi, 200 lbs, 0.2 ton	GF10P	½ NPTF	●	●	
–	–	0-10,000	0-51,500	0-25.5	100 psi, 500 lbs, 0.5 ton	GF20P	½ NPTF	●	●	
–	–	0-10,000	0-110,000	0-55	100 psi, 1000 lbs, 1 ton	GF50P	½ NPTF	●	●	
–	–	0-10,000	0-27,000	0-13.5	100 psi, 200 lbs, 0.25 ton	GF120P	½ NPTF	●	●	
–	–	0-10,000	–	0-23.5/36/65	100 psi, 0.5/0.5/1 ton	GF813P	¼ NPTF			●
–	–	0-10,000	–	0-22/32	100 psi, 0.5/0.5 ton	GF230P	½ NPTF	●	●	
–	–	0-10,000	–	0-50/100	100 psi, 1/1 ton	GF510P	½ NPTF	●	●	
–	–	0-10,000	–	0-25.5/32.5/55	100 psi, 0.5/0.5/0.5 ton	GF835P	¼ NPTF			●
–	–	0-10,000	–	0-79/103	100 psi, 1/1 ton	GF871P	¼ NPTF			●
–	–	0-10,000	–	0-150/200	100 psi, 5/5 ton	GF200P	¼ NPTF			●
–	–	0-10,000	0-22,200	0-11	100 psi, 200 lbs, 0.2 ton	GF10P	½ NPTF	●	●	
–	–	0-10,000	0-51,500	0-25.5	100 psi, 500 lbs, 0.5 ton	GF20P	½ NPTF	●	●	
–	–	0-10,000	0-11,000	0-55	100 psi, 1000 lbs, 1 ton	GF50P	½ NPTF	●	●	
–	–	0-10,000	–	0-79/103	100 psi, 1/1 ton	GF871P	¼ NPTF			●
–	–	0-10,000	–	0-150/200	100 psi, 5/5 ton	GF200P	¼ NPTF			●

* Metric scale Force Gauges are available by changing the “P” suffix to “B”.

▼ Shown: **H4049L, G2534R, G4089L, G2535L, G4040L**

Visual References for System Pressure

Glycerin Filled (G-Series)

- **Calibrated in dual scale reading in psi and bar**
- **All pressure sensing parts sealed and dampened by glycerin for long life**
- **Includes safety blow-out disk and pressure equalizing membrane**
- **Gauge snubbers or needle valves recommended for high-cycle applications**

High-Cycle Dry Gauges (H-Series)

- **Calibrated in dual scale reading in psi and bar**
- **Ideal for use in many applications, specifically for high cycle and harsh environments**
- **Gauge snubbers or needle valves recommended to shut off gauge when not in use**

GA45GC Gauge Adaptor Assembly

45° angled gauge adaptor improves safety.

Page: 162

Gauge Adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: 153

Snubber Valve V91

Infinitely adjustable for metering oil out of a gauge. The **V91** Snubber Valve is also suitable as a shut-off valve to protect the gauge during high-cycle applications.

Page: 163

◀ *When lifting or pressing, always use a gauge. A gauge is your "window" to the system–it lets you see what's going on.*

CAUTION! When lifting or pressing, always use a gauge.

Do not override factory setting of relief valves. Always use a gauge to check system pressure. A gauge is your "window" to the system. It lets you see what's going on.

See our Safety Instructions.

Page: 400

G H Series

Pressure Range:
0 - 15,000 psi

Face Diameter:
2.5 - 4 inches

Accuracy, % of full scale:
±1% and 1½%

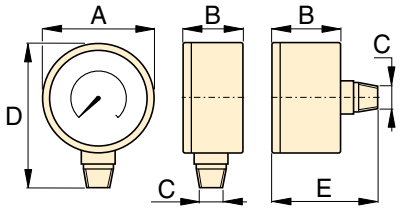

Dimensions (in)						
Face Diam.	Connection	A	B	C	D	E
2.5	Lower Mount	2.50	1.46	¼" NPTF	3.31	–
2.5	Center Rear	2.50	1.46	¼" NPTF	–	2.48
4.0	Lower Mount	4.0	1.15	¼" NPTF	4.80	–
4.0	Lower Mount	4.0	1.93	½" NPTF	5.38	–

Note: dimensions for reference only.

Maximum Indicator Pointer

Indicator retains peak readings of pressure or force generated by the system.

Order model number: **H4000G**.

Note: For use on H-Series gauges only.

▼ SELECTION CHART

Gauge Series	Pressure Range		Model Number				Major Graduation		Minor Graduation		Major Graduation		Minor Graduation	
			Face ø 2.5" ¼ NPTF Lower Mount	Face ø 2.5" ¼ NPTF Center Rear	Face ø 4" ¼ NPTF Lower Mount	Face ø 4" ½ NPTF Lower Mount	(psi)				(bar)			
	(psi)	(bar)	Accuracy ±1½%	Accuracy ±1½%	Accuracy ±1%	Accuracy ±1%	(2.5")	(4")	(2.5")	(4")	(2.5")	(4")	(2.5")	(4")
G -Series	0-100	0-7	G2509L	–	–	–	10	–	2	–	1	–	0,01	–
	0-160	0-11	G2510L	–	–	–	10	–	2	–	1	–	0,02	–
	0-200	0-14	G2511L	–	–	–	50	–	5	–	1	–	0,02	–
	0-300	0-20	G2512L	–	–	–	50	–	5	–	5	–	0,50	–
	0-600	0-40	G2513L	–	–	–	100	–	10	–	10	–	1	–
	0-1,000	0-70	G2514L	G2531R	–	–	100	–	20	–	10	–	1	–
	0-2,000	0-140	G2515L	–	–	–	500	–	50	–	10	–	2	–
	0-3,000	0-200	G2516L	–	–	–	500	–	50	–	50	–	5	–
	0-6,000	0-400	G2517L	G2534R	–	–	1000	–	100	–	100	–	10	–
	0-10,000	0-700	G2535L	G2537R	G4088L	G4039L	2000	1000	200	100	100	100	10	10
	0-15,000	0-1000	G2536L	G2538R	G4089L	G4040L	3000	3000	200	200	100	100	20	20
H-Series	0-10,000	0-700	–	–	H4049L	H4071L	–	1000	–	100	–	100	–	10

▼ Gauge shown: **T6003L**

T
Series

Pressure Range:
0 - 50,000 psi

Face Diameter:
6.4 inches

Accuracy, % of full scale:
± ½% and ± 1½%

- **Calibrated for dual scale reading in psi and bar**
- **All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization**
- **40,000 and 50,000 psi models include flange mounting**
- **1/2" NPTF versions are made of high-strength alloy steel**
- **0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 40,000 and 50,000 psi models**
- **Integral maximum indicator pointer standard on all gauges**

Cone Mount Gauge Adaptor

Contains fittings to connect ¼" cone fitting gauge to ⅜" cone system.

Kit includes **43-301** tee, **43-704** gauge adaptor and **45-116 t**ubing.

Order model number: **83-011**.

Page: **95**

Cone Mount Gauge Connector

For connecting gauges with ¼" cone fitting directly to model number **11-100** or **11-400** pump. May be used with other ¼" cone systems.

Order model number: **43-704**

Page: **95**

▼ *An Enerpac P2282 hand pump equipped with a T6011L test system gauge is used for proof pressure testing of hydraulic valves.*



T6001L, 6002L, 6003L



T6007L, 6008L



T6010L, 6011L

Pressure Range (psi)	Pressure Range (bar)	Model Number: Alloy Steel ½" NPTF	Model Number: Stainless Steel 0.25" Cone	Number Intervals (psi)	Graduation Intervals (psi)	Number Intervals (bar)	Graduation Intervals (bar)
0-1,000*	0-70	**T6001L**	–	100	10	10	1
0-5,000*	0-350	**T6002L**	–	500	50	50	5
0-10,000*	0-700	**T6003L**	**T6007L**	1,000	100	100	10
0-20,000*	0-1400	–	**T6008L**	1,000	100	200	20
0-40,000**	0-2800	–	**T6010L**	5,000	200	500	20
0-50,000**	0-3500	–	**T6011L**	5,000	500	500	50

* Accuracy: ± ½%
** Accuracy: ± 1½%

▼ Gauge shown: **DGR2**

DGR Series

Pressure Range:
0 - 20,000 psi

Voltage:
3 VDC (battery)

Accuracy, % of full scale:
± 0.25%

- **Rated for system pressure up to 20,000 psi**
- **Displays in multiple units: psi, bar, mPA, kg/cm² (user selectable)**
- **Zero reset – ensures that gauge reads actual system pressure**
- **Batteries included, condition indicator on read-out**
- **IP65 rated case design**
- **Shut off selectable – menu driven**
- **UL listed, CE and RoHS compliant**

Back-lit Readout

Back-lit readout allows easy reading in less than ideal lighting.

Gauge Adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: 163

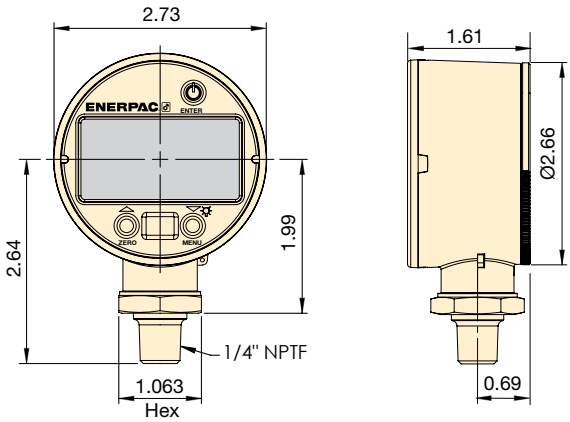

Pressure Rating (psi)		Pressure Rating (bar)		Model Number	Pressure Rating (MPa)		Pressure Rating (Kg/cm²)	
Range	Resolution	Range	Resolution		Range	Resolution	Range	Resolution
0-20,000	1	0-1380	0.1	**DGR2**	0-140	0.01	0-1400	0.1

▼ *Greater accuracy and easier to read: enhance your ability to monitor and control hydraulic system pressure up to 20,000 psi.*

▼ Shown: **GA45GC**

- **45° angled gauge improves visibility**
- **Slim and narrow design**
- **Easy to fit in a broad range of systems**
- **Maximize controlled load movement**
- **Glycerin dampened gauge with dual scale**
- **Enerpac high-flow female coupler**

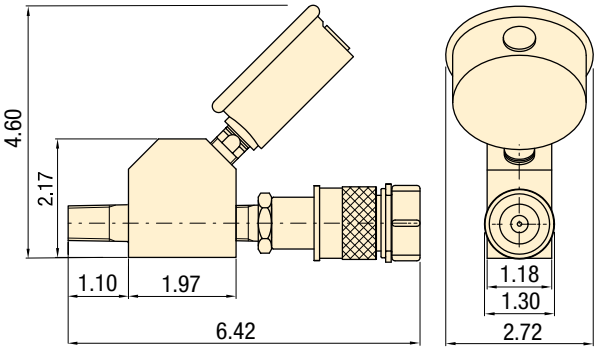

Model Number	Gauge Port	Male End	Female End	Gauge Range	
				(psi)	(bar)
GA45GC	G2535L	3/8" NPTF	CR400	0-10,000	0-700

GA45GC, AMGC Series

Maximum Operating Pressure:
10,000 psi

Connection 1:
3/8" NPTF Male

Connection 2:
CR400 Coupler

4-Way Manifold Assembly Complete with Gauges

Offering ease of portability and convenience with an ergonomic robust design, ready to use. Enerpac's CR400 female couplers on all ports allow the manifold to be quickly connected to up to four cylinders. Glycerin filled, 10,000 psi gauges allow operators to work safely. All protected by the robust protection frame.

Manifold Type (used for cylinders)	Model Number
4x Single-acting	**AMGC41**
4x Double-acting	**AMGC42**

Page: **154**

Portable Tool Box

Portable tool box with hand pump, GA45GC gauge adaptor assembly, hose and RC, RSM, RCS-cylinder, WR5 wedgie or LW16 lifting wedge.

Page: **65**

▼ *The Gauge Adaptor Assembly is the window to your system; allows easy reading of the pressure for safe operation.*

▼ Shown left to right: **GA3, V91, GA1, GA2, GA4, NV251, GA918**

GA, NV, V Series

Operating Pressure:
10,000 psi

▼ *A gauge is easily installed into your hydraulic system using a gauge adaptor.*

Gauge Adaptors (GA-Series)

- For easy mounting of a pressure gauge into your system
- Male end screws into pump or cylinder port, female end accepts hose or coupler, third port is for gauge connection
- GA918 provides for swivel connection
- Simplifies gauge installation and reading

Model Number	Gauge Port (NPTF)	Male End (NPTF)	Female End (NPTF)	Dimensions (in) A	B	C	D	E	F
GA1	½" NPTF	⅜" NPTF	⅜	2.81	1.24	½" NPTF	⅜" NPTF	⅜" NPTF	1.25
GA2	½" NPTF	⅜" NPTF		6.10	1.38	½" NPTF	⅜" NPTF	⅜" NPTF	1.25
GA3	¼" NPTF	⅜" NPTF		5.25	1.38	¼" NPTF	⅜" NPTF	⅜" NPTF	1.25
GA4	½" NPTF	¼" NPTF		4.38	1.38	½" NPTF	¼" NPTF	⅜" NPTF	1.25



GA1



GA2, GA3, GA4

Swivel Adaptor (GA918)

- Simplifies gauge installation and reading

Model Number	Dimensions (in) A	B	C	D	E	S	S1
GA918	4.62	1.72	½" NPTF	1.30	½" NPTF	1.13	1.50



Needle Valves (NV- and V-Series)

- Both NV251 and V91 provide positive shut-off
- 316 stainless steel stem, 24 threads/in.

Model Number	Orifice	Thread Size	Dimensions (in) A	B	C	D	E	F	G
NV251	0.17	¼" NPT	2.22	0.75	0.38	1.81	2.25	1.13	0.72
V91	0.19	½" NPT	3.50	1.44	0.63	1.25	2.50	1.25	—



NV251



V91

▼ Shown from left to right: **V152, V66, V82, V161, V42, V17**

Your Hydraulic Control Solution

Valve Applications

To see these valves used in typical hydraulic circuits, please see our "Yellow Pages".

Page: **410**

▼ *The V152 Pressure Relief Valve limits the pressure or force developed in the hydraulic system.*

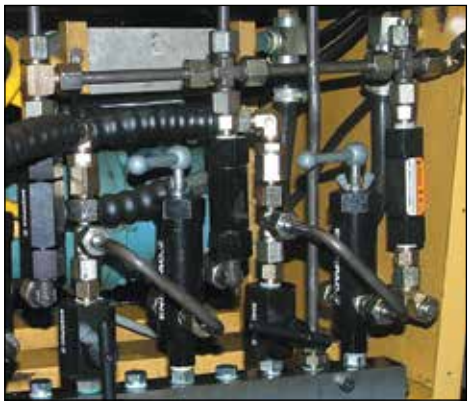

- **All valves are rated for 10,000 psi operating pressure**
- **All valves feature NPTF porting to insure against leakage at rated pressure**
- **All valves are painted, coated, or plated for corrosion resistance**
- **Viton® seals (in V66NV and V152NV) for high temperature applications, nickel-plated for maximum corrosion resistance**

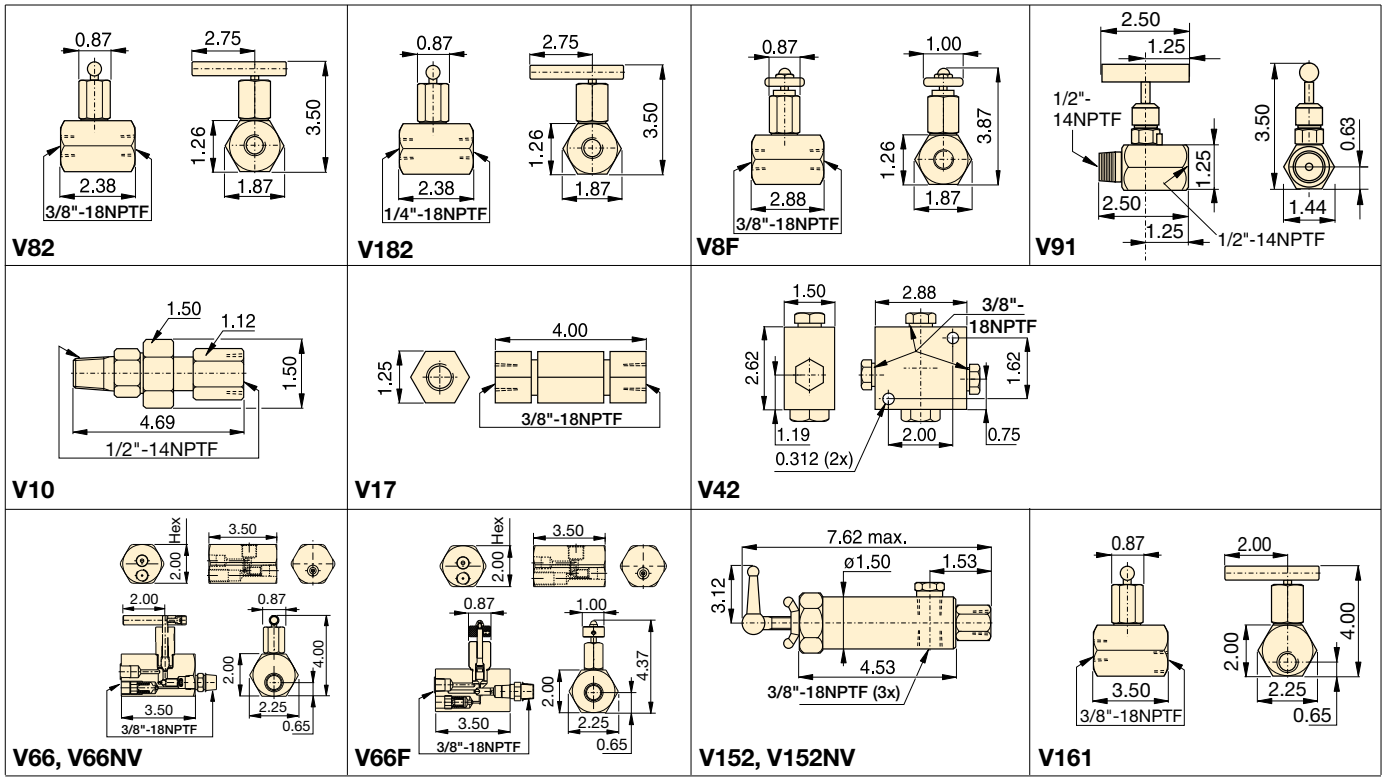

Valve Dimensions in inches.

Premounted Manifold

For two or four port manifold with integral flow control valves, see the manifold page of the System Components section.

Page: 152

Fittings

For additional fittings see the fitting page of the System Components section.

Page: 153

V Series

Maximum Operating Pressure:
10,000 psi

Valve Type and Model Number		Description		Hydraulic Symbol
Needle Valve **V82** **V182F** **V8F**		**V82:** To control cylinder speed. Can also be used as shut-off valve for temporary load holding. ⅜" NPTF female ports. **V182**: Same as V82, but with	¼" NPTF female ports. Also suitable for gauge snubbing. **V8F:** Similar to V82, but with very fine metering for precise flow control. **Not recommended as shut-off valve.**	
Snubber Valve **V91**		**V91:** Adjustable for metering oil out of a gauge to prevent snapping of gauge pointer when load or pressure is suddenly released. Also suitable as shut-off valve to protect	the gauge during high cycling applications. ½" NPTF male and female threads for use with GA1, GA2 or GA4 gauge adaptors.	
Auto Damper® Valve **V10**		**V10:** To be used when gauge pressure must be monitored during high cycle applications. Creates a flow resistance when load is released suddenly.	No adjustments are necessary. ½" NPTF male and female threads for use with GA1, GA2 or GA4 gauge adaptors.	
Check Valve **V17**		**V17:** Ruggedly built to resist shock and operate with low pressure drop. Closes smoothly without pounding. ⅜" NPTF female ports.		
Pilot Operated Check Valve **V42**		**V42:** Can be mounted at the cylinder to hold the load in case of system pressure loss. Normally used with double-acting cylinders where pilot port receives pressure	from a Tee-fitting in the cylinder retract line. ⅜" NPTF female ports. Pilot pressure ratio 14% (6.5:1).	
Manually Operated Check Valve **V66, V66NV*** **V66F**		**V66, V66NV:** For load holding applications with single- and double-acting cylinders. Valves allow oil to flow back to tank when cylinder retracts. V66NV with Viton seals, nickel-plated.	**V66F:** Similar to V66, but with very fine metering capability for precise flow control. V66F not designed for load holding applications.	
Pressure Relief Valve **V152** **V152NV***		**V152:** Limits pressure developed by the pump in hydraulic circuit, thus limiting the force created by other components. Valve opens whenever preset pressure is reached.	To increase pressure setting, turn handle clockwise. Includes: • 3 ft return line hose kit • ±3% repeatability • 800-10,000 psi adjustment range.	
Sequence/Pressure Differential Valve **V161**		**V161:** To control oil flow to a secondary circuit. Flow is blocked until system pressure rises to the V161 setting. When this pressure level is reached, the V161 opens to	allow flow to the secondary circuit. A pressure differential is always maintained between the primary and secondary circuit. **Min. operating pressure: 2000 psi.**	

* See page 64 for more information about products for use in high temperature and extreme environment applications.

Enerpac Hydraulic Presses

Enerpac Hydraulic Presses are available in a wide variety of standard capacities, configurations and constructions, or you can "build your own" with the easy-to-use matrix.

The IP and IPR-Series Presses are a welded construction for maximum strength and durability, and when combined with the power of high-pressure hydraulics, will provide years of safe and dependable service in your workshop.

XLP-Series Presses are a bolted contruction which offer exceptional value.

Enerpac press capacities range from 10 tons to 200 tons and are available in Bench, C-Clamp, Arbor, H-Frame and Roll-Frame models.

These press features increase productivity and broaden the range of applications:

Standard on many Enerpac IP Presses, the exclusive Hydra-Lift™ offers effortless adjustment to the press daylight by use of a hydraulic lift.

Easy horizontal cylinder position is achieved with the unique "roller-head" cylinder mounting block, standard on most Enerpac IP Presses.

Optional "V-blocks" for positioning of complex parts are designed with high-strength steel for long life.



Press Section Overview

Available in capacities from 10 to 200 ton, each Enerpac press consists of three basic high-quality components: a press frame, a power source and a cylinder.

Press Frame
Press frames include features like horizontally adjustable cylinders and vertically adjustable bolsters for ease of use and optimal positioning of the workpiece.

Power Source
Depending on the production requirements, Enerpac presses can be powered by manual, air hydraulic and electric pumps.

Cylinder
Depending on the application, double-acting cylinders offer increased efficiency. Check out the Selection Charts for the press best suited for your needs.

Gauge
All Workshop presses and Roll-Frame Presses feature an easy to monitor pressure/force gauge for increased safety.

Capacity (tons)	Press Type and Functions	Series		Page
10-200	H-Frame Presses	IP		168 ▶
50-200	Roll Frame Presses	IPR		172 ▶
5-20	C-Clamp Presses	A		174 ▶
10-30	Arbor Presses	A		175 ▶
10-200	Press Accessories Press Speed Chart			176 ▶
10-200	Custom Built Presses	IP		177 ▶
10-75	Workshop Bench Presses Workshop H-Frame Presses	VLP XLP		178 ▶
5 1-100	Tension Meter Load Cells	TM LH		180 ▶
	Custom Hydraulic Presses			181 ▶

▼ Press shown: **IPE5060**

Setting the Industry Standard

- **Quality welded frame for maximum strength and long life**
- **Exclusive "Hydra-Lift™" bed for effortless adjustment of the vertical daylight (10-ton models are manual)**
- **Roller head design is standard to allow movement and locking of the cylinder from side to side (10 ton, 25 ton and 30 ton are manual)**
- **All models in the Quick Selection Chart have been matched to a pump, cylinder, hoses and gauge, offering the complete package**

◀ *An Enerpac H-Frame press quickly removes the shaft from this assembly.*

Cylinder Mounting Block

Allows cylinder mounting into a press frame, while also allowing side to side adjustment of cylinder position.

Page: **176**

Hydra-Lift™

Allows easy, effortless daylight adjustment. Standard on most H-Frame presses.

Page: **176**

Pump Mounting Bracket

Heavy-duty steel brackets allow mounting of one of the Enerpac Power Sources to power your press.

Page: **176**

Gauge Included

All standard press models include a gauge and gauge adaptor, matching the press capacity.

Page: **171**



V-Blocks

These optional V-Blocks are designed for easy fixturing of round stock and other non-uniform materials. Featuring precise fit into the press bolster.

Page: **176**

Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 177 and the electric pump from the modular matrix on page 115 (electric) or page 127 (air).

Any questions should be directed to our Technical Service Department.

Page: 176

Cylinder Types

= Single-acting, Spring Return

= Double-acting, Hydraulic Return

IP Series

Capacity:
10 - 200 tons

Maximum Daylight and Width:
54.50 & 48.00 inches

Maximum Operating Pressure:
10,000 psi

▼ QUICK SELECTION CHART

For more technical information see next page.

Press Capacity (tons)	Maximum Vertical Daylight (in)	Maximum Bed Width (in)	Power Source: Type: Man.	Type: Elec.	Type: Air	Valve: Man.	Valve: Elec.	Press Model Number	Cylinder: Spring Return	Cylinder: Hydraulic Return	Cylinder: Stroke (in)	Speed (sec/in)*: Rapid Advance	Speed (sec/in)*: Pressing
10	40.00	18.63		●		●		IPE1215	●		10	0.90	6.70
	40.00	18.63			●	●		IPA1220	●		10	2.20	13.40
	40.00	18.63	●			●		IPH1240	●		10	{4}	{15}
	40.00	18.63	●			●		IPH1234		●	10	{2}	{15}
	40.00	18.63			●	●		IPA1244		●	10	2.20	13.40
25	54.50	29.00		●		●		IPE2505	●		6	1.50	15.40
	54.50	29.00		●			●	IPE2510	●		14	0.70	7.70
	54.50	29.00			●	●		IPA2520	●		14	5.20	30.90
	54.50	29.00	●			●		IPH2531	●		14	{5}	{34}
30	54.50	29.00			●	●		IPA3071		●	14	0.60	43.00
	54.50	29.00		●			●	IPE3060		●	14	0.90	9.80
	54.50	29.00	●			●		IPH3080		●	14	{7}	{34}
50	48.56	28.75		●			●	IPE5010	●		13	1.02	11.04
	48.56	28.75			●	●		IPA5021	●		6	1.00	74.00
	48.56	28.75	●			●		IPH5030	●		6	{2}	{38}
	48.56	28.75	●			●		IPH5031	●		6	{11}	{73}
	48.56	28.75		●		●		IPE5005	●		6	2.90	28.90
	48.56	28.75			●	●		IPA5073		●	13	1.00	22.20
	48.56	28.75		●			●	IPE5060		●	13	1.00	11.00
	48.56	28.75	●			●		IPH5080		●	13	{2}	{38}
100	41.00	35.00			●	●		IPA10023	●		10	1.90	41.20
	41.00	35.00		●			●	IPE10010	●		10	1.90	20.60
	41.00	35.00	●			●		IPH10030	●		10	{3}	{70}
	41.00	35.00		●			●	IPE10060		●	13	1.90	20.60
	41.00	35.00	●			●		IPH10080		●	6	{3}	{70}
150	48.50	48.00		●			●	IPE15065		●	13	2.20	15.40
200	48.50	48.00		●			●	IPE20065		●	13	3.10	22.10

* {--} Speed in strokes per inch plunger travel

Hoses

All standard press models come with a hydraulic hose – HC9306 with the exception of IPA1220, IPA1244 comes with hydraulic hose – HC9308 and IPA2520 comes with hydraulic hose - HC9310.

Page: 148

▼ *The moveable "cylinder mounting block" allows the user to quickly adapt the press to a specific job.*

◀ For full features see page 174.

Press Capacity (tons)	Press Model Number	Pump Model Number	Page:	Cylinder Model Number	Page:	H-Frame Press Dimensions (in) A (max)	A (min)	B	C	D	E
10	**IPE1215**	PEM1201B	**102**	RC1010	**6**	40.00	2.44	–	46.75	5.00	18.63
	IPA1220	XA12	**125**	RC1010	**6**	40.00	2.44	–	46.75	5.00	18.63
	IPH1240	P392	**86**	RC1010	**6**	40.00	2.44	–	46.75	5.00	18.63
	IPH1234	P84	**88**	RR1010	**40**	40.00	2.44	–	46.75	5.00	18.63
	IPA1244	XA12V	**125**	RR1010	**40**	40.00	2.44	–	46.75	5.00	18.63
25	**IPE2505**	PUJ1200B	**100**	RC256	**6**	54.50	7.00	–	57.00	11.88	29.00
	IPE2510	ZE3310SB-N	**115**	RC2514	**6**	54.50	7.00	–	57.00	11.88	29.00
	IPA2520	XA12	**125**	RC2514	**6**	54.50	7.00	–	57.00	11.88	29.00
	IPH2531	P80	**88**	RC2514	**6**	54.50	7.00	–	57.00	11.88	29.00
30	**IPA3071**	PAM1042	**121**	RR3014	**40**	54.50	7.00	–	57.00	11.88	29.00
	IPE3060	ZE3410SB-N	**115**	RR3014	**40**	54.50	7.00	–	57.00	11.88	29.00
	IPH3080	P84	**88**	RR3014	**40**	54.50	7.00	–	57.00	11.88	29.00
50	**IPE5010**	ZE4320SB-N	**115**	RC5013	**6**	48.56	7.06	18.76	54.00	10.38	28.75
	IPA5021	PAM1022	**121**	RC506	**6**	48.56	7.06	18.76	54.00	10.38	28.75
	IPH5030	P462	**86**	RC506	**6**	48.56	7.06	18.76	54.00	10.38	28.75
	IPH5031	P80	**88**	RC506	**6**	48.56	7.06	18.76	54.00	10.38	28.75
	IPE5005	PUJ1200B	**100**	RC506	**6**	48.56	7.06	18.76	54.00	10.38	28.75
	IPA5073	ZA4408MX	**126**	RR5013	**40**	48.56	7.06	18.76	54.00	10.38	28.75
	IPE5060	ZE4420SB-N	**115**	RR5013	**40**	48.56	7.06	18.76	54.00	10.38	28.75
	IPH5080	P464	**88**	RR5013	**40**	48.56	7.06	18.76	54.00	10.38	28.75
100	**IPA10023**	ZA4208MX	**126**	RC10010	**6**	41.00	5.50	20.00	51.00	11.69	35.00
	IPE10010	ZE4320SB-N	**115**	RC10010	**6**	41.00	5.50	20.00	51.00	11.69	35.00
	IPH10030	P462	**86**	RC10010	**6**	41.00	5.50	20.00	51.00	11.69	35.00
	IPE10060	ZE4420SB-N	**115**	RR10013	**40**	41.00	5.50	20.00	51.00	11.69	35.00
	IPH10080	P464	**88**	RR1006	**40**	41.00	5.50	20.00	51.00	11.69	35.00
150	**IPE15065**	ZE5420SG-N	**115**	RR15013	**40**	48.50	12.50	28.00	54.50	10.00	48.00
200	**IPE20065**	ZE5420SG-N	**115**	RR20013	**40**	48.50	12.50	28.00	54.50	10.00	48.00

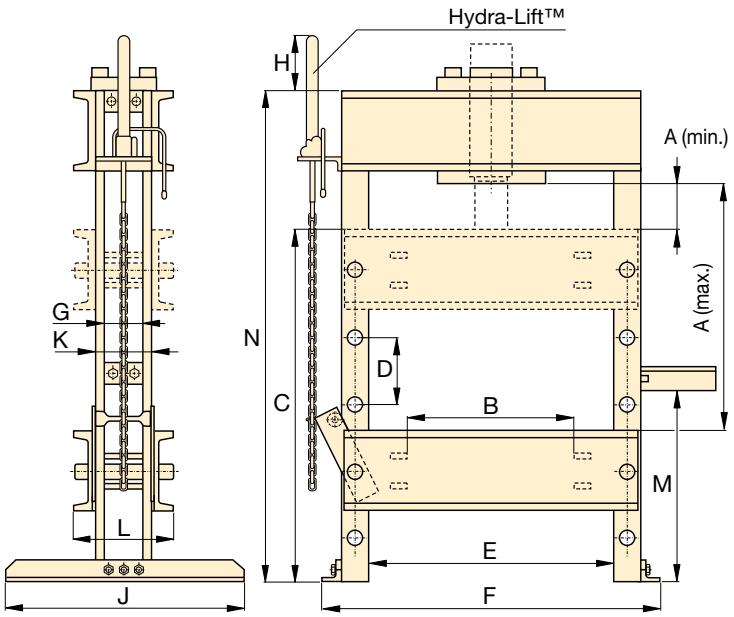

	H-Frame Press Dimensions (in)								Weight	Press Model Number
	F	G	H	J	K	L	M	N	(lbs)	
	24.88	–	–	29.75	4.25	7.44	35.00	52.00	298	**IPE1215**
	24.88	–	–	29.75	4.25	7.44	35.00	52.00	160	**IPA1220**
	24.88	–	–	29.75	4.25	7.44	35.00	52.00	158	**IPH1240**
	24.88	–	–	29.75	4.25	7.44	35.00	52.00	189	**IPH1234**
	24.88	–	–	29.75	4.25	7.44	35.00	52.00	163	**IPA1244**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	605	**IPE2505**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	697	**IPE2510**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	610	**IPA2520**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	620	**IPH2531**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	684	**IPA3071**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	722	**IPE3060**
	40.50	4.00	13.25	30.00	5.25	10.69	26.50	76.00	664	**IPH3080**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	1,040	**IPE5010**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	968	**IPA5021**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	968	**IPH5030**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	926	**IPH5031**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	930	**IPE5005**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	1,057	**IPA5073**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	1,051	**IPE5060**
	42.75	5.00	8.75	36.00	7.25	14.38	30.75	76.00	1,003	**IPH5080**
	51.00	5.75	8.75	36.00	8.75	17.25	33.13	76.00	1,650	**IPA10023**
	51.00	5.75	8.75	36.00	8.75	17.25	33.13	76.00	1,722	**IPE10010**
	51.00	5.75	8.75	36.00	8.75	17.25	33.13	76.00	1,656	**IPH10030**
	51.00	5.75	8.75	36.00	8.75	17.25	33.13	76.00	1,743	**IPE10060**
	51.00	5.75	8.75	36.00	8.75	17.25	33.13	76.00	1,665	**IPH10080**
	67.17	9.12	3.09	44.00	13.12	21.85	47.75	90.00	3,906	**IPE15065**
	67.17	9.12	3.09	44.00	13.12	21.85	47.75	90.00	3,906	**IPE20065**

IP Series

Capacity:
10 - 200 tons

Maximum Daylight and Width:
54.50 & 48.00 inches

Maximum Operating Pressure:
10,000 psi

H-Frame Press Gauges

All standard press models include a gauge and gauge adaptor, matching the press capacity:

Press Capacity (tons)	Gauge Model Number	Adaptor Model Number
10	**GF10P**	**GA2**
25	**GF20P**	**GA2**
30	**GF835P**	**GA3**
50	**GF50P**	**GA2**
100	**GF871P**	**GA3**
150	**GF200P**	**GA3**
200	**GF200P**	**GA3**

For more information on gauges, please refer to the System Components section.

Page: 147

Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 177 and the electric pump from the modular matrix on page 115 (electric) or page 127 (air).

Any questions should be directed to our Technical Service Department.

Page: 176

▼ Shown: **IPR10075**

The One and Only

- **Quality welded frame for maximum strength and long life**
- **Frame rolls easily on four steel roller bearings**
- **Hydraulic clamp cylinders lock frame into position**
- **Exclusive "Hydra-Lift™" bolster for effortless adjustment of the vertical daylight**
- **Standard roller head design allows movement of the cylinder from side to side**
- **All models in the Quick Selection Chart have been matched to a pump, cylinder, hoses and gauge, offering the complete package**
- **Roll Frame design features a stationary bed with the ability to support heavy loads**

Cylinder Mounting Block
Allows cylinder mounting into a press frame, while also allowing side to side adjustment of cylinder position.
Page: **176**

Pump Mounting Bracket
Heavy-duty steel brackets to allow conversion to one of the Enerpac Power Sources to power your press.
Page: **176**

Hydra-Lift™
Allows easy, effortless daylight adjustment.
Page: **176**



Optional V-Blocks
These V-Blocks, 200 ton only, are designed for easy fixturing of round stock and other non-uniform materials. Featuring precise fit into the press bolster.
Page: **176**

Press Capacity (tons)	Vertical Daylight A (in) minimum	Vertical Daylight A (in) maximum	Horizontal Daylight E (in)	Pump Model Number	Page:	Press Model Number	Cylinder, Double-Acting Hydraulic Return	Stroke (in)	Model Number	Page:	Speed (sec/in) Rapid Advance	Speed (sec/in) Pressing
50	6.00	37.12	28.75	ZE4420SB-N	**115**	**IPR5075**	●	13.13	RR5013	**41**	1.0	11.1
100	6.28	41.28	35.00	ZE5420SG-N	**115**	**IPR10075**	●	13.13	RR10013	**41**	1.5	10.3
200	11.00	51.00	48.00	ZE5420SG-N	**115**	**IPR20075**	●	13.00	RR20013	**41**	3.1	22.1

▼ *An IPR20075 Roll Frame Press is used to remove a large shaft from this pillow-block assembly. The Roll Frame design allows this heavy part to be safely loaded with an overhead crane.*

IPR Series



Capacity:
50 - 200 tons

Maximum Daylight and Width:
51.00 & 48.00 inches

Maximum Operating Pressure:
10,000 psi

Roll Frame Press Gauges

All standard press models include a gauge and gauge adaptor, matching the press capacity:

Press Capacity (tons)	Gauge Model Number	Adaptor Model Number
50	**GF50P**	**GA2**
100	**GF871P**	**GA3**
200	**GF200P**	**GA3**

For more information on gauges, please refer to the System Components section.

Page: **147**

Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 177 and the electric pump from the modular matrix on page 115 (electric) or page 127 (air).

Any questions should be directed to our Technical Service Department.

Page: **176**

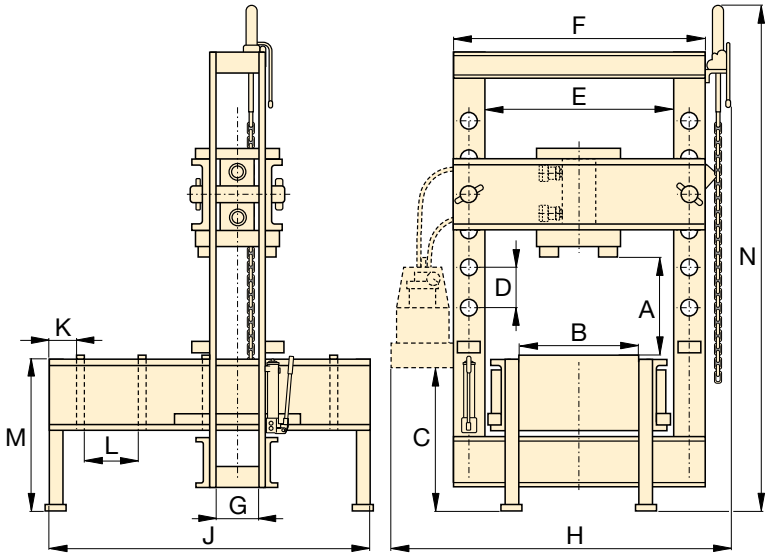

	Roll Frame Press Dimensions (in)											Weight	Press Model Number
	B	C	D	F	G	H	J	K	L	M	N	(lbs)	
	20.71	38.25	10.38	36.75	5.00	55.92	64.00	8.00	10.63	30.00	112.96	1,961	**IPR5075**
	26.50	38.00	8.75	45.00	5.75	63.19	66.00	8.00	10.63	32.00	118.94	3,849	**IPR10075**
	38.75	36.75	10.00	64.00	9.12	84.63	86.50	8.00	15.00	36.00	125.96	7,869	**IPR20075**

▼ Shown from left to right: **A220 and A330**

The Standard In Workshop Tools

C-Clamp Press

- **5, 10 and 20 ton capacity**
- **Operational in all positions**

Arbor Press

- **Foot mounting holes for horizontal or vertical positioning**
- **Machined work surfaces for easier fixturing**
- **Slotted back to simplify loading and unloading of longer parts**

Push Pin A183

For applications requiring precision pressing, such as shaft removal and insertion. This attachment fits 10 ton cylinders and requires the use of a threaded adaptor saddle (A13).

Smooth Saddle A185

For pressing applications of delicate parts, such as aluminum castings, this saddle decreases surface marks during the pressing application. Requires 10-ton cylinder and threaded adaptor saddle (A13).

▼ *A310 Arbor Press*

Press Type	Press Capacity (tons)	Maximum Vertical Daylight (in)	Maximum Bed Width (in)	Cylinder Series Number*	Press Model Number	Weight (lbs)
Arbor	**10**	9.06	5.31	RC10-x	**A310***	62
	30	10.00	7.00	RC30-x	**A330***	220
C-Clamp	**5**	6.50	2.00	RC5-x	**A205***	14
	10	9.00	3.25	RC10-x	**A210***	37
	20	11.88	3.75	**	**A220****	83

* Requires RC cylinder listed, see page 7 for specifications.
** Requires RC25 ton cylinder, limited to 20 tons.

▲ *RC-308 cylinder mounted in A-330 Arbor Press powered by a PATG-Turbo Air pump for controlled pressing of bearings for sprockets of weaving machines. The V-152 Pressure Relief Valve controls the pressing force.*

A Series

Capacity:
5 - 30 ton

Maximum Daylight and Width:
11.88 and 7.00 inches

Mounting Capabilities:
Fixed or Portable

Maximum Operating Pressure:
10,000 psi

For high-cycle production applications, C-Clamp and Arbor presses should be limited in their capacity. Consult Enerpac Technical Services for specific application details.

Hydraulic Cylinders
Cylinders for C-Clamps and Arbor Presses must be ordered separately.
Page: 6

Hydraulic Pumps
Pumps for C-Clamps and Arbor Presses must be ordered separately.
Page: 85

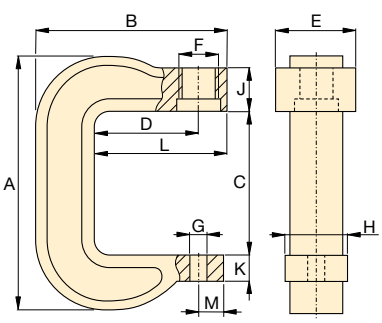

C-Clamp Press A205, A210, A220

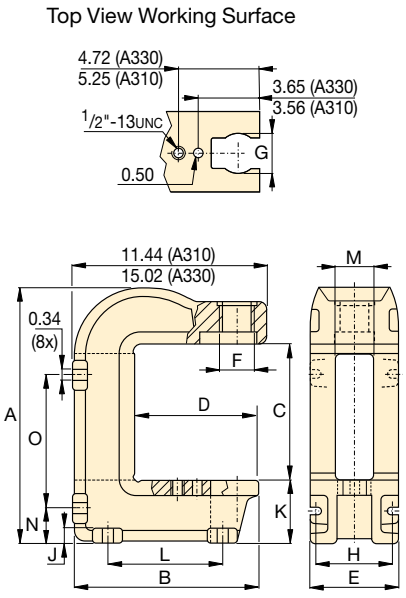

Arbor Press A310, A330

	Press Dimensions (in)														Press Model Number
	A	B	C	D	E	F	G	H	J	K	L	M	N	O	
	16.31	11.06	9.06	7.25	5.94	2¼-14 UN	2.50	4.81	0.75	3.75	6.88	2.56	2.13	8.63	**A310***
	22.18	14.02	10.00	7.40	7.00	3⁵⁄₁₆-12 UN	2.50	5.50	1.10	6.63	8.00	2.63	3.88	10.88	**A330***
	11.44	8.00	6.50	3.75	2.88	1½-16 UN	1.02	2.00	2.50	1.06	4.75	1.00	–	–	**A205***
	16.00	11.13	9.00	6.00	3.25	2¼-14 UN	1.02	3.00	2.50	1.69	7.63	1.13	–	–	**A210***
	21.25	13.63	11.88	6.00	4.76	3⁵⁄₁₆-12 UN	1.02	3.75	2.75	1.88	8.38	1.13	–	–	**A220****

Description	Frame Capacity	Model Number		Features
Cylinder Mounting Block	10 ton H-Frame 25 and 30 ton H-Frame 50 ton H-Frame 100 ton H-Frame 200 ton H-Frame	**IPK1012** **IPK3012** **PK501** **PK1002** **PK2002**		• All mounting blocks allow horizontal movement of cylinder
V- Blocks	10 ton H-Frame 25 and 30 ton H-Frame 50 ton H-Frame 100 ton H-Frame 150 & 200 ton H-Frame 200 ton Roll Frame	**A136** **A130** **A150** **A175** **A200** **A200R**		• Machined from high strength steel for long life • All model numbers include two V-blocks
Hydra-Lift™	25-100 ton H-Frame 150-200 ton H-Frame 50 and 100 ton Roll Frame 200 ton Roll Frame	**IPL100** **IPL101** **IPLR100** **IPLR200**		• Allows easy, effortless daylight adjustments • Includes accessory chain
Pump Mounting Bracket	Hand operated and small Air Pumps; P80, P84, P142, P392, PA133, XA, Turbo II pumps Electric, large Hand Pumps, and ZA4 Air Pumps; ZE Series, P462, P464, 10/90 Series Air Pumps	**PMB1** **PMB2**		• Both mounting brackets are pre-drilled to accept a number of different pump models

Cylinder Speed

This chart will help you calculate the time required for an Enerpac cylinder to extend when powered by a 10,000 psi Enerpac hydraulic pump. The Cylinder Speed Chart can also be used to determine the pump type and model best suited for an application when you know the plunger speed required.

Cylinder and Pump Selection Chart

Cylinder Capacity (tons)	Cylinder Load	Hand Operated Pumps				Electric Pumps					Air Pumps			
		Strokes per inch of plunger travel				Seconds per inch of plunger travel								
		Single Speed	Two-Speed			½ hp Port.	½ hp Subm.	ZE3 Series	ZE4 Series	ZE5 Series	@100 psi air			
		P391	P392	P80 P84	P462 P464						XA	PA133	PAM 10 Series	ZA4
10	No load	15	4	2	1	0.7	0.9	0.3	0.2	0.2	1.10	2.70	0.21	0.16
	Load	15	15	15	8	6.7	6.7	3.4	2.2	1.1	9.00	16.80	14.90	4.50
25	No load	34	8	5	1	1.5	2.1	0.7	0.5	.4	2.60	6.20	0.48	0.36
	Load	34	34	34	18	15.5	15.5	7.7	5.2	2.6	20.60	38.60	34.30	10.30
30	No load	43	10	7	1	1.9	2.6	0.9	0.6	0.5	3.20	7.50	0.60	0.46
	Load	43	43	43	23	19.5	19.5	9.80	6.5	3.3	26.00	48.70	43.30	13.00
50	No load	73	16	11	2	3.3	4.4	1.50	1.0	0.8	5.50	13.30	1.00	0.80
	Load	73	73	73	38	33.2	33.2	16.6	11.0	5.5	44.20	82.92	73.70	22.10
100	No load	137	30	21	3	6.2	8.3	2.8	1.9	1.5	10.30	24.80	1.90	1.50
	Load	137	137	137	71	61.9	61.9	31.0	20.7	10.3	82.50	154.70	137.50	41.30

Note: Values are approximate. Cylinder speed may vary in actual application.

CUSTOM BUILD YOUR OWN PRESS
If the press that would best fit your application cannot be found in the charts, you can easily build your custom press here. All presses must be ordered with cylinders. **The pump is ordered separately.**

▼ This is how a press model number is built up:

IP	H	-	050	S	06	-	1
1 Product Type	2 Frame Type		3 Press Capacity	4 Cylinder Type	5 Cylinder Stroke		6 Pump Mounting Kit

1 Product Type
IP = Industrial Press

2 Frame Type
H = H-Frame
R = Roll Frame [1]

3 Press Capacity
010 = 10 ton
025 = 25 ton
030 = 30 ton
050 = 50 ton
100 = 100 ton
150 = 150 ton
200 = 200 ton

4 Cylinder Type
S = Single-Acting (RC-Series)
D = Double-Acting (RR-Series)

5 Cylinder Stroke (in)
- 10 ton S/A: **06, 08, 10, 12, 14**
  10 ton D/A: **10, 12**
- 25 ton S/A: **06, 10, 12, 14**
- 30 ton S/A: **08**
  30 ton D/A: **08, 14**
- 50 ton S/A: **06, 13**
  50 ton D/A: **06, 13, 20**
- 100 ton S/A: **06, 10**
  100 ton D/A: **06, 13, 18**
- 150 ton D/A: **06, 13, 32**
- 200 ton D/A: **13, 18, 24**

6 Pump Mounting Kit [2]
0 = No mounting kit
1 = Hand operated and small air pumps:
P80, P84, P141, P142, P202, P391, P392, PA133 and all Turbo II Air pumps
2 = Electric, large hand operated and modular air pumps:
PUJ12, PEM12, ZE36 Series
P462, P464
PAM10 and -90 Series

[1] Roll Frame Press: 50-, 100- and 200-ton press capacity only. (Assembly required)
[2] Includes hoses for press, except for option **0**.

Ordering Example

Model number: IPH050S06-2

IPH050S06-2 is a 50-ton H-Frame press with a single-acting, 6-inch stroke cylinder (RC506). It has a pump mounting kit (for an electric Pump or a Modular Air Pump).

See the cylinder and pump selection chart on previous page for selecting the proper pump.

IP Series

Capacity:
10 - 200 tons

Maximum Daylight and Width:
54.50 & 48.00 inches

Maximum Operating Pressure:
10,000 psi

"No Load" indicates the plunger speed as it extends toward the load (1st stage).
"Load" indicates the plunger speed as the load is applied at a system pressure of 10,000 psi (2nd stage).

Formula V = A ÷ Q

V (sec/in) = **A** (in^2) ÷ **Q** (in^3/min)
V = Cylinder plunger speed in seconds per inch
A = Cylinder effective area in square inches (in^2)
Q = Pump oil flow in cubic inches (in^3)

$$\text{Cylinder Plunger Speed (sec/in)} = \frac{\text{Cylinder Effective Area } (in^2)}{\text{Pump Flow Rate } (in^3/min)} \times \frac{60 \text{ sec}}{1}$$

▼ Shown from left to right: **XLP256XA11GU, XLP506XA12GU, VLP106P142U**

VLP-Series Bench Presses

- **Compact design mounts conveniently on bench top**
- **Operational in vertical or horizontal position**

XLP-Series Presses

- **Easy height adjustment with integrated winch mechanism**
- **Horizontal cylinder adjustment enables flexible load placement**
- **Multiple pump options including pneumatic foot-controlled pumps with integrated gauges for optimal control and variable oil flow**
- **50 and 75-ton units provided in kit form**

No workshop can do without one

XA-Series Foot Pump

The XLP-Press with XA-Series Air Powered Foot Pump: no need to fully lift up foot – rest bodyweight on heel, resulting in a handsfree and stable working position – safe and controlled press operation.

Press Kits

The 50 and 75-ton presses come standard as unassembled kits, and include complete press frame, winch, cylinder, pump with gauge, couplers and hose.

Easy Grip Forklift Access

Cut-away in lower frame for pallet truck access allows easy transportation of 50 and 75-ton XLP-Series Presses.

Side-To-Side Cylinder Movement

Cylinder can be positioned horizontally side-to-side on all XLP-Series presses.

Press Capacity (tons)	Maximum Vertical Daylight (in)	Maximum Bed Width (in)	Press Model Number	Power Source: Pump Type Man.	Pump Type Elec.	Pump Type Air	Valve Type Man.	Valve Type Elec.	Pump Model Number	Cylinder: S/A	Cylinder: D/A	Stroke (in)	Cylinder Model Number
10	16.73	17.13	**VLP106P142U**	●			●		P142	●		6.13	RC106
	16.73	17.13	**VLP106PAT1U**			●	●		PATG1102N	●		6.13	RC106
25	47.68	20.08	**XLP256P392U**	●			●		P392	●		6.25	RC256
	47.68	20.08	**XLP256XA11GU**			●	●		XA11G	●		6.25	RC256
50	37.80	38.98	**XLP506P802U**	●			●		P802	●		6.25	RC506
	37.80	38.98	**XLP506XA12GU**			●	●		XA12G	●		6.25	RC506
	37.80	38.98	**XLP5013ZEBU**		●			●	ZE4408SB		●	13.13	RR5013
	37.80	38.98	**XLP5013ZEIU**		●			●	ZE4408SI		●	13.13	RR5013
75	37.60	38.98	**XLP756XA12GU**			●	●		XA12G	●		6.13	RC756

= Single-Acting = Double-Acting

Bringing Value to the Workshop

The VLP- and XLP-Series Presses provide a simple and economical solution for standard workshop applications.

The 10-ton VLP comes standard with an RC cylinder and a hand or air pump. Compact and versatile, it's the ideal solution for pressing smaller workpieces from the comfort of a workbench.

The similarly equipped 25-ton XLP features a sturdy welded H-frame, an adjustable bolster and a horizontally adjustable cylinder.

The 50- and 75-ton XLP Presses offer an exceptional value with features including adjustable lower and upper bolsters, horizontally adjustable cylinders, single- and double acting cylinders*, and multiple pump options. These presses come standard as unassembled kits which include the frame, winch, cylinder, pump, gauge, couplers and hose.

For premium performance in more demanding applications, Enerpac also offers the IP Press Series, which features heavy-duty welded frames and a broad range of cylinder and pump options. Contact Enerpac for additional information.

*On select models

All standard VLP and XLP models include a hose and gauge. The presses that come with an XA pump have the gauge integrated into the pump.

Press Capacity (tons)	Gauge Model Number	Hose Model Number
10	GF10P	HC7206
25	GF20P	HC7210
50	GF50P	HC7210
75	–	HC7210

For more information on gauges and hoses, please refer to the System Components section.

VLP, XLP Series

Capacity:
10 - 75 tons

Maximum Daylight and Width:
47.68 & 38.98 inches

Maximum Operating Pressure:
10,000 psi

IMPORTANT!
Workshop press frames are designed exclusively for pressing operations, not for pulling. For pulling applications please contact Enerpac.



Optional V-Blocks for VLP and XLP Presses

Place upright to facilitate the positioning of pipes and bars, or upside down to serve as a convenient work table. Each model number includes two V-blocks.

To be used with press (ton)	V-Blocks Model Number
10	VB10
25	VB25
50	VB501
75	VB101



VLP 10 ton



XLP 25 ton

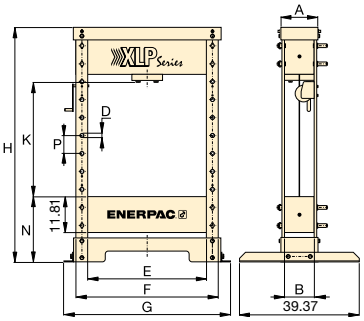

XLP 50, 75 ton

Speed (inches/sec) **		Dimensions (in)														Wt.	Press Model Number
Rapid Advance	Pressing	A	B	C	D	E	F	G	H	J	K	M	N	O	P	(lbs)	
0.10**	0.02**	4.33	3.15	–	–	17.13	–	21.26	24.21	29.61	16.73	–	3.15	–	–	108	VLP106P142U
0.45	0.07	4.33	3.15	–	–	17.13	–	21.26	24.21	29.61	16.73	–	3.15	–	–	119	VLP106PAT1U
0.13**	0.03**	10.63	5.51	20.08	1.26	20.08	24.80	27.95	63.78	67.13	14.06-47.68	5.51	8.58	42.20	4.80	364	XLP256P392U
0.39	0.05	10.63	5.51	–	1.26	20.08	24.80	27.95	63.78	67.13	14.06-47.68	–	8.58	42.20	4.80	375	XLP256XA11GU
0.22**	0.01**	12.20	9.45	–	1.26	38.98	46.85	54.72	76.97	–	8.27-37.80	–	21.46	–	5.91	1312	XLP506P802U
0.18	0.02	12.20	9.45	–	1.26	38.98	46.85	54.72	76.97	–	8.27-37.80	–	21.46	–	5.91	1323	XLP506XA12GU
0.98	0.09	12.20	9.45	–	1.26	38.98	46.85	54.72	76.97	79.53	8.27-37.80	–	21.46	–	5.91	1530	XLP5013ZEBU
0.98	0.09	12.20	9.45	–	1.26	38.98	46.85	54.72	76.97	79.53	8.27-37.80	–	21.46	–	5.91	1530	XLP5013ZEIU
0.13	0.02	16.54	12.99	–	1.65	38.98	48.43	56.30	76.97	–	8.07-37.60	–	21.46	–	5.91	1984	XLP756XA12GU

** = speed in inches per hand pump stroke

▼ Shown: **LH102 and TM5** (in middle)

TM, LH
Series

Capacity:
2,000 to 200,000 lbs.

Accuracy, % of full scale:
± 2%

TM and LH models are 100% tested to verify accuracy within a ± 2% range.

If your application requires a calibrated tool, it must be submitted for certification testing.

Certification is NOT available from Enerpac.

Tension Meter TM5

- **Accuracy, ± 2% of full scale**
- **Zinc and bronze plated to resist rust and corrosion**
- **Dual-range readout in kilograms and pounds**
- **Cushioned metal case provides safe storage and transport**
- **Maximum indicating pointer reading for pre-selected forces or to maintain maximum force readings**

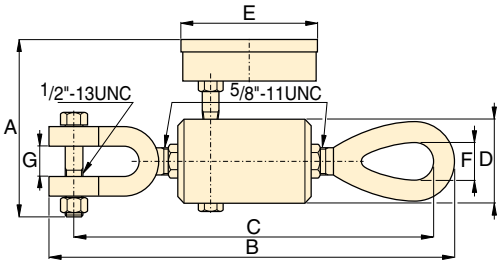

TM5

Load Cells LH Series

- **Accuracy, ± 2% of full scale**
- **Swivel loading pad reduces eccentric loading for improved accuracy**
- **Maximum indicating pointer reading for pre-selected forces or to maintain maximum force readings**
- **Dual-range readout in kilograms and pounds**

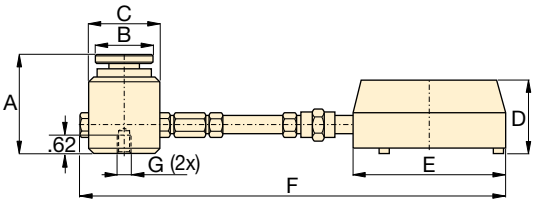

LH-Series

Type	Gauge Capacity		Model Number	Minimum Reading		Gauge Increments		Dimensions (in)						
	(lbs)	(kg)		(lbs)	(kg)	(lbs)	(kg)	A	B	C	D	E	F	G
Direct Mounted	10,000	4500	**TM5**	1,000	500	100	100	4.75	9.75	9.29	2.00	4.00	0.88	0.75
Direct Load Cell Mounted	2,000	900	**LH10**	200	100	20	20	3.06	1.75	2.25	2.38	4.00	10.00	¼"-20, 1.75" BC
	10,000	4500	**LH50**	1,000	500	100	100	3.06	1.75	2.25	2.38	4.00	10.00	¼"-20, 1.75" BC
Remote Mounted with 2 ft. Hose	2,000	900	**LH102**	200	100	20	20	3.06	1.75	2.25	2.38	5.81	33.31	¼"-20, 1.75" BC
	10,000	4500	**LH502**	1,000	500	100	100	3.06	1.75	2.25	2.38	5.81	33.10	¼"-20, 1.75" BC
	20,000	9000	**LH1002**	2,000	1000	200	200	3.06	1.75	2.25	2.38	5.81	33.10	¼"-20, 1.75" BC
Remote Mounted with 6 ft. Hose	50,000	21000	**LH2506**	5,000	2500	500	500	4.00	2.75	3.38	2.38	5.81	82.44	⅜"-24, 2.5" BC
	100,000	45000	**LH5006**	5,000	2500	1,000	1000	5.22	4.00	5.00	2.38	5.81	84.06	⅜"-24, 3.5" BC
	200,000	90000	**LH10006**	20,000	10000	2,500	1000	6.22	5.00	6.25	2.38	5.81	85.31	⅜"-24, 4.0" BC

With decades of experience and in-house capabilities look to Enerpac to help find solutions to your customization needs.

Next to our large range of standard workshop presses, Enerpac offers the possibility of customization. Because many customers have specific requirements, we offer turn-key project management, including design, engineering and manufacturing. As the market leader, we listen to our customers and with our world wide experience we offer the best solutions, especially when safety is not negotiable. Whether a longer stroke, wider frame or complete new design is required, our custom product group has many years of experience in multiple industries to deliver a solution that meets or exceeds expectations.

OVERVIEW

▲ *Enerpac's hydraulic presses can be configured to fulfill a broad range of applications. Each press is designed and manufactured according to customer specifications and in cooperation with our engineering team.*

◀ *Fully Automated PLC-Controlled 1800-Ton, High-Accuracy Press*

◀ *50-Ton Workshop Press for Maintenance Jobs*

◀ *100-Ton Press for Assembly of Spring-Loaded Cylinders*

CUSTOMIZABLE FEATURES:

- Capacity
- Cylinder Stroke
- Pump Type
- Controls
- Guarding
- Daylight Dimensions

CONFIGURATIONS

- Vertical and horizontal press
- Cylinders mounted in upper and lower bolsters
- Height built to customer specifications
- Daylight (vertical and horizontal) built to customer specifications

Enerpac offers a complete line of pullers with the widest range of sizes, capacities and styles. Whether your application requires mechanical or hydraulic force, Enerpac can satisfy your requirements.

Made of high strength steel alloys, you can depend on Enerpac pullers to provide years of trouble-free operation, even in the harshest environments.

Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying. Damage to parts is minimized through the use of controlled hydraulic power.

Lock-Grip Pullers

The puller's self-centering closing system allows all jaws to move simultaneously, making it easy for a single operator to mount the puller and to perform the application.

CAUTION!

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.

Always wear Safety Goggles and Gloves while using pullers.

Puller Section Overview

When selecting a puller it is important to consider three basic specifications:

1. Capacity:

The amount of force the puller is capable of producing.

Typically, the capacity required for a job can be determined by using the shaft diameter of the part being pulled.

For manual pullers, the center bolt diameter of the puller should be at least half the diameter of the shaft being pulled from.

For hydraulic pullers, the capacity in tons should be 7 to 10 times the shaft diameter. Use the following chart:

Shaft Diameter	Puller Capacity
0" to 1"	14 ton
1" to 2"	24 ton
2" to 3.5"	36 ton
3.5" to 5.5"	50 ton

2. Reach:

The distance between the bottom of the base and the jaw flats. The puller's reach must equal or exceed the same distance of the part being pulled.

3. Spread:

The distance between the jaws. The puller's spread needs to be greater than the width of the part being pulled.

Puller Function	Capacity (tons)	Puller Type	Series		Page
	14-50	**Master Puller Sets** Max. Reach: 27.56 in. Spread Range: 43.30 in.	BHP		184 ▶
	14-50	**Grip Puller Sets** Max. Reach: 27.56 in. Spread Range: 43.30 in.	BHP		185 ▶
	7-24	**Cross-Bearing Puller Sets** Max. Reach: 34.00 in. Spread Range: 22.83 in.	BHP		186 ▶ 193 ▶
	7-25	**Bearing Cup Pullers** Max. Reach: 5.91 in. Spread Range 9.45 in.	BHP		187 ▶
	7-25	**Bearing Separator** Max. Spread: 9.84 in. Max. Width 10.24 in.	BHP		187 ▶
	1-20	**Mechanical Sync-Grip Puller** Max. Reach: 4.13-23.62 in. Spread Range: 4.33-26.77 in.	SGM		190 ▶
	14-50	**Hydraulic Sync-Grip Puller Sets** Max. Reach: 12.60-27.56 in. Spread Range: 13.78-38.58 in.	MPS GPS SGH		191 ▶ 192 ▶
	3-40	**Mechanical Lock-Grip Pullers** Max. Reach: 4.02-13.19 in. Spread Range: 5.20-25.00 in.	LGM		194 ▶
	10-64	**Hydraulic Lock-Grip Pullers** Max. Reach: 8.46-16.06 in. Spread Range: 11.81-25.98 in.	LGH		196 ▶
	10-64	**Hydraulic Lock-Grip Master Pullers Sets** Max. Reach: 8.46-16.06 in. Spread Range: 11.81-25.98 in.	LGHMS		199 ▶
		**Internal Mechanical Pullers** Max. Reach: 1.77-3.11 in. Spread Range: 0.98-3.94 in.	IPM		200 ▶
	100	**Posi Lock® Hydraulic Pullers** Max. Reach: 48.0 in. Spread Range: 7.5-70 in.	EPH		201 ▶

▼ Shown: **Master Puller Set BHP3751G**

Multi-Purpose Puller Set

WARNING

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.

- **Supplied with a full hydraulic set including pump, hose, cylinder, gauge and gauge adaptor in a storage case**
- **High quality, forged steel components provide superior reliability and service**
- **Sets include speed crank and adjusting screw for fast contact to work before hydraulics are applied**
- **All Master Puller Sets include a Grip Puller, a Cross Bearing Puller, a Bearing Cup Puller and a Bearing Separator which can be ordered separately. See items 10, 20, 30 and 40**

▼ *Maintenance engineers throughout the industry greatly appreciate Enerpac Master Puller sets.*

▼ **SELECTION CHART**

	Master Puller Set Capacity	14 ton	24 ton	36 ton	50 ton*	Page Number
	Model Number ▶	**BHP1752**	**BHP2751G**	**BHP3751G**	**BHP5751G**	
	Included Hydraulics: **Set Weight ▶**	82 lbs	198 lbs	380 lbs	657 lbs	
	Hand Pump	P142	P392	P392	P80	**86-89** ▶
	Cylinder	RWH121900	RCH202	RCH302	RCH603	**34-35** ▶
	Saddle	–	HP2015	HP3015	HP5016	**35** ▶
	Hose	HC7206C	HC7206C	HC7206C	HC7206C	**149** ▶
	Gauge Adaptor Assembly	GA45GC	GA45GC	GA45GC	GA45GC	**162** ▶
	Included Pullers:					
10	Grip Puller	BHP1762	BHP252	BHP352	BHP552	**185** ▶
20	Cross Bearing Puller	BHP1772	BHP262	BHP362	BHP562	**186** ▶
30	Bearing Cup Puller	BHP180	BHP280	BHP380	BHP580	**187** ▶
40	Bearing Separator	BHP181	BHP282	BHP382	BHP582	**187** ▶

* Puller capacity at 7,850 psi

▼ Shown: **Grip Puller Set BHP351G**

BHP
Series

Capacity:
14, 24, 36 and 50 tons

Maximum Reach:
9.92 - 27.56 inches

Spread Range:
9.84 - 43.30 inches

Maximum Operating Pressure:
10,000 psi

WARNING

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.

- **Precise hydraulic control allows fast, efficient and safe pulling**
- **High quality, forged steel components provide superior reliability and service**
- **Available with and without full hydraulic set**

Ordering Example

Model Number BHP251G:

Includes Grip Puller BHP252 and a full hydraulic set. (Hand pump, cylinder, saddle, hose, gauge and gauge adaptor.)

Model Number BHP252:

Includes Grip Puller mechanical parts **only,** for use with your existing hydraulics.

▼ **SELECTION CHART**

	Grip Puller Set Capacity		14 ton	24 ton	36 ton	50 ton**
	Model Number	**Included ▶**	**BHP152**	**BHP251G**	**BHP351G**	**BHP551G**
	Hydraulics:	**set weight ▶**	48 lbs	123 lbs	200 lbs	353 lbs
	Hand Pump		P142	P392	P392	P80
	Cylinder		RWH121900	RCH202	RCH302	RCH603
	Saddle		–	HP2015	HP3015	HP5016
	Hose		HC7206C	HC7206C	HC7206C	HC7206C
	Gauge Assembly Adaptor		GA45GC	GA45GC	GA45GC	GA45GC
10	**Grip Puller ***	**Model Number ▶**	**BHP1762***	**BHP252***	**BHP352***	**BHP552***
	Spread Range (in)	2-jaw	9.84	15.75	23.38	35.43
		3-jaw	9.84	19.68	31.50	43.30
	Maximum Reach (in)	2-jaw	9.92	11.81	15.25	27.56
		3-jaw	9.92	11.81	15.25	27.56
	Jaw (in)	Thickness	0.59	0.79	0.98	1.18
		Width	0.94	1.10	1.50	1.57
	Adjusting Screw (in)	Thread	¾"-16 UNF	1"-8 UNC	1¼"-7 UNC	1⅝"-5.5 UNS
		Length	15.75	26.38	31.16	38.39

* Grip Puller model number without hydraulics.
** Puller capacity at 7,850 psi

▼ Shown: **Cross-Bearing Puller Set BHP361G**

BHP Series

Capacity:
7, 12, 18 and 25 tons

Maximum Reach:
14.06 - 34.00 inches

Maximum Spread Range:
10.24 - 22.83 inches

Maximum Operating Pressure:
5000 psi

WARNING!
Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.

- **Precise hydraulic control allows fast, efficient and safe pulling**
- **High quality, forged steel components provide superior reliability and service**
- **The Cross-Bearing Puller without hydraulics, Bearing Cup Puller and Bearing Puller may be ordered separately. See items 20, 30 and 40**

Cross Bearing Puller Sets			
Hand Pump	XA11G Air Pump	PUD1300 Electric Pump	XC1201M Cordless Pump
BHP162	BHP162A	BHP162EB *	BHP162CB *
BHP261G	BHP261GA	BHP261GEB *	BHP261GCB *
BHP361G	BHP361GA	BHP361GEB *	BHP361GCB *
BHP561G	BHP561GA	BHP561GEB *	BHP561GCB *

* **EB** for 115 V application
EE for 230 V application

▼ **SELECTION CHART –** Each set includes all items in columns*

	Cross-Bearing Puller Set Capacity		7 ton	12 ton	18 ton	25 ton
		* SET Model Number ▶	BHP162	BHP261G	BHP361G	BHP561G
	Included Hydraulics:	set weight ▶	57 lbs	137 lbs	267 lbs	408 lbs
	Hand Pump		P142	P392	P392	P80
	Cylinder		RWH121900	RCH202	RCH302	RCH603
	Saddle		–	HP2015	HP3015	HP5016
	Hose		HC7206C	HC7206C	HC7206C	HC7206C
	Gauge		GA45GC	GA45GC	GA45GC	GA45GC
20	SET includes Cross-Bearing Puller	Model Number ▶	BHP1772	BHP262	BHP362	BHP562
	Spread (in)	Maximum	10.24	13.58	17.32	22.83
		Minimum	4.53	5.51	7.09	8.66
	Reach (in)	Maximum	14.06	22.44	27.95	34.00
	Adjusting Screw (in)	Diameter	¾"-16 UNF	1"-8 UNC	1¼"-7 UNC	1⅝"-5.50 UNS
		Length	15.75	26.38	31.10	38.39
	Leg (in)	Length	4.17	4.53	8.07	23.98
		Length	14.06	9.45	18.11	34.02
		Length	–	16.54	27.95	–
		Length	–	22.44	–	–
	Upper Leg Ends (in)	Thread	¾"-16 UNF	¾"-16 UNF	1"-14 UNS	1¼"-12 UNF
	Lower Leg Ends (in)	Thread	⅝"-18 UNF	⅝"-18 UNF	1"-14 UNS	1¼"-12 UNF
30	SET includes Bearing Cup Puller	Model Number ▶	BHP180	BHP280	BHP380	BHP580
40	SET includes Bearing Separator	Model Number ▶	BHP181	BHP282	BHP382	BHP582
	SET includes Wooden Case	Model Number ▶	CW166	CW166	CW550	CW750

* Each set includes Cross-Bearing Puller, Bearing Cup Puller, Bearing Separator and Case

▼ Shown: **BHP180**

Bearing Cup Puller

- **Made of high strength steel alloy**
- **Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts**
- **Adjustable to fit a variety of bearings and seals**

BHP
Series

Capacity:
7, 12, 18 and 25 tons

Maximum Reach:
4.53 - 5.91 inches

Maximum Spread Range:
5.71 - 9.84 inches

Maximum Operating Pressure:
5000 psi

▼ SELECTION CHART

Capacity*		7 ton	12 ton	18 ton	25 ton
30 Bearing Cup Puller					
Model Number ▶		**BHP180**	**BHP280**	**BHP380**	**BHP580**
Spread (in)	Max.	5.71	6.30	9.45	9.45
	Min.	1.57	1.26	2.36	2.36
Reach (in)	Max.	4.53	5.51	5.91	5.91
Center Screw	Thread	¾"-16 UNF	1"-8 UNC	1¼"-7 UNC	1⅝"-5.50 UNS

* Bearing cup puller rated at 50% of puller capacity.

WARNING!
Do not exceed 50% of the rated puller capacity when using a double crosshead (2 grip arms) or when using puller legs in combination with bearing puller attachment.

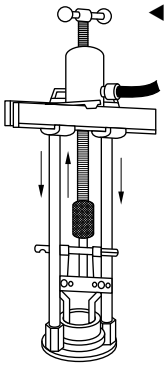

◀ *Bearing Cup Puller shown with Cross Bearing Puller attachment.*

▼ Shown: **BHP181**

Bearing Separator

- **Made of high strength steel alloy**
- **Wedge-shaped edges allow removal of the most hard-to-grip components**
- **Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts**



Bearing Separator shown with Cross Bearing Puller attachment. ▶

▼ SELECTION CHART

Capacity**		7 ton	12 ton	18 ton	25 ton
40 Bearing Separator					
Model Number ▶		**BHP181**	**BHP282**	**BHP382**	**BHP582**
Spread (in)	Max.	4.33	5.28	9.84	9.84
	Min.	0.39	0.47	0.67	0.67
Width (in)		4.33	6.10	10.24	10.24
Thread		⅝"-18 UNF	⅝"-18 UNF	1"-14 UNS	1¼"-12 UNF

* Bearing separator rated at 50% of puller capacity.



Bearing Separator

Bearing Separator has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Separator should be used with the Cross Bearing Puller.

OVERVIEW

The Enerpac Sync Grip multi-purpose puller range is designed to make your jobs easier and safer to accomplish.

Remove bearings, bushings, gears, sleeves, wheels and flywheels, sprockets and other shaft mounted items simply and effectively.

Mechanical and hydraulic configurations are available with a variety of optional accessories that expand application range and increase utility.

Hydraulic models are available in standard sets which include detachable hydraulic cylinders and a choice of pump options, along with a gauge assembly and hose for safe monitoring of applied pulling forces.

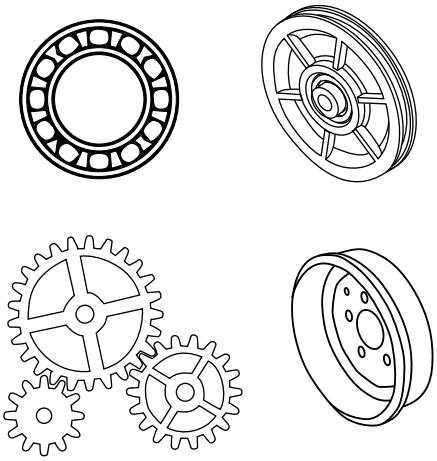

Always wear safety goggles and gloves while using pullers.

WARNING!
Do not exceed 50% of the rated puller capacity when using two jaw configurations.

▼ DIMENSIONAL DATA

Puller Capacity	Puller Model No.	Sync-Grip Pullers Dimensions (in)								Wt.***
		Standard Reach Jaws		Optional Extended Reach Jaws		Jaw Tip			Jaw Hole Spacing	
		Max. Reach	Max. Spread	Max. Reach	Max. Spread	Height	Width	Thickness		
(ton)		A	B	A	B	D	E	F	(in)	(lbs)
Mechanical Pullers										
1	SGM01*	4.13	4.33	—	—	0.31	0.28	0.30	0.75	1.8
4	SGM04*	7.28	6.89	—	—	0.30	0.31	0.83	2.01	4.4
7	SGM07*	8.86	9.45	—	—	0.39	0.31	0.98	1.75	14.3
10	SGM10*	16.14	13.78	19.29	15.94	0.49	0.59	0.98	3.27	32.0
20	SGM20	23.62	26.77	25.20	28.35	0.87	0.94	1.61	4.92	122.3
Hydraulic Pullers										
14	SGH14*	12.60	13.78	15.75	15.94	0.49	0.59	0.98	3.27	55.1
24	SGH24	12.60	18.90	17.13	21.26	0.61	0.69	1.22	4.53	108.0
36	SGH36	16.14	25.59	20.67	28.35	0.87	0.94	1.61	4.92	165.3
50**	SGH64	27.56	38.58	33.46	42.52	1.18	1.06	1.97	5.91	363.7
100	SGH100	39.37	63.00	—	—	1.79	1.94	2.76	9.84	842

* Puller can be set up as a 2 or 3 jaw configuration.
** Puller capacity at 7,850 psi, maximum cylinder capacity @ 10,000 psi is 64.6 tons.
*** With standard legs and cylinder for hydraulic models

Sync-Grip Pullers: available in both mechanical or hydraulic versions. Some models can be configured as a two jaw puller, however, three jaws are recommended for most even distribution of pulling forces.

Cross Puller: hydraulically powered via detachable cylinder and choice of pump. The Cross Puller can be used individually as a 'push' puller or in conjunction with the Bearing Separator or Bearing Cup Puller.

Bearing Separator: use where access is restricted. The Bearing Separator is used in conjunction with the Cross Puller.

Bearing Cup Puller: specifically designed for cup style bearing and other applications requiring an internal style puller.

Detachable Hollow Cylinder: provided with all hydraulic puller models including both the standard Sync Grip and Cross Puller.

In Sync Grip, Cross Bearing and Master Puller Sets, a hose and gauge are provided as standard along with your choice of pump; including manual hand operated, cordless battery powered, electric or air powered. In each case the pump selection has been optimized for compatibility with the pullers.

Easy To Use

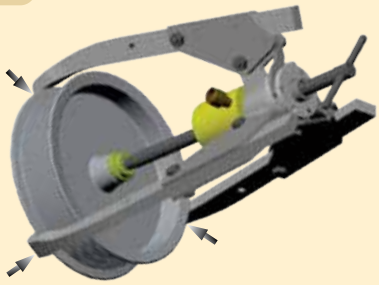

Simple, Safe, Productive

All three jaws close simultaneously making the puller easier and safer to operate.

The synchronous feature of the SGM and SGH-Series Pullers makes positioning the puller simple and helps prevent misalignment.

▼ DIMENSIONAL DATA

Cross Puller Dimensions (in)			Wt.**	Bearing Separator Dims. (in)				Wt.	Bearing Cup Dimensions (in)							Wt.
													Spread Range		Jaw Tip			
Standard Leg Height	Long Leg Height	Maximum Spread		Dia.	Min. Spread	Max. Spread	Thread Size		Height	Height	Min. Spread	Max. Spread					
A	A	B	(lbs)	A	B	B	C	(lbs)	A	B	C	C	D	E	F	(lbs)
Mechanical Pullers				**Mechanical Pullers**					**Mechanical Pullers**							
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hydraulic Pullers				**Hydraulic Pullers**					**Hydraulic Pullers**							
4.17	14.06	10.24	40.77	4.33	0.39	4.33	5/8"- 18 UNF	6.0	4.53	9.33	1.57	5.71	0.20	0.18	1.22	4.41
4.53	22.44	13.58	76.04	6.10	0.47	5.28	5/8"- 18 UNF	12.6	5.51	10.47	1.26	6.30	0.18	0.18	0.98	5.29
8.07	27.95	17.32	123.42	10.24	0.67	9.84	1" - 14 UNS	62.8	5.91	12.20	2.36	9.45	0.31	0.43	2.17	13.22
23.97	34.01	22.83	250.15	10.24	0.67	9.84	1-1/4"- 12 UNF	62.8	5.91	12.20	2.36	9.45	0.31	0.43	2.17	14.11
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

** With cylinder and standard legs

▼ Shown: **SGM10 with three jaws**

SGM
Series

Puller Capacity:
1 - 20 tons

Maximum Reach:
4.1 - 23.6 inches

Maximum Spread:
4.3 - 26.8 inches

- **Sync-Grip mechanism synchronizes movement of all jaws for simultaneous engagement, helping to prevent misalignment for safe and easy use**
- **Threaded spindle and jaw indexes provide adjustable reach**
- **Three-jaw configuration for even load distribution**
- **Two-jaw configuration for confined access applications available on all pullers 10 ton and below (not available on SGM20)**
- **High-strength forged jaws for superior reliability**
- **Suitable for a variety of applications including bearings, bushings, wheels, gears and pulleys**

Dimensions
Dimensional information for all puller models is included in the dimensional overview table:

Page: 188

WARNING!
Do not exceed 50% of the rated puller capacity when using two jaw configurations.

▼ *SGM10 with two jaws.*

▼ **DIMENSIONAL DATA**

Puller Capacity (ton)	Puller Model No.	Dimensions (in) Max. Reach A	Max. Spread B	Weight (lbs)	Long Jaw Sets Model No.*	Dimensions (in) Max. Reach A	Max. Spread B
1	**SGM01**	4.13	4.33	1.8	–	—	—
4	**SGM04**	7.28	6.89	4.4	–	—	—
7	**SGM07**	8.86	9.45	14.3	–	—	—
10	**SGM10**	16.14	13.78	32.0	**SG1002K**	19.29	15.94
20	**SGM20**	23.62	26.77	122.3	**SG3002K**	25.20	28.35

* Jaw sets include three jaws.

Hydraulic Sync-Grip Master Puller Sets

▼ Shown: **MPS14H**

SGH, MPS
Series

Puller Capacity:
14 - 50 tons

Maximum Reach:
12.6 - 27.6 inches

Maximum Spread:
13.8 - 38.6 inches

Maximum Operating Pressure:
10,000 psi

- **Sync-Grip mechanism synchronizes movement of all jaws for simultaneous engagement**
- **Hydraulically applied pulling force increases pulling capacity reducing operator fatigue**
- **Standard jaws adjust to accommodate different reach requirements. Optional long jaw sets available for additional reach requirements**
- **Designed for applications including pulling, pushing and dismounting gears, bearings, bushings, etc.**

Dimensions
Dimensional information for all puller models is included in the dimensional overview table:

Page: 188

Sets Include:[1)]

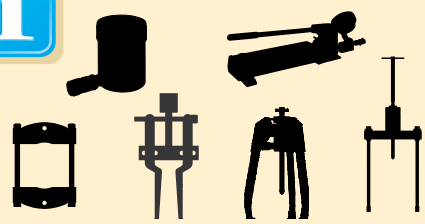

[1)] Choose pump options below.

▼ **DIMENSIONAL DATA**

Puller Capacity (ton)	Model No. (Puller and Cylinder)	Stroke (in)	Dimensions (in) Max. Reach A	Dimensions (in) Max. Spread B	Wt. (lbs)	Hydraulic Puller Sets: Hand Pump	Air Pump	Electric Pump	Cordless Pump	All Sets Include:	Long Jaw Sets Model No.***	Dimensions (in) Max. Reach A	Dimensions (in) Max. Spread B
14	**SGH14**	1.0	12.60	13.78	55.1	**MPS14H**	**MPS14A**	**MPS14E**	**MPS14C**	*	**SG1002K**	15.75	15.94
24	**SGH24**	2.0	12.60	18.90	108.0	**MPS24H**	**MPS24A**	**MPS24E**	**MPS24C**	**GA45GC & HC7206C**	**SG2002K**	17.13	21.26
36	**SGH36**	2.5	16.14	25.59	165.3	**MPS36H**	**MPS36A**	**MPS36E**	**MPS36C**		**SG3002K**	20.67	28.35
50**	**SGH64**	3.0	27.56	38.58	363.7	**MPS64H**	**MPS64A**	**MPS64E**	**MPS64C**		**SG6002K**	33.46	42.52

* 14-ton sets include an AR630 female coupler, GA45 gauge adaptor, and G2535L gauge.
** Puller capacity at 7,850 psi, maximum cylinder capacity @ 10,000 psi is 64.6 tons.
*** Jaw sets include three jaws.

For 115 V application add "B" suffix
For 230 V application add "E" suffix

▼ Shown: **GPS14H**

SGH, GPS Series

Puller Capacity:
14 - 100 tons

Maximum Reach:
12.6 - 39.4 inches

Maximum Spread:
13.8 - 63.0 inches

Maximum Operating Pressure:
10,000 psi

- **Sync-Grip mechanism synchronizes movement of all jaws for simultaneous engagement**
- **Hydraulically applied pulling force increases pulling capacity and reduces operator fatigue**
- **Threaded spindle and jaw indexes provide adjustable reach**
- **Three-jaw configuration for even load distribution**
- **High-strength forged jaws for superior reliability**
- **The versatile puller set facilitates safe and easy dismounting in a variety of applications**

Dimensions
Dimensional information for all puller models is included in the dimensional overview table:

Page: 188

Sets Include:[1)]

[1)] Choose pump options below.

▼ DIMENSIONAL DATA

Puller Capacity (ton)	Model No. (Puller and Cylinder)	Stroke (in)	Dimensions (in) Max. Reach A	Dimensions (in) Max. Spread B	Wt. (lbs)	Hydraulic Puller Sets: Hand Pump	Air Pump	Electric Pump	Cordless Pump	All Sets Include:	Long Jaw Sets Model No.***	Dimensions (in) Max. Reach A	Dimensions (in) Max. Spread B
14	**SGH14**	1.0	12.60	13.78	55.1	**GPS14H**	**GPS14A**	**GPS14E**	**GPS14C**	*	**SG1002K**	15.75	15.94
24	**SGH24**	2.0	12.60	18.90	108.0	**GPS24H**	**GPS24A**	**GPS24EE**	**GPS24CC**	**GA45GC**	**SG2002K**	17.13	21.26
36	**SGH36**	2.5	16.14	25.59	165.3	**GPS36H**	**GPS36A**	**GPS36E**	**GPS36C**	**&**	**SG3002K**	20.67	28.35
50**	**SGH64**	3.0	27.56	38.58	363.7	**GPS64H**	**GPS64A**	**GPS64E**	**GPS64C**	**HC7206C**	**SG6002K**	33.46	42.52
100	**SGH100**	3.0	39.37	63.00	842.0	**—**	**—**	**GPS100E**	**—**	**HC7206C**	**—**	—	—

* 14-ton sets include an AR630 female coupler, GA45 gauge adaptor, and G2535L gauge.
** Puller capacity at 7,850 psi, maximum cylinder capacity @ 10,000 psi is 64.6 tons.
*** Jaw sets include three jaws.

For 115 V application add "B" suffix
For 230 V application add "E" suffix

Cross-Bearing Puller Sets

▼ Shown: **Cross-Bearing Puller Set BHP361G**

- **Precise hydraulic control allows fast, efficient and safe pulling**
- **High-quality forged components provide superior reliability and service**
- **Quick set-up to tackle a variety of jobs**

BHP
Series

Puller Capacity:
7 - 25 tons

Maximum Reach:
14.1 - 34 inches

Maximum Spread:
10.2 - 22.8 inches

Maximum Operating Pressure:
10,000 psi

WARNING!
Enerpac cylinder and pump can be operated to 10,150 psi, but should not be operated past 5,075 psi when using the cross bearing puller set tools.

Dimensions
Dimensional information for all puller models is included in the dimensional overview table:

Page: 188

Sets Include:[1)]

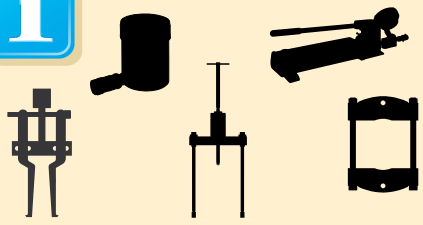

[1)] Choose pump options below.

▼ **DIMENSIONAL DATA**

Puller Capacity* (ton)	Cross-Bearing Only Model No.	Stroke (in)	Dimensions (in) Maximum Reach A	Dimensions (in) Maximum Spread B	Cross Bearing Puller Sets Hand Pump	Air Pump	Electric Pump	Cordless Pump
7	**BHP1772**	1.0	14.06	10.24	**BHP162**	**BHP162A**	**BHP162E**	**BHP162C**
12	**BHP262**	2.0	22.44	13.58	**BHP261G**	**BHP261GA**	**BHP261GE**	**BHP261GC**
18	**BHP362**	2.5	27.95	17.32	**BHP361G**	**BHP361GA**	**BHP361GE**	**BHP361GC**
25	**BHP562**	3.0	34.01	22.83	**BHP561G**	**BHP561GA**	**BHP561GE**	**BHP561GC**

* Cross Puller, Bearing Cup Puller and Bearing Separator rated at 50% of Grip Puller capacity.

For 115 V application add "B" suffix
For 230 V application add "E" suffix

▼ Shown: **2 and 3-Jaw Mechanical Lock-Grip Pullers**

- **Quickly and easily mount on a wide range of applications**
- **Lock-on jaws offer a secure grip for safe and easy operation**
- **Synchronous jaw movement enables entire pulling job to be performed by a single operator**
- **Available in 2 and 3-jaw configurations**

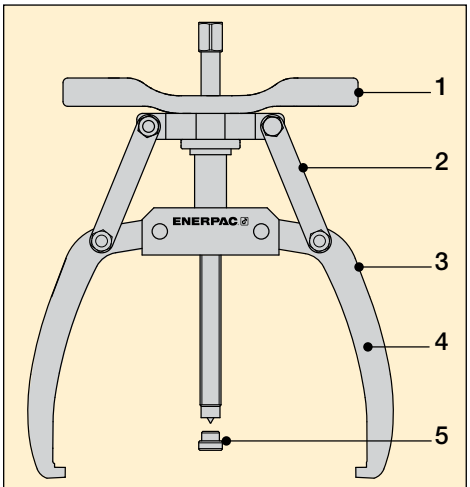

1. Convenient adjustment handle simplifies positioning of jaws on application and increases speed of operation.
2. Locking mechanism helps prevent puller jaws from slipping off application during pulling process.
3. Greater spreading width on top portion of jaws enables use on thicker objects.
4. Synchronous jaw movement increases ease of use, allowing one operator to mount the tool and perform the pulling application.
5. Point protector helps prevent damage to spindle when pulling against a flat surface.

▼ *Lock-Grip Pullers – the simple, safe and cost-effective way to remove shaft-mounted parts.*

Mechanical Lock-Grip Pullers

LGM-Series Pullers are an ideal solution for pulling small to medium-size wheels, sprockets, bearings and other similar shaft-mounted parts. The puller's self- centering closing system allows all jaws to move simultaneously, making it easy for a single operator to mount the puller and to perform the application.

Turning the puller handle locks the jaws onto the application, allowing the desired object to be pulled free when the spindle is turned.

LGM Series

Puller Capacity:
3 - 40 tons

Maximum Reach:
4.02 - 13.19 inches

Maximum Spread:
5.20 - 25 inches

IMPORTANT!
Always wear safety goggles and gloves while using pullers.

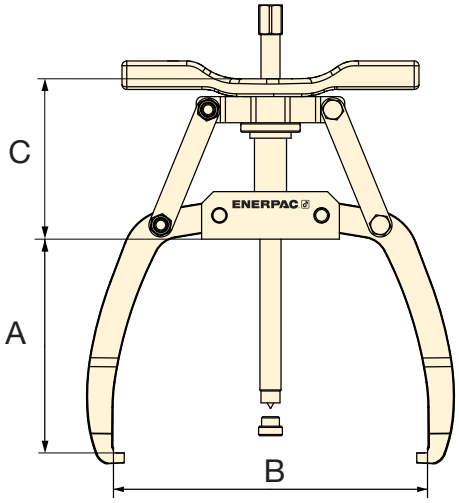

Point Protector

LGM-Series Pullers MUST be used with a point protector if the shaft end does not contain a drilled center hole.

One point protector is included with every puller.

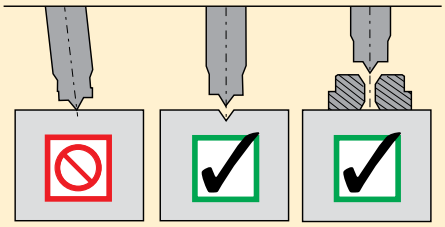

▼ SELECTION CHART

Puller Model No.	Dimensions (in)				Number of Jaws	Puller Capacity	Maximum Torque	Weight	Replacement Point Protector Item Number
	Maximum Reach A	Minimum Spread Dia. B	Maximum Spread Dia. B	C		(ton)	(ft-lbs)	(lbs)	
LGM203	4.02	1.10	5.20	2.36	2	3	30	3.74	**SGM0404**
LGM305	4.02	1.10	5.20	2.36	3	5	50	4.62	
LGM204	5.59	1.18	7.32	3.54	2	4	50	5.50	
LGM306	5.59	1.18	7.32	3.54	3	6	74	6.82	
LGM207	6.97	1.38	10.24	5.28	2	7	87	10.78	**SGM0704**
LGM308	6.97	1.38	10.24	5.28	3	8	99	15.18	
LGM211	8.46	3.31	11.81	4.96	2	11	150	14.74	
LGM318	8.46	4.33	15.35	5.51	3	18	245	21.56	
LGM324	10.43	4.33	18.11	5.51	3	24	327	30.64	**LGH14K6**
LGM340	13.19	3.94	25.00	7.68	3	40	735	79.37	**LGH24K6**

▼ Shown: **2 and 3-Jaw Hydraulic Lock-Grip Pullers**

- **Quickly and easily mount on a wide range of applications**
- **Hydraulically applied pulling force increases pulling capacity, reducing operator fatigue**
- **Lock-on jaws offer a secure grip for safe and easy operation**
- **Synchronous jaw movement enables entire pulling job to be performed by a single operator**
- **Available in 2 and 3-jaw configurations with or without a detachable hollow cylinder**

Point Protector

LGH-Series Pullers MUST be used with a point protector if the shaft end does not contain a drilled center hole.

One point protector is included with every puller.

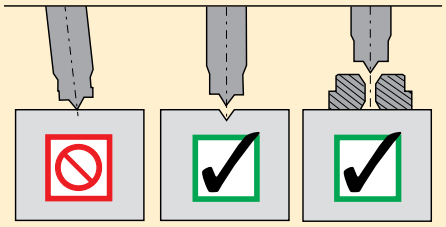

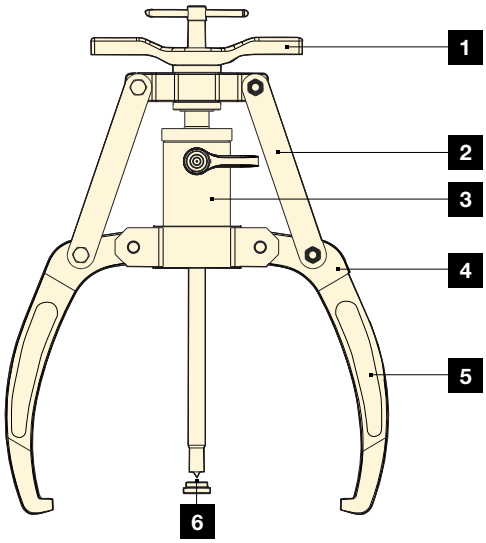

1. Convenient adjustment handle simplifies positioning of jaws on application and increases speed of operation.
2. Locking mechanism helps prevent jaws from slipping off application during pulling process.
3. Detachable hollow cylinder offers increased pulling capacity compared to mechanical alternatives.
4. Greater spreading width on jaws enables use on thicker objects.
5. Synchronous jaw movement increases ease of use, allowing one operator to mount the tool and perform the pulling application.
6. Point protector helps prevent damage to spindle when pulling against a flat surface.

Hydraulic Lock-Grip Pullers

LGH-Series Pullers provide the same safety and ease of use as their mechanical counterparts, with the pulling force applied by a standard 10,150 psi hydraulic cylinder. LGH-Series Pullers can apply up to 64 tons of force and are perfect for removing larger shaft-mounted objects up to 26 inches in diameter.

Turning the puller handle locks the jaws onto the application, allowing the desired object to be pulled free when the spindle is turned.

LGH Series

Puller Capacity:
10 - 64 tons

Maximum Reach:
8.46 - 16.06 inches

Maximum Spread:
11.81 - 25.98 inches

Maximum Operating Pressure:
10,150 psi

IMPORTANT!
Always wear safety goggles and gloves while using pullers.

Model Numbers Without a Cylinder

To order a puller without cylinder, add "NC" after "LGH".

Example: LGHNC210

Sets Include:[1) 2)]

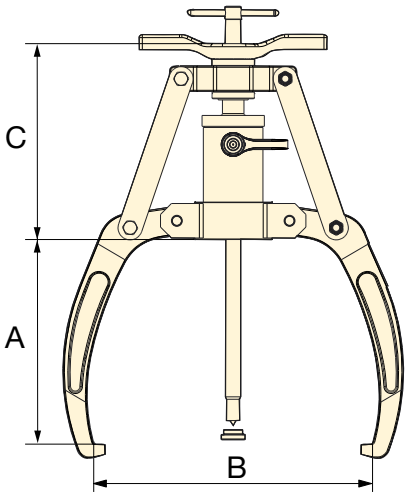

[1)] Choose pump options below.
[2)] All sets include hose model number HC7206C.

▼ DIMENSIONAL DATA

Puller Model No.*	Dimensions (in)				No. of Jaws	Puller Cap.	Wt.	Replacement Point Protector Item Number	Hydraulic Puller Sets[1) 2)]			
	Max. Reach A	Min. Spread Dia. B	Max. Spread Dia. B	C		(ton)	(lbs)		Hand Pump (P392) Gauge (GA45GC)	Air Pump (XA11G) Integrated Gauge	Electric Pump (PUD1300) Gauge (G2535L)	Cordless Pump (XC1201M) Gauge (GA45GC)
LGH210	8.46	3.31	11.81	7.56	2	10	22.66	**SGM0704**	—	—	—	—
LGH310	8.46	3.31	11.81	7.56	3	10	27.94	**SGM0704**	**LGHS310H**	**LGHS310A**	**LGHS310E**	**LGHS310C**
LGH214	10.24	4.92	14.96	7.32	2	14	31.24	**LGH14K6**	—	—	—	—
LGH314	10.24	4.92	14.96	7.32	3	14	40.04	**LGH14K6**	**LGHS314H**	**LGHS314A**	**LGHS314E**	**LGHS314C**
LGH224	13.23	6.50	18.90	12.80	2	24	82.28	**LGH24K6**	—	—	—	—
LGH324	13.23	6.50	18.90	12.80	3	24	104.06	**LGH24K6**	**LGHS324H**	**LGHS324A**	**LGHS324E**	**LGHS324C**
LGH253	16.06	9.06	25.98	18.62	2	53	243.76	**LGH253K6**	—	—	—	—
LGH364	16.06	9.06	25.98	18.62	3	64	306.90	**LGH253K6**	**LGHS364H**	**LGHS364A**	**LGHS364EB**	**LGHS364C**

*Standard models include cylinder. To receive puller without cylinder add "NC" after LGH (Example: LGHNC210).

For 115 V application add "B" suffix
For 230 V application add "E" suffix

Hydraulic Lock-Grip Master Puller Sets

ENERPAC

Master Puller Set includes a hydraulic puller, cylinder, a pump with hose and gauge for standard pulling applications, as well as a selection of accessories designed for work environments where clearance prevents a direct application of the puller jaws.

Lock-Grip Pullers: All sets come with a hydraulic LGH-Series Puller. Both two jaw and three jaw versions are available.

Detachable Hollow Cylinder: Provided with all hydraulic pullers as well as the Cross Puller.

Pump with Hose and Gauge: Puller Sets and Master Puller Sets are supplied with a hose, gauge, and your choice of a hand, air, electric or cordless pump.

Cross Puller: Hydraulically powered via a detachable hydraulic cylinder and pump. The Cross Puller can be used individually as a 'push' puller, or in conjunction with the Bearing Separator or Bearing Cup Puller.

Bearing-Cup Puller: Specifically designed to pull cup style bearings and other applications requiring an internal style puller.

Bearing Separator (used with Cross Bearing Puller): Features narrow edges, which enable puller to be placed behind hard to reach bearings, gears, etc., where limited clearance prevents the direct application of puller arms.

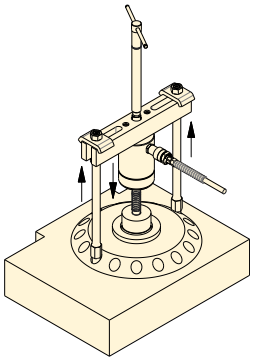

▲ *Cross Puller on application*



▲ *Cross Puller with Bearing Cup Puller on application*



▲ *Cross Puller with Bearing Separator on application*

▼ DIMENSIONAL DATA

Puller Model No.	Cross Puller Dimensions (in)					Thread Size	Wt.*
	Model No.	A	Min. B		C		(lbs)
LGH310	BHP112	11.02	4.53		5/8"-18 UNF		4.40
LGH314	BHP172	11.02	4.53		5/8"-18 UNF		4.62
LGH324	BHP272	14.57	5.51		5/8"-18 UNF		5.28
LGH364	BHP672	24.21	8.66		1 1/4"-12 UNF-2A		14.08

Bearing Separator Dimensions (in)					Wt.
Model No.	A	Min. B	Max. B		(lbs)
BHP181	4.33	0.39	4.33		6.16
BHP282	6.14	0.47	5.28		12.54
BHP292	7.17	0.51	8.27		27.5
BHP682	11.81	0.79	11.81		95.7

Bearing Cup Puller Dimensions (in)					Wt.
Model No.	A	B	Min. C	Max. C	(lbs)
BHP180	5.31	9.29	1.57	5.71	4.4
BHP190	6.46	10.43	1.57	5.71	4.62
BHP280	6.46	10.43	1.57	5.71	5.28
BHP580	5.91	12.20	2.36	9.45	14.08

* With slotted crosshead, cylinder, and spindle

Hydraulic Lock-Grip Master Puller Sets

▼ Shown: **LGHMS Master Puller Set with Hand Pump Option**

LGHMS
Series

Puller Capacity:
10 - 64 tons

Maximum Reach:
8.46 - 16.06 inches

Maximum Spread:
11.81 - 25.98 inches

Maximum Operating Pressure:
10,150 psi

WARNING!
Enerpac cylinders and pumps can be operated to 10,150 psi, but should not be operated past 5,000 psi when using the Cross Bearing Puller Set tools.

- **All LGHMS-Series Master Puller Sets include an LGH-Series Puller, a Cross Puller, a Bearing Separator, a Bearing Cup Puller, a detachable Hollow Cylinder, a hose, a gauge and a pump**
- **Set options include hand, air, electric and cordless pumps for an optimal solution to every application**

Dimensions
Dimensional information for all puller models is included in the dimensional overview table:

Page: 188

Sets Include:[1) 2)]

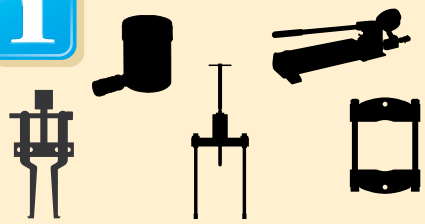

[1)] Choose pump options below.
[2)] All sets include hose model number HC7206C.

▼ **DIMENSIONAL DATA**

Puller Model No.	Dimensions		Number of Jaws	Puller Capacity	Replacement Point Protector Item Number	Hydraulic Master Puller Sets[1) 2)]			
	Minimum Spread (in)	Maximum Spread (in)		(ton)		Hand Pump (P392) Gauge (GA45GC)	Air Pump (XA11G) Integrated Gauge	Electric Pump (PUD1300) Gauge (G2535L)	Cordless Pump (XC1201M) Gauge (GA45GC)
LGH310	3.31	11.81	3	10	**SGM0704**	**LGHMS310H**	**LGHMS310A**	**LGHMS310E**	**LGHMS310C**
LGH314	4.92	14.96	3	14	**LGH14K6**	**LGHMS314H**	**LGHMS314A**	**LGHMS314E**	**LGHMS314C**
LGH324	6.50	18.90	3	24	**LGH24K6**	**LGHMS324H**	**LGHMS324A**	**LGHMS324E**	**LGHMS324C**
LGH364	9.06	25.98	3	64	**LGH253K6**	**LGHMS364H**	**LGHMS364A**	**LGHMS364E**	**LGHMS364C**

For 115 V application add “B” suffix
For 230 V application add “E” suffix

▼ Shown: **IPM3**

IPM
Series

Maximum Reach:
1.77 - 3.11 inches

Spread Range:
0.98 - 3.94 inches

IMPORTANT!
Always wear Safety Goggles and Gloves while using pullers.

- **Remove bearings or other shaft-mounted parts where no spindle support is available**
- **Slide hammer allows for application of safe, high-impact force**
- **Includes two sets of jaws for internal and external pulling applications**

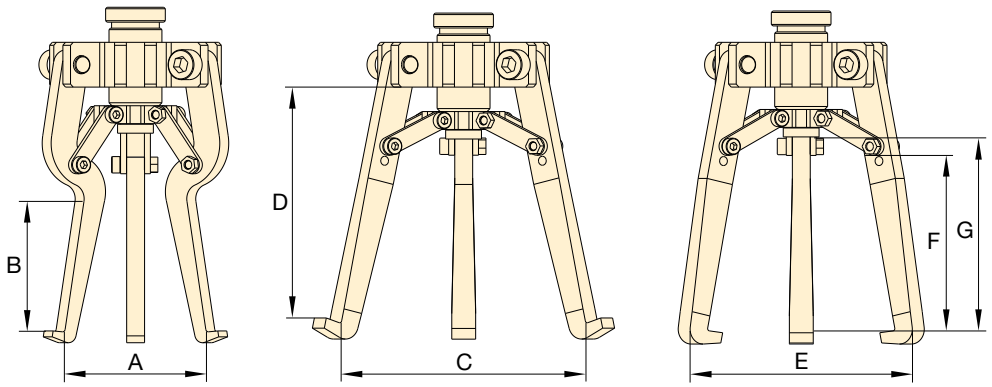

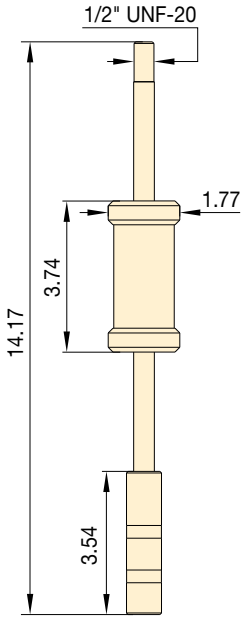

Slide Hammer Dimensions (in)

▼ **DIMENSIONAL CHART**

Model Number	Internal Jaw Dimensions (in)			Standard Jaw Dimensions (in)							Weight
				Internal Configuration			External Configuration				
	Spread Diameter A		Maximum Reach B	Spread Diameter C		Maximum Reach D	Spread Diameter E		Maximum Reach F	G	
	(min)	(max)		(min)	(max)		(min)	(max)			(lbs)
IPM3	0.98	2.36	1.77	2.36	3.94	3.11	0.59	2.95	2.16	2.75	4.60

Posi Lock® 100-Ton Hydraulic Grip Pullers

▼ **EPH1003**

EPH Series

Capacity:
100 tons

Maximum Reach:
48 inches

Spread Range:
7.5 - 70 inches

Maximum Operating Pressure:
10,000 psi

- **Roller cart with power lift**
- **Adjustable jaw tips**
- **Puller easily detaches from cart**
- **Self-contained unit**
- **Puller height range 26.5" to 66.5"**

Pushing Adaptors

All Posi Lock 100 Ton Hydraulic Pullers include (3) pushing adaptors.

Diameter (in)	Overall Length (in)	Model Number
3.5	29	**EPHT1162**
3.5	19	**EPHT1163**
3.5	9	**EPHT1164**

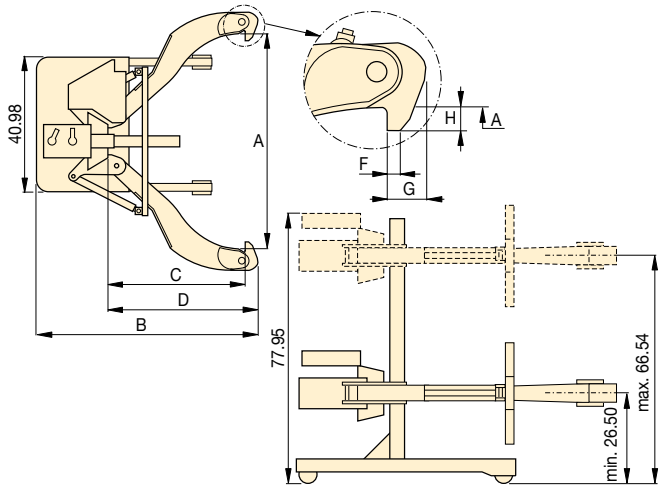

▲ *The EPH1002 quickly and easily removes this drive coupler from its shaft.*

Number of Jaws	Max. Spread (in)	Capacity (tons)	Model Number	Dimensions (in)							Weight (lbs)
				Spread Range A	Overall Length B	Reach (max.) C	Jaw Length D	Jaw Width F	Tip Clearance G	Tip Depth H	
2	70.00	100	**EPH1002**	7.5-70.0	77.00	48.00	53.00	1.25	3.5	3.5	1700
3	70.00		**EPH1003**	7.5-70.0	77.00	48.00	53.00	1.25	3.5	3.5	1950

Enerpac offers an extensive range of dedicated tools for a variety of specific and flexible applications. Whatever your requirement… punching, spreading or bending… you can be sure that Enerpac has the correct tool to do your job safely and efficiently.

Featuring maintenance sets, machine lifts and load skates, as well as hole punches pipe benders and cable cutters, Enerpac has the tools to ensure that even your most demanding applications can be undertaken with the highest degree of safety and accuracy.



Pump and Tool Sets

Selected hydraulic tools in this section are available in sets, for a perfect tool/pump match.

Hydraulic System Setup

Check out our "Yellow Pages" section for help on system setups and valving configurations.

Page: 399

Hydraulic, Electric and Manual Cutters

Enerpac Cutters can be found in the Cutter section of this catalog.

Page: 221

Specialty Tool Section Overview

Capacity (tons)	Tool Type and Functions	Series		Page
2.5 - 12.5	Maintenance Sets	MS		204 ▶
35 - 50	Punch, Punch Sets	SP MSP STP		208 ▶
16	Lifting Wedge	LW		212 ▶
8.5 - 20	Hydraulic Machine Lifts	SOH		213 ▶
1 - 80	Heavy-Duty Load Skates	ER ES ELP		214 ▶
0.67 - 16 (cu. feet)	Industrial Storage Cases	CM		216 ▶
0.75 - 1.00	Hydraulic Wedgie Spread Cylinders	A WR		217 ▶
Nominal Bore 1/2 - 4 inches	Pipe Bender Sets	STB		218 ▶

▼ Shown: **MS210**

The Universal Hydraulic Tool Box

- **All sets include Enerpac pump, hose, cylinder and gauge**
- **Lock-on or threaded connectors**
- **Complete set for almost every maintenance application**

Maintenance Sets

Enerpac Maintenance sets are a complete assortment of accessories matched to hydraulic powered tools. Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12.5 tons.

More Information

For detailed information on all included attachments, see the following pages.

Page: 206

Clamping a workpiece is just one of the many applications for the Enerpac maintenance sets. ▶

▼ **QUICK SELECTION CHART**

Capacity using attachments* (tons)	Set Model Number						Number of Attachment Components	Weight (lbs)
2.5	**MS24**	P142	HC7206	RC55	GP10S	GA4	33	59
2.5	**MSFP5****	P142	HC7206	RC55	G2535L	GA3	24	44
5	**MSFP10**	P392	HC7206	RC106	G2535L	GA3	23	105
5	**MS210**	P392	HC7206	RC106	GP10S	GA2	35	140
12.5	**MS220**	P392	HC7206	RC256	GP10S	GA2	13	210
5 - 12.5	**MS21020**	P392	HC7206	RC102, 106, 256	GP10S	GA2	53	350

* If no attachments are being used, capacity is double these values. Maximum operating pressure is then 10,000 psi.
** This set also includes the FZ1055 Adaptor.

CAUTION!

When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (5,000 psi).

WARNING!

Only use attachments provided with set. Non Enerpac attachments and longer extension tubes will reduce column strength, potentially creating unsafe conditions.

MS Series

Capacity (using attachments):
2.5 - 12.5 tons

Max. Operating Pressure (using attachments):
5,000 psi

▼ APPLICATION EXAMPLES

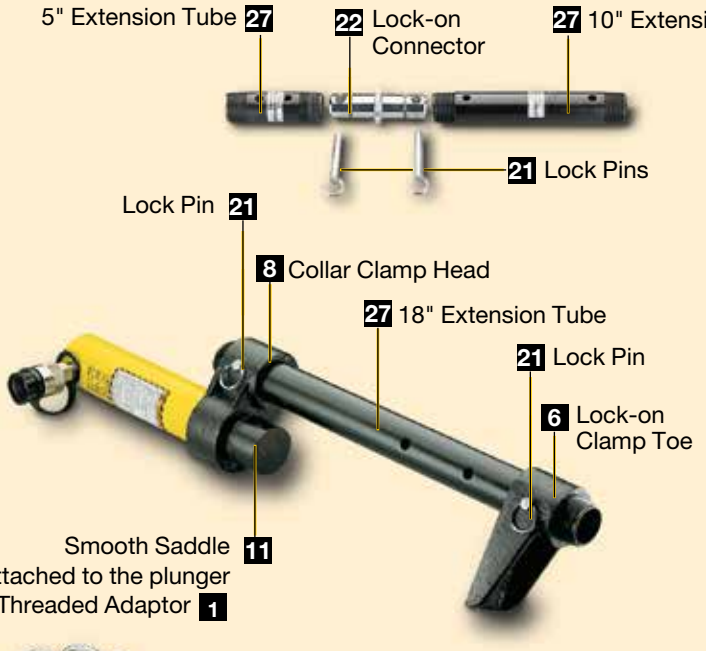

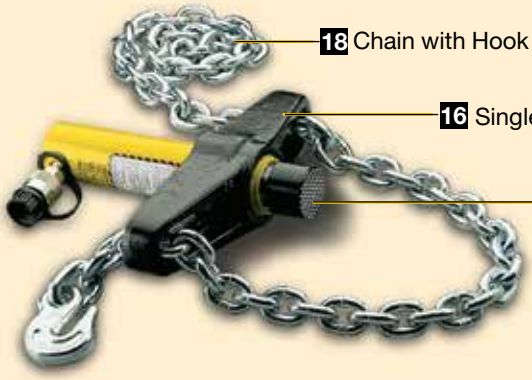

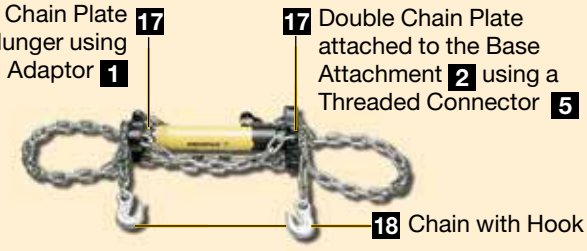

CAUTION! When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (5,000 psi).

Note: All dimensions in inches.

Set Model No.	MS2-4	MSFP5	MSFP10	MS2-10	MS2-20	MS2-1020
Base/Collar/ Plunger Attachments	Capacity Using Attachments					
	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
Cylinder Series	RC5	RC5	RC10	RC10	RC25	RC10, RC25
1	A23	A23	A13	A13	A28	A13 / A28
2	A25	A25	A21	A21	A27	A21 / A27
3	A1034	A1034	A20	A20	A595	A20 / A595
4	MZ4010	MZ4010	A14	A14	A243	A14 / A243
5	A545	A545	A10	A10	–	A10(2x)
6	–	–	–	A8	–	A8
7	A530	A530	A6	A6	–	A6
8	MZ4011	–	–	A192	–	A192
9	–	–	–	A305	–	A305
10	A531	A531	A18	A18	–	A18
11	–	–	–	A185	–	A185
12	A532	A532	A15	A15	–	A15
13	–	–	–	–	A607	A607
14	A629	A629	A129	A129	–	A129
15	A539	A539	A128	A128	–	A128
Chains and Attachments for Pulling	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
Cylinder Series	RC5	RC5	RC10	RC10	RC25	RC10, RC25
16	A558	–	–	A132	A238	A132, A238
17	–	–	–	A5 (2x)	–	A5(2x)
18	A557(2x)	–	–	A141(2x)	A218(2x)	A141(2x) / A218(2x)
Tubes, Connectors and Adaptors	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
Cylinder Series	RC5	RC5	RC10	RC10	RC25	RC10, RC25
19	A544	–	–	A19(2x)	A242(2x)	A19(2x) and A242(2x)
20	WR5	WR5	WR5	A92	–	A92
21	MZ4013(4x)	MZ4013(4x)	A16(4x)	A16(4x)	–	A16(4x)
22	MZ4007(3x)	MZ4007(3x)	MZ1050(3x)	MZ1050(2x)	–	MZ1050(3x)
23	MZ4008(2x)	–	–	MZ1051	–	MZ1051(2x)
24	MZ4009	MZ4009	MZ1052	MZ1052	–	MZ1052
25	–	–	–	A285	–	A285
26	A650	–	–	–	–	–
Length: 3"	MZ4002	MZ4002	–	–	–	
5"	MZ4003	MZ4003	MZ1002	MZ1002	–	MZ1002
10"	MZ4004	MZ4004	MZ1003	MZ1003	A239	MZ1003 and A239
18"	MZ4005(2x)	MZ4005	MZ1004	MZ1004	A240	MZ1004(2x) and A240
23"	MZ4006	MZ4006	–	–	–	–
30"	–	–	MZ1005	MZ1005	A241	MZ1005(2x) and A241
Case	CM6	CM6	CW166	CW166	CW166	CW350
Weight	59 lbs.	44 lbs.	105 lbs.	140 lbs.	210 lbs.	350 lbs.

Base/Collar/Plunger Attachments

1 Threaded Adaptor



Tons	Model No.	A	B	C	D
2.5	A23	¾"-16 UN	1.13	1.05	¾"-14 NPT
5.0	A13	1"-8 UN	1.25	2.19	1¼"-11½ NPT
12.5	A28	1½"-16 UN	1.87	2.75	2"-11½ NPT

2 Base Attachment



Tons	Model No.	A	B	C	D
2.5	A25	¾"-14 NPT	2.00	0.50	1.75
5.0	A21	1¼"-11½ NPT	2.25	0.50	2.56
12.5	A27	2"-11½ NPT	2.50	0.50	3.88

3 Collar Toe



Tons	Model No.	A	B	C	D
2.5	A1034	1½"-16	2.13	1.97	1.25
5.0	A20	2¼"-14	3.16	2.25	2.25
12.5	A595	3⁵⁄₁₆"-12	4.06	2.03	3.18

4 Flat Base



Tons	Model No.	A	B	C	D
2.5	MZ4010	¾"-14 NPT	4.50	1.25	2.50
5.0	A14	1¼"-11½ NPT	6.50	1.38	3.50
12.5	A243*	2"-11½ NPT	6.50	2.31	6.50

* A243 is a round base model

5 Threaded Connector



Tons	Model No.	A	B
2.5	A545	¾"-14 NPT	1.38
5.0	A10	1¼"-11½NPT	1.63

6 Lock-on Clamp Toe



Tons	Model No.	A	B	C	D
5.0	A8	1.69	4.13	2.00	2.25

7 Threaded Plunger Toe



Tons	Model No.	A	B	C	D
2.5	A530	¾"-14 NPT	2.25	1.00	1.33
5.0	A6	1¼"-11½ NPT	3.12	1.25	2.25

8 Collar Clamp Head



Tons	Model No.	A	B	C	D
2.5	MZ4011	¾"-14 NPT	1.95	3.00	1½-16 UN
5.0	A192	1.69	2.50	2.00	2¼-14 UN

9 Spreader Toe



Tons	Model No.	A	B	C	D
5.0	A305	1¼"-11½ NPT	4.50	1.00	2.00

10 Serrated Saddle



Tons	Model No.	A	B	C
2.5	A531	¾"-14 NPT	1.25	1.09
5.0	A18	1¼"-11½ NPT	1.50	2.00

11 Smooth Saddle



Tons	Model No.	A	B	C
5.0	A185	1¼"-11½ NPT	1.50	2.00

12 90° V-Base



Tons	Model No.	A	B	C	D
2.5	A532	¾"-14 NPT	1.50	1.88	1.00
5.0	A15	1¼"-11½ NPT	2.13	2.25	2.13

13 Plunger Base



Tons	Model No.	A	B	C
12.5	A607	2"-11½ NPT	6.56	1.53

14 Wedge Head



Tons	Model No.	A	B	C	D
2.5	A629	¾"-14 NPT	2.75	1.31	1.13
5.0	A129	1¼"-11½ NPT	4.00	2.00	1.75

15 Rubber Flex-Head



Tons	Model No.	A	B	C
2.5	A539	¾"-14 NPT	1.75	2.75
5.0	A128	1¼"-11½ NPT	3.40	3.40

Chains and Attachments for Pulling

16 Single Chain Plate



Tons	Model No.	A	B	C	D
2.5	A558	1½"-16 UN	7.75	1.56	1.75
5.0	A132	2¼"-14 UN	12.12	2.50	3.12
12.5	A238	3⁵⁄₁₆"-12 UN	17.75	4.03	4.93

17 Double Chain Plate



Tons	Model No.	A	B	C	D
5.0	A5	1¼"-11½ NPT	6.18	2.00	4.96

18 Chain with Hook

Tons	Model No.	Chain Length
2.5	A557	5 feet
5.0	A141	6 feet
12.5	A218	8 feet

Tubes, Connectors and Adaptors

19 Pipe Coupling



Tons	Model No.	A	B	C
2.5	A544	¾"-14 NPT	1.69	1.31
5.0	A19	1¼"-11½ NPT	1.94	2.15
12.5	A242	2"-11½ NPT	3.50	3.25

20 Spreader



Tons	Model No.	A	B	C	D
1.0	WR5	—	8.78	0.50	3.70
1.0	A92	2¼"-14 UN	9.63	1.38	6.25

21 Lock Pin



Tons	Model No.	A	B
2.5	MZ4013	0.25	2.38
5.0	A16	0.44	3.25

22 Lock-on Connector



Tons	Model No.	A	B
2.5	MZ4007	0.75	3.12
5.0	MZ1050	1.31	5.00

23 Male Lock-on Adaptor



Tons	Model No.	A	B	C
2.5	MZ4008	¾"-14 NPT	2.38	0.75
5.0	MZ1051	1¼"-11½ NPT	3.56	1.31

24 Female Lock-on Adaptor



Tons	Model No.	A	B	C
2.5	MZ4009	¾"-14 NPT	2.56	0.75
5.0	MZ1052	1¼"-11½ NPT	3.81	1.31

25 Adjustable Extension



Tons	Model No.	A	B	C	D
5.0	A285	1¼"-11½ NPT	13.20	17.37	1.30

26 Slip-Lock Extension



Tons	Model No.	A	B	C
2.5	A650	¾"-14 NPT	7.88	14.37

▼ Shown: **SP35S**

- **0.50" thick mild steel maximum capacity**
- **Round, oblong and square punches and dies are available to solve your punching applications**
- **Long life Enerpac single-acting, spring return design**
- **Durable case keeps tools and dies together and provides for easy carrying and storage**
- **CR400 female coupler included**

▼ *SP-Series, Lightweight Hydraulic Punch – much faster than drilling.*

Much Faster than Drilling...

Tool Kit SPK10

Included with all 35-ton punches, this tool kit is used to remove and install the punch into the head.

Can be ordered as a replacement under model number **SPK10**.



Ordering Information

The 35-ton hydraulic punch may be ordered by itself or as a set, including an electric, air or hand pump.

Please refer to the Quick Selection Chart information on next page.

A punch and die may also be ordered as a matched set.

▼ **STANDARD PUNCH AND DIE SETS SELECTION CHART**

Hole Shape	Imperial*		Metric*	
	Hole Size (in)	Bolt Size (in)	Hole Size (mm)	Bolt Size (mm)
●	0.31	¼	7.9	–
●	0.38	5⁄16	9.5	M8
●	0.44	⅜	11.1	M10
●	0.53	7⁄16	13.5	M12
●	0.56	½	14.3	–
●	0.69	⅝	17.5	M16
●	0.78	–	19.8	M18
●	0.81	¾	20.6	–
■	0.31	¼	7.9	–
■	0.38	5⁄16	9.5	M8
■	0.44	⅜	11.1	M10
■	0.50	7⁄16	12.7	M12
⬮	0.31 x 0.75	¼	7.9 x 19	–
⬮	0.38 x 0.75	5⁄16	9.5 x 19	M8
⬮	0.44 x 0.75	⅜	11.1 x 19	M10
⬮	0.50 x 0.75	7⁄16	12.7 x 19	M12

* Material thickness should **not** exceed hole diameter.

▼ QUICK SELECTION CHART

Included					Model Number	Weight
*	Punch and Die Set	Pump	Pump Type[1]	Hose		(lbs)
SP35	–	–	–	–	**SP35**	35
SP35	Standard**	–	–	–	**SP35S**	40
SP35	Standard**	PUD1100B	E	HC7206	**SP35SP**	70
SP35	Metric***	–	–	–	**MSP351**	40
SP35	Standard**	P392	H	HC7206	**STP35H** [2]	55
SP35	Standard**	PATG1102N	A	HC7206	**STP35A** [2]	63

* Punch oil capacity: 4.58 in^3
Includes the following punch and die sets:
** SPD438, SPD688, SPD563 and SPD813
*** SPD375, SPD531, SPD438 and SPD688

[1] E = Electric; H = Hand; A = Air operated
[2] STP35H and STP35A include the GP10S gauge and GA2 gauge adapter.

SP, MSP, STP Series

Capacity:
35 tons

Hole Sizes:
0.31 - 0.81 inch

Maximum Operating Pressure:
10,000 psi

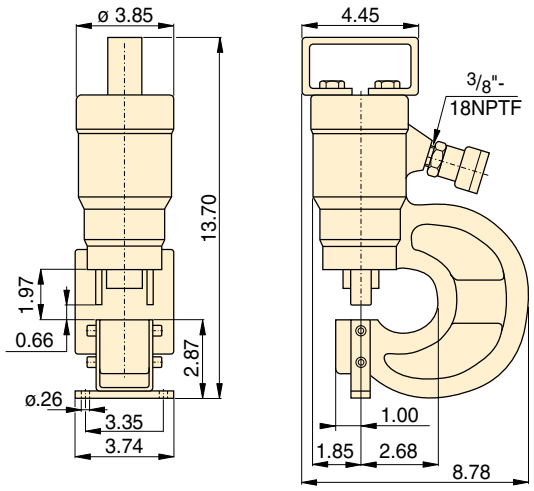

CAUTION!
Chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.

CAUTION!
Material thickness should not exceed hole diameter.

	Standard Punch & Die Set	Maximum Allowable Material Thickness To Be Punched (in) (Material thickness should not exceed hole diameter.)										
	Model No.	1)	2)	3)	4)	5)	6)	7)	8)	9)	10)	11)
	SPD313	0.31	0.31	0.25	0.25	0.25	0.25	0.13	0.19	0.25	0.25	0.25
	SPD375	0.38	0.38	0.31	0.31	0.31	0.31	0.19	0.25	0.31	0.31	0.31
	SPD438	0.44	0.44	0.38	0.38	0.38	0.31	0.19	0.31	0.31	0.31	0.31
	SPD531	0.50	0.50	0.44	0.44	0.44	0.38	0.25	0.31	0.38	0.38	0.38
	SPD563	0.50	0.50	0.50	0.44	0.50	0.44	0.25	0.38	0.44	0.44	0.44
	SPD688	0.50	0.50	0.50	0.44	0.50	0.40	0.25	0.31	0.40	0.40	0.40
	SPD781	0.50	0.50	0.50	0.44	0.50	0.38	0.25	0.31	0.38	0.39	0.38
	SPD813	0.50	0.50	0.50	0.44	0.50	0.31	0.19	0.31	0.31	0.31	0.31
	SPD458	0.31	0.31	0.25	0.25	0.25	0.25	0.13	0.19	0.25	0.25	0.25
	SPD549	0.38	0.38	0.31	0.31	0.31	0.31	0.19	0.25	0.31	0.31	0.31
	SPD639	0.44	0.44	0.38	0.38	0.38	0.31	0.19	0.31	0.31	0.31	0.31
	SPD728	0.50	0.50	0.44	0.44	0.44	0.38	0.25	0.31	0.38	0.38	0.34
	SPD106	0.31	0.31	0.25	0.25	0.25	0.25	0.13	0.19	0.25	0.25	0.25
	SPD125	0.38	0.38	0.31	0.31	0.31	0.31	0.19	0.25	0.31	0.31	0.31
	SPD188	0.44	0.44	0.38	0.38	0.38	0.31	0.19	0.31	0.31	0.31	0.31
	SPD250	0.50	0.50	0.44	0.44	0.44	0.38	0.25	0.31	0.38	0.38	0.38

Steel Qualities (see table):

1) Mild A-7
2) Boiler Plate
3) Structural A-36
4) Struct Corten (ASTM A242)
5) Cold Rolled C-1018
6) Hot Rolled C-1050
7) Hot Rolled C-1095
8) Hot Rolled C-1095 Annealed
9) Stainless Annealed
10) Stainless 304 Hot Rolled
11) Stainless 316 Cold Rolled

▼ Shown: **SP50100**

Cuts the Time Spent Forming Holes

- **Available as a complete set including electric pump and hoses**
- **Double-acting cylinder design for fast cycle times**
- **Punch and die changeover tools included**
- **Lifting handle for easy carrying**
- **Adjustable power stripper prevents movement of the metal during stripping**
- **CR400 female couplers included**

Depth Stop

For simplified repetitive punching applications an adjustable Depth Stop is available.
Order model number: **SP110.**

Foot Mounting Kit

A foot mounting kit for easy mounting of the 50-ton punch to workbench or fixture is available.
Please order: **SP120.**

Ordering Information

The 50-ton Hydraulic Punch may be ordered by itself or as a set with an electric pump. A punch and die may be ordered as a matched set. Please refer to the selection chart information.

◄ *Save time using this 50-ton Enerpac Punch.*

▼ *Shown below is the 50-ton punch with SP120 and SP110 assembled.*

▼ QUICK SELECTION CHART PUNCH SETS

Included				Set Model Number	Weight
Model Number Punch*	Punch & Die Sets	Pump	Hose (2x)		(lbs)
SP50	All**	–	–	**SP50100**	255
SP50	All**	ZE4410SBN	HC7206	**SP5000**	384

* Punch Oil Capacity:
Advance: 17 in³
Retract: 14 in³

** All standard sets from chart below.

SP
Series

Capacity:
50 tons

Hole Sizes:
0.53 - 1.03 inches

Maximum Operating Pressure:
10,000 psi



SP110





SP120

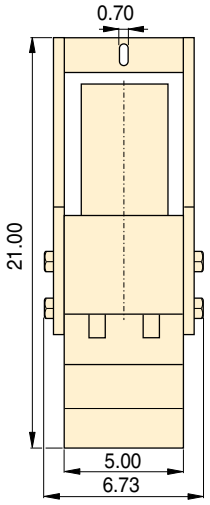

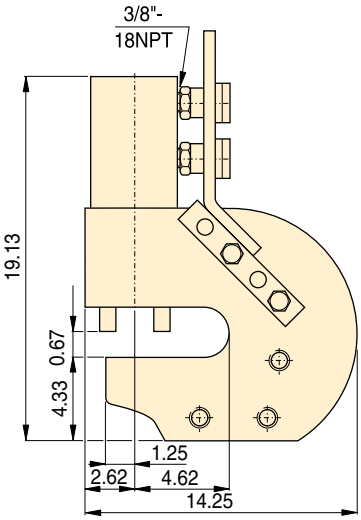

SP50

CAUTION!
Material thickness should not exceed hole diameter.

CAUTION!
Chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.

Steel Qualities (see table below):

1) Mild A-7
2) Boiler Plate
3) Structural A-36
4) Struct Corten (ASTM A242)
5) Cold Rolled C-1018
6) Hot Rolled C-1050
7) Hot Rolled C-1095
8) Hot Rolled C-1095 Annealed
9) Stainless Annealed
10) Stainless 304 Hot Rolled
11) Stainless 316 Cold Rolled

▼ STANDARD PUNCH AND DIE SELECTION CHART

Hole Shape	Hole Size	Bolt Size	Standard Punch and Die Set	Maximum Allowable Material Thickness To Be Punched (in)										
	(in)	(in)	Model Numbers	1)	2)	3)	4)	5)	6)	7)	8)	9)	10)	11)
●	0.53	½	**SP150**	0.53	0.53	0.53	0.53	0.53	0.49	0.32	0.40	0.49	0.49	0.49
●	0.66	⅝	**SP170**	0.56	0.56	0.56	0.50	0.56	0.51	0.32	0.40	0.51	0.51	0.51
●	0.78	¾	**SP190**	0.56	0.56	0.56	0.50	0.56	0.49	0.32	0.40	0.49	0.50	0.49
●	0.91	⅞	**SP121**	0.56	0.56	0.56	0.50	0.56	0.35	0.22	0.35	0.35	0.35	0.35
●	1.03	1	**SP123**	0.56	0.56	0.56	0.44	0.56	0.31	0.19	0.31	0.31	0.31	0.31

▼ Shown: **LWC16, LW16 with SB2 and optional LWB1**

LW Series

Minimum Clearance:
0.39 inches

Maximum Lift Height:
2.02* - 2.72* inches

Maximum Force:
16 tons

Maximum Operating Pressure:
10,000 psi

* Using LWB1

Portable Hydraulic Toolbox
Tool Box set includes hand pump, gauge, adaptor assembly, hose and coupler.

Page: 65

Split-Flow Manifolds
Split Flow Valves to control two or four lifting wedges simultaneously (**LW16** only).

AM21 with 3 ports 3/8" NPTF.
AM41 with 5 ports 3/8" NPTF.

Page: 152

- **Minimized access gap for greater accessibility on applications with limited insertion space**
- **Secure, stable lifting and lowering motion with no slippage**
- **Single-acting spring return cylinder allows for automatic, mechanical retraction**
- **Integrated hand pump offers greater maneuverability (LWC16 only)**
- **Includes safety block SB2**

Portable Hydraulic Toolbox Set SWR5PGH

Tool box includes P392 hand pump, gauge adaptor assembly, hose and **WR5**.

▼ *The LW-Series is the ideal solution for lifting heavy equipment with minimum floor clearance.*

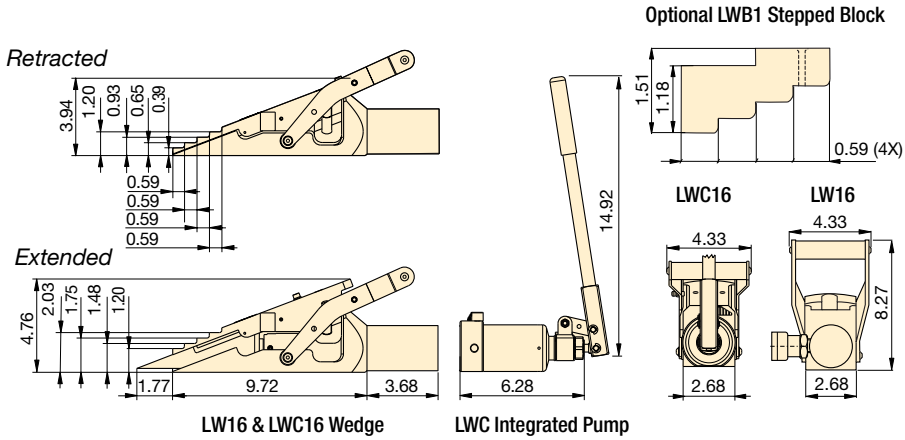

LW16 & LWC16 Wedge — LWC Integrated Pump

Max. Lifting Force (ton)	Model No.	Minimum Clearance Gap (in)	Max. Lift per Stage (in)	Max. Lifting Height (in)	Max. Lifting Height using Stepped Block (in)	Oil Capacity (in^3)	Wt. (lbs)	Pump Power Source
16	LW16*	0.39	0.83	2.02	2.72	4.75	15.4	External
	LWC16**					–	22.0	Integrated

* Includes SB2

** Includes SB2, LWB1, and carrying case

▼ Shown from left to right: **SOH10-6, SOH23-6**

SOH
Series

Lifting Capacity:
8.5 - 20 tons

Stroke:
5.39 - 6.18 inches

Toe Clearance:
0.79 - 1.18 inches

Maximum Operating Pressure:
10,000 psi

- **For lifting heavy equipment with minimum available access**
- **Remote operation of hydraulic pump enhances safety**
- **Low-height lifting toe**
- **Precision guided to reduce friction and isolate cylinder from side-loads**
- **Two extendable support feet provide extra stability**
- **Includes RC-Series cylinder with CR400 coupler**

ER-Series Load Skates

In combination with the Enerpac Lifting Wedge we recommend Load Skates for moving heavy loads.

Page: 214

RSM Flat-Jac®

Low height, single acting spring-return cylinders are ideal for space restricted applications.

Page: 26

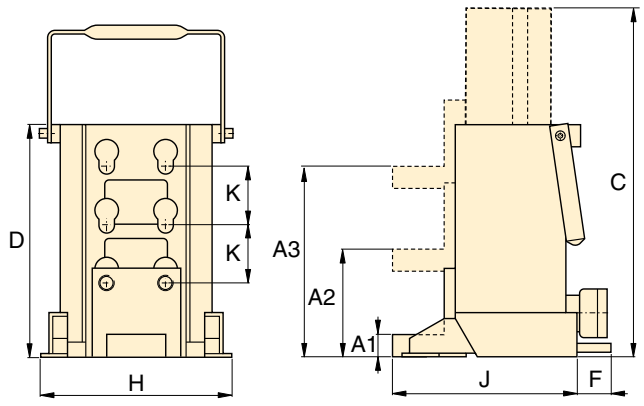

▼ *Heavy transport using Load Skates. The machine is first lifted, using SOH-Series Enerpac Machine Lifts.*

Capacity	Toe Clearance with Cylinder Retracted (in)			Stroke	Model Number	Oil Capacity	Dimensions (in)						Weight
	Minimum	Central	Maximum				Total Ext. Height	Total Body Height					
(ton)	A1	A2	A3	(in)		(in^3)	C	D	F	H	J	K	(lbs)
8.5	0.79	3.74	6.69	5.39	**SOH10-6**	13.7	17.00	11.61	–	7.48	8.46	2.95	59.2
20	1.18	4.33	7.48	6.18	**SOH23-6**	32.0	18.58	12.40	2.56	10.24	9.84	3.15	99.2

▼ Shown: **Set ERS20**

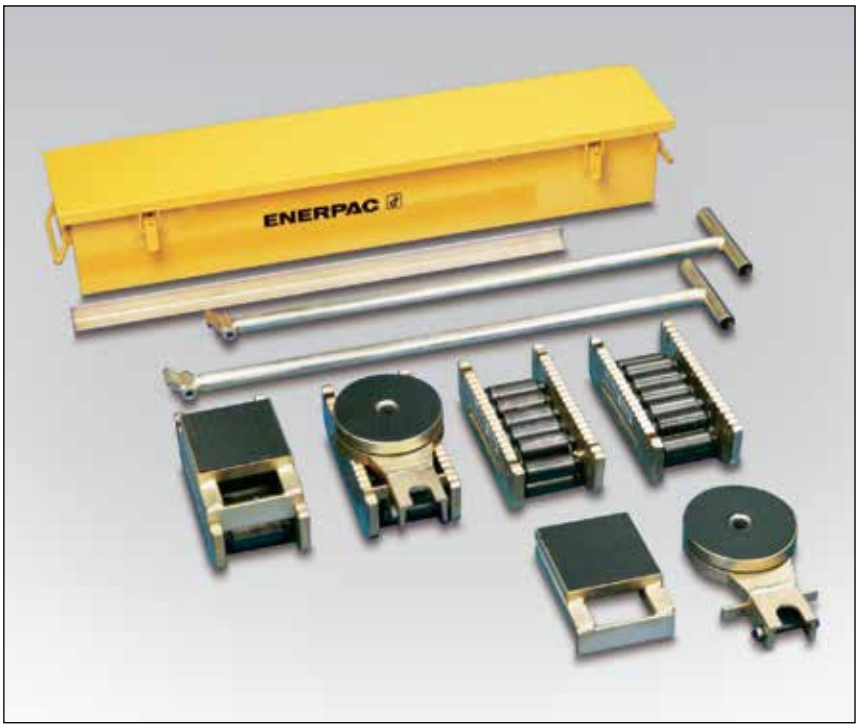

Move Heavy Loads Easily and Safely

- **Rugged and sturdy construction for long life**
- **Low profile construction for increased stability**
- **Low rolling-resistance allows for easy load movement**
- **Attachable load leveling plates and swivel turntables for turning corners**



Sets (see table) include all components necessary to handle a variety of applications. Two **ELB1** link-up bars, two **ERH1** handles (34.4" long) and one **EMB1** metal box are included. Optional long handle **ERH2** (46.4") also available.

Lifting Wedge and Machine Lifts

To place the Load Skates, the load must first be lifted. This can be done easily and safely using Enerpac Lifting Wedge or Machine Lifts.

Page: 212

▼ *Heavy transport using Load Skates. The machine is first lifted, using SOH-Series Enerpac Machine Lifts.*

▼ *Chemical tank transportation: The first inch(s) the load was lifted with an RCS-Series Low Height Cylinder and then moved onto load skates for transportation.*

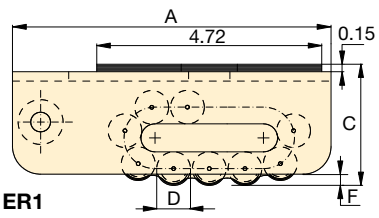

ER1

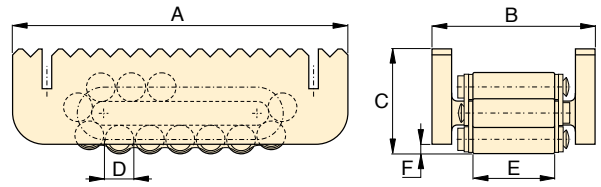

ER10, ER15, ER30

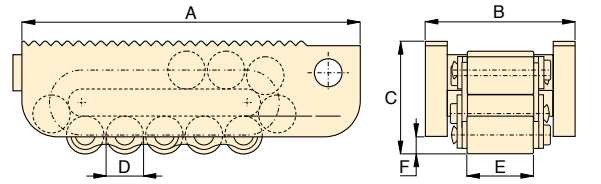

ER60, ER80

ELP, ER, ES Series

Maximum Carrying Capacity:

80 tons



Turntable Swivel ES1



Turntable Swivel ES10, ES15, ES30



Turntable Swivel ES60, ES80

Load Skates may be ordered separately or as a matched set.

Set Capacity* (tons)	Set Model Number	Load Skates (4)	Turntable Swivels (2)	Leveling Plates (2)	Weight Including handles and metal box (lbs)
					
20	ERS20	ER10	ES10	ELP10	110
30	ERS30	ER15	ES15	ELP15	123
60	ERS60	ER30	ES30	ELP30	167

* Sets are designed to enable two skates to take full load for extra safety on uneven floor surfaces



Leveling Plate
ELP10
ELP15
ELP30



Leveling Plate
ELP60
ELP80

	Capacity (ton)	Model Number	Dimensions (inch) A	B	C	D	E	F	Contact Rolls per Skate	Rollers per Skate	Weight (lbs)
Load Skates	1	**ER1**	6.69	3.94	2.56	0.71	2.00	0.24	4	11	8.4
	10	**ER10**	8.27	3.94	2.63	0.71	2.00	0.24	5	15	11.5
ER1	15	**ER15**	8.69	4.45	2.95	0.94	2.38	0.39	4	13	16.0
	30	**ER30**	10.63	5.13	3.63	1.18	2.69	0.39	4	13	28.6
	60	**ER60**	15.00	6.63	4.94	1.65	3.00	0.63	4	13	70.4
ER10	80	**ER80**	20.88	7.19	5.75	1.97	3.38	0.75	6	17	134.2
Turntable Swivel	1	**ES1**	8.15	–	1.02	3.54	–	–	–	–	2.4
	10	**ES10**	8.66	2.87	1.65	5.12	–	–	–	–	8.1
ES1	15	**ES15**	8.66	3.39	1.65	5.12	–	–	–	–	8.1
	30	**ES30**	9.84	3.78	1.89	5.91	–	–	–	–	11.7
	60	**ES60**	10.83	4.49	2.40	7.48	–	–	–	–	30.1
ES10	80	**ES80**	14.17	5.04	2.40	8.66	–	–	–	–	41.6
Leveling Plate	10	**ELP10**	5.87	2.87	1.65	4.72	–	–	–	–	8.1
	15	**ELP15**	5.87	3.39	1.65	4.72	–	–	–	–	8.1
	30	**ELP30**	7.01	3.78	1.89	5.12	–	–	–	–	11.6
	60	**ELP60**	10.63	4.49	2.40	7.09	–	–	–	–	30.4
	80	**ELP80**	13.78	5.04	2.40	7.87	–	–	–	–	41.4

▼ Shown: **CM16**

CM
Series

Case Size:
0.67 - 16 cubic ft.

Protect your Equipment

- **Protect your equipment from dust, water, grease and dirt**
- **Reduce losses on the jobsite, maintenance area or shop**
- **Durable steel, painted with rust-resistant primer and finished in durable enamel**
- **Heavy-duty hinges and lifting handles**
- **Lockable**

Maintenance Sets

Enerpac Maintenance sets are a complete assortment of accessories matched to hydraulic powered tools. Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12.5 tons.

Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying. Damage to parts is minimized through the use of controlled hydraulic power.

Page: 183

▼ *When not storing the lifting system, this heavy-duty storage case doubles as a work station.*

Case Size (ft^3)	Model Number	Interior Dimensions L x W x H (in)	Thickness (in)	Weight (lb)
0.67	**CM6**	23.5 x 7 x 8	0.035	15.4
1.13	**CM1**	24.5 x 11.1 x 6.5	0.035	17.6
4.50	**CM4**	30.6 x 17.9 x 13.9	0.059	35.3
7.50	**CM7**	47.6 x 15.2 x 18	0.074	125.7
16.00	**CM16**	47.9 x 23.9 x 21.9	0.059	121.3

▼ Shown clockwise from top: **WR15, WR5, A92**

A, WR
Series

Capacity:
0.75 - 1.00 ton

Tip Clearance:
0.50 - 1.38 inches

Maximum Spread Range:
3.70 - 11.50 inches

Maximum Operating Pressure:
10,000 psi

- **Single-acting, spring return**
- **WR15: For long stroke spreading applications**
- **WR5: For use in very confined work areas**
- **A92*: Spreader attachment screws onto RC-Series 10-ton cylinders (except RC101)***



WR5

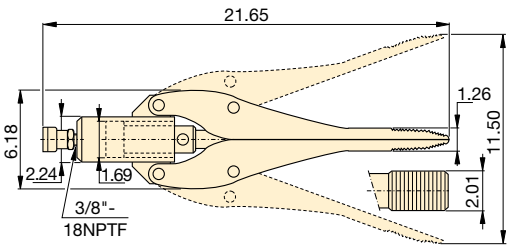

WR15



A92*

Spreader Capacity (ton)	Tip Clearance (in)	Model Number	Maximum Spread (in)	Cylinder Effective Area (in^2)	Oil Capacity (in^3)	Wt. (lbs)
1.00	0.50	**WR5**	3.70	1.00	0.61	5.0
0.75	1.26	**WR15**	11.50	2.25	3.91	25.0
1.00	1.38	**A92***	6.25	–	–	8.0

* Maximum system pressure must be limited to half the rated pressure (5000 psi)

RC-Series TRIO Cylinders
10-ton RC-Series TRIO cylinders (except RC101) fit into A92 Spreader attachment.
Page: 6

Best Match Hand Pump
To power your WR5 and WR15 the **P392** hand pump is an ideal choice.
Page: 86

Portable Hydraulic Toolbox Set SWR5PGH
Tool box includes P392 hand pump, gauge adaptor assembly, hose and **WR5**.
Page: 65

▼ *A WR5 Wedgie cylinder is used to loosen a bridge bearing.*

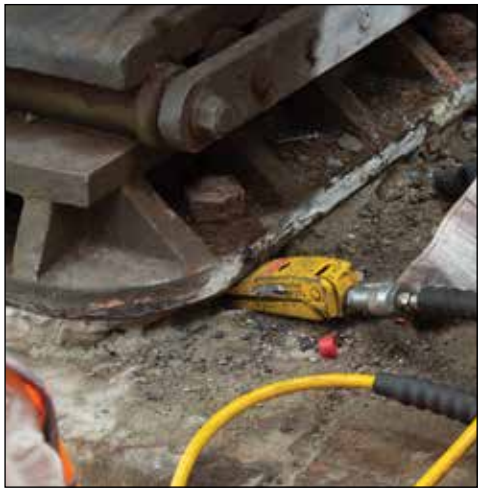

▼ Shown: **STB101H**

Quick, Safe and Wrinkle-free Bending

'One Shot' and 'Sweep'

One shot shoes give up to a 90° bend without resetting. Sweep shoes are used where increased radii are required for multiple parallel pipe installations.

- **Makes smooth, wrinkle-free bends**
- **Sets include cylinder, hose and manual, air or electric pump**
- **Sets are also available without hydraulics**
- **Bending shoes and bending frame are lightweight, heat-treated aluminum**
- **All sets include sturdy steel storage case**
- **All sets include BZ12091 angle indicator for accurate bending**
- **BZ12377 Shoe Lock Pin included in every set**
- **Eject-O-Matic™ benders (STB202 models) use a double-acting cylinder to eject pipe from the bending shoe**

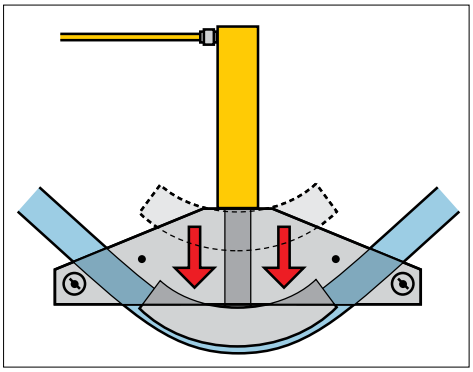

▲ *Typical one shot bending operation.*

▼ **SELECTION CHART**

Pipe Range Nominal Size (in)		Set Model Number	Hand Pump*	Air Pump*	Electric Pump*	Cylinder*	Hose*	Steel Case*	Saddle	Weight (includes steel case)
One Shot	Sweep									(lbs)
½ - 2	–	STB101X	–	–	–	–	-	CM4	A12	88
		STB101N	–	–		RC1010	HC7206	CM4	A12	105
		STB101H	P392	–	–	RC1010	HC7206	CM4	A12	114
		STB101A	–	PATG1102N	–	RC1010	HC7206	CM4	A12	119
		STB101B	–	–	PUJ1200B[2]	RC1010	HC7206	CM4	A12	127
1 - 2	2½ - 4	STB221X	–	–	–	–	-	CM7	A29	229
		STB221N	–	–	–	RC2510	HC7206	CM7	A29	263
		STB221H	P80	–	–	RC2510	HC7206	CM7	A29	286
1¼ - 4	–	STB202X[1]	–	–	–	–	-	CM7	A29	316
		STB202N[1]	–	–	–	RR3014	HC7206 (2x)	CM7	A29	383
		STB202B[1]	–	–	ZU4408SB[2]	RR3014	HC7206 (2x)	CM7	A29	467

* See corresponding sections of this catalog for more detailed specifications.

[1] Eject-O-Matic™ [2] For 230 volt applications change the last digit of Set Model Number from "B" to "E".

Nominal pipe size (outside dia.) (in)	Wall Thick-ness (in)	Schedule Pipe *	Pipe Bend Inside Radius (in)	STB101 ½ - 2 One Shot	STB221 1-2 One Shot 2½ - 4 Sweep	STB202 1¼ - 4 One Shot	One Shot Bending Shoe Model Number	Sweep Bending Shoe Model Number
½ (0.840)	0.109	40	2⅞	Yes	–	–	BZ12011	–
	0.147	80		Yes	–	–		
	0.187	160		WS	–	–		
	0.294	DEH		WS	–	–		
¾ (1.050)	0.113	40	4	Yes	–	–	BZ12021	–
	0.154	80		Yes	–	–		
	0.218	160		WS	–	–		
	0.308	DEH		WS	–	–		
1 (1.315)	0.133	40	5⅛	Yes	Yes	–	BZ12031	–
	0.179	80		Yes	Yes	–		
	0.250	160		WS	WS	–		
	0.358	DEH		–	WS	–		
1¼ (1.660)	0.140	40	6⅞	Yes	Yes	Yes	BZ12041	–
	0.191	80		Yes	Yes	Yes		
	0.250	160		WS	WS	Yes		
	0.342	DEH		–	WS	WS		
1½ (1.900)	0.145	40	7 5⁄16	Yes	Yes	Yes	BZ12051	–
	0.200	80		Yes	Yes	Yes		
	0.281	160		WS	WS	Yes		
	0.400	DEH		–	WS	WS		
2 (2.375)	0.154	40	8 5⁄16	Yes	Yes	Yes	BZ12061	–
	0.218	80		–	Yes	Yes		
	0.343	160		–	WS	Yes		
2½ (2.875)	0.203	40	9½	–	Yes	Yes	BZ12341	BZ12382
	0.276	80		–	WS	Yes		
	0.375	160		–	WS	Yes		
3 (3.500)	0.216	40	11¼	–	Yes	Yes	BZ12351	BZ12383
	0.300	80		–	WS	Yes		
3½ (4.000)	0.226	40	15½	–	Yes	Yes	BZ12391	BZ12384
	0.318	80		–	WS	Yes		
4 (4.500)	0.237	40	17¾	–	Yes	Yes	BZ12392	BZ12385
	0.337	80		–	–	Yes		

STB Series

Nominal Pipe Size:
0.5 - 4 inches

Maximum Bend Angle:
90°

Maximum Operating Pressure:
10,000 psi

*** Schedule Pipe**

All bender sets are designed to bend mild steel pipe. For other material please consult Enerpac.

40 = Standard;
80 = Extra Heavy;
160 = Double Extra Heavy;
DEH = Double Extra Heavy (slightly thicker than 160);
WS = Can be bent by using wider spacing for swivel shoes.

Frame Assembly	Pivot Pin**	Pivot Shoes**	One Shot or Sweep[3] Bending Shoes included								Set Model Number
BZ12371	BZ12375	BZ12071	BZ12011	BZ12021	BZ12031	BZ12041	BZ12051	BZ12061	–	–	STB101X
											STB101N
											STB101H
											STB101A
											STB101B
BZ12372	BZ12376	BZ13401	BZ12031	BZ12041	BZ12051	BZ12061	BZ12382[3]	BZ12383[3]	BZ12384[3]	BZ12385[3]	STB221X
											STB221N
											STB221H
BZ12374	BZ12376	BZ13401	–	BZ12041	BZ12051	BZ12061	BZ12341	BZ12351	BZ12391	BZ12392	STB202X[1]
											STB202N[1]
											STB202B[1]

[3] Shoes are Sweep, all other shoes are One Shot.
** Sets include two pivot pins and two pivot shoes.

When you need to make cuts through heavy-duty bar, chain, cable and similar materials, look no further than Enerpac's broad range of cutters.

An extensive lineup of hydraulic, electric and manual cutters provides a quick, safe and cost-effective solution for technicians from construction, mining, manufacturing and many other industries.

Enerpac's cutters are built to handle industrial-grade materials on a daily basis. Like all Enerpac tools, each cutter is designed and built to last in tough working conditions for a safer, simpler and more productive workflow.

Cutter Type		Maximum Tool Capability*	Series		Power Source	Page
Bar Cutters		2.04" (Maximum Material Cutting Diameter)	**EB**		Hydraulic, Electric, Cordless	**222** ▶
Decommissioning Cutters		6.69" (Maximum Blade Aperture)	**EDC**		Hydraulic	**226** ▶
Flat Bar Cutters		2.75" x 0.59" (Maximum Material Cutting Height and Width)	**EFB**		Electric	**227** ▶
Chain Cutters		1.25" (Maximum Link Cutting Diameter)	**ECC**		Electric	**228** ▶
Wire and Cable Cutters		7.09" (Maximum Material Cutting Diameter)	**EWC**		Hydraulic, Electric	**230** ▶
Cutter / Spreader Combination Tools		11.81" (Maximum Blade Aperture)	**ECS**		Electric	**233** ▶
Hydraulic Cutterheads		4.00" (Maximum Material Cutting Diameter)	**WHC WHR STC**		Hydraulic	**234** ▶
Self-Contained Hydraulic Cutters		3.38" (Maximum Material Cutting Diameter)	**WMC**		Manual	**235** ▶
ZE-Series Pumps and Accessories		1.5 - 7.5 hp	**EBH EWCH**		Electric	**236** ▶
ZC, ZE-Series Pumps and Accessories		1.4 - 7.5 hp	**EDCH**		Electric, Cordless	**237** ▶

* Actual cutting capabilities may vary depending on material being cut.

▼ Shown left to right: **EBC20B, EBH30, EBE22B**

Your Fast, Safe and Simple Solution for Cutting Metal Bar

Productivity

- **A broad range of hydraulic and electric tools quickly and easily cut through heavy-duty bar**
- **Highly durable, long-lasting blades outlast angle grinder or saw blades**

Safety

- **Controlled cutting process enhances user safety compared with use of cut-off blades**
- **Minimal spark risk compared to torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Internal Mechanics

EBH-Series: Cylinder is driven by an external Enerpac pump

EBE, EBC-Series: Cylinder is driven by a radial pump powered by an electric motor.

Typical Bar Cutting Applications

- Commercial and residential construction
- Concrete and masonry
- Metal fabrication
- Industrial manufacturing

▼ *Enerpac's bar cutters are built to handle tough cutting applications.*

EBH-Series Hydraulic Bar Cutters

EBH-Series Hydraulic Bar Cutters

EBH-Series Hydraulic Bar Cutters are driven by a specialized external hydraulic pump for optimal power and a higher duty cycle compared with other cutter types.

These cutters are ideal for use in production or manufacturing facilities with demanding, high-volume cutting applications.

EBH Series

CE

Maximum Material Hardness:
43 HRc

Maximum Material Diameter:
1.18 - 2.04 inches

Maximum Operating Pressure:
10,000 psi

① Highly durable blades maintain effectiveness throughout rigorous use
② Safety guard helps protect hands from injury
③ Heavy-duty cutting head provides a longer operational life
④ Lifting handle enables easier positioning and transport
⑤ Double-acting cylinder with advance and retract buttons improves control and reduces jamming
⑥ External hydraulic pump helps keep the tool cool, improving operational time (pump, hose, and pump coupler sold separately)

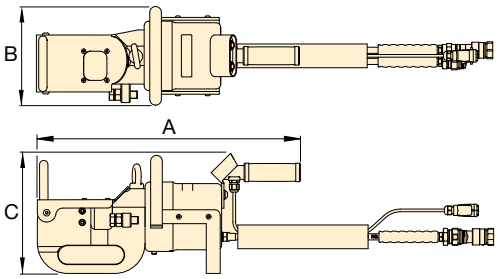

Pumps and Accessories

The EBH-Series Cutters are designed to work with specialized ZE4 and ZE6-Series pumps.

Pump models vary by voltage type. The pump and hose are sold separately. Both are required for the system to function. For complete details on required pumps and accessories:

Page: **236**

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

Drawings are for guidance purposes only, exact tool configurations vary by model.

Maximum Material Diameter* (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	Weight (lbs)	Replacement Blade Kit Number
1.18	**EBH30**	87,000	43	50	10,000	18.9	7.2	8.7	46	**EBH3001K**
1.38	**EBH35**	89,900	43	68	10,000	22.3	8.4	10.2	106	**EBH3501K**
2.04	**EBH52**	72,500	43	121	10,000	30.1	10.39	12.2	299	**EBH5201K**

* Maximum material properties indicated refer to the material to be cut.

EBE-Series Electric Bar Cutters

The versatile EBE-Series Electric Bar Cutters quickly cut through heavy-duty bar up to one inch (26 mm) in diameter without the need for an external hydraulic pump. Their compact size and low weight enable them to be easily transported and used wherever an external power source is available.

EBE Series

Maximum Material Hardness:
43 HRc

Maximum Material Diameter:
0.87 - 1.02 inches

Voltage*:
120 and 230 Volts

* ETL certification applies to 120V tools only

① Highly durable blades maintain effectiveness throughout rigorous use
② Safety guard helps protect hands from injury
③ Heavy-duty cutting head provides a longer operational life
④ Lifting handle enables easy positioning and transport
⑤ Piston-release mechanism allows blade to be reset, reducing jamming and providing a controlled cutting process

EBE22

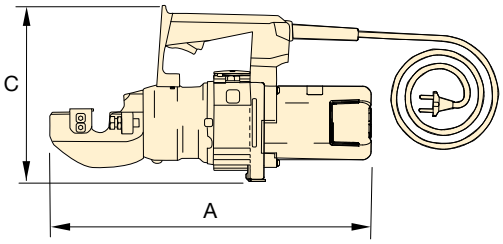



EBE26

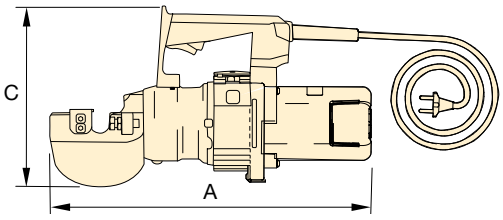

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Maximum Material Diameter* (in)	Power Specifications Volts	Hz	Amps	Watts	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Dimensions (in) A	B	C	Cord Length (ft)	Wt. (lbs)	Replacement Blade Kit Number
0.87	120	60	11	1300	**EBE22B**	94,275	43	25.1	18.1	5.5	9.8	6	29	**EBE2201K**
0.87	230	50	6.8	1400	**EBE22E**	94,275	43	25.1	18.1	5.5	9.8	10	29	**EBE2201K**
1.02	120	60	11	1300	**EBE26B**	94,275	43	37	18.4	5.5	10.2	6	35	**EBE2601K**
1.02	230	50	6.8	1400	**EBE26E**	94,275	43	37	18.4	5.5	10.2	10	35	**EBE2601K**

* Maximum material properties indicated refer to the material to be cut.

EBC-Series Cordless Bar Cutters

EBC-Series Cordless Bar Cutters

The highly portable EBC-Series Cordless Bar Cutters quickly and easily slice through up to number 6 rebar, or similar metal bar up to 0.79" (20mm) in diameter.

A powerful 20V Lithium-ion battery provides mobility and long lasting performance, making these tools the perfect go-to solution for the jobsite, including remote locations, or anywhere an external power source is not available.

EBC Series

Maximum Material Hardness:
43 HRc

Maximum Material Diameter:
0.79 inches

Battery:
12 and 18 Volts

* ETL certification applies to 120V tools only

① Highly durable blades maintain effectiveness throughout rigorous use
② Safety guard helps protect hands from injury
③ Highly durable cutting head can be rotated 360 degrees to aid in the positioning of the blades on the application.
④ Lifting handle enables easy positioning and transport
⑤ Piston-release mechanism allows blade to be reset, providing a controlled cutting process and reducing jamming
⑥ Powerful 20V battery provides high performance and complete mobility

Batteries and Chargers

EBC-Series Cutters come standard with two DeWALT® TM 18V-5Ah Lithium-ion batteries and one DeWALT® TM 12V and 18V charger. Additional batteries and chargers sold separately.

EBC-Series Cutters work with DeWALT® 18V MAX* batteries. DeWALT® is a registered trademark of DEWALT Industrial Tool Co., which has not manufactured, licensed, approved, or endorsed this cutter product.

Dimensions shown in inches.

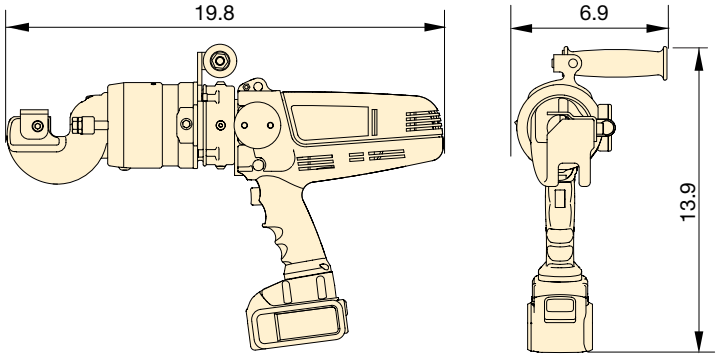

EBC-Series Replacement Parts

To order replacement parts, use one of the model numbers shown below.

For Cutter Model No.	DeWALT® Lithium-ion Battery	Li-ion Battery Charger 12V and 20V
EBC20B	B205	BC1220B
EBC20E	B185	BC1220E

Charger Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Maximum Material Diameter* (in)	Power Specifications: Battery Input Voltage (volts)	Power Specifications: Amps	Power Specifications: Watts	Model Number**	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Weight (without battery) (lbs)	Replacement Blade Kit Number
0.79	18-20	46	830	**EBC20B**	94,275	43	21.2	19.2	**EBC2001K**
0.79	18-20	46	830	**EBC20E**	94,275	43	21.2	19.2	**EBC2001K**

* Maximum material properties indicated refer to the material to be cut.
** To order an EBC-Series Cutter without batteries or a charger, remove the "B" or "E" from the Model Number, e.g. "EBC20"

▼ Shown: **EDCH130**

EDCH Series

Maximum Material Hardness:
41 HRc

Maximum Blade Aperture:
5.12 – 6.69 inches

Maximum Operating Pressure:
10,000 psi

Productivity

- **Powerful jaws and an exceptionally large blade aperture enable use on a large variety of applications including metal tubes, communication cables, profiles and similar materials***
- **Multiple pump options provide power, speed and mobility for all your applications**

Safety

- **Minimal spark risk compared with torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

* NOTE: Do not use to cut wire rope. Use instead the wire and rope cutter, page 232.

Pumps and Accessories

The EDCH-Series Cutters are designed to work with specialized ZC3, ZE4 and ZE6-Series pumps.

The pump and hose are sold separately. Both are required for the system to function. See page 237 for complete details on required pumps and accessories.

Page: 237

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

① Durable blades maintain efficiency throughout rigorous use
② Double-acting steel piston and cylinder improve robustness and control
③ Control knob immediately stops the tool when released, improving operator safety
④ External hydraulic pump helps keep tool cooler and working longer (pump, hose, and pump coupler sold separately)

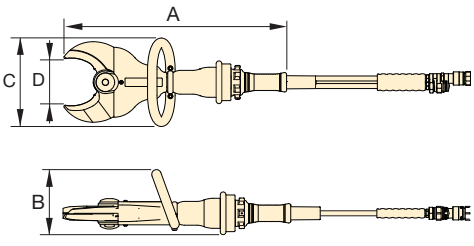

Maximum Blade Aperture (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	D	Weight (lbs)	Replacement Blade Kit Number
5.12	**EDCH130**	94,275	41	10,000	23.2	6.7	9.2	5.1	25.4	**EDCH13001K**
5.70	**EDCH145**	94,275	41	10,000	27.0	8.1	9.7	5.7	37.3	**EDCH14501K**
6.69	**EDCH170**	94,275	41	10,000	28.9	6.8	9.8	6.7	53.4	**EDCH17001K**

* Maximum material properties indicated refer to the material to be cut.

Electric Flat Bar Cutters

▼ Shown: **EFBE5017B**

EFBE Series

Maximum Material Hardness:
33 HRc

Maximum Material Dimensions:
1.96 x 0.67 – 2.75 x 0.59 in.

Voltage*:
120 and 230 volts

* ETL certification applies to 120V tools only

Productivity

- **Cut through high-tensile flat bar in seconds**
- **Highly durable, long-lasting blades offer increased longevity and less down time**

Safety

- **Controlled cutting process enhances operator safety**
- **Minimal spark risk compared with torching, grinding and sawing methods**

Replacement Blade Kits

To order replacement parts use one of the model numbers shown below.

For Cutter Model Number	Order Blade Kit Number
EFBE5017B	EFBE501701K
EFBE5017E	EFBE501701K
EFBE7015B	EFBE701501K
EFBE7015E	EFBE701501K

① Highly durable blades cut through flat bar, maintaining effectiveness throughout rigorous use

② Heavy-duty cutting head provides a longer operational life

③ Robust handle enables easy positioning and transport

④ Piston-release mechanism allows blade to be retracted, providing a controlled cutting process and reducing jamming

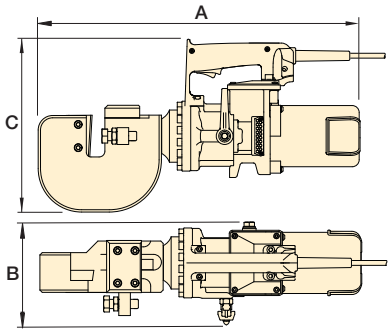

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)

E = 230V, 50 Hz (with European-style SCHUKO plug)

Max. Material Dimensions* (in)		Power Specifications				Model Number	Maximum Material Tensile Strength*	Maximum Material Hardness*	Maximum Cutting Force	Cord Length	Dimensions (in)			Wt.
Height	Width	Volts	Hz	Amps	Watts		(psi)	(HRc)	(tons)	(ft)	A	B	C	(lbs)
1.96	0.67	120	60	11.0	1300	**EFBE5017B**	65,267	33	29.8	6	19.0	6.9	10.7	46
1.96	0.67	230	50	6.8	1400	**EFBE5017E**	65,267	33	29.8	10	19.0	6.9	10.7	46
2.75	0.59	120	60	11.0	1300	**EFBE7015B**	65,267	33	29.8	6	21.9	6.9	11.7	66
2.75	0.59	230	50	6.8	1400	**EFBE7015E**	65,267	33	29.8	10	21.9	6.9	11.7	66

* Maximum material properties indicated refer to the material to be cut.

▼ Shown: **ECCE32B-Series Chain Cutter**

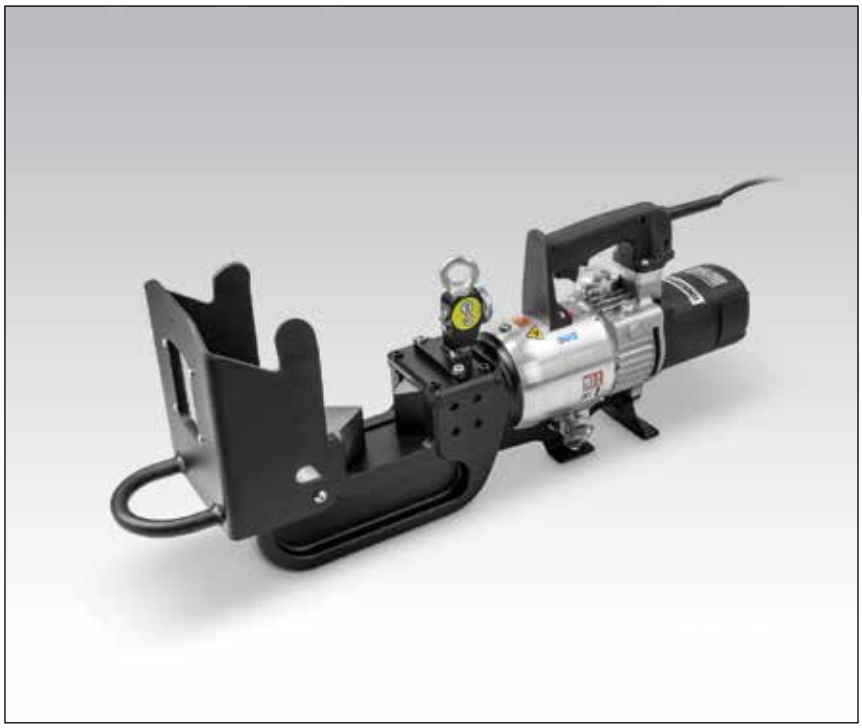

Your Simple Solution for Cutting High-Strength Industrial Chain

Internal Mechanics

ECCE-Series: Cylinder is driven by a radial pump powered by an electric motor.

Productivity

- **Quickly cut through heavy-duty chain links with minimal effort**
- **Highly durable blades outlast angle grinder or saw blades**

Safety

- **Controlled cutting process behind a protective shield enhances safety**
- **Precisely cut only selected link, helping prevent damage to adjacent links and weakening of chain**
- **Minimal spark risk compared to torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Typical Chain Cutting Applications

- Chain manufacturing
- Mining
- Rigging / material handling for transport
- Oil and gas
- Marine

◀ *Cut through chain links with ease using Enerpac's chain cutters.*

ECCE-Series Electric Chain Cutters

ECCE-Series Electric Chain Cutters

ECCE-Series Electric Chain Cutters are ideal for applications where safety is paramount. Unlike other cutting methods, Enerpac's chain cutters precisely cut selected chain links behind an enclosed, transparent safety guard.

This not only protects the operator's hands, it also helps prevent damage to adjacent links, which often results from using alternative cutting methods like torches or cut-off tools.

ECCE Series

Maximum Material Hardness:
46 HRc

Maximum Material Diameter:
1.25 inches

Maximum Grade Chain:
100

Voltage*:
120 and 230 volts

* ETL certification applies to 120V tools only

① Highly durable blades cut through heavy-duty chain, maintaining effectiveness throughout rigorous use

② Transparent safety guard protects hands and allows continuous monitoring for better management of cutting process

③ Heavy-duty cutting head provides a longer operational life

④ Lifting handle and eyebolt enable easy positioning and transport

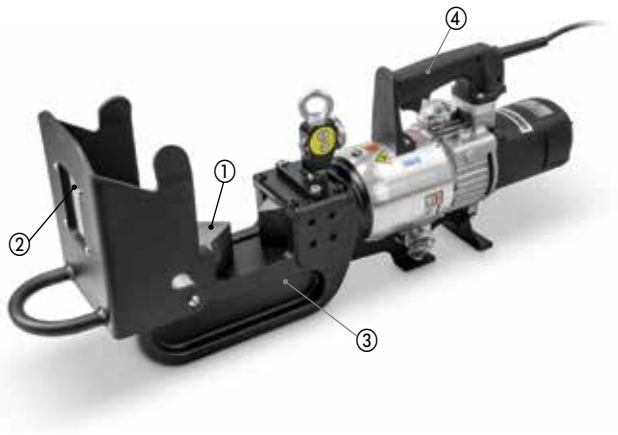

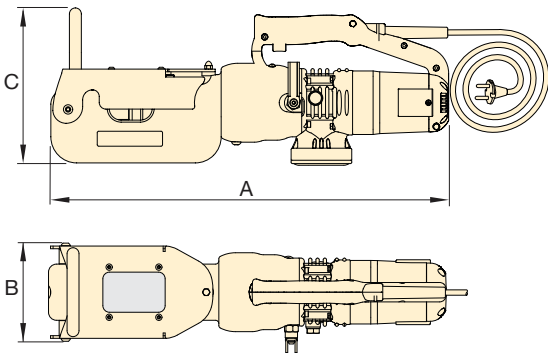

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)

E = 230V, 50 Hz (with European-style SCHUKO plug)

Maximum Material Diameter [1) 2)] (in)			Power Specifications				Model Number	Maximum Material Hardness [1)]	Maximum Cutting Force	Dimensions (in)			Cord Length	Wt.	Replacement Blade Kit Number
Grade 70	Grade 80	Grade 100	Volts	Hz	Amps	Watts		(HRc)	(tons)	A	B	C	(ft)	(lbs)	
1.00	1.00	0.5	120	60	10.0	1200	**ECCE26B**	46	35.1	23.6	6.0	9.3	6	55	**ECCE2601K**
1.00	1.00	0.5	230	50	5.3	1100	**ECCE26E**	46	35.1	23.6	6.0	9.3	10	55	**ECCE2601K**
1.25	1.00	0.75	120	60	11.0	1300	**ECCE32B**	46	52.9	27.5	7.5	12.6	6	106	**ECCE3201K**
1.25	1.00	0.75	230	50	6.8	1400	**ECCE32E**	46	52.9	27.5	7.5	12.6	10	106	**ECCE3201K**

[1)] Cutting larger chains or those of a grade higher than those recommended will result in increased wear, and may damage the tool.
[2)] All links over 1/2" must be cut in two passes, with each pass cutting one side of the link.

▼ Shown left to right: **EWCH90 and EWCE55B**

The Quick and Clean Way to Cut Cable and Wire Rope

Productivity

- **A broad range of hydraulic and electric tools quickly and easily cut through cable and wire rope**

Safety

- **Controlled cutting process enhances operator safety**
- **Minimal spark risk compared with torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Internal Mechanics

EWCH-Series: Cylinder is driven by an external Enerpac pump.

EWCE-Series: Cylinder is driven by a radial pump powered by an electric motor

Typical Wire and Cable Cutting Applications

- Telecommunications
- Electrical installation and maintenance
- Power generation and transmission
- Shipbuilding

▼ *Guillotine-style blades make quick work of electrical cables and wire rope.*

EWCH-Series Hydraulic Wire and Cable Cutters

EWCH-Series Hydraulic Wire and Cable Cutters

EWCH-Series Hydraulic Wire and Cable Cutters are ideal for use in production facilities where demanding, high-volume cutting applications are often encountered.

Each tool is driven by a specialized external hydraulic pump, which provides greater cutting force and allows for higher duty cycles compared with other cutter types.

EWCH Series

CE

Maximum Material Hardness (Cable):
43 HRc

Maximum Material Diameter:
3.54 - 7.09 inches

Maximum Operating Pressure:
10,000 psi

① Guillotine-style blades maintain effectiveness throughout rigorous use
② Cutting head can be opened and closed to help position material to be cut
③ Eyebolt facilitates easy lifting
④ Double-acting cylinder with advance and retract buttons improves control and reduces jamming
⑤ External hydraulic pump helps keep tool cooler and working longer (pump, hose, and pump coupler sold separately)

Pumps and Accessories

The EWCH-Series Cutters are designed to work with specialized ZE6-Series pumps. The pump and hose are sold separately. Both are required for the system to function. See page 236 for complete details on required pumps and accessories.

Page: 236

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

EWCH180

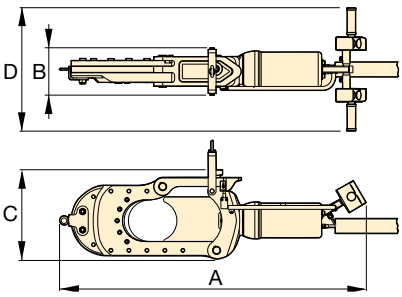

EWCH90

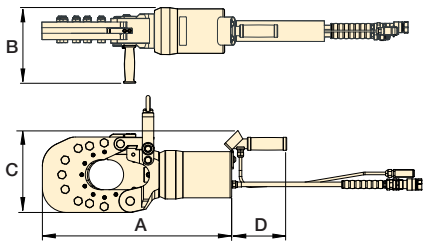

EWCH140

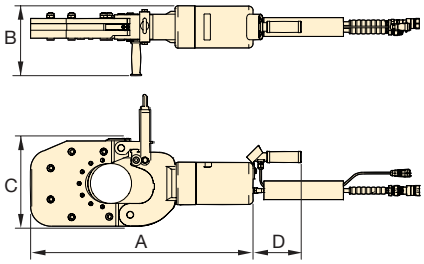

Maximum Material Diameter* (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	D	Wt. (lbs)	Replacement Blade Kit Number
3.54	**EWCH90**	94,275	43	61.8	10,000	22.9	11.1	9.9	6.7	119	**EWCH9001K**
5.51	**EWCH140**	94,275	43	61.8	10,000	30.8	9.7	12.2	6.7	198	**EWCH14001K**
7.09	**EWCH180**	94,275	43	89.0	10,000	53.7	8.3	15.8	21.7	330	**EWCH18001K**

* Maximum material properties indicated refer to the material to be cut.

EWCE-Series Electric Wire and Cable Cutters

EWCE-Series Electric Wire and Cable Cutters combine the efficiency and safety of their hydraulic counterparts with the greater portability of electric tools. Their lighter weight allows for easier carrying and positioning. Available in 120V and 230V versions.

EWCE Series

Maximum Material Hardness:
48 HRc

Maximum Material Diameter:
1.65 - 2.17 inches

Voltage*:
120 and 230 Volts

* ETL certification applies to 120V tools only

① Durable, guillotine-style blades maintain effectiveness throughout rigorous use
② Cutting head opens wide for easy positioning of wire or cable
③ Robust handles enable easy positioning and transport
④ Double-acting cylinder with directional control improves handling and reduces jamming

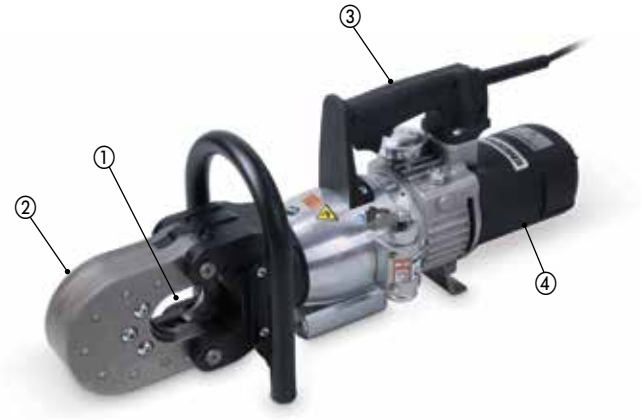

▼ *Cut through wire and cables with ease.*

Dimensions shown in inches.

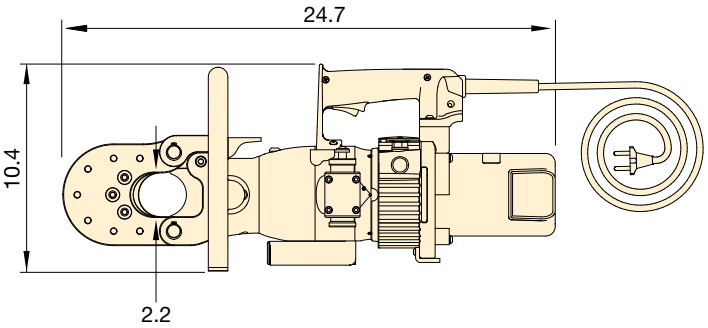

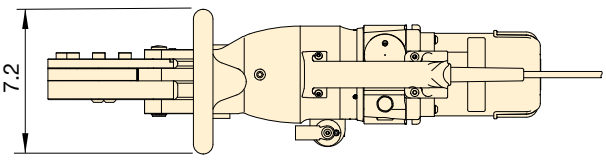

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Max. Material Diameter* (in)		Power Specifications				Model No.	Maximum Material Hardness*	Maximum Cutting Force	Cord Length	Weight	Replacement Blade Kit Number
Cable	Rope	Volts	Hz	Amps	Watts		(HRc)	(tons)	(ft)	(lbs)	
2.17	1.65	120	60	11.0	1300	**EWCE55B**	48	38.2	6	55	**EWCE5501K**
2.17	1.65	230	50	6.8	1400	**EWCE55E**	48	38.2	10	55	**EWCE5501K**

* Maximum material properties indicated refer to the material to be cut.

Cutter / Spreader Combination Tools

▼ Shown: **ECSE300B**

ECSE Series

Maximum Material Hardness:
41 HRc

Maximum Blade Aperture:
11.81 inches

Voltage*:
120 and 230 Volts

* ETL certification applies to 120V tools only

Internal Mechanics

ECSE-Series: Cylinder is driven by a radial pump powered by an electric motor.

Typical Cutter / Spreader Applications

- Industrial manufacturing
- Recycling
- Demolition

Productivity

- **Blades easily cut through metal profiles, pipes, rods and other obstructions**
- **Wedges on tips of blades provide powerful spreading force**

Safety

- **Controlled cutting process creates minimal spark risk compared with torching, grinding and sawing methods**

① Highly durable blades grip and cut through metal obstructions with ease
② Cutting head can be rotated 180 degrees in each direction for easier access to the application
③ Robust handle enables easy positioning and transport
④ Double-acting cylinder improves control and reduces jamming
⑤ Wedges provide powerful spreading force

Dimensions shown in inches.

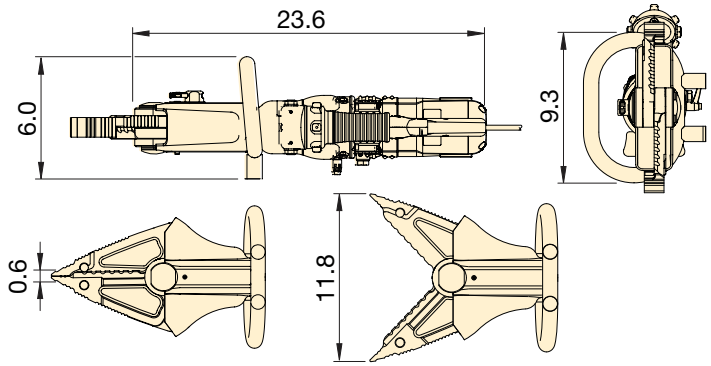

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 1-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Maximum Blade Aperture (in)	Power Specifications Volts	Hz	Amps	Watts	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Spreading Force** (tons)	Cord Length (ft)	Weight (lbs)	Replacement Jaws Kit Number
11.81	120	60	10.0	1200	**ECSE300B**	94,275	41	5.17	6	33	**ECSE30001K**
11.81	230	50	5.3	1100	**ECSE300E**	94,275	41	5.17	10	33	**ECSE30001K**

* Maximum material properties indicated refer to the material to be cut.
** 0.98 inches from jaw tips with jaws closed.

▼ Shown left to right: **WHC3380, WHC750**

WHC, WHR, STC Series

Capacity:
3 - 20 tons

Cutting Capacity:
0.50 - 4 inches

Maximum Operating Pressure:
10,000 psi



Cutterhead Sets

Hydraulic Cutterheads are available as sets (pump, tool and hose).

Cutter Model Number	Pump Model Number	Set Model Number †
WHC750	P392	**STC750H**
WHC750	P392FP	**STC750FP**
WHC750	PATG1102N	**STC750A**
WHC1250	P392	**STC1250H**
WHC1250	P392FP	**STC1250FP**
WHC1250	PATG1102N	**STC1250A**

†: H = Hand Pump, A = Air Operated Pump
FP = Foot Pump

- **Single acting, spring-return on all models, except WHR1250**
- **Guillotine action for efficient operation**
- **Lifting handles on larger models**
- **Carrying bag included for easy carrying and tool protection**
- **Ideal for use with most Enerpac pumps featuring 3-way valve or dump valve and 10,000 psi pressure rating (except WHR1250, which requires 4-way valve)**
- **CR400 coupler and dust cap included on all models**

▼ *Steel rope is easily cut with the smooth guillotine action of an Enerpac cutterhead.*

▼ **Selection Chart Maximum Cutting Capacities** (diameter in inches)

Cutter Head Operation	Model Number	Capacity (ton)	Oil Cap. (in³)	Steel Wire Rope, Hempcore or IWRC 6x7 6x12 6x19	Round Bar				Wire Strand				Cable		Length (in)	Wt. (lbs)	Replacement Blade Kit Numbers
					Copper Wire or Bar	Aluminum Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Aluminum Wire Strands 6x7	ACSR	Guy Steel Wire Strands 1x7 1x19	Telephone Cable CPP	Underground Cable (Power)			
Single-acting	**WHC750***	**4**	1.2	0.63	0.75	0.75	0.75	0.50***	0.75	0.75	0.75	0.63	☆	☆	5.00	7	**WCB750**
	WHC1250*	**20**	8.2	1.25	1.25	1.25	1.25	1.00	1.25	1.25	1.25	0.88	☆	☆	11.00	25	**WCB1250**
	WHC2000	**13**	7.3	1.00	1.25	1.25	0.88	☆	2.00	2.00	2.00	0.75	☆	☆	15.00	23	**WCB2000**
	WHC3380	**3**	4.0	☆	☆	☆	☆	☆	3.00	3.00	☆	☆	3.38	3.38	19.00	20	**WCB3380**
	WHC4000	**8**	8.4	☆	☆	☆	☆	☆	3.50	3.50	☆	☆	4.00	4.00	24.00	32	**WCB4000**
D/A**	**WHR1250**	**20**	7.5	1.25	1.25	1.25	1.25	1.00	1.25	1.25	1.25	0.88	☆	☆	16.50	26	**WCB1250**

* Available in sets. ** D/A = Double-acting *** Low Alloy

☆ Will not cut designated material

Self-Contained Hydraulic Cutters

▼ Shown left to right: **WMC2200, WMC750**

WMC Series

Capacity:
3 - 20 tons

Maximum Material Diameter:
0.38 - 3.38 inches

- **Rotating heads for operator convenience**
- **Guillotine action (except WMC1000) for efficient operation**
- **Carrying bag included for easy carrying and tool protection**
- **Velcro® straps to secure handles on larger models for easy transportation**
- **Spring-return on all models**
- **Lightweight, self-contained tool, can be used anywhere**

Replacement Blades

To order 60-62HRc hardened replacement blades use one of the model numbers shown below.

For Cutter Model Number	Order Blade Model Number
WMC580	**WCB750**
WMC750	**WCB750**
WMC1000	**WCB1000**
WMC1250	**WCB1250**
WMC2200	**WCB2000**
WMC 3380	**WCB3380**

Caution!

A "☆" in the charts on these pages means that this hydraulic cutter is not designed to cut this size or type of material. Any attempt to do so may result in personal injury and damage to the unit and will void the warranty.

▼ **Selection Chart Maximum Cutting Capacities** (diameter in inches)

Model Number	Capacity (ton)	Steel Wire Rope, Hemp-core or IWRC 6x7 6x12 6x19	Round Bar				Wire Strand					Cable		Length (in)	Weight (lbs)
			Copper Wire or Bar	Alumi-num Wire or Bar	Soft Steel Bolts	Rein-forcing Bar	Bare Copper Wire Strands	Bare Alumi-num Wire Strands 6x7	ACSR Wire Strands	Guy Steel Wire Strands 1x7	Guy Steel Wire Strands 1x19	Tele-phone Cable CPP	Under-ground Cable (Power)		
WMC580	**4**	0.63	0.63	0.63	0.63	0.38	0.63	0.63	0.63	0.56	0.56	☆	☆	15.00	8
WMC750	**4**	0.75	0.75	0.75	0.69	0.50***	0.75	0.75	0.75	0.56	0.56	☆	☆	15.00	8
WMC1000*	**20**	☆	0.75	0.75	0.75	0.75	☆	☆	☆	☆	☆	☆	☆	26.75	25
WMC1250	**20**	1.25	1.25	1.25	1.25	0.88	1.25	1.25	1.25	0.88	0.88	☆	☆	26.75	23
WMC2200	**13**	1.00	1.25	1.25	0.88	☆	2.00	2.00	2.00	0.75	0.75	☆	☆	24.75	24
WMC3380	**3**	☆	☆	☆	☆	☆	3.00	3.00	☆	☆	☆	3.38	3.38	26.00	22

* Cuts .50" alloy chain grade 70 (type G7 transport or tie-down) or grade 80 (for overhead lifting applications)
☆ Will not cut designated material
*** Low Alloy

EBH-Series Bar Cutters and EWCH-Series Wire and Cable Cutters are powered by an external pump with an electric valve.

A twin hydraulic hose and electric cable connect the tools to the pump, allowing the user to operate them directly from a control panel located on the cutters.

ZE Series

Reservoir Capacity:
1.2 - 2.6 gallon

Motor Size:
1.5 - 7.5 hp

Maximum Operating Pressure:
10,000 psi

▼ Pumps used with EBH Bar Cutters and EWCH Wire & Cable Cutters

ZE4-Series Pump

Specialized **ZE4-Series** pumps provide a balance of speed and versatility, and are available in 115 and 230 volts. Recommended for use with **EBH30** and **EBH35** cutters when portability, or the convenience of using standard voltage is required.

ZE6-Series Pump

Specialized **ZE6-Series** three-phase pumps offer a high-flow rate that provides fast performance for demanding applications. Recommended for all **EWCH and EBH** bar cutting applications where speed is critical, or where higher flow rates are required by the application.

Gauges

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

Hoses

EBH-and EWCH-Series Cutters require a twin hose with an electric cable. The hose comes equipped with the appropriate couplers.

Required hoses sold separately.

Description	Model No.
20 ft. long, twin hose with sheath and electric cable	**CH720EC**

Voltage: (Model No. ending with suffix)

B = 115V, 50-60 Hz (with NEMA 5-15 plug)
E = 208-240V, 50-60 Hz (with commonly used European (SCHUKO) plug)
I = 208-240V, 50-60 Hz (with NEMA 6-15 plug)

Pump Series	Pump Model Number [1] [2]	Motor Electrical Specification	Motor Size (hp)	Reservoir Capacity (gal)	Height (in)	Length (in)	Width (in)	Wt. (lbs)	Recommended Cutter Model Number (sold separately)
ZE4	**ZE4404XB**	115 V-1 ph 50-60 Hz	1.5	1.2	20.2	20.5	11.0	100	**EBH30 EBH35**
	ZE4404XE	208-240V-1 ph 50-60 Hz							
	ZE4404XI	208-240V-1 ph 50-60 Hz							
ZE6	**ZE6410XG-S**	208-240 V-3 ph	7.5	2.6	15.1	22	15.1	170	**All EWCH- and EBH-Series Cutters**
	ZE6410XJ-S	460-480 V-3 ph							
	ZE6410XK-S	440 V-3 ph							
	ZE6410XW-S	380-415 V-3 ph							

[1] Indicated pumps come equipped with appropriate configurations to work with indicated cutters.
[2] ZE6 pumps are available with roll cages. To add add a roll cage, add an "R" prior to the "S" in the nomenclature, e.g. ZE6410XG-RS.

Pumps and Accessories for EDCH Cutters

EDCH-Series Decommissioning Cutters are designed to work in a wide variety of environments, from factories to demolition projects.

Enerpac offers multiple pump options to provide power, speed and mobility for all your applications.

ZE, ZC Series

Reservoir Capacity:
1.2 - 2.6 gallon

Motor Size:
1.4 - 1.5 - 7.5 hp

Maximum Operating Pressure:
10,000 psi

▼ Pumps used with EDCH Decommissioning Cutters

ZC3-Series Pumps

Specialized ZC3-Series Cordless Pumps offer the portability of a cordless tool without the added weight of an integrated motor, combining freedom of movement with ease of use. Recommended for use with **EDCH130** cutters.

ZE4-Series Pumps

Specialized ZE4-Series Pumps provide a balance of speed and versatility. Recommended for use with all **EDCH** Cutters when the convenience of using standard voltage is required.

ZE6-Series Pump

Specialized ZE6-Series pumps offer a high-flow rate that provides fast performance. Recommended for use with all **EDCH** Cutters when 3-phase power is available, and speed is critical.

Gauges

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

Hoses

EDCH-Series Cutters require a twin hose for operation. The hose comes equipped with the appropriate couplers.

Required hoses sold separately.

Description	Model No.
20 ft. long, twin hose only	**CH720MC**

Voltage: (Model No. ending with suffix)

B = 115V, 50-60 Hz (with NEMA 5-15 plug)
E = 208-240V, 50-60 Hz (with commonly used European (SCHUKO) plug)
I = 208-240V, 50-60 Hz (with NEMA 6-15 plug)

Pump Series	Pump Model Number [1] [2]	Motor Electrical Specification	Motor Size (hp)	Reservoir Capacity (gal)	Height (in)	Length (in)	Width (in)	Wt. (lbs)	Recommended Cutter Model Number (sold separately)
ZC3	**ZC3204XB**	Cordless (115 V Charger)	1.4	1.2	25.7	18.6	14.3	60	**EDCH130**
	ZC3204XE	Cordless (230 V Charger)							
ZE4	**ZE4204XB**	115 V-1 ph 50-60 Hz	1.5	1.2	20.2	20.5	11.0	100	**EDCH130 EDCH145 EDCH170**
	ZE4204XE	208-240V-1 ph 50-60 Hz							
	ZE4204XI	208-240V-1 ph 50-60 Hz							
ZE6	**ZE6210XG-S**	208-240 V-3 ph	7.5	2.6	15.1	22	15.1	170	
	ZE6210XJ-S	460-480 V-3 ph							
	ZE6210XK-S	440 V-3 ph							
	ZE6210XW-S	380-415 V-3 ph							

[1] Indicated pumps come equipped with appropriate configurations to work with indicated cutters.
[2] ZE6 pumps are available with roll cages. To add add a roll cage, add an "R" prior to the "S" in the nomenclature, e.g. ZE6210XG-RS.

Enerpac's Bolting Solutions caters to the complete bolting work-flow, ensuring joint integrity in a variety of applications throughout industry:

Joint Assembly

From simple pipe alignment to complex joint positioning of large structural assemblies, our comprehensive line of joint assembly products range from hydraulic and mechanical flange alignment and flange closing tools to PLC-controlled multi-point synchronous positioning systems.

Controlled Tightening

Enerpac offers a variety of controlled tightening options to best meet the requirements of your application. From manual torque multipliers to hydraulic and pneumatic driven square drive wrenches, and from low-profile hexagon torque wrenches to inter-connectable bolt tensioning tools; we offer the products you need for accurate and simultaneous tightening of multiple bolts.

Joint Separation

Enerpac also provides hydraulic nut splitters and a variety of mechanical and hydraulic spreading tools for joint separation during inspection, maintenance and decommissioning operations. High-quality bolting solutions from the brand you can trust. See how Enerpac can make your bolting work-flow more accurate, safer and efficient.

Enerpac Bolting Integrity Software Solutions

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections.

The software is used by a wide range of clients worldwide often interfacing with maintenance, construction and commissioning management systems.

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report.

Custom Joint information can also be entered.

Page: **416**

Bolting Tools and Pumps Section Overview

	Capacity	Tool Type and Functions	Series		Page
Controlled Tightening and Loosening	1400-26,150 Ft.lbs	**Square Drive Hydraulic Torque Wrenches** Rigid steel design & maximum versatility	S		240 ▶
	¾ – 6⅛ inches 19 - 155 mm	**Heavy-duty Impact Sockets** Square Drive	BSH		244 ▶
	1 1/16 - 4 15/16 inches 27- 120 mm	**Back-Up Spanners for Torque Wrenches**	BUS		245 ▶
	1 13/16 - 3⅛ inches 46 - 75 mm	**Safe T™ Torque Lock** Hands-free torque wrench system	STTL		246 ▶
	2000-35,000 Ft.lbs 1980-4360 Ft.lbs	**Low-Profile Hydraulic Torque Wrenches-Steel UltraSlim Stepped-Width Cassette**	W W-SL		248 ▶ 258 ▶
	1408-28,002 Ft.lbs	**Hexagon and Square Drive Torque Wrenches** One drive, two tools	RSL, RLP RSL, RSQ		262 ▶
	1411-24,057 Ft.lbs	**Square Drive Aluminum Torque Wrenches** Setting Industry-First Safety Standards	DSX		274 ▶
	1541-13,489 Ft.lbs	**Drive Units, Hexagon Cassettes and Square Drive Torque Wrenches**	HMT, HLP, HSQ		278 ▶ 283 ▶
	750-8000 Ft.lbs	**Manual Torque Multipliers**	E		284 ▶
	1000-6000 Ft-lbs	**Pneumatic Torque Wrenches**	PTW		286 ▶
	148-7375 Ft.lbs	**Mobile Calibration System** For continuous rotation tools and hydraulic wrenches	MCS		290 ▶
		Selection Matrix Optimum Combinations Torque Wrenches - Torque Pumps - Hoses			291 ▶
	Flow 15 in³/min.	**Portable Electric Torque Pumps** Cordless Hydraulic Power	XC		292 ▶
	Flow 32 in³/min.	**Electric Torque Pumps**	E-Pulse		294 ▶
	Flow 60-120 in³/min.	**Electric Torque Pumps**	TQ		296 ▶
	Flow 60-120 in³/min.	**Electric Torque Pumps**	ZU4T		298 ▶
	Flow 60-120 in³/min.	**Electric Torque Pumps**	ZE4T, ZE5T		302 ▶
	Flow 25-60 in³/min.	**Air Torque Pumps**	LAT ZA4T		304 ▶ 306 ▶
	15.1 - 522.7 tons 25.2 - 444.9 tons	**Topside Tensioners**	HM GT		310 ▶ 314 ▶
	17.8 - 260.9 tons	**Subsea Tensioners**	EAJ		316 ▶
	22.9 - 333.9 tons	**Power Gen Tensioners Foundation Bolt Tensioners**	PGT, FTR, FTE		318- 323 ▶
	0.037 in³/stroke	**High-Pressure Hand Pump Ultra-High-Pressure Hoses & Couplers**	HPT, HT, B		324 325
	Flow 4 in³/min. Flow 8-20 in³/min.	**Ultra High-Pressure Air Pump Electric Tensioning Pumps**	ATP ZUTP		327 ▶ 328
Joint Assembly / Joint Separation	1-10 tons	**Flange Alignment Tools**	ATM		330 ▶
	8-14 tons	**Step-type Industrial Spreaders**	FSC, FSH, FSM		332 ▶
	½ - 2⅞ A/F 2¾ - 5⅜ A/F	**Hydraulic Nut Splitters**	NC, NSC NSH		334 ▶ 338
	1-12 in. flange	**Mechanical Flange Face Tool**	FF		340 ▶

▼ Shown: **S3000PX**

Safety and Performance

- **Compact, high-strength uni-body construction provides a small operating radius without sacrificing endurance**
- **35° rotation angle and rapid return stroke for fast operation**
- **Tough manifold design with added safety feature for enhanced operator safety**

Simplicity

- **360° click-on reaction arm with quick release lever provides easier handling, even when wearing gloves**
- **Includes robust handle which mounts on both sides of tool for extra maneuverability**
- **Push button square drive release for quickly reversing the square drive for tightening or loosening**

Versatility

- **Available with optional enhanced tilt and swivel TSP300 manifold for horizontal and vertical maneuverability, with greater durability***

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**
- **Optional Angle-of-Turn Indicator provides measurement of rotation**

* TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

Setting New Standards in Safety, Simplicity and Performance

Two Handle Styles

Robust angled positioning handles come standard with every S-Series (X-Edition) tool. Straight positioning handles are available as accessories.

Compatible S-Series (X-Edition) wrenches	Angled positioning handles (standard)	Straight positioning handles (optional)
S1500X, S3000X	**SWH6A**	**SWH6S**
S6000X, S11000X	**SWH10A**	**SWH10S**
S25000X	Supplied with an eyebolt handle **(SWH10EA)**	

TSP - Pro Series Swivel

The optional TSP300 tilt and swivel manifold with robust interlocking design provides 360° X-axis rotation and 160° Y-axis rotation.

Page: 243



Calibration Certificate

All X-Edition tools are CE-ATEX certified and are shipped complete with a calibration certificate.

CE II 2 GD T4

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

Square Drive Hydraulic Torque Wrenches

Standard are ① ② ⑥ ⑧. Other items are optional.

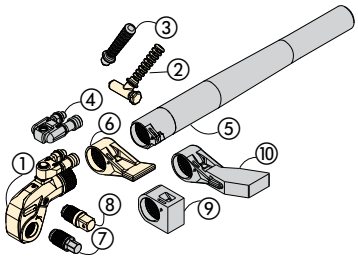

① Drive Unit
② Angled Positioning Handle
③ Straight Positioning Handle
④ Pro Series Swivel
⑤ Reaction Tube Extension
⑥ Standard Reaction Arm
⑦ Allen® Drive
⑧ Square Drive
⑨ Short Reaction Arm
⑩ Extended Reaction Arm

250%

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

S Series (X-Edition)

Nominal Torque at 10,000 psi:
26,150 Ft.lbs

Square Drive Range:
¾ - 2½ inches

Nose Radius:
0.98 - 2.52 inches

Maximum Operating Pressure:
10,000 psi

***TORQUE WRENCH SELECTION (based on hexagon socket size range)**

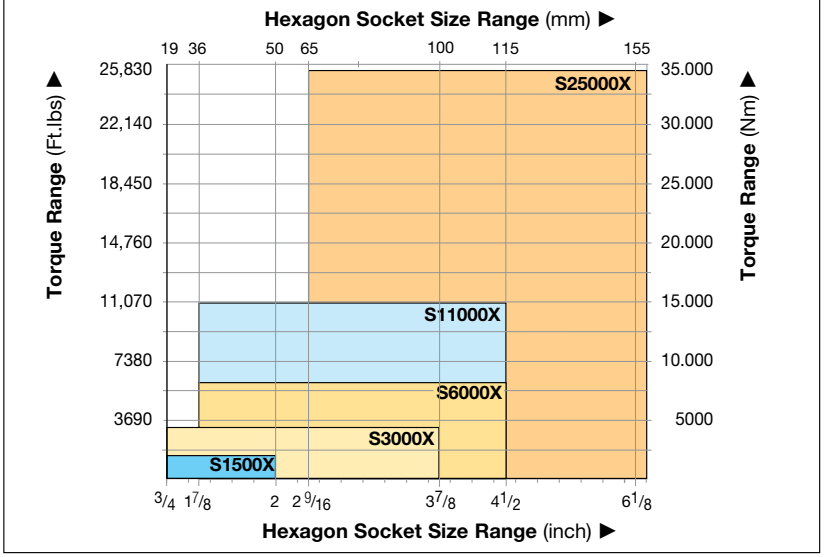

Use only Heavy-Duty Impact Sockets

For power-driven torquing equipment, according to ISO2725 and ISO1174; DIN 3129 and DIN 3121 or ASME-B107.2/1995.

Page: 244

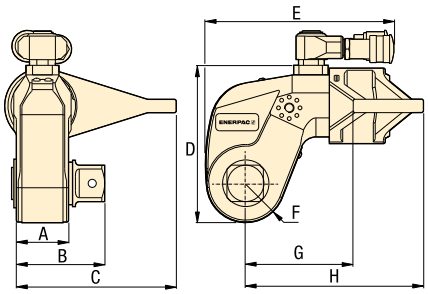

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

Safe T™ Torque Lock

The Safe T™ Torque Lock is suitable for all bolted applications from 140 to 11,070 ft-lbs. using a heavy-duty impact socket.

The patented mechanical locking system creates a hands-free torque wrench solution suitable for Enerpac only square drive tools.

Suitable for S3000X, S6000X, and S11000X.

Page: 246

Nominal Torque at 10,000 psi / 690 bar		Minimum Torque at 1000 psi / 69 bar		Square Drive		Angle-of-Turn Model No. (optional)	Torque Wrench Model No.*	Dimensions (in)								Wt.
				Size (in)	Model No. (included with wrench)											
(Ft.lbs)	(Nm)	(Ft.lbs)	(Nm)					A	B	C	D	E	F	G	H	(lbs)
1440	1952	144	195	¾"	SD15–012	AOT15	**S1500X**	1.54	2.56	4.25	3.82	5.35	0.98	2.76	5.08	7.0
3225	4373	323	438	1"	SD30–100	AOT30	**S3000X**	1.89	3.15	5.31	5.04	6.81	1.30	3.54	6.34	12.3
6150	8338	615	834	1½"	SD60–108	AOT60	**S6000X**	2.17	3.62	6.65	6.18	7.56	1.57	4.33	7.40	20.2
11,175	15.151	1,118	1.515	1½"	SD110–108	AOT110	**S11000X**	2.83	4.49	7.76	7.48	8.98	1.95	5.24	9.02	34.7
26,150	35.455	2,615	3.545	2½"	SD250–208	AOT250	**S25000X**	3.50	5.63	9.69	9.61	11.30	2.52	7.17	11.61	70.8

* To order a S-series (X-Edition) wrench fitted with the TSP swivel, insert a "P" prior to the "X" in the tool designation. e.g., **S1500PX**.

Nominal Torque at 10,000 psi:
26,150 ft.lbs.

Hexagon Size Allen® Drive:
½ - 2¼ in. (14-85 mm)

For S Series (X-Edition)

TORQUE WRENCH	OPTIONAL ALLEN® DRIVES, IMPERIAL				OPTIONAL ALLEN® DRIVES, METRIC				SHORT REACTION ARM FOR ALLEN® DRIVES		
Model Number	**Hexagon Size** (in)	**Maximum Torque** (ft.lbs)	**Model Number**	**Dim. B1** (in)	**Hexagon Size** (mm)	**Maximum Torque** (ft.lbs)	**Model Number**	**Dim. B1** (in)	**Model Number**	**Dimensions** (in) **C1**	**H1**
S1500X (1440 Ft-lbs)	½	355	**SDA15008**	2.6	**14**	475	**SDA1514**	2.60	**SRA15X**	2.66	2.56
	⅝	690	**SDA15010**	2.6	**17**	850	**SDA1517**	2.68			
	¾	1195	**SDA15012**	2.8	**19**	1185	**SDA1519**	2.76			
	⅞	1400	**SDA15014**	2.9	**22**	1400	**SDA1522**	2.87			
	1	1400	**SDA15100**	3.0	**24**	1400	**SDA1524**	2.91			
S3000X (3225 Ft-lbs)	⅝	690	**SDA30010**	3.0	**17**	850	**SDA3017**	3.03	**SRA30X**	3.15	2.91
	¾	1195	**SDA30012**	3.1	**19**	1185	**SDA3019**	3.11			
	⅞	1895	**SDA30014**	3.3	**22**	1835	**SDA3022**	3.23			
	1	2825	**SDA30100**	3.4	**24**	2385	**SDA3024**	3.31			
	1⅛	3200	**SDA30102**	3.5	**27**	3200	**SDA3027**	3.35			
	1¼	3200	**SDA30104**	3.5	**30**	3200	**SDA3030**	3.43			
	–	–	–	–	**32**	3200	**SDA3032**	3.46			
S6000X (6050 Ft-lbs)	⅝	690	**SDA60010**	3.3	**17**	850	**SDA6017**	3.39	**SRA60X**	3.60	3.50
	¾	1195	**SDA60012**	3.5	**19**	1185	**SDA6019**	3.46			
	⅞	1895	**SDA60014**	3.6	**22**	1835	**SDA6022**	3.58			
	1	2825	**SDA60100**	3.7	**24**	2385	**SDA6024**	3.66			
	1⅛	4025	**SDA60102**	3.8	**27**	3395	**SDA6027**	3.70			
	1¼	5520	**SDA60104**	3.9	**30**	4655	**SDA6030**	3.78			
	–	–	–	–	**32**	5650	**SDA6032**	3.82			
S11000X (11,175 Ft-lbs)	**1¼**	5520	**SDA110104**	4.5	**30**	4655	**SDA11030**	4.41	**SRA110X**	5.02	4.17
	1⅜	7345	**SDA110106**	4.6	**32**	5650	**SDA11032**	4.49			
	1½	9535	**SDA110108**	4.6	**36**	8040	**SDA11036**	4.61			
	1⅝	11,000	**SDA110110**	4.8	**41**	11,000	**SDA11041**	4.76			
	1¾	11,000	**SDA110112**	4.9	**46**	11,000	**SDA11046**	5.00			
S25000X (26,150 Ft-lbs)	**1½**	9535	**SDA250108**	5.5	**36**	8040	**SDA25036**	5.51	**SRA250X**	6.24	5.31
	1⅝	12,120	**SDA250110**	5.7	**41**	11,880	**SDA25041**	5.67			
	1¾	15,135	**SDA250112**	5.8	**46**	16,775	**SDA25046**	5.83			
	1⅞	18,620	**SDA250114**	5.9	**50**	21,545	**SDA25050**	5.94			
	2	22,595	**SDA250200**	5.9	**55**	26,150	**SDA25055**	6.06			
	2¼	26,150	**SDA250204**	6.0	**60**	26,150	**SDA25060**	6.22			
	–	–	–	–	**65**	26,150	**SDA25065**	6.34			
	–	–	–	–	**70**	26,150	**SDA25070**	6.46			
	–	–	–	–	**75**	26,150	**SDA25075**	6.61			
	–	–	–	–	**85**	26,150	**SDA25085**	6.89			

TSP-Series, Pro Series Swivels

- Robust interlocking design
- 360° X-axis and 160° Y-axis rotation
- Increases tool fit in restricted access areas
- Simplifies hose placement
- Includes male and female couplers

TSP RTEX SRSX Series

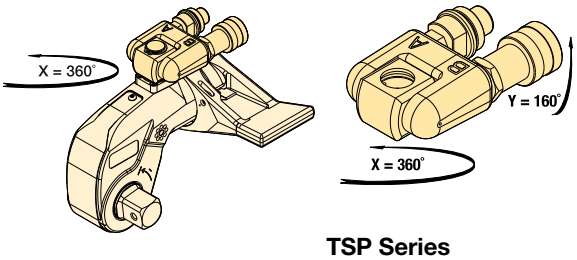

TSP Series

Torque Wrench Model Number	Model Number	Maximum Pressure (psi)	Wt. (lbs)
S1500X, S3000X, S6000X, S11000X, S25000X	TSP300*	10,000	0.44

Note: To order a S-series (X-Edition) wrench fitted with the TSP swivel, insert a "P" prior to the "X" in the tool designation, e.g., **S1500PX.**

* TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

RTEX-Series, Reaction Tube Extensions

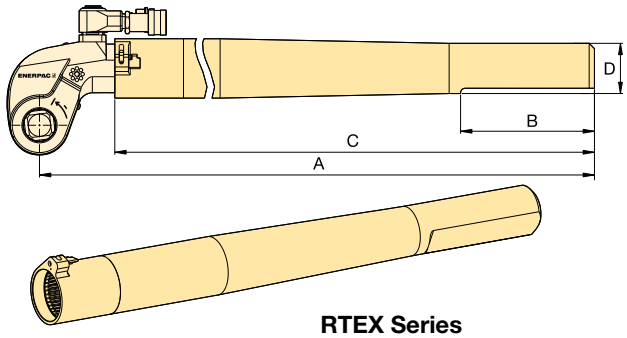

RTEX Series

- Full torque rated
- Increases tool fit in restricted access areas

Torque Wrench Model Number	Model Number	Dimensions (in)				Wt. (lbs)*
		A	B	C	D	
S1500X	RTE15X	27.80	5.98	25.04	2.28	10.1
S3000X	RTE30X	28.86	5.98	25.47	2.24	12.1
S6000X	RTE60X	29.41	5.98	25.94	2.56	17.0
S11000X	RTE110X	30.28	5.98	26.57	2.99	24.7
S25000X	RTE250X	32.01	5.98	26.97	3.94	38.1

* Weights indicated are for the accessories only and do not include the wrench.

SRSX-Series, Extended Reaction Arms

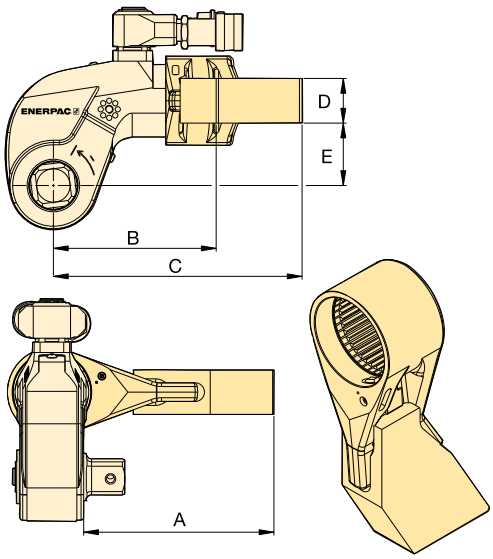

SRSX Series

- Lightweight interchangeable design

Wrench Model	Max. Torque (Ft-lbs)	Model Number	Dimensions (in)					Wt. (lbs)*
			A	B	C	D	E	
S1500X	1328	SRS151X	3.70	3.39	5.00	0.94	1.34	1.8
	1210	SRS152X	4.69	3.82	5.43	0.94	1.34	2.2
	1131	SRS153X	5.71	4.29	5.83	0.94	1.34	2.6
S3000X	2890	SRS301X	4.37	4.17	6.61	1.34	1.89	3.5
	2739	SRS302X	5.39	4.61	7.17	1.34	1.89	4.4
	2638	SRS303X	6.38	5.20	7.80	1.34	1.89	5.5
S6000X	5784	SRS601X	5.43	5.04	7.56	1.54	2.44	5.1
	5501	SRS602X	6.42	5.67	8.15	1.54	2.44	6.0
	5295	SRS603X	7.44	6.26	8.74	1.54	2.44	7.5
S11000X	10,812	SRS1101X	5.87	6.18	9.13	1.81	2.99	9.7
	10,300	SRS1102X	6.89	6.77	9.72	1.81	2.99	11.2
	9883	SRS1103X	7.87	7.36	10.28	1.81	2.99	12.8
S25000X	24,751	SRS2501X	7.20	8.23	11.61	1.97	3.94	16.8
	23,652	SRS2502X	8.19	8.74	12.20	1.97	3.94	18.5
	22,694	SRS2503X	9.17	9.29	12.83	1.97	3.94	22.0

* Weights indicated are for the accessories only and do not include the wrench.

- **Heavy-duty impact sockets**
- **Supplied with "Pin and Ring"**

BSH Series

Hexagon Sizes:

¾ - 6⅛ inches | 19 - 155 mm

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.



Pin and Ring

All sockets are supplied with a "Pin and Ring" to hold the socket in place on the square drive of the tool.

METRIC SOCKETS							
3/4" Square Drive		1" Square Drive		1 1/2" Square Drive		2 1/2" Square Drive	
A/F (mm)	Model Number	A/F (mm)	Model Number	A/F (mm)	Model Number	A/F (mm)	Model Number
19	BSH7519	19	BSH1019	36	BSH1536	65	BSH2565
24	BSH7524	24	BSH1024	41	BSH15163	70	BSH2570
27	BSH7527	27	BSH1027	46	BSH1546	75	BSH2575
30	BSH7530	30	BSH1030	50	BSH1550	80	BSH2580
32	BSH7532	32	BSH1032	55	BSH1555	85	BSH2585
36	BSH7536	36	BSH1036	60	BSH1560	90	BSH2590
41	BSH75163	41	BSH10163	65	BSH1565	95	BSH2595
46	BSH7546	46	BSH1046	70	BSH1570	100	BSH25100
50	BSH7550	50	BSH1050	75	BSH1575	105	BSH25105
–	–	55	BSH1055	80	BSH1580	110	BSH25110
–	–	60	BSH1060	85	BSH1585	115	BSH25115
–	–	65	BSH1065	90	BSH1590	120	BSH25120
–	–	70	BSH1070	95	BSH1595	125	BSH25125
–	–	75	BSH1075	100	BSH15100	135	BSH25135
–	–	80	BSH1080	105	BSH15105	140	BSH25140
–	–	85	BSH1085	110	BSH15110	145	BSH25145
–	–	90	BSH1090	115	BSH15115	150	BSH25150
–	–	95	BSH1095	–	–	155	BSH25155
–	–	100	BSH10100	–	–	–	–

IMPERIAL SOCKETS													
3/4" Square Drive		1" Square Drive				1 1/2" Square Drive				2 1/2" Square Drive			
A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number
¾"	BSH7519	¾"	BSH1019	2 5⁄16"	BSH10231	1 7⁄16"	BSH15144	2 13⁄16"	BSH15281	2 7⁄16"	BSH25244	4 3⁄16"	BSH25419
7⁄8"	BSH75088	7⁄8"	BSH10088	2 3⁄8"	BSH10238	1 1⁄2"	BSH1538	2 7⁄8"	BSH15288	2 1⁄2"	BSH25250	4 1⁄4"	BSH25425
15⁄16"	BSH75094	15⁄16"	BSH10094	2 7⁄16"	BSH10244	1 9⁄16"	BSH15156	2 15⁄16"	BSH1575	2 9⁄16"	BSH2565	4 5⁄16"	BSH25110
1 1⁄16"	BSH7527	1 1⁄16"	BSH1027	2 1⁄2"	BSH10250	1 5⁄8"	BSH15163	3"	BSH15300	2 5⁄8"	BSH25263	4 3⁄8"	BSH25438
1 3⁄16"	BSH7530	1 3⁄16"	BSH1030	2 9⁄16"	BSH1065	1 11⁄16"	BSH1543	3 1⁄16"	BSH15306	2 11⁄16"	BSH25269	4 1⁄2"	BSH25450
1 1⁄4"	BSH75125	1 1⁄4"	BSH10125	2 5⁄8"	BSH10263	1 3⁄4"	BSH15175	3 1⁄8"	BSH15313	2 3⁄4"	BSH2570	4 5⁄8"	BSH25463
1 5⁄16"	BSH75131	1 5⁄16"	BSH10131	2 11⁄16"	BSH10269	1 13⁄16"	BSH1546	3 3⁄16"	BSH15319	2 13⁄16"	BSH25281	4 3⁄4"	BSH25475
1 3⁄8"	BSH7535	1 3⁄8"	BSH1035	2 3⁄4"	BSH1070	1 7⁄8"	BSH15188	3 1⁄4"	BSH15325	2 7⁄8"	BSH25288	4 7⁄8"	BSH25488
1 7⁄16"	BSH75144	1 7⁄16"	BSH10144	2 13⁄16"	BSH10281	1 15⁄16"	BSH15194	3 3⁄8"	BSH15338	2 15⁄16"	BSH2575	5"	BSH25500
1 1⁄2"	BSH7538	1 1⁄2"	BSH1038	2 7⁄8"	BSH10288	2"	BSH15200	3 1⁄2"	BSH15350	3"	BSH25300	5 1⁄8"	BSH25513
1 9⁄16"	BSH75156	1 9⁄16"	BSH10156	2 15⁄16	BSH1075	2 1⁄16"	BSH15206	3 5⁄8"	BSH15363	3 1⁄16"	BSH25306	5 3⁄16"	BSH25519
1 5⁄8"	BSH75163	1 5⁄8"	BSH10163	3"	BSH10300	2 1⁄8"	BSH15213	3 3⁄4"	BSH1595	3 1⁄8"	BSH25313	5 1⁄4"	BSH25525
1 11⁄16"	BSH7543	1 11⁄16"	BSH1043	3 1⁄16"	BSH10306	2 3⁄16"	BSH15219	3 7⁄8"	BSH15388	3 3⁄16"	BSH25319	5 3⁄8"	BSH25538
1 3⁄4"	BSH75175	1 3⁄4"	BSH10175	3 1⁄8"	BSH10313	2 1⁄4"	BSH15225	3 15⁄16"	BSH15100	3 1⁄4"	BSH25325	5 1⁄2"	BSH25140
1 13⁄16"	BSH7546	1 13⁄16"	BSH1046	3 3⁄16"	BSH10319	2 5⁄16"	BSH15231	4"	BSH15400	3 3⁄8"	BSH25338	5 3⁄4"	BSH25575
1 7⁄8"	BSH75188	1 7⁄8"	BSH10188	3 1⁄4"	BSH10325	2 3⁄8"	BSH15238	4 1⁄8"	BSH15105	3 1⁄2"	BSH25350	5 7⁄8"	BSH25150
1 15⁄16"	BSH75194	1 15⁄16"	BSH10194	3 3⁄8"	BSH10338	2 7⁄16"	BSH15244	4 3⁄16"	BSH15419	3 5⁄8"	BSH25363	6"	BSH25600
2"	BSH75200	2"	BSH10200	3 1⁄2"	BSH10350	2 1⁄2"	BSH15250	4 1⁄4"	BSH15425	3 3⁄4"	BSH2595	6 1⁄8"	BSH25613
–	–	2 1⁄16"	BSH10206	3 5⁄8"	BSH10363	2 9⁄16"	BSH1565	4 5⁄16"	BSH15110	3 7⁄8"	BSH25388	–	–
–	–	2 1⁄8"	BSH10213	3 3⁄4"	BSH1095	2 5⁄8"	BSH15263	4 3⁄8"	BSH15438	3 15⁄16"	BSH25100	–	–
–	–	2 3⁄16"	BSH10219	3 7⁄8"	BSH10388	2 11⁄16"	BSH15269	4 1⁄2"	BSH15450	4"	BSH25400	–	–
–	–	2 1⁄4"	BSH10225	–	–	2 3⁄4"	BSH1570	4 5⁄8"	BSH15463	4 1⁄8"	BSH25105	–	–

Back-Up Spanners for Torque Wrenches

▼ **BUS03 Back-Up Spanner** (safety cable not shown)

BUS Series

Hexagon Sizes (A/F):
1 1/16 - 4 15/16 inches

Hexagon Sizes (A/F):
27 - 120 mm

Back-Up Spanners

Hands free operation of a hydraulic torque wrench improves the safety of the operator significantly.

Enerpac Back-Up Spanners are a hands-free tool that eliminates the need to use a flogging spanner as a backing tool.

The Back-Up Spanners have been specifically designed to prevent them from locking onto the nut during bolt torquing operations. They fit easily onto the back nut and prevent it from turning during make up or break out of bolted joints.

- **Hands free solution – improves operator safety**
- **Eliminates the need for flogging spanners**
- **Speeds up the bolting process**
- **Includes safety cable with quick-connect carabiners, stainless steel tethers and secure Allen-key fixings**
- **Won't lock on during operations**
- **Lightweight, spark-free and non-impact for improved safety and ease of use**
- **Two hexagon sizes in one tool**

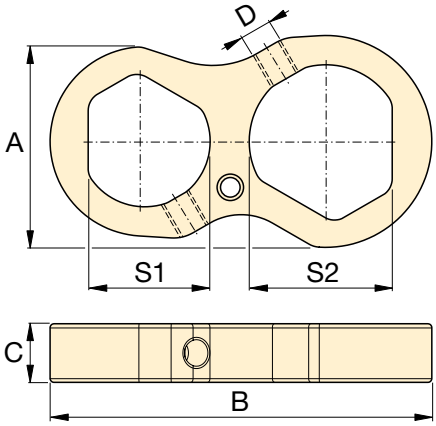

▼ **SELECTION CHART BACK-UP SPANNERS**

Hexagon Sizes (A/F) S1 to S2 (in)	Hexagon Sizes (A/F) S1 to S2 (mm)	Model Number	Dimensions (in) A	B	C	D	Wt. (lbs)
1 1/16 - 1 1/4"	27 - 32	**BUS01**	2.0	3.9	0.6	M8	0.7
1 7/16 - 1 5/8"	36 - 41	**BUS02**	2.4	4.7	0.6	M8	0.9
1 13/16 - 2"	46 - 50	**BUS03**	3.0	5.6	0.8	M8	1.3
2 3/16 - 2 3/8"	55 - 60	**BUS04**	3.5	6.5	0.8	M12	1.8
2 9/16 - 2 3/4"	65 - 70	**BUS05**	3.9	7.5	1.0	M16	2.2
2 15/16 - 3 1/8"	75 - 80	**BUS06**	4.4	8.4	1.0	M16	2.9
3 1/2 - 3 7/8"	–	**BUS07**	5.3	10.1	1.2	M20	4.9
4 1/4 - 4 5/8"	–	**BUS08**	6.4	12.2	1.2	M20	7.3
-	85 - 90	**BUS09**	5.0	9.5	1.0	M16	3.7
3 3/4 - 3 15/16"	95 - 100	**BUS10**	5.4	10.5	1.2	M20	5.1
4 1/8 - 4 15/16"	105 - 110	**BUS11**	6.0	11.7	1.2	M20	6.8
-	115 - 120	**BUS12**	6.5	12.6	1.2	M20	7.7

▼ *Enerpac Back-Up Spanners to be used to stop back nut from turning during make up or break out.*

▼ Shown: **STTLS Safe T™ Torque Lock**

Hands-free Torque Wrench System

Safe T™ Torque Lock

The Safe T™ Torque Lock is suitable for all bolted applications from 140 ft-lbs to 11,175 ft-lbs. using a heavy-duty impact socket.

The patented mechanical locking system creates a hands-free torque wrench solution suitable for Enerpac only square drive tools.

Suitable for:

S-Series	RSQ-Series
S3000X	RSQ3000
S6000X	RSQ5000
S11000X	RSQ11000

IMPORTANT:

Safe T™ Torque Lock not suitable for use on PTFE coated nuts.

Safety – Safe T™ Torque Lock

- **Transforming Enerpac S-Series and RSQ-Series wrenches into a dedicated hands-free tool**
- **Improves operator safety during bolting operations by minimizing exposure to pinch points and high-pressure hydraulic connections**
- **Grips securely to the application in any orientation, including inverted positions**
- **Minimizes drop hazards of falling tools**
- **Reduces operator fatigue on overreaching or awkward positioning of the tool**

Simplicity

- **With one twist of the locking collar the Safe T™ Torque Lock grips onto the application, firmly holding the full tool weight in place**
- **Assembles onto the torque wrench with one push of the square drive quick-release button for tightening or loosening**
- **Locking feature dramatically reduces the number of tool lifts**

Versatility

- **Suitable for both S-Series & RSL-Series squaredrive wrenches**
- **Simple twist & lock mechanism is user friendly, easy to operate**
- **No additional loose components like reaction washers are needed**

▼ *Hands-free torque wrench system: STLLS-model with S-Series torque wrench. The square drive of the wrench can easily be exchanged by the Safe T™ Torque Lock model.*

Common Torque Lock Applications:

- Oil & Gas flanges
- Tower Crane installation
- Machine installation/assembly (Mining),
- Wind Tower installation etc.

Industries

- Oil & Gas, Petrochemical
- Wind Power Generation
- Mining
- Marine
- Manufacturing
- Rail and more

STTL Series

Hexagon Range (A/F):
1 13/16 - 3 1/8 inch

Hexagon Range (A/F)
46 - 75 mm

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

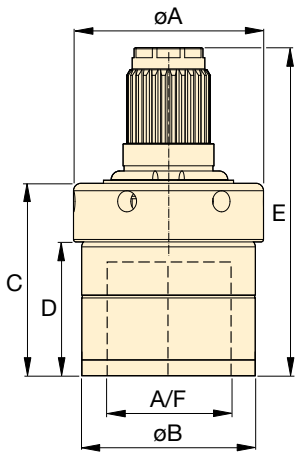

STTLS
for S-Series Spline Fitting

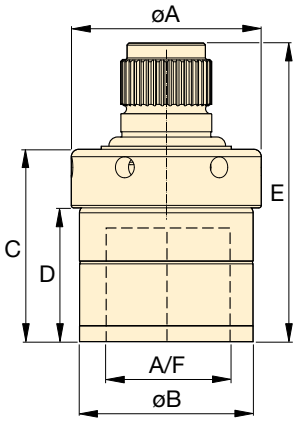

STTLR
for RSQ-Series Spline Fitting

Hexagon Sizes (A/F) (inch)	Hexagon Sizes (A/F) (mm)	For use with torque wrench model	Safe T™ Torque Lock Model Number: For S-Series Spline Fitting	Safe T™ Torque Lock Model Number: For RSQ-Series Spline Fitting	Dimensions (in) A	B	C	D	E	Wt. (lbs)	Dimensions (mm) A	B	C	D	E	Wt. (kg)
1 13/16	46	S3000X	STTLS31046	-	3.0	2.8	3.1	2.1	5.2	4.4	77	71	78	54	133	2,0
		RSQ3000	-	STTLR31046					4.8	4.2					121	1,9
2	50	S3000X	STTLS31550	–	3.5	3.2	3.1	2.1	5.2	5.7	89	82	78	54	133	2,6
		RSQ3000	–	STTLR31550					4.8	5.7					123	2,6
2 3/16	55	S3000X	STTLS31055	-	3.7	3.4	3.3	2.3	5.4	6.6	93	86	83	58	138	3,0
		RSQ3000	-	STTLR31055					5.1	6.4					130	2,9
2 3/8	–	RSQ3000	–	STTLR315238	3.9	3.6	3.6	2.6	5.4	7.7	99	92	91	67	136	3,5
2	50	RSQ5000	–	STTLR51550	3.5	3.2	3.1	2.1	5.2	5.9	89	82	78	54	132	2,7
–	60	S6000X	STTLS61560M	-	3.9	3.6	3.4	2.5	5.9	8.2	99	92	86	62	150	3,7
		RSQ5000	-	STTLR51560M					5.7	8.2					145	3,7
2 3/8	–	S6000X	STTLS615238	–	3.9	3.6	3.6	2.6	6.0	8.4	99	92	91	67	154	3,8
		RSQ5000		STTLR515238					5.9	8.4					150	3,8
2 9/16	65	S6000X	STTLS61565	-	4.2	3.9	4.2	2.9	6.8	11.7	107	100	108	74	172	5,3
		RSQ5000	-	STTLR51565					6.6	11.9					168	5,4
2 3/4	70	S6000X	STTLS61570	–	4.5	4.2	4.3	3.0	6.8	13.0	114	107	109	76	173	5,9
		RSQ5000		STTLR51570					6.7	13.2					169	6,0
2 15/16	75	S6000X	STTLS61575	-	4.4	4.1	4.4	3.1	7.0	12.3	112	105	113	80	177	5,6
		RSQ5000	-	STTLR51575					6.9	13.2					173	5,8
–	60	S11000X	STTLS111560M	-	3.9	3.6	3.4	2.5	6.6	9.3	99	92	86	62	167	4,2
		RSQ11000	-	STTLR111560M					6.1	9.3					156	4,2
2 9/16	65	S11000X	STTLS111565	-	4.2	3.9	4.2	2.9	7.5	12.8	107	100	107	74	189	5,8
		RSQ11000	-	STTLR111565					7.0	12.8					178	5,8
2 3/4	70	S11000X	STTLS111570	–	4.5	4.2	4.3	3.0	7.5	14.1	114	107	109	76	191	6,4
		RSQ11000		STTLR111570					7.1	14.3					181	6,5
2 15/16	75	S11000X	STTLS111575	-	4.4	4.1	4.4	3.1	7.7	13.2	112	105	113	80	195	6,0
		RSQ11000	-	STTLR111575					7.2	13.2					183	6,0
3 1/8	–	S11000X	STTLS1115318	–	4.8	4.5	4.5	3.2	7.8	16.1	122	115	115	81	197	7,3
		RSQ11000	-	STTLR1115318					7.3	16.3					185	7,4

▼ W4206X cassette with W4000PX drive unit

Setting New Standards in Safety, Simplicity and Performance

Safety and Performance

- **Superior strength to size ratio provides easy access to difficult to reach applications without sacrificing endurance**
- **30° rotation angle and rapid return stroke provide fast operation**
- **Tough manifold design with added safety feature for enhanced operator safety**

Simplicity

- **Fast release drive unit enables rapid exchange of cassettes, no tools required and no pins to lose**
- **Drive unit includes robust handle which mounts on both sides to allow for extra maneuverability**
- **Quick and easy disassembly for maintenance without special tools**

Versatility

- **Available with optional enhanced tilt and swivel TSP300 manifold for horizontal and vertical maneuverability, with greater durability***
- **X-Edition drive units, cassettes and most accessories are compatible with standard edition tools ***
- **Drive unit compatible with UltraSlim cassettes**

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**

* TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

Two Handle Styles

Robust angled positioning handles come standard with every W-Series (X-Edition) tool. Straight positioning handles, designed for extreme limited acess applications, are available as accessories.

Compatible W-Series (X-Edition) Wrenches	Angled Positioning Handles (standard)	Straight Positioning Handles (optional)
W2000X, W4000X	**SWH6A**	**SWH6S**
W8000X, W15000X	**SWH10A**	**SWH10S**
W22000X, W35000X	Supplied with an eyebolt handle **(SWH10EA)**	

TSP - Pro Series Swivel

The optional TSP300 tilt and swivel manifold with robust interlocking design provides 360° X-axis rotation and 160° Y-axis rotation.

Page: 260



Calibration Certificate

All X-Edition cassettes are CE-ATEX certified, factory calibrated and are shipped complete with a calibration certificate.

CE II 2 GD ck T4
CSA/SIRA 15XT072

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

Double-Acting Hydraulic Hexagon Wrenches, X-Edition

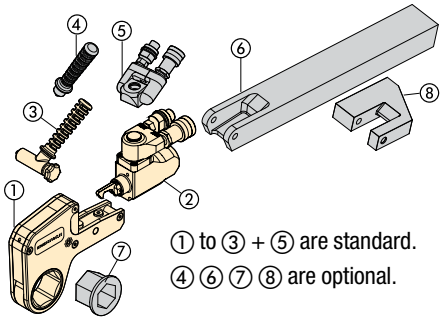

① to ③ + ⑤ are standard.
④ ⑥ ⑦ ⑧ are optional.

① Hexagon Cassette (pages 250-257)
② Drive Unit (page 249)
③ Angled Positioning Handle (page 248)
④ Straight Positioning Handle (page 248)
⑤ Pro Series Swivel (page 260)
⑥ Extended Reaction Arm (page 260)
⑦ Reducer Insert (pages 250-257)
⑧ Reaction Paddle (page 260)

W Series (X-Edition)

Nominal Torque at 10,000 psi:
35,000 ft.lbs

Hexagon Range:
1 1/16 - 6 1/8 in | 30-155 mm

Nose Radius:
1.22 - 4.52 inches

Maximum Operating Pressure:
10,000 psi

DRIVE UNIT AND INTERCHANGEABLE CASSETTE SELECTION

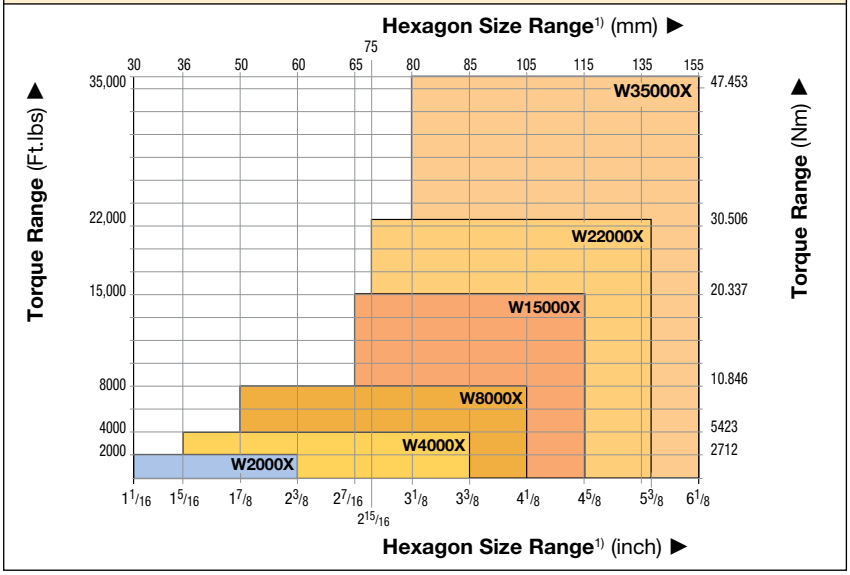

[1] See page 411 for table of hexagon sizes of bolts, nuts and related thread diameters.

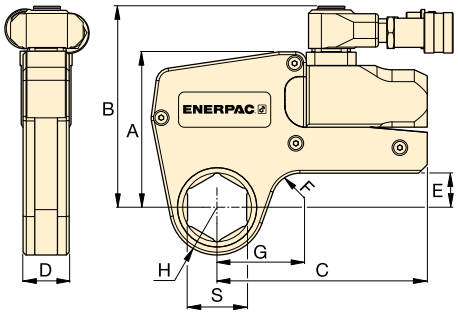

Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench and pump matrix.

Page: 291

▼ *These rigid steel wrenches with low-profile interchangeable hexagon cassettes guarantee durability and maximum versatility in bolting applications.*

▼ SELECTION CHART

Hexagon Range * *Page:* 250		Nominal Torque at 10,000 psi		Drive Unit Model Number **	Minimum Torque		Dimensions (see pages 250-257 for dimensions **G, H,** and **S**) (in)					Weight (Drive unit without hexagon cassette)
(in)	(mm)	(Ft.lbs)	(Nm)		(Ft.lbs)	(Nm)	**A**	**B**	**C**	**D**	**F**	(lbs)
1 1/16 - 2 3/8	30 - 60	2040	2766	**W2000X**	204	277	4.29	5.55	5.83	1.26	0.79	3.04
1 5/16 - 3 3/8	36 - 85	4175	5661	**W4000X**	418	566	5.35	6.57	7.01	1.61	0.79	4.44
1 7/8 - 4 1/8	50 - 105	8470	11,484	**W8000X**	847	1148	6.77	8.07	8.19	2.07	0.98	6.59
2 7/16 - 4 5/8	65 - 115	15,330	20,785	**W15000X**	1533	2079	8.15	9.45	9.96	2.48	0.79	10.72
2 15/16 - 5 3/8	75 - 135	22,500	30,506	**W22000X**	2250	3050	8.94	10.46	11.68	3.03	1.38	16.98
3 1/8 - 6 1/8	80-155	35,000	47,453	**W35000X**	3500	4745	10.54	11.94	13.60	3.57	1.98	26.40

* With in-line reaction foot.
** To order a W-series (X-Edition) wrench fitted with the TSP swivel, insert a "P" prior to the "X" in the tool designation. e.g., **W2000PX**.

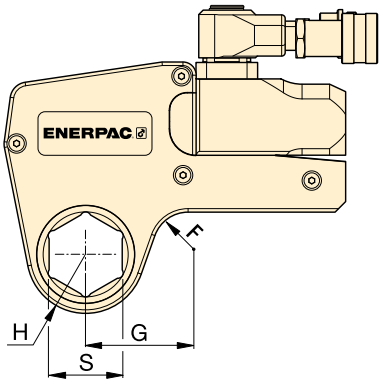

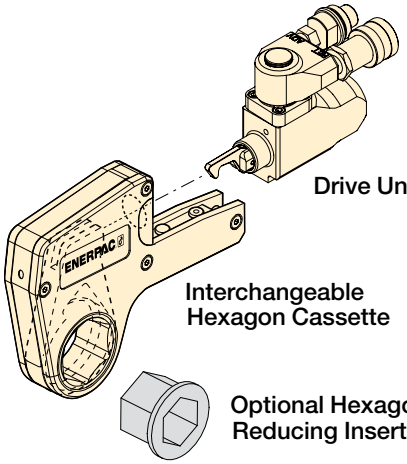

W Series (X-Edition)

Nominal Torque at 10,000 psi:
2040 ft.lbs

Hexagon Range:
1 1/16 - 2 3/8 inches

Maximum Operating Pressure:
10,000 psi

Metric Sizes

For metric sizes of hexagon cassettes and reducer inserts see:

Page: 256

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W2000X	1 1/16	1.22	2.11	W2101X	4.19	–	–	–	–	–	–
	1 1/8	1.22	2.11	W2102X	4.19	–	–	–	–	–	–
	1 3/16	1.22	2.11	W2103X	4.19	–	–	–	–	–	–
	1 1/4	1.22	2.11	W2104X	4.19	–	–	–	–	–	–
	1 5/16	1.22	2.11	W2105X	4.48	–	–	–	–	–	–
	1 3/8	1.22	2.11	W2106X	4.43	–	–	–	–	–	–
	1 7/16	1.22	2.11	W2107X	4.37	1 7/16 - 1 1/8	W2107R102	–	–	–	–
	1 1/2	1.32	2.29	W2108X	4.51	–	–	–	–	–	–
	1 9/16	1.32	2.29	W2109X	4.44	–	–	–	–	–	–
	1 5/8	1.32	2.29	W2110X	4.38	1 5/8 - 1 1/4	W2110R104	1 5/8 - 1 3/16	W2110R103	–	–
	1 11/16	1.44	2.38	W2111X	4.63	–	–	–	–	–	–
	1 3/4	1.44	2.38	W2112X	4.57	–	–	–	–	–	–
	1 13/16	1.44	2.38	W2113X	4.46	1 13/16 - 1 7/16	W2113R107	1 13/16 - 1 1/4	W2113R104	–	–
	1 7/8	1.54	2.48	W2114X	4.69	–	–	–	–	–	–
	1 15/16	1.54	2.48	W2115X	4.64	–	–	–	–	–	–
	2	1.54	2.48	W2200X	4.54	2 - 1 5/8	W2200R110	2 - 1 7/16	W2200R107	–	–
	2 1/16	1.65	2.70	W2201X	4.83	–	–	–	–	–	–
	2 1/8	1.65	2.70	W2202X	4.74	–	–	–	–	–	–
	2 3/16	1.65	2.70	W2203X	4.64	2 3/16 - 1 13/16	W2203R113	2 3/16 - 1 5/8	W2203R110	2 3/16 - 1 7/16	W2203R107
	2 1/4	1.75	2.55	W2204X	4.94	–	–	–	–	–	–
	2 5/16	1.75	2.55	W2205X	4.84	–	–	–	–	–	–
	2 3/8	1.75	2.55	W2206X	4.72	2 3/8 - 2	W2206R200	2 3/8 - 1 7/8	W2206R114	2 3/8 - 1 13/16	W2206R113
	–	–	–	–	–	2 3/8 - 1 1/2	W2206R108	2 3/8 - 1 7/16	W2206R107	2 3/8 - 1 5/8	W2206R110

W4000X, Inch-Cassettes & Reducer Inserts



Nominal Torque at 10,000 psi:
4175 ft.lbs

Hexagon Range:
1 5/16 - 3 3/8 inches

Maximum Operating Pressure:
10,000 psi

W Series (X-Edition)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W4000X	1 5/16	1.46	2.40	W4105X	8.15	–	–	–	–	–	–
	1 3/8	1.46	2.40	W4106X	8.15	–	–	–	–	–	–
	1 7/16	1.46	2.40	W4107X	8.15	–	–	–	–	–	–
	1 1/2	1.46	2.40	W4108X	8.31	–	–	–	–	–	–
	1 9/16	1.46	2.40	W4109X	8.22	–	–	–	–	–	–
	1 5/8	1.46	2.40	W4110X	8.15	–	–	–	–	–	–
	1 11/16	1.56	2.52	W4111X	8.43	–	–	–	–	–	–
	1 3/4	1.56	2.52	W4112X	8.35	–	–	–	–	–	–
	1 13/16	1.56	2.52	W4113X	8.25	–		–	–	–	–
	1 7/8	1.63	2.63	W4114X	8.45	–	–	–	–	–	–
	1 15/16	1.63	2.63	W4115X	8.39	–	–	–	–	–	–
	2	1.63	2.63	W4200X	8.28	2 - 1 7/16	W4200R107	–	–	–	
	2 1/16	1.73	2.89	W4201X	8.65	–	–	–	–	–	–
	2 1/8	1.73	2.89	W4202X	8.53	–	–	–	–	–	–
	2 3/16	1.73	2.89	W4203X	8.42	2 3/16 - 1 5/8	W4203R110	2 3/16 - 1 7/16	W4203R107	2 3/16 - 1 1/4	W4203R104
	2 1/4	1.83	2.78	W4204X	8.73	–	–	–	–	–	–
	2 5/16	1.83	2.78	W4205X	8.61	–	–	–	–	–	–
	2 3/8	1.83	2.78	W4206X	8.47	2 3/8 - 2	W4206R200	2 3/8 - 1 13/16	W4206R113	2 3/8 - 1 7/16	W4206R107
	–	–	–	–	–	2 3/8 - 1 3/8	W4206R106	–	–	–	–
	2 7/16	1.95	3.00	W4207X	8.96	2 7/16 - 2	W4207R200	–	–	–	–
	2 1/2	1.95	3.00	W4208X	8.86	2 1/2 - 2	W4208R200	2 1/2 - 1 13/16	W4208R113	2 1/2 - 2 1/16	W4208R201
	2 9/16	1.95	3.00	W4209X	8.67	2 9/16 - 2 3/16	W4209R203	2 9/16 - 2 1/8	W4209R202	–	–
	–	–	–	–	–	2 9/16 - 2	W4209R200	2 9/16 - 1 13/16	W4209R113	–	–
	2 5/8	2.07	3.08	W4210X	9.14	–	–	–	–	–	–
	2 11/16	2.07	3.08	W4211X	9.03	–	–	–	–	–	–
	2 3/4	2.07	3.08	W4212X	8.84	2 3/4 - 2 3/8	W4212R206	2 3/4 - 2 3/16	W4212R203	2 3/4 - 2 1/8	W4212R202
	2 13/16	2.18	3.21	W4213X	9.32	–	–	–	–	–	–
	2 7/8	2.18	3.21	W4214X	9.17	–	–	–	–	–	–
	2 15/16	2.18	3.21	W4215X	8.96	2 15/16 - 2 9/16	W4215R209	2 15/16 - 2 3/8	W4215R206	2 15/16 - 2 3/16	W4215R203
	–	–	–	–	–	2 15/16 - 2	W4215R200	–	–	–	–
	3	2.30	3.29	W4300X	9.51	3 - 2 3/16	W4300R203	–	–	–	–
	3 1/16	2.30	3.29	W4301X	9.42	–	–	–	–	–	–
	3 1/8	2.30	3.29	W4302X	9.16	–	–	3 1/8 - 2 3/4	W4302R212	3 1/8 - 2 9/16	W4302R209
	–	–	–	–	–	3 1/8 - 2 3/8	W4302R206	3 1/8 - 2 5/16	W4302R205	3 1/8 - 2 1/4	W4302R204
	–	–	–	–	–	3 1/8 - 2 3/16	W4302R203	3 1/8 - 2 1/8	W4302R202	3 1/8 - 2	W4302R200
	3 3/16	2.44	3.37	W4303X	9.92	–	–	–	–	–	–
	3 1/4	2.44	3.37	W4304X	9.92	–	–	–	–	–	–
	3 5/16	2.44	3.37	W4305X	9.92	–	–	–	–	–	–
	3 3/8	2.44	3.37	W4306X	9.92	–	–	–	–	–	–



Nominal Torque at 10,000 psi:
8470 ft.lbs

Hexagon Range:
1⅞ - 4⅛ inches

Maximum Operating Pressure:
10,000 psi

W
Series
(X-Edition)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W8000X	1⅞	1.77	3.08	W8114X	17.97	–	–	–	–	–	–
	1 15/16	1.77	3.08	W8115X	17.89	–	–	–	–	–	–
	2	1.77	3.08	W8200X	17.75	–	–	–	–	–	–
	2 1/16	1.89	3.15	W8201X	17.52	–	–	–	–	–	–
	2⅛	1.89	3.15	W8202X	17.36	–	–	–	–	–	–
	2 3/16	1.89	3.15	W8203X	17.22	–	–	–	–	–	–
	2¼	2.01	3.25	W8204X	17.92	–	–	–	–	–	–
	2 5/16	2.01	3.25	W8205X	17.76	–	–	–	–	–	–
	2⅜	2.01	3.25	W8206X	17.59	–	–	–	–	–	–
	2 7/16	2.07	3.38	W8207X	17.65	–	–	–	–	–	–
	2½	2.07	3.38	W8208X	17.52	–	–	–	–	–	–
	2 9/16	2.07	3.38	W8209X	17.29	2 9/16 - 2	W8209R200		–		–
	2⅝	2.20	3.34	W8210X	17.50	–	–	–	–	–	–
	2 11/16	2.20	3.34	W8211X	17.36	–	–	–	–	–	–
	2¾	2.20	3.34	W8212X	17.12	2¾ - 2 3/16	W8212R203		–		–
	2 13/16	2.28	3.35	W8213X	17.57	–	–	–	–	–	–
	2⅞	2.28	3.35	W8214X	17.38	–	–	–	–	–	–
	2 15/16	2.28	3.35	W8215X	17.11	2 15/16 - 2⅜	W8215R206	2 15/16 - 2 3/16	W8215R203	–	–
	3	2.38	3.52	W8300X	17.77	–	–	–	–	–	–
	3 1/16	2.38	3.52	W8301X	17.65	–	–	–	–	–	–
	3⅛	2.38	3.52	W8302X	17.33	3⅛ - 2 9/16	W8302R209	3⅛ - 2⅜	W8302R206	3⅛ - 2 3/16	W8302R203
	–	–	–	–	–	3⅛ - 2	W8302R200	–	–	–	–
	3 3/16	2.60	3.63	W8303X	18.99	–	–	–	–	–	–
	3¼	2.60	3.63	W8304X	18.72	–	–	–	–	–	–
	3 5/16	2.60	3.63	W8305X	18.54	–	–	–	–	–	–
	3⅜	2.60	3.63	W8306X	18.36	–	–	–	–	–	–
	3 7/16	2.60	3.63	W8307IX	18.11	–	–	–	–	–	–
	3½	2.60	3.63	W8308X	17.81	3½ - 3	W8308R300	3½ - 2 15/16	W8308R215	3½ - 2¾	W8308R212
	3 9/16	2.91	4.05	W8309X	20.36	–	–	–	–	–	–
	3⅝	2.91	4.05	W8310X	20.18	–	–	–	–	–	–
	3 11/16	2.91	4.05	W8311X	19.93	–	–	–	–	–	–
	3¾	2.91	4.05	W8312X	19.71	3¾ - 3⅛	W8312R302	3¾ - 2 15/16	W8312R215	3¾ - 2¾	W8312R212
	3 13/16	2.91	4.05	W8313X	19.46	–	–	–	–	–	–
	3⅞	2.91	4.05	W8314X	19.10	3⅞ - 3⅛	W8314R302	3⅞ - 2 15/16	W8314R215	–	–
	3 15/16	3.13	4.33	W8315X	20.31	–	–	–	–	–	–
	4	3.13	4.33	W8400X	20.04	–	–	–	–	–	–
	4 1/16	3.13	4.33	W8401IX	19.80	–	–	–	–	–	–
	4⅛	3.13	4.33	W8402X	19.39	–	–	–	–	–	–

W15000X, Inch-Cassettes & Reducer Inserts

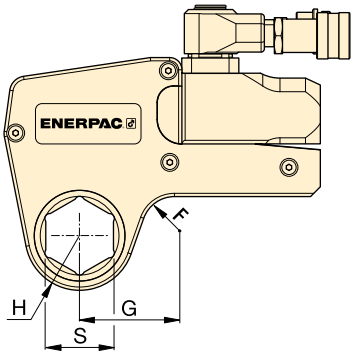

Nominal Torque at 10,000 psi:
15,330 ft.lbs

Hexagon Range:
2 7/16 - 4 5/8 inches

Maximum Operating Pressure:
10,000 psi

W Series (X-Edition)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W15000X	2 7/16	2.32	3.49	W15207X	30.72	–	–	–	–	–	–
	2 1/2	2.32	3.49	W15208X	30.72	–	–	–	–	–	–
	2 9/16	2.32	3.49	W15209X	30.72	–	–	–	–	–	–
	2 5/8	2.32	3.49	W15210X	30.72	–	–	–	–	–	–
	2 11/16	2.32	3.49	W15211X	30.72	–	–	–	–	–	–
	2 3/4	2.32	3.49	W15212X	30.72	–	–	–	–	–	–
	2 13/16	2.44	3.56	W15213X	30.62	–	–	–	–	–	–
	2 7/8	2.44	3.56	W15214X	30.39	–	–	–	–	–	–
	2 15/16	2.44	3.56	W15215X	30.08	–	–	–	–	–	–
	3	2.54	3.66	W15300X	30.86	3 - 2 1/8	W15300R202	–	–	–	–
	3 1/16	2.54	3.66	W15301X	30.71	–	–	–	–	–	–
	3 1/8	2.54	3.66	W15302X	30.34	3 1/8 - 2 9/16	W15302R209		–		
	3 3/16	2.74	3.80	W15303X	32.38	–	–	–	–	–	–
	3 1/4	2.74	3.80	W15304X	32.07	–	–	–	–	–	–
	3 5/16	2.74	3.80	W15305X	31.85	–	–	–	–	–	–
	3 3/8	2.74	3.80	W15306X	31.63	–	–	–	–	–	–
	3 7/16	2.74	3.80	W15307IX	31.32	–	–	–	–	–	–
	3 1/2	2.74	3.80	W15308X	30.98	3 1/2 - 2 15/16	W15308R215	3 1/2 - 2 3/4	W15308R212		–
	3 9/16	2.95	4.01	W15309X	31.70	–	–	–	–	–	–
	3 5/8	2.95	4.01	W15310X	31.70	–	–	–	–	–	–
	3 11/16	2.95	4.01	W15311X	31.70	–	–	–	–	–	–
	3 3/4	2.95	4.01	W15312X	31.70	3 3/4 - 3 1/8	W15312R302	3 3/4 - 2 15/16	W15312R215		–
	3 13/16	2.95	4.01	W15313X	31.70	–	–	–	–	–	–
	3 7/8	2.95	4.01	W15314X	31.70	3 7/8 - 3 1/8	W15314R302	3 7/8 - 2 15/16	W15314R215	–	–
	3 15/16	3.17	4.06	W15315X	34.02	–	–	–	–	–	–
	4	3.17	4.06	W15400X	33.70	–	–	–	–	–	–
	4 1/16	3.17	4.06	W15401IX	33.41	–	–	–	–	–	–
	4 1/8	3.17	4.06	W15402X	33.09	4 1/8 - 3 1/2	W15402R308	4 1/8 - 3 5/16	W15402R305	4 1/8 - 3 1/4	W15402R304
	4 3/16	3.17	4.06	W15403IX	32.81	–	–	–	–	–	–
	4 1/4	3.17	4.06	W15404X	32.29	4 1/4 - 3 1/2	W15404R308	4 1/4 - 3 1/8	W15404R302	–	–
	4 5/16	3.44	4.52	W15405X	35.61	–	–	–	–	–	–
	4 3/8	3.44	4.52	W15406X	35.32	–	–	–	–	–	–
	4 7/16	3.44	4.52	W15407X	34.99	–	–	–	–	–	–
	4 1/2	3.44	4.52	W15408IX	34.63	–	–	–	–	–	–
	4 9/16	3.44	4.52	W15409IX	34.28	–	–	–	–	–	–
	4 5/8	3.44	4.52	W15410IX	33.72	4 5/8 - 3 15/16	W15410R315	4 5/8 - 3 7/8	W15410R314	4 5/8 - 3 3/4	W15410R312
	–	–	–	–	–	4 5/8 - 3 1/2	W15410R308	–	–	–	–



Nominal Torque at 10,000 psi:
22,500 ft.lbs

Hexagon Range:
2 15/16 - 5 3/8 inches

Maximum Operating Pressure:
10,000 psi

W Series (X-Edition)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W22000X	2 15/16	2.64	4.02	W22215X	48.72	–	–	–	–	–	–
	3	2.64	4.02	W22300X	48.40	–	–	–	–	–	–
	3 1/16	2.64	4.02	W22301X	48.22	–	–	–	–	–	–
	3 1/8	2.64	4.02	W22302X	47.78	3 1/8 - 2 3/8	W22302R206	3 1/8 - 2 3/16	W22302R203	–	–
	3 3/16	2.85	4.23	W22303X	50.58	–	–	–	–	–	–
	3 1/4	2.85	4.23	W22304X	50.19	–	–	–	–	–	–
	3 5/16	2.85	4.23	W22305X	49.92	–	–	–	–	–	–
	3 3/8	2.85	4.23	W22306X	49.66	–	–	–	–	–	–
	3 7/16	2.85	4.23	W22307X	50.29	–	–	–	–	–	–
	3 1/2	2.85	4.23	W22308X	48.87	3 1/2 - 2 3/4	W22308R212	3 1/2 - 2 9/16	W22308R209	3 1/2 - 2 3/8	W22308R206
	3 9/16	3.07	4.45	W22309X	51.58	–	–	–	–	–	–
	3 5/8	3.07	4.45	W22310X	51.30	–	–	–	–	–	–
	3 11/16	3.07	4.45	W22311X	50.93	–	–	–	–	–	–
	3 3/4	3.07	4.45	W22312X	50.62	3 3/4 - 2 15/16	W22312R215	–	–	–	–
	3 13/16	3.07	4.45	W22313X	50.24	–	–	–	–	–	–
	3 7/8	3.07	4.45	W22314X	49.77	3 7/8 - 3 1/8	W22314R302	3 7/8 - 2 15/16	W22314R215	3 7/8 - 2 3/4	W22314R212
	3 15/16	3.35	4.72	W22315X	53.57	–	–	–	–	–	–
	4	3.35	4.72	W22400X	53.19	–	–	–	–	–	–
	4 1/16	3.35	4.72	W22401IX	52.82	–	–	–	–	–	–
	4 1/8	3.35	4.72	W22402X	52.43	–	–	–	–	–	–
	4 3/16	3.35	4.72	W22403X	52.09	–	–	–	–	–	–
	4 1/4	3.35	4.72	W22404X	51.48	4 1/4 - 3 1/2	W22404R308	4 1/4 - 3 1/8	W22404R302	4 1/4 - 2 15/16	W22404R215
	4 5/16	3.54	4.92	W22405X	54.26	–	–	–	–	–	–
	4 3/8	3.54	4.92	W22406X	53.91	–	–	–	–	–	–
	4 7/16	3.54	4.92	W22407X	53.50	–	–	–	–	–	–
	4 1/2	3.54	4.92	W22408IX	53.06	–	–	–	–	–	–
	4 9/16	3.54	4.92	W22409X	52.64	–	–	–	–	–	–
	4 5/8	3.54	4.92	W22410IX	51.99	4 5/8 - 3 7/8	W22410R314	4 5/8 - 3 3/4	W22410R312	4 5/8 - 3 1/2	W22410R308
	4 3/4	3.74	5.12	W22412X	54.54		–	–	–	–	–
	4 7/8	3.74	5.12	W22414X	53.60	–	–	–	–	–	–
	5	3.74	5.12	W22500X	52.37	5 - 4 1/4	W22500R404	5 - 4 1/8	W22500R402	5 - 3 7/8	W22500R314
	5 1/8	3.94	5.31	W22502X	55.10	–	–	–	–	–	–
	5 3/16	3.94	5.31	W22503X	54.71	–	–	–	–	–	–
	5 1/4	3.94	5.31	W22504X	54.05	–	–	–	–	–	–
	5 3/8	3.94	5.31	W22506X	52.77	5 3/8 - 4 5/8	W22506R410	5 3/8 - 4 1/4	W22506R404	5 3/8 - 4 1/8	W22506R402
	–	–	–	W22506X	52.77	5 3/8 - 3 7/8	W22506R314	–	–	–	–

W35000X, Inch-Cassettes & Reducer Inserts



W Series (X-Edition)

Nominal Torque at 10,000 psi:
35,000 ft.lbs

Hexagon Range:
3⅛ - 6⅛ inches

Maximum Operating Pressure:
10,000 psi

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (in)	Model Number
W35000X	3⅛	3.02	4.99	W35302X	72.30	3⅛ – 2	W35302R200
	3⁹⁄₁₆	3.02	4.99	W35303X	72.10	–	–
	3¼	3.02	4.99	W35304X	71.70	–	–
	3⁵⁄₁₆	3.02	4.99	W35305X	71.40	–	–
	3⅜	3.02	4.99	W35306X	71.00	–	–
	3⁷⁄₁₆	3.02	4.99	W35307IX	70.50	–	–
	3½	3.02	4.99	W35308X	70.10	3½ - 2⁵⁄₁₆	W35308R205
	3⁹⁄₁₆	3.23	5.22	W35309X	71.40	–	–
	3⅝	3.23	5.22	W35310X	73.40	–	–
	3¹¹⁄₁₆	3.23	5.22	W35311X	73.00	–	–
	3¾	3.23	5.22	W35312X	72.50	–	–
	3¹³⁄₁₆	3.23	5.22	W35313X	72.10	–	–
	3⅞	3.23	5.22	W35314X	71.40	3⅞ - 2¹¹⁄₁₆	W35314R211
	3¹⁵⁄₁₆	3.45	5.39	W35315X	70.80	3¹⁵⁄₁₆ - 2¹³⁄₁₆	W35315R213
	4	3.45	5.39	W35400X	74.70		–
	4⅛	3.45	5.39	W35401X	74.30	–	–
	4⅛	3.45	5.39	W35402X	73.90	–	–
	4³⁄₁₆	3.45	5.39	W35403X	73.40	–	–
	4¼	3.45	5.39	W35404X	72.80	4¼ - 3⅛	W35404R301
	4⁵⁄₁₆	3.69	5.63	W35405X	76.90	–	–
	4⅜	3.69	5.63	W35406X	76.50	–	–
	4⁷⁄₁₆	3.69	5.63	W35407X	76.10	–	–
	4½	3.69	5.63	W35408X	75.60	–	–
	4⁹⁄₁₆	3.69	5.63	W35409IX	75.20	–	–
	4⅝	3.69	5.63	W35410IX	74.50	4⅝ - 3⅝	W35410R310
	4¾	3.91	5.85	W35412X	78.50	4¾ - 3¾	W35412R312
	4⅞	3.91	5.85	W35414X	76.90	–	–
	5	3.91	5.85	W35500X	75.60	5 - 4	W35500R400
	5⅛	4.09	6.02	W35502X	78.90	5⅛ - 4⅛	W35502R402
	5³⁄₁₆	4.09	6.02	W35503X	78.50	–	–
	5¼	4.09	6.02	W35504X	77.60	–	–
	5⅜	4.09	6.02	W35506X	76.30	5⅜ - 4⁵⁄₁₆	W35506R405
	5½	4.31	6.24	W35508X	79.80	–	–
	5⁹⁄₁₆	4.31	6.24	W35509X	79.40	–	–
	5⅝	4.31	6.24	W35510X	78.50	–	–
	5¾	4.31	6.24	W35512X	76.90	5¾ - 4¾	W35512R412
	5⅞	4.52	6.46	W35514X	80.90	5⅞ - 4⅞	W35514R414
	6	4.52	6.46	W35600X	79.60	–	
	6⅛	4.52	6.46	W35602X	77.80	6⅛ - 5⅛	W35602R502

Back-Up Spanners
Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

Hexagon Bolt and Nut Sizes
See the table of hexagon sizes of bolts, nuts and related thread diameters.

Page: 411



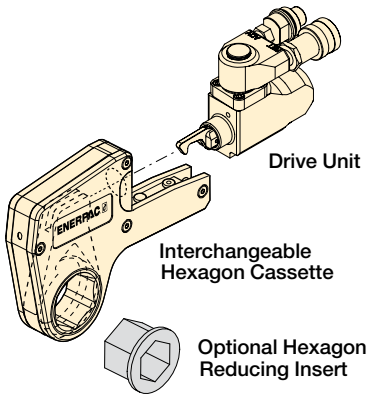

W Series (X-Edition)

Hexagon Range:
24 - 105 mm

Maximum Operating Pressure:
10,000 psi (690 bar)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size* S (mm)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (mm)	Model Number	Hexagon Reducer (mm)	Model Number	Hexagon Reducer (mm)	Model Number
W2000X	30	1.22	2.11	W2103X	4.19	–	–	–	–	–	–
	32	1.22	2.11	W2104X	4.19	–	–	–	–	–	–
	36	1.22	2.11	W2107X	4.19	–	–	–	–	–	–
	38	1.32	2.29	W2108X	4.51	–	–	–	–	–	–
	41	1.32	2.29	W2110X	4.38	41 - 32	W2110R104	41 - 30	W2110R103	41 - 24	W2110R024M
	46	1.44	2.38	W2113X	4.69	46 - 36	W2113R107	46 - 32	W2113R104	–	–
	50	1.54	2.48	W2200X	4.54	50 - 41	W2200R110	50 - 36	W2200R107	–	–
	55	1.65	2.70	W2203X	4.64	55 - 46	W2203R113	55 - 41	W2203R110	55 - 36	W2203R107
	60	1.75	2.55	W2206X	4.72	60 - 50	W2206R200	60 - 46	W2206R113	60 - 41	W2206R110
	–	–	–	–	–	60 - 36	W2206R107	–	–	–	–
W4000X	36	1.46	2.40	W4107X	7.72	–	–	–	–	–	–
	41	1.46	2.40	W4110X	7.72	–	–	–	–	–	–
	46	1.56	2.52	W4113X	7.94	–	–	–	–	–	–
	50	1.63	2.63	W4200X	8.28	50 - 36	W4200R107	–	–	–	–
	55	1.73	2.89	W4203X	8.42	55 - 41	W4203R110	55 - 36	W4203R107	55 - 32	W4203R104
	60	1.83	2.78	W4206X	8.47	60 - 50	W4206R200	60 - 46	W4206R113	60 - 36	W4206R107
	65	1.95	3.00	W4209X	8.67	65 - 55	W4209R203	65 - 50	W4209R200	65 - 46	W4209R113
	70	2.07	3.08	W4212X	8.84	70 - 60	W4212R206	70 - 55	W4212R203	–	–
	75	2.18	3.21	W4215X	8.96	75 - 65	W4215R209	75 - 60	W4215R206	–	–
	–	–	–		–	75 - 55	W4215R203	75 - 50	W4215R200	–	–
	80	2.30	3.29	W4302X	9.16	80 - 75	W4302R215	80 - 70	W4302R212	80 - 65	W4302R209
	–	–	–		–	80 - 55	W4302R203	80 - 50	W4302R200		–
	85	2.44	3.37	W4085MX	9.48	–	–	–	–	–	–
W8000X	50	1.77	3.08	W8200X	17.75	–	–	–	–	–	–
	55	1.89	3.15	W8203X	17.22	–	–	–	–	–	–
	60	2.01	3.25	W8206X	17.59	–	–	–	–	–	–
	65	2.07	3.38	W8209X	17.29	65 - 50	W8209R200	–	–	–	–
	70	2.07	3.34	W8212X	17.12	70 - 55	W8212R203	–	–	–	–
	75	2.28	3.35	W8215X	17.11	75 - 60	W8215R206	75 - 55	W8215R203	–	–
	80	2.38	3.52	W8302X	17.33	80 - 65	W8302R209	80 - 60	W8302R206	80 - 55	W8302R203
	–	–	–	–	–	80 - 50	W8302R200		–	–	–
	85	2.60	3.63	W8085MX	18.42	85 - 70	W8085R070M	85 - 65	W8085R065M	85 - 60	W8085R060M
	–	–	–	–	–	85 - 55	W8085R055M	–	–	–	–
	90	2.91	4.05	W8090MX	20.46	90 - 75	W8090R075M	–	–	–	–
	95	2.91	4.05	W8312X	19.71	95 - 80	W8312R302	95 - 75	W8312R215	–	–
	100	3.13	4.33	W8315X	20.31	–	–	–	–	–	–
	105	3.13	4.33	W8402X	19.39	–	–	–	–	–	–

* See page **411** for table of hexagon sizes of bolts, nuts and related thread diameters.

W-Series, Metric Cassettes and Reducer Inserts



Hexagon Range:
50 - 155 mm

Maximum Operating Pressure:
10,000 psi (690 bar)

W
Series
(X-Edition)

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S (mm)	Nose Radius H (in)	Dim. G (in)	Model Number	Wt. (lbs)	Hexagon Reducer (mm)	Model Number	Hexagon Reducer (mm)	Model Number
W15000X	65	2.32	3.49	W15209X	30.72	–	–	–	–
	70	2.32	3.49	W15212X	30.72	–	–	–	–
	75	2.44	3.56	W15215X	30.08	–	–	–	–
	80	2.54	3.66	W15302X	30.34	80-65	W15302R209	–	–
	85	2.74	3.80	W15085MX	31.70	85-70	W15085R070M	–	
	90	2.95	4.01	W15090MX	33.32	90-75	W15090R075M	–	–
	95	2.95	4.01	W15312X	31.70	95-80	W15312R302	95 - 75	W15312R215
	100	3.17	4.06	W15315X	34.02	–	–	–	–
	105	3.17	4.06	W15402X	33.09	105-90	W15402R090M	–	–
	110	3.44	4.52	W15405X	35.61	110-95	W15110R095M	–	–
	115	3.44	4.52	W15115MX	34.48	115-100	W15115R100M	–	–
W22000X	75	2.64	4.02	W22215X	48.72	–	–	–	
	80	2.64	4.02	W22302X	47.78	80-60	W22302R206	80 - 55	W22302R203
	85	2.85	4.23	W22085MX	49.74	85-65	W22085MR209	85 - 60	W22085MR206
	90	3.07	4.45	W22090MX	51.72	90-70	W22090M212	90 - 60	W22090MR206
	95	3.07	4.45	W22312X	50.62	95-75	W22312R215	–	–
	100	3.35	4.72	W22315X	53.57	–	–	–	–
	105	3.35	4.72	W22402X	52.09	–	–	–	–
	110	3.54	4.92	W22404X	51.48	–	–	–	–
	115	3.54	4.92	W22115MX	52.88	–	–	–	–
	120	3.74	5.12	W22412X	54.54	–	–	–	–
	123	3.74	5.12	W22123MX	53.80	–	–	–	–
	130	3.94	5.31	W22502X	55.10	–	–	–	–
	135	3.94	5.31	W22506X	52.77	135-105	W22506R402	–	–
W35000X	80	3.02	5.08	W35302X	72.30	80-50	W35302R200	–	–
	85	3.02	5.08	W35085MX	33.10	–	–	–	
	90	3.23	5.33	W35090MX	34.30	90-60	W35090R206	–	–
	95	3.23	5.30	W35312X	72.50	–	–	–	–
	100	3.45	5.48	W35315X	70.80	–	–	–	–
	105	3.45	5.48	W35402X	73.90	–	–	–	–
	110	3.69	5.75	W35405X	76.90	110-85	W35405R085M	–	–
	115	3.69	5.75	W35115MX	77.10	–	–	–	–
	120	3.91	6.01	W35412X	78.50	120-95	W35412R312	–	–
	123	3.91	6.01	W35123MX	78.90	–	–	–	–
	130	4.09	6.30	W35502X	78.90	130-105	W35502R402	–	–
	135	4.09	6.30	W35506X	76.30	135-110	W35506R405	–	–
	140	4.31	6.43	W35508X	79.80	140-115	W35508R115M	–	–
	145	4.31	6.43	W35512X	76.90	145-120	W35512R412	–	–
	150	4.52	6.67	W35514X	80.90	–	–	–	–
	151	4.52	6.67	W35151MX	82.10	–	–	–	–
	155	4.52	6.67	W35602X	77.80	155-130	W35602R502	–	–

▼ Shown: **W4206SL stepped-width cassette with W4000X drive unit**

Your Easy and Long-Lasting Solution to Difficult Access Bolting Applications

Designed for Tight Spots

Stepped width design provides easy access in confined areas. UltraSlim cassettes fit where standard solutions won't.

Built to Outperform

High endurance components keep working when others fail.

Top Mounted Handles

Standard top mounted handles provide safety and versatility; optional angled handles are also available.

Replacement handle (straight)	**SWH6S**
Angled handle (optional)	**SWH6A**



Calibration Certificate

All **UltraSlim Series** cassettes are CE - ATEX certified, factory calibrated and are shipped complete with a calibration certificate.

CE II 2 GD T4
CSA/SIRA 15XT072

Versatility

- **Lean, stepped width design allows tool to be mounted over bolts where other tools won't fit**
- **Bi-Hexagonal cassette allows twice as many positioning points on nut or bolt**
- **Uses same drive unit as standard W-series hexagon cassettes**
- **Robust top mounted handle stays out of the way, providing safe fastening in hard to reach areas**

Performance

- **Premium components provide best-in-class endurance**

Ease of Use

- **Few moving parts are easily accessible for quick field maintenance**
- **Fast release drive unit enables rapid exchange of cassettes, no tools required and no pins to lose**
- **Uses same drive unit as standard and X-Edition cassettes**

Accuracy

- **Constant torque output provides accuracy of +/- 3% across the full stroke**

Slim enough to fit and tough enough to last. This UltraSlim wrench is the perfect controlled bolting solution for this oil and gas flange. ▶

UltraSlim Stepped-Width Cassettes

UltraSlim Stepped-Width Cassettes

Accessing narrow spaces normally requires significantly reducing the width of the torque wrench. For the tool operator, this has always meant vastly reduced tool durability, and/or reduced torque output.

By using the highest-grade materials, perfecting the geometry, and placing the positioning handle on top of the tool, Enerpac UltraSlim cassettes are able to provide greater torque, get into tighter spaces, and vastly outperform the competition in product durability.*

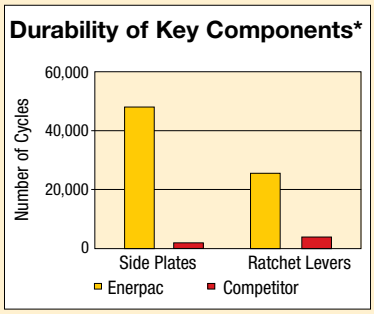

Average test results, whereby three Enerpac 1 13/16" UltraSlim cassettes and three competitor 1 13/16" cassettes were tested at 4000 ft-lbs for 50,000 cycles. The Enerpac side plates never broke for the full duration of the test.

W-SL Series Ultra-Slim

Nominal Torque at 10,000 psi:
4360 Ft.lbs.

Hexagon Range:
1 13/16 - 2 15/16 inches

Maximum Operating Pressure:
10,000 psi

Torque Wrench Pumps

Visit enerpac.com for system matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

Torque Wrench Hoses

Use Enerpac THQ-Series hoses with W-Series torque wrenches to ensure the integrity of your hydraulic system.

10,000 psi	
6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**



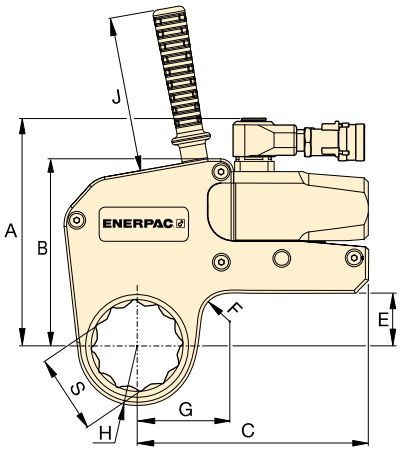

▼ **SELECTION CHART**

Hexagon Size S (in)	Hexagon Size S (mm)	Nominal Torque @ 10,000 psi (Ft.lbs)	Cassette Model Number *	Minimum Torque @ 1000 psi (Ft.lbs)	Nose Radius H (in)	Dimensions (in) G	A	B	C	D	D1	E	F (radius)	J	Weight (lbs)	Drive Unit Model ** (sold separately)
1 13/16	46	1980	W2113SL	200	1.44	2.35	5.54	4.30	5.81	1.28	1.00	0.94	0.79	4.72	4.87	W2000X
2	50	1980	W2200SL	200	1.52	2.40									4.87	
2 3/16	55	1980	W2203SL	200	1.63	2.49									4.87	
2 3/8	60	1980	W2206SL	200	1.75	2.56									4.88	
1 13/16	46	4360	W4113SL	430	1.56	2.65	6.91	5.69	7.03	1.59	1.13	1.61	0.79	4.72	10.15	W4000X
2 3/16	55	4360	W4203SL	430	1.73	2.70									10.15	
2 3/8	60	4360	W4206SL	430	1.89	2.82									10.36	
2 9/16	65	4360	W4209SL	430	1.99	2.92									10.37	
2 3/4	70	4360	W4212SL	430	2.11	2.98									10.42	
2 15/16	75	4360	W4215SL	430	2.20	2.99									10.37	

* Bi-Hexagonal Cassette includes top mounted straight handle.

** May also be used with **W2000PX** and **W4000PX** drive units, featuring double-swivel manifolds.

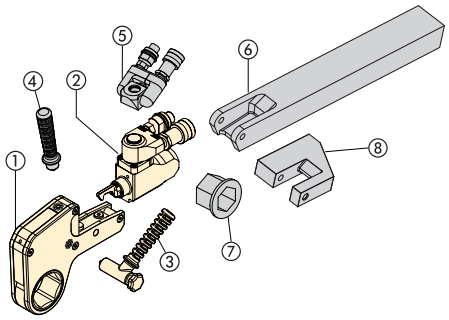

① Hexagon Cassette
② Drive Unit
③ Angled Positioning Handle
④ Straight Positioning Handle (optional)
⑤ Pro Series Swivel (optional)
⑥ Extended Reaction Arm (optional)
⑦ Reducer Insert (optional)
⑧ Reaction Paddle (optional)

TSP
WTE
WRP
Series

TSP-Series, Pro Series Swivels

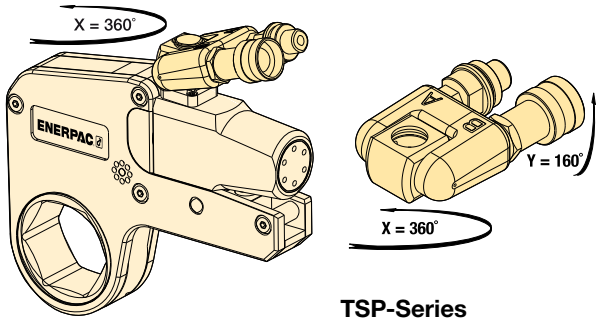

TSP-Series

- **Robust interlocking design**
- **360° X-axis and 160° Y-axis rotation**
- **Increases tool fit in restricted access areas**
- **Simplifies hose placement**
- **Includes male and female couplers**

Torque Wrench Model Number	Model Number	Maximum Pressure (psi)	Wt. (lbs)
W2000X, W4000X, W8000X, W15000X, W22000X, W35000X	TSP300*	10,000	0.44

Note: To order a W-series (X-Edition) wrench fitted with the TSP swivel, insert a "P" prior to the "X" in the tool designation, e.g., W2000PX.
* TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

WTE-Series, Extended Reaction Arm

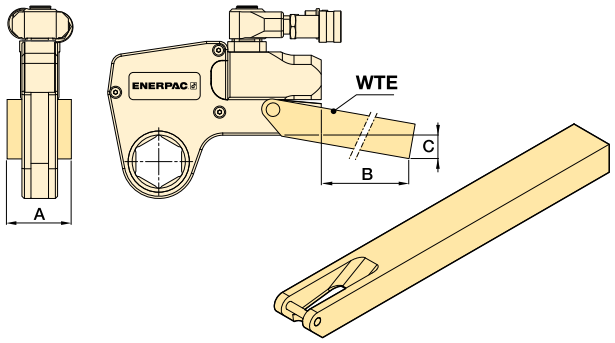

WTE-Series

- **Full torque rated**
- **Increases tool fit in restricted access areas**

Torque Wrench Model Number	Model Number	Dimensions (in)			Wt.* (lbs)
		A	B	C	
W2000X	WTE20	2.20	15.67	2.66	5.73
W4000X	WTE40	2.60	17.17	2.91	10.14
W8000X	WTE80	3.35	17.68	2.15	16.76
W15000X	WTE150	4.02	19.61	2.83	26.46
W22000X	WTE220	4.49	20.51	3.03	38.14
W35000X	WTE350	5.00	16.48	5.23	39.24

* Weights indicated are for the accessories only and do not include the wrench.

WRP-Series Reaction Paddles

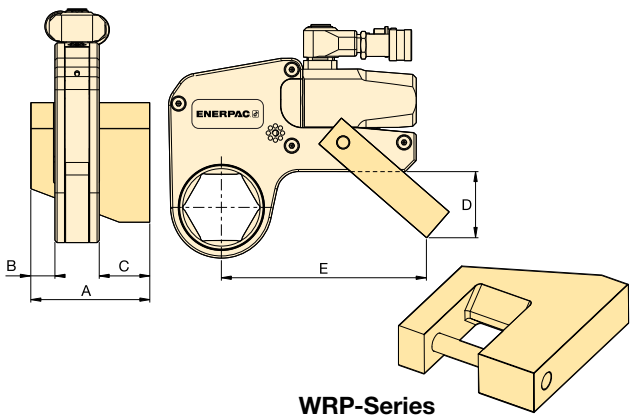

WRP-Series

- **Lightweight interchangeable design**
- **Allows for offset reaction when in-line reaction is not available**

Torque Wrench Model Number	Model Number	Dimensions (in)					Wt.* (lbs)
		A	B	C	D	E	
W2000X	WRP20	3.31	0.63	1.40	1.77	5.83	0.88
W4000X	WRP40	4.29	0.83	1.87	2.32	7.48	1.76
W8000X	WRP80	5.37	1.02	2.25	2.72	8.78	4.41
W15000X	WRP150	6.50	1.26	2.74	3.43	10.12	8.60
W22000X	WRP220	8.15	1.52	3.58	5.28	12.48	15.87
W35000X	WRP350	9.22	1.79	3.58	7.17	13.98	23.37

* Weights indicated are for the accessories only and do not include the wrench.

ENERPAC professional series steel torque wrenches provide reliable controlled tightening solutions across many industries.

S3000X Square Drive Torque Wrench on Wind Turbine Assembly and Maintenance

S3000X used to connect wind turbine segments during assembly and maintenance. A robust but compact solution is required for bolt tightening on wind tower sections. Large numbers of fasteners require precise application of torque to ensure joint integrity is achieved and maintained.

The Enerpac S-Series wrench offers simple and reliable operation while providing accurate and repeatable results.

W4000X Low-Profile Torque Wrench on an API Pipe Flange

Throughout the Oil and Gas, Petrochemical and Processing Industries, pipeline joints, valves, pumps and machinery present challenges for controlled bolting.

The restricted access on this flange was easily overcome with an Enerpac W-Series Torque Wrench. The W Wrenches offer reliability and control, ensuring even and consistent torque is applied to all bolts.

S3000X on an Oil and Gas Flange

During maintenance, quick turnaround times are essential; S-Series wrenches provide a large angle of nut rotation per stroke, offering speed and accuracy in a compact ergonomic tool.

▼ RSL Drive Units with interchangeable RLP Hexagon Cassette and RSQ Square Drive Cassette

Setting New Standards in Safety, Simplicity and Performance

Safety and Performance

- Innovative design that completely encloses all moving parts and minimizes pinch points
- 30-35° rotation angle provides added productivity while avoiding "tool lock-on" which is common with some torque wrench designs

Simplicity

- Simple robust alloy steel design with just three moving parts for reduced maintenance
- Robust handles are available for both sides and the tops of cassettes to allow for extra maneuverability
- Designed to give optimum strength-to-weight and torque-to-weight ratios
- Minimum nose radius for trouble-free tool fit

Versatility

- Interchangeable cassette design
- Wide range of hexagon sizes available for all applications
- Reaction arm has a simple dial lock for rapid change
- For use in multiple industrial, energy, and oil and gas applications

Accuracy

- Constant torque output provides accuracy of +/-3% across full stroke

RLP-Series, Low-Profile Hexagon Cassettes

For metric and imperial hexagon cassettes see pages 264-268.

Page: 264

RSQ-Series, Square-Drive Heads

RSQ Square Drive Heads are interchangeable with the RLP Hexagon Cassettes for the same size RSL Drive Unit.

Page: 272

Back-Up Spanner

To be used to stop back nut from turning during make up or break out. Two hex sizes in one tool.

Page: 245

Torque Wrench Pumps

Visit enerpac.com for system-matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

Torque Wrench Hoses

Use Enerpac THQ700 Series hoses with RSL-Series torque wrenches to ensure the integrity of your hydraulic system.

6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

Drive Units for Hexagon & Square Drive Cassettes

One Drive, Two Tools
One RSL-Hydraulic Drive Unit fits RLP-Hexagon Cassette or RSQ-Square Drive Head.

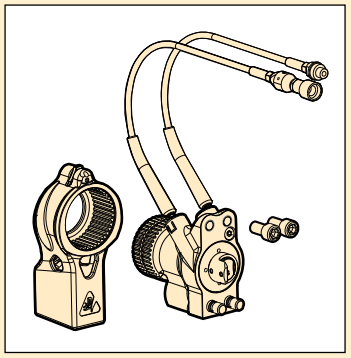

RSL

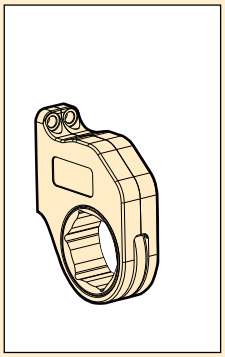

RLP... / RLP...SL

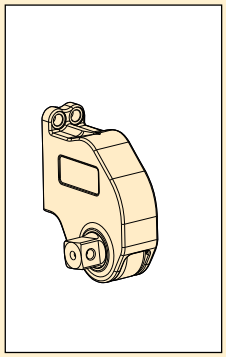

RSQ

RSL Series

Maximum Torque Output:
1408 - 28,002 Ft-lbs

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

▼ TORQUE WRENCH OPTIONS AND ACCESSORIES

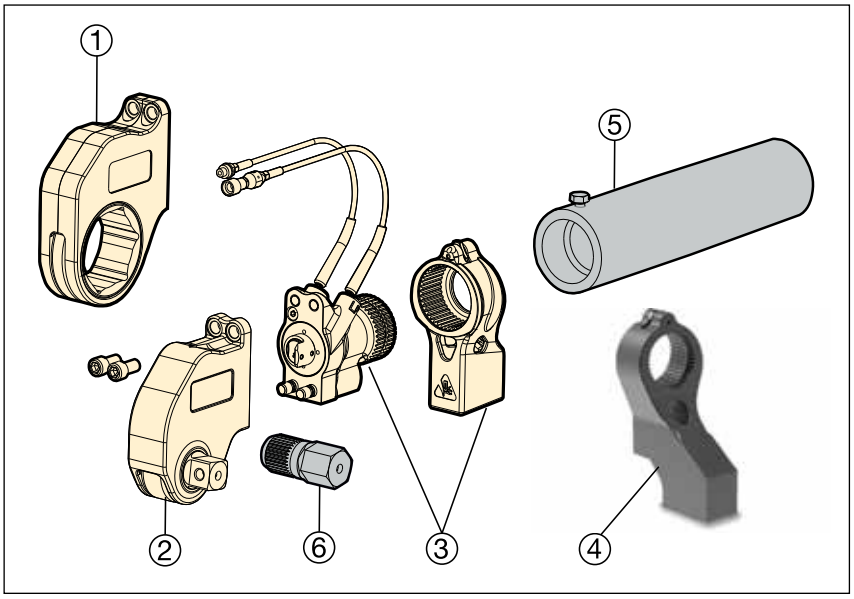

① **RLP**-Hexagon Cassette (pages 264-268)
RLP-SL-Slimline Hexagon Cassette (pages 270-271)

② **RSQ**-Square Drive Cassette (pages 272-273)

③ **RSL**-Drive Unit and Reaction Arm (page 263)

Optional Parts (page 269)

④ **ERA**-Extended Reaction Arm, for RSQ only

⑤ **ERT**-Extended Reaction Tube, for RLP only

Optional Parts (only available per request)

⑥ Hexagon Bit

▼ SELECTION CHART

Hexagon Cassette Range (A/F) (see pages 264 - 268 for sizes and model numbers		Maximum Torque Output at 10,000 psi		Drive Unit Model Number	Minimum Torque Output at 1000 psi		
(inch)	(mm)	(Ft.lbs)	(Nm)		(Ft.lbs)	(Nm)	(lbs)
⅞ - 2⅜	26 - 60	1408	1909	**RSL1500**	141	191	3.4
1⁵⁄₁₆ - 2¹⁵⁄₁₆	33 - 75	3080	4176	**RSL3000**	308	417	5.6
1¹¹⁄₁₆ - 3⅛	46 - 80	5303	7190	**RSL5000**	530	719	8.9
2⅜ - 3⅛	60 - 80	7862	10,659	**RSL8000**	786	1066	10.6
2⁷⁄₁₆ - 4⅝	62 - 110	11,154	15,123	**RSL11000**	1115	1512	11.6
2¹⁵⁄₁₆ - 4⅝	75 - 115	18,843	25,547	**RSL19000**	1884	2554	20.0
3⅛ - 6⅛	80 - 155	28,002	37,965	**RSL28000**	2800	3796	22.0

Bolting Integrity Software
Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

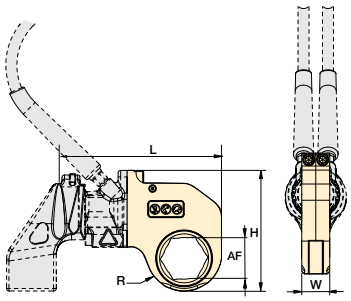

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

RSL Series

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F (in)	Hexagon Size A/F (mm)	Hexagon Cassette Model Number	Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Dimensions (in) R	L	W	H	Wt. (lbs)	Dimensions (mm) R	L	W	H	Wt. (kg)
RSL1500	⅞	–	RLP1014	320	434	0.79	6.00	1.25	4.33	2.2	20,1	152,4	31,8	110,0	1,0
	1 1/16	26	RLP1101	640	868	0.95	6.05	1.25	4.50	2.2	24,1	153,7	31,8	114,3	1,0
	1⅛	–	RLP1102	640	868	1.03	6.12	1.25	4.57	2.3	26,2	155,4	31,8	116,1	1,0
	1 3/16	30	RLP1103	640	868	1.03	6.12	1.25	4.57	2.3	26,2	155,4	31,8	116,1	1,0
	1¼	32	RLP1104	640	868	1.03	6.12	1.25	4.57	2.3	26,2	155,4	31,8	116,1	1,0
	1 5/16	33	RLP1105	900	1220	1.15	6.24	1.25	4.69	2.4	29,2	158,5	31,8	119,1	1,1
	1⅜	35	RLP1106	900	1220	1.15	6.24	1.25	4.69	2.4	29,2	158,5	31,8	119,1	1,1
	1 7/16	36	RLP1107	900	1220	1.15	6.24	1.25	4.69	2.4	29,2	158,5	31,8	119,1	1,1
	1½	38	RLP1108	1408	1909	1.31	6.41	1.25	4.86	2.7	33,3	162,8	31,8	123,4	1,2
	1 9/16	–	RLP1109	1408	1909	1.31	6.41	1.25	4.86	2.7	33,3	162,8	31,8	123,4	1,2
	1⅝	41	RLP1110	1408	1909	1.31	6.41	1.25	4.86	2.7	33,3	162,8	31,8	123,4	1,2
	1 11/16	–	RLP1111	1408	1909	1.40	6.49	1.25	4.94	2.7	35,6	164,8	31,8	125,5	1,2
	1¾	–	RLP1112	1408	1909	1.40	6.49	1.25	4.94	2.7	35,6	164,8	31,8	125,5	1,2
	1 13/16	46	RLP1113	1408	1909	1.40	6.49	1.25	4.94	2.7	35,6	164,8	31,8	125,5	1,2
	1⅞	–	RLP1114	1408	1909	1.48	6.58	1.25	5.03	2.7	37,6	167,1	31,8	127,8	1,2
	1 15/16	–	RLP1115	1408	1909	1.48	6.58	1.25	5.03	2.7	37,6	167,1	31,8	127,8	1,2
	2	50	RLP1200	1408	1909	1.48	6.58	1.25	5.03	2.7	37,6	167,1	31,8	127,8	1,2
	2 1/16	–	RLP1201	1408	1909	1.58	6.68	1.25	5.13	2.7	40,1	169,7	31,8	130,3	1,2
	2⅛	–	RLP1202	1408	1909	1.58	6.68	1.25	5.13	2.7	40,1	169,7	31,8	130,3	1,2
	2 3/16	55	RLP1203	1408	1909	1.58	6.68	1.25	5.13	2.7	40,1	169,7	31,8	130,3	1,2
	2¼	–	RLP1204	1408	1909	1.70	6.79	1.25	5.24	2.8	43,2	172,5	31,8	133,1	1,3
	2 5/16	–	RLP1205	1408	1909	1.70	6.79	1.25	5.24	2.8	43,2	172,5	31,8	133,1	1,3
	2⅜	60	RLP1206	1408	1909	1.70	6.79	1.25	5.24	2.8	43,2	172,5	31,8	133,1	1,3
RSL3000	1 5/16	33	RLP3105	900	1220	1.18	7.62	1.38	5.49	3.5	30,0	193,5	35,1	139,4	1,6
	1⅜	35	RLP3106	900	1220	1.18	7.62	1.38	5.49	3.5	30,0	193,5	35,1	139,4	1,6
	1 7/16	36	RLP3107	900	1220	1.18	7.62	1.38	5.49	3.5	30,0	193,5	35,1	139,4	1,6
	1½	38	RLP3108	1200	1627	1.32	7.77	1.38	5.63	3.9	33,5	197,4	35,1	143,0	1,8
	1 9/16	–	RLP3109	1200	1627	1.32	7.77	1.38	5.63	3.9	33,5	197,4	35,1	143,0	1,8
	1⅝	41	RLP3110	1200	1627	1.32	7.77	1.38	5.63	3.9	33,5	197,4	35,1	143,0	1,8
	1 11/16	–	RLP3111	1900	2576	1.47	7.87	1.38	5.78	4.0	37,3	199,9	35,1	146,8	1,8
	1¾	–	RLP3112	1900	2576	1.47	7.87	1.38	5.78	4.0	37,3	199,9	35,1	146,8	1,8
	1 13/16	46	RLP3113	1900	2576	1.47	7.87	1.38	5.78	4.0	37,3	199,9	35,1	146,8	1,8
	1⅞	–	RLP3114	2600	3526	1.60	8.04	1.38	5.92	4.5	40,6	204,2	35,1	150,4	2,0
	1 15/16	–	RLP3115	2600	3526	1.60	8.04	1.38	5.92	4.5	40,6	204,2	35,1	150,4	2,0
	2	50	RLP3200	2600	3526	1.60	8.04	1.38	5.92	4.5	40,6	204,2	35,1	150,4	2,0
	2 1/16	–	RLP3201	3080	4176	1.76	8.16	1.38	6.08	4.7	44,7	207,3	35,1	154,4	2,1
	2⅛	–	RLP3202	3080	4176	1.76	8.16	1.38	6.08	4.7	44,7	207,3	35,1	154,4	2,1
	2 3/16	55	RLP3203	3080	4176	1.76	8.16	1.38	6.08	4.7	44,7	207,3	35,1	154,4	2,1
	2¼	–	RLP3204	3080	4176	1.84	8.25	1.38	6.15	4.8	46,7	209,6	35,1	156,2	2,2
	2 5/16	–	RLP3205	3080	4176	1.84	8.25	1.38	6.15	4.8	46,7	209,6	35,1	156,2	2,2
	2⅜	60	RLP3206	3080	4176	1.84	8.25	1.38	6.15	4.8	46,7	209,6	35,1	156,2	2,2
	2 7/16	62	RLP3207	3080	4176	1.95	8.14	1.38	6.26	4.6	49,5	206,8	35,1	159,0	2,1
	2½	63	RLP3208	3080	4176	1.95	8.14	1.38	6.26	4.6	49,5	206,8	35,1	159,0	2,1
	2 9/16	65	RLP3209	3080	4176	1.95	8.14	1.38	6.26	4.6	49,5	206,8	35,1	159,0	2,1
	2⅝	–	RLP3210	3080	4176	2.04	8.23	1.38	6.36	4.4	51,8	209,0	35,1	161,5	2,0
	2 11/16	–	RLP3211	3080	4176	2.04	8.23	1.38	6.36	4.4	51,8	209,0	35,1	161,5	2,0
	2¾	70	RLP3212	3080	4176	2.04	8.23	1.38	6.36	4.4	51,8	209,0	35,1	161,5	2,0
	2 13/16	–	RLP3213	3080	4176	2.16	8.34	1.38	6.54	4.7	54,9	211,8	35,1	166,1	2,1
	2⅞	–	RLP3214	3080	4176	2.16	8.34	1.38	6.54	4.7	54,9	211,8	35,1	166,1	2,1
	2 15/16	75	RLP3215	3080	4176	2.16	8.34	1.38	6.54	4.7	54,9	211,8	35,1	166,1	2,1

Hexagon Cassettes for RSL-Series

Enerpac's Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. Our Bolting Software Suite includes **BoltUp** (free, online calculator providing reliable, repeatable bolt loads), **Informate** (bolt load calculation software for huge range of flanged joints and clamped connections), and **Integrity Data Management System/iDMS** (flexible data management and activity-planning system for use on assets featuring bolted connections).

Contact Enerpac for more information.

Page: 416

Slimline Hexagon Cassettes

For accessing narrow spaces RLP...SL Stepped-Width Hexagon Cassettes are available. Slimline cassettes use same drive unit as standard RLP-cassettes.

270

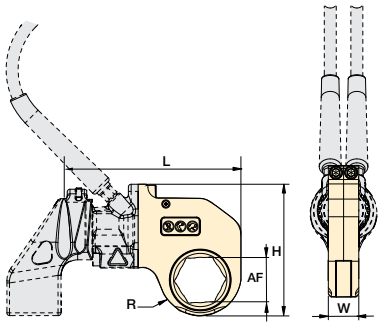

RSL Series

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F (in)	Hexagon Size A/F (mm)	Hexagon Cassette Model Number	Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Dimensions (in) R	Dimensions (in) L	Dimensions (in) W	Dimensions (in) H	Wt. (lbs)	Dimensions (mm) R	Dimensions (mm) L	Dimensions (mm) W	Dimensions (mm) H	Wt. (kg)
RSL5000	1 11/16	–	RLP5111	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	1¾	–	RLP5112	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	1 13/16	46	RLP5113	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	1⅞	–	RLP5114	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	1 15/16	–	RLP5115	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	2	50	RLP5200	2600	3526	1.61	9.08	1.75	6.52	6.6	40,9	230,6	44,5	165,6	3,0
	2 1/16	–	RLP5201	3500	4746	1.71	9.18	1.75	6.62	6.5	43,4	233,2	44,5	168,1	2,9
	2⅛	–	RLP5202	3500	4746	1.71	9.18	1.75	6.62	6.5	43,4	233,2	44,5	168,1	2,9
	2 3/16	55	RLP5203	3500	4746	1.71	9.18	1.75	6.62	6.5	43,4	233,2	44,5	168,1	2,9
	2¼	–	RLP5204	4500	6102	1.87	9.34	1.75	6.78	7.0	47,5	237,2	44,5	172,2	3,2
	2 5/16	–	RLP5205	4500	6102	1.87	9.34	1.75	6.78	7.0	47,5	237,2	44,5	172,2	3,2
	2⅜	60	RLP5206	4500	6102	1.87	9.34	1.75	6.78	7.0	47,5	237,2	44,5	172,2	3,2
	2 7/16	62	RLP5207	5303	7191	2.01	9.48	1.75	6.92	7.0	51,1	240,8	44,5	175,8	3,2
	2½	63	RLP5208	5303	7191	2.01	9.48	1.75	6.92	7.0	51,1	240,8	44,5	175,8	3,2
	2 9/16	65	RLP5209	5303	7191	2.01	9.48	1.75	6.92	7.0	51,1	240,8	44,5	175,8	3,2
	2⅝	–	RLP5210	5303	7191	2.16	9.63	1.75	7.07	7.5	54,9	244,6	44,5	179,6	3,4
	2 11/16	–	RLP5211	5303	7191	2.16	9.63	1.75	7.07	7.5	54,9	244,6	44,5	179,6	3,4
	2¾	70	RLP5212	5303	7191	2.16	9.63	1.75	7.07	7.5	54,9	244,6	44,5	179,6	3,4
	2 13/16	–	RLP5213	5303	7191	2.24	9.71	1.75	7.15	7.5	56,9	246,6	44,5	181,6	3,4
	2⅞	–	RLP5214	5303	7191	2.24	9.71	1.75	7.15	7.5	56,9	246,6	44,5	181,6	3,4
	2 15/16	75	RLP5215	5303	7191	2.24	9.71	1.75	7.15	7.5	56,9	246,6	44,5	181,6	3,4
	3	–	RLP5300	5303	7191	2.26	9.73	1.75	7.17	7.2	57,4	247,1	44,5	182,1	3,3
	3 1/16	–	RLP5301	5303	7191	2.26	9.73	1.75	7.17	7.2	57,4	247,1	44,5	182,1	3,3
	3⅛	80	RLP5302	5303	7191	2.26	9.73	1.75	7.17	7.2	57,4	247,1	44,5	182,1	3,3
RSL8000	2⅜	60	RLP8206	4500	6102	1.87	9.53	2.25	7.00	8.9	47,5	242,1	57,2	177,8	4,0
	2 7/16	62	RLP8207	5800	7865	2.01	9.67	2.25	7.13	9.0	51,1	245,6	57,2	181,1	4,1
	2½	63	RLP8208	5800	7865	2.01	9.67	2.25	7.13	9.0	51,1	245,6	57,2	181,1	4,1
	2 9/16	65	RLP8209	5800	7865	2.01	9.67	2.25	7.13	9.0	51,1	245,6	57,2	181,1	4,1
	2⅝	–	RLP8210	7862	10.661	2.16	9.82	2.25	7.28	9.6	54,9	249,4	57,2	184,9	4,4
	2 11/16	–	RLP8211	7862	10.661	2.16	9.82	2.25	7.28	9.6	54,9	249,4	57,2	184,9	4,4
	2¾	70	RLP8212	7862	10.661	2.16	9.82	2.25	7.28	9.6	54,9	249,4	57,2	184,9	4,4
	2 13/16	–	RLP8213	7862	10.661	2.24	9.90	2.25	7.38	9.6	56,9	251,5	57,2	187,5	4,4
	2⅞	–	RLP8214	7862	10.661	2.24	9.90	2.25	7.38	9.6	56,9	251,5	57,2	187,5	4,4
	2 15/16	75	RLP8215	7862	10.661	2.24	9.90	2.25	7.38	9.6	56,9	251,5	57,2	187,5	4,4
	3	–	RLP8300	7862	10.661	2.26	9.92	2.25	7.39	9.3	57,4	252,0	57,2	187,7	4,2
	3 1/16	–	RLP8301	7862	10.661	2.26	9.92	2.25	7.39	9.3	57,4	252,0	57,2	187,7	4,2
	3⅛	80	RLP8302	7862	10.661	2.26	9.92	2.25	7.39	9.3	57,4	252,0	57,2	187,7	4,2

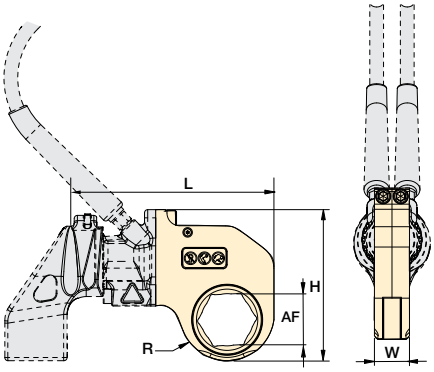

RSL Series

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F		Hexagon Cassette Model Number	Maximum Torque Output		Dimensions (in)				Wt.	Dimensions (mm)				Wt.
	(in)	(mm)		(ft-lbs)	(Nm)	R	L	W	H	(lbs)	R	L	W	H	(kg)
RSL11000	2 7/16	62	RLP11207	5800	7865	1.98	10.00	2.50	8.03	14.2	50,3	254,0	63,5	204,0	6,4
	2 1/2	–	RLP11208	5800	7865	1.98	10.00	2.50	8.03	14.2	50,3	254,0	63,5	204,0	6,4
	2 9/16	65	RLP11209	5800	7865	1.98	10.00	2.50	8.03	14.2	50,3	254,0	63,5	204,0	6,4
	2 5/8	–	RLP11210	7300	9899	2.19	11.20	2.50	8.23	14.8	55,6	284,5	63,5	209,0	6,7
	2 11/16	–	RLP11211	7300	9899	2.19	11.20	2.50	8.23	14.8	55,6	284,5	63,5	209,0	6,7
	2 3/4	70	RLP11212	7300	9899	2.19	11.20	2.50	8.23	14.8	55,6	284,5	63,5	209,0	6,7
	2 13/16	–	RLP11213	9000	12.204	2.29	11.31	2.50	8.34	14.8	58,2	287,3	63,5	211,8	6,7
	2 7/8	–	RLP11214	9000	12.204	2.29	11.31	2.50	8.34	14.8	58,2	287,3	63,5	211,8	6,7
	2 15/16	75	RLP11215	9000	12.204	2.29	11.31	2.50	8.34	14.8	58,2	287,3	63,5	211,8	6,7
	3	–	RLP11300	11,154	15.125	2.43	11.44	2.50	8.47	15.2	61,7	290,6	63,5	215,1	6,9
	3 1/16	–	RLP11301	11,154	15.125	2.43	11.44	2.50	8.47	15.2	61,7	290,6	63,5	215,1	6,9
	3 1/8	80	RLP11302	11,154	15.125	2.43	11.44	2.50	8.47	15.2	61,7	290,6	63,5	215,1	6,9
	3 3/16	–	RLP11303	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	–	85	RLP11085M	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	3 1/4	–	RLP11304	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	3 5/16	–	RLP11305	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	3 3/8	–	RLP11306	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	3 7/16	–	RLP11307	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	3 1/2	–	RLP11308	11,154	15.125	2.60	11.71	2.50	8.64	16.6	66,0	297,4	63,5	219,5	7,5
	–	90	RLP11090M	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 9/16	–	RLP11309	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 5/8	–	RLP11310	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 11/16	–	RLP11311	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 3/4	95	RLP11312	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 13/16	–	RLP11313	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 7/8	–	RLP11314	11,154	15.125	2.88	11.89	2.50	8.92	17.2	73,2	302,0	63,5	226,6	7,8
	3 15/16	100	RLP11315	11,154	15.125	2.98	12.00	2.50	9.03	16.4	75,7	304,8	63,5	229,4	7,4
	4	–	RLP11400	11,154	15.125	2.98	12.00	2.50	9.03	16.4	75,7	304,8	63,5	229,4	7,4
	4 1/16	–	RLP11401	11,154	15.125	2.98	12.00	2.50	9.03	16.4	75,7	304,8	63,5	229,4	7,4
	4 1/8	105	RLP11402	11,154	15.125	2.98	12.00	2.50	9.03	16.4	75,7	304,8	63,5	229,4	7,4
	4 1/4	–	RLP11404	11,154	15.125	2.98	12.00	2.50	9.03	16.4	75,7	304,8	63,5	229,4	7,4
	4 5/16	110	RLP11405	11,154	15.125	3.25	12.27	2.50	9.30	17.6	82,6	311,7	63,5	236,2	8,0
	4 1/2	–	RLP11408	11,154	15.125	3.25	12.27	2.50	9.30	17.6	82,6	311,7	63,5	236,2	8,0
	4 5/8	–	RLP11410	11,154	15.125	3.25	12.27	2.50	9.30	17.6	82,6	311,7	63,5	236,2	8,0

Hexagon Cassettes for RSL-Series

Enerpac's Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. Our Bolting Software Suite includes **BoltUp** (free, online calculator providing reliable, repeatable bolt loads), **Informate** (bolt load calculation software for huge range of flanged joints and clamped connections), and **Integrity Data Management System/iDMS** (flexible data management and activity-planning system for use on assets featuring bolted connections).

Contact Enerpac for more information.

Page: 416

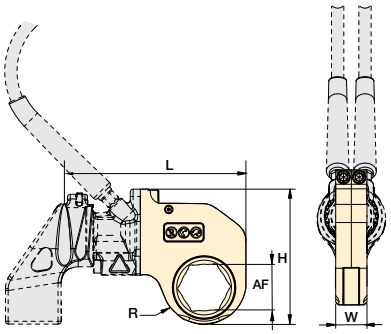

RSL Series

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F (in)	Hexagon Size A/F (mm)	Hexagon Cassette Model Number	Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Dimensions (in) R	L	W	H	Wt. (lbs)	Dimensions (mm) R	L	W	H	Wt. (kg)
RSL19000	2 15/16	75	RLP19215	11,000	14.916	2.45	12.72	2.75	9.44	21.5	62,2	323,1	69,9	239,8	9,8
	3	–	RLP19300	11,000	14.916	2.45	12.72	2.75	9.44	21.5	62,2	323,1	69,9	239,8	9,8
	3 1/16	–	RLP19301	11,000	14.916	2.45	12.72	2.75	9.44	21.5	62,2	323,1	69,9	239,8	9,8
	3⅛	80	RLP19302	11,000	14.916	2.45	12.72	2.75	9.44	21.5	62,2	323,1	69,9	239,8	9,8
	3 3/16	–	RLP19303	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	–	85	RLP19085M	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	3¼	–	RLP19304	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	3 5/16	–	RLP19305	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	3⅜	–	RLP19306	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	3 7/16	–	RLP19307	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	3½	–	RLP19308	16,000	21.696	2.77	13.04	2.75	9.76	22.6	70,4	331,2	69,9	247,9	10,3
	–	90	RLP19090M	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3 9/16	–	RLP19309	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3⅝	–	RLP19310	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3 11/16	–	RLP19311	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3¾	95	RLP19312	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3 13/16	–	RLP19313	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3⅞	–	RLP19314	18,843	25.551	2.95	13.22	2.75	9.94	23.8	74,9	335,8	69,9	252,5	10,8
	3 15/16	100	RLP19315	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4	–	RLP19400	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4 1/16	–	RLP19401	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4⅛	105	RLP19402	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4 3/16	–	RLP19403	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4¼	–	RLP19404	18,843	25.551	3.30	13.57	2.75	10.28	25.3	83,8	344,7	69,9	261,1	11,5
	4 5/16	110	RLP19405	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	4⅜	–	RLP19406	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	4 7/16	–	RLP19407	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	4½	–	RLP19408	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	–	115	RLP19115M	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	4 9/16	–	RLP19409	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6
	4⅝	–	RLP19410	18,843	25.551	3.44	13.71	2.75	10.43	25.6	87,4	348,2	69,9	264,9	11,6

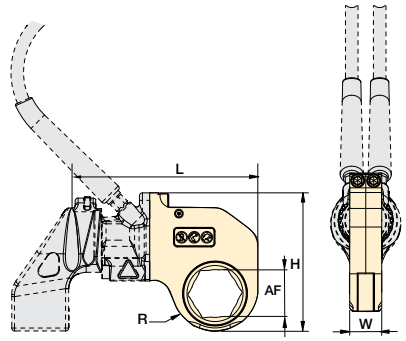

Hexagon Range:
⅞ - 6⅛ inches

Hexagon Range:
26 - 155 mm

Maximum Operating Pressure:
10,000 psi

RSL Series

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F (in)	Hexagon Size A/F (mm)	Hexagon Cassette Model Number	Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Dimensions (in) R	L	W	H	Wt. (lbs)	Dimensions (mm) R	L	W	H	Wt. (kg)
	3⅛	80	RLP28302	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3⅜	–	RLP28303	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	–	85	RLP28085M	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3¼	–	RLP28304	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3⅝	–	RLP28305	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3⅜	–	RLP28306	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3⅞	–	RLP28307	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	3½	–	RLP28308	16,000	21.696	2.56	14.36	3.00	10.54	27.6	65,0	364,7	76,2	267,7	12,5
	–	90	RLP28090M	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3⅝	–	RLP28309	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3⅝	–	RLP28310	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3¹¹⁄₁₆	–	RLP28311	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3¾	95	RLP28312	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3¹³⁄₁₆	–	RLP28313	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3⅞	–	RLP28314	22,000	29.832	2.92	14.36	3.00	10.77	28.8	74,2	364,7	76,2	273,6	13,1
	3¹⁵⁄₁₆	100	RLP28315	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
	4	–	RLP28400	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
	4⅛	–	RLP28401	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
	4⅛	105	RLP28402	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
	4⅜	–	RLP28403	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
	4¼	–	RLP28404	28,002	37.971	3.29	14.47	3.00	11.14	31.7	83,6	367,5	76,2	283,0	14,4
RSL28000	4⅝	110	RLP28405	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4⅜	–	RLP28406	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4⅞	–	RLP28407	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4½	–	RLP28408	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	–	115	RLP28115M	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4⅝	–	RLP28409	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4⅝	–	RLP28410	28,002	37.971	3.43	14.61	3.00	11.28	31.5	87,1	371,1	76,2	286,5	14,3
	4¾	120	RLP28412	28,002	37.971	3.65	14.83	3.00	11.50	33.5	92,7	376,7	76,2	292,1	15,2
	–	123	RLP28123M	28,002	37.971	3.65	14.83	3.00	11.50	33.5	92,7	376,7	76,2	292,1	15,2
	4⅞	–	RLP28414	28,002	37.971	3.65	14.83	3.00	11.50	33.5	92,7	376,7	76,2	292,1	15,2
	5	–	RLP28500	28,002	37.971	3.65	14.83	3.00	11.50	33.5	92,7	376,7	76,2	292,1	15,2
	5⅛	130	RLP28502	28,002	37.971	3.79	14.97	3.00	11.64	33.2	96,3	380,2	76,2	295,7	15,1
	5⅜	–	RLP28503	28,002	37.971	3.79	14.97	3.00	11.64	33.2	96,3	380,2	76,2	295,7	15,1
	5¼	–	RLP28504	28,002	37.971	3.79	14.97	3.00	11.64	33.2	96,3	380,2	76,2	295,7	15,1
	5⅜	135	RLP28506	28,002	37.971	3.79	14.97	3.00	11.64	33.2	96,3	380,2	76,2	295,7	15,1
	5½	140	RLP28508	28,002	37.971	4.05	15.23	3.00	11.90	33.5	102,9	386,8	76,2	302,3	15,2
	5⅝	–	RLP28509	28,002	37.971	4.05	15.23	3.00	11.90	33.5	102,9	386,8	76,2	302,3	15,2
	5⅝	–	RLP28510	28,002	37.971	4.05	15.23	3.00	11.90	33.5	102,9	386,8	76,2	302,3	15,2
	5¾	145	RLP28512	28,002	37.971	4.05	15.23	3.00	11.90	33.5	102,9	386,8	76,2	302,3	15,2
	5⅞	150	RLP28514	28,002	37.971	4.22	15.48	3.00	12.15	34.5	107,2	393,2	76,2	308,6	15,6
	6	–	RLP28600	28,002	37.971	4.22	15.48	3.00	12.15	34.5	107,2	393,2	76,2	308,6	15,6
	6⅛	155	RLP28602	28,002	37.971	4.22	15.48	3.00	12.15	34.5	107,2	393,2	76,2	308,6	15,6

▼ TWMPS503

TWMPS503, Torque Wrench Moly Paste

- Enerpac 503 Moly Paste reduces friction on threaded fasteners – bolts, nuts and studs
- The low and uniform friction coefficient of 0.06 (torque coefficient, K, of 0.11) creates reliable assembly conditions
- This lubricant stays in place through heat, load and vibration to ensure trouble-free disassembly from -20° F to 750° F (-29° C to 400° C)
- 4 lbs. (1,8 kg) container

for **RSL** Series

ERA-Series, Extended Reaction Arms

For Torque Wrench Model No.	Model Number	Dimensions (in)					(lbs)
		A	B	C	D	E	
RSL1500	ERA15114	3.42	5.71	7.68	1.14	1.42	1.98
	ERA15228	4.45	7.13	9.06	1.14	1.42	3.97
	ERA15342	5.47	8.90	10.87	1.14	1.42	5.95
	ERA15456	6.46	9.29	11.26	1.14	1.42	7.94
	ERA15570	7.44	11.30	13.27	1.14	1.42	9.92
RSL3000	ERA30114	4.13	7.68	10.12	1.34	1.61	5.95
	ERA30228	5.16	9.09	11.54	1.34	1.61	7.94
	ERA30342	6.14	10.47	12.91	1.34	1.61	9.92
	ERA30456	7.13	11.89	14.66	1.34	1.61	11.90
RSL5000	ERA50114	5.16	8.19	11.18	1.73	1.89	9.04
	ERA50228	6.14	9.57	12.60	1.73	1.89	11.02
	ERA50342	7.13	10.98	13.98	1.73	1.89	13.01
	ERA50456	8.15	12.37	15.39	1.73	1.89	15.00
RSL11000	ERA110114	4.92	8.62	11.65	2.01	2.32	13.89
	ERA110228	5.91	10.04	13.06	2.01	2.32	16.09
	ERA110342	6.93	11.46	14.45	2.01	2.32	18.08
	ERA110456	7.91	12.83	15.83	2.01	2.32	20.06
RSL28000	ERA280228	6.73	13.19	16.18	2.24	3.50	24.91
	ERA280342	7.76	14.57	17.60	2.24	3.50	30.00

NOTE: Extended Reaction Arms for RSL8000 and RSL19000 are available on request.

- Only to be used on RSL-drive units with RSQ-square drive wrenches
- Used in place of standard reaction arm
- Lightweight interchangeable design
- Full torque rated

ERA-Series

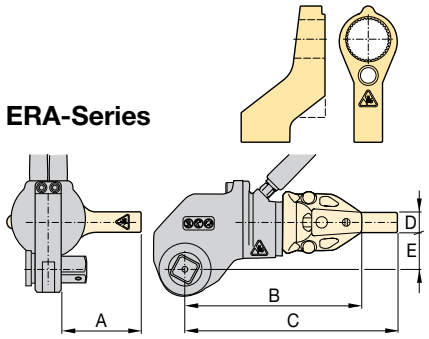

ERT-Series, Extended Reaction Tubes

For Torque Wrench Model No.	Model Number	Dimensions (in)			Wt. (lbs)
		A	B	Ø C	
RSL1500	ERT152	6.18	2.01	2.24	1.98
	ERT156	10.20	5.98	2.24	3.53
	ERT159	13.19	9.02	2.24	5.51
	ERT1512	16.18	12.01	2.24	7.50
	ERT1524	28.19	24.02	2.24	14.78
RSL3000	ERT3012	16.89	12.01	2.76	6.61
	ERT3024	28.90	24.02	2.76	13.01
RSL5000	ERT5012	17.76	12.01	3.50	12.35
	ERT5024	29.76	24.02	3.50	24.91
RSL11000	ERT1106	12.99	5.98	3.74	4.63
	ERT11012	19.02	12.01	3.74	9.04
	ERT11018	25.00	17.99	3.74	13.45
	ERT11024	30.98	24.02	3.74	18.52
RSL19000	ERT19024	31.50	24.02	5	36.82
RSL28000	ERT2806	13.82	5.98	5	7.94
	ERT28012	19.80	12.01	5	16.09
	ERT28018	25.79	17.99	5	24.03
	ERT28024	31.81	24.02	5	36.60

NOTE: Extended Reaction Tubes for RSL8000 are available on request.

- Only to be used on RSL-drive units with RLP-hexagon cassettes
- Used in place of standard reaction arm
- One-piece steel design, durable and simple
- Increases tool fit in restricted access areas
- Full torque rated

ERT-Series

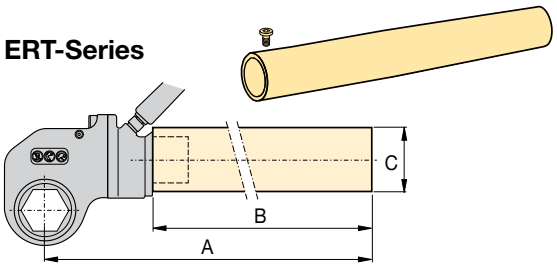

▼ Shown: **RSL drive unit with interchangeable RLP—SL slimline cassette**

Setting New Standards in Simplicity, Versatility and Accuracy

Simplicity

- **Minimum nose radius for trouble-free tool fit which makes it uniquely equipped to access tight spaces, such as Blowout Preventers (BOPs)**
- **Simple robust alloy steel design with three moving parts for reduced maintenance**
- **Proven to perform even in the harshest environments**
- **Reaction arm has a simple dial lock for rapid change**
- **Designed to give optimum strength-to-weight and torque- to-weight ratios**

Versatility

- **Interchangeable cassette design**
- **Drive unit / hexagon cassette combination for limited height in line solutions**
- **Wide range of hexagon sizes available for all applications**

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**

Ease of Use

- **Few moving parts are easily accessible for quick field maintenance**
- **Innovative design that completely encloses all moving parts and minimizes pinch points**

Torque Wrench Pumps

Visit enerpac.com for system matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

Options and Accessories

Optional extended reaction arms and tubes are common accessories available for maximum versatility. Please contact your Enerpac representative to help you select the optimum solution for your application.

Page: 269

Back-Up Spanner

To be used to stop back nut from turning during make up or break out. Two hex sizes in one tool.

Hexagon Sizes (A/F) (in)	Hexagon Sizes (A/F) (mm)	Back-Up Spanner Model Number
1 1/16 - 1 1/4	27 - 32	**BUS01**
1 7/16 - 1 5/8	36 - 41	**BUS02**
1 13/16 - 2	46 - 50	**BUS03**
2 3/16 - 2 3/8	55 - 60	**BUS04**
2 9/16 - 2 3/4	65 - 70	**BUS05**
2 15/16 - 3 1/8	75 - 80	**BUS06**
3 1/2 - 3 7/8	–	**BUS07**
4 1/4 - 4 5/8	–	**BUS08**
–	85 - 90	**BUS09**
3 3/4 - 3 15/16	95 - 100	**BUS10**
4 1/8 - 4 15/16	105 - 110	**BUS11**
–	115 - 120	**BUS12**

Page: 245

Slimline Stepped-Width Hexagon Cassettes

Slimline Stepped-Width Hexagon Cassettes

Accessing narrow spaces, typically found on BOP stacks, normally requires significantly reducing the width of the torque wrench. For the tool operator, this has always meant vastly reduced tool durability, and/or reduced torque output.

By using the highest-grade materials and perfecting the geometry, the RSL Slimline cassettes are able to provide greater torque, get into tighter spaces, and vastly outperform the competition in product durability.

RSL Series

Hexagon Range:
1¼ - 3³⁄₁₆ inches

Hexagon Range:
32 - 80 mm

Maximum Operating Pressure:
10,000 psi

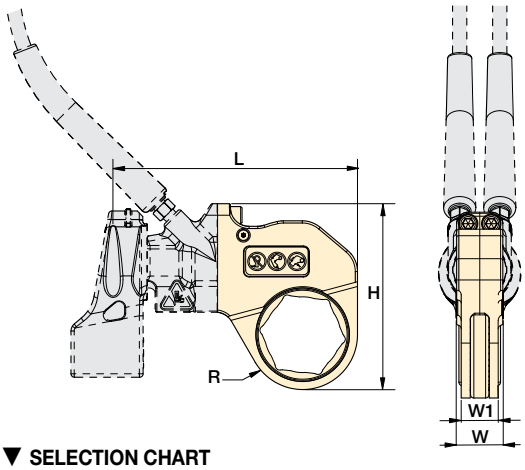

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size A/F		Hexagon Cassette Model Number	Maximum Torque Output		Dimensions (in)					Wt.	Dimensions (mm)					Wt.
	(in)	(mm)		(ft-lbs)	(Nm)	R	L	W	W1	H	(lbs)	R	L	W	W1	H	(kg)
RSL1500	1¼	32	RLP1104SL	375	509	1.03	6.12	1.25	1.00	4.57	2.2	26,2	155,4	31,8	25,4	116,1	1,0
	1⁷⁄₁₆	36	RLP1107SL	658	892	1.15	6.24	1.25	1.00	4.69	2.3	29,2	158,5	31,8	25,4	119,1	1,0
	1⅝	41	RLP1110SL	831	1127	1.31	6.41	1.25	1.00	4.86	2.7	33,3	162,8	31,8	25,4	123,4	1,2
	1¹³⁄₁₆	46	RLP1113SL	831	1127	1.40	6.49	1.25	1.00	4.94	2.7	35,6	164,8	31,8	25,4	125,5	1,2
	2	50	RLP1200SL	831	1127	1.48	6.58	1.25	1.00	5.03	2.7	37,6	167,1	31,8	25,4	127,8	1,2
RSL3000	2	50	RLP3200SL	1354	1836	1.60	8.04	1.38	1.13	5.92	4.5	40,6	204,2	35,1	28,7	150,4	2,0
	2³⁄₁₆	55	RLP3203SL	1604	2175	1.76	8.16	1.38	1.13	6.08	4.7	44,7	207,3	35,1	28,7	154,4	2,1
	2⅜	60	RLP3206SL	1604	2175	1.84	8.25	1.38	1.13	6.15	4.8	46,7	209,6	35,1	28,7	156,2	2,2
	2⁹⁄₁₆	65	RLP3209SL	1604	2175	1.95	8.14	1.38	1.13	6.26	4.6	49,5	206,8	35,1	28,7	159,0	2,1
	2¾	70	RLP3212SL	1604	2175	2.04	8.23	1.38	1.13	6.36	4.4	51,8	209,0	35,1	28,7	161,5	2,0
	2¹⁵⁄₁₆	75	RLP3215SL	1604	2175	2.16	8.34	1.38	1.13	6.54	4.7	54,9	211,8	35,1	28,7	166,1	2,1
RSL5000	2¾	70	RLP5212SL	4173	5659	2.16	9.63	1.75	1.62	7.07	7.5	54,9	244,6	44,5	41,1	179,6	3,4
	3⅛	80	RLP5302SL	4173	5659	2.26	9.73	1.75	1.62	7.17	7.2	57,4	247,1	44,5	41,1	182,1	3,3
RSL8000	2³⁄₁₆	55	RLP8203SL	2487	3372	1.71	9.53	2.25	2.00	6.84	8.5	43,4	242,1	57,2	50,8	173,7	3,9
	2⅜	60	RLP8206SL	3198	4336	1.87	9.67	2.25	2.00	7.00	8.9	47,5	245,6	57,2	50,8	177,8	4,0
	2⁹⁄₁₆	65	RLP8209SL	4122	5589	2.01	9.67	2.25	2.00	7.13	9.0	51,1	245,6	57,2	50,8	181,1	4,1
	2¾	70	RLP8212SL	5587	7576	2.16	9.82	2.25	2.00	7.28	9.6	54,9	249,4	57,2	50,8	184,9	4,4
	2¹⁵⁄₁₆	75	RLP8215SL	5587	7576	2.24	9.90	2.25	2.00	7.36	9.6	56,9	251,5	57,2	50,8	186,9	4,4
	3⅛	80	RLP8302SL	5587	7576	2.26	9.92	2.25	2.00	7.39	9.3	57,4	252,0	57,2	50,8	187,7	4,2
	3³⁄₁₆	–	RLP8303SL	4740	6427	2.26	9.92	2.25	2.00	7.39	9.3	57,4	252,0	57,2	50,8	187,7	4,2

▼ RSL drive unit with interchangeable RSQ square drive cassette

Setting New Standards in Safety, Simplicity and Performance

Safety and Performance

- **Innovative design that completely encloses all moving parts and minimizes pinch points**
- **30–35° of operating stroke provides added productivity while avoiding "tool lock on" which is common with some torque wrench designs**

Simplicity

- **Simple robust design with just three moving parts for reduced maintenance**
- **Robust handles are available which mount on both sides and the tops of cassettes to allow for extra maneuverability**
- **Pull-type square drive release for quickly reversing the square drive for tightening or loosening**

Versatility

- **Square Drive Sets available with interchangeable Hexagon Cassettes**
- **Power head / square drive combination for flexible use with standard impact quality sockets**
- **Reaction arm has a simple dial lock for rapid change**

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**

Torque Wrench Options and Accessories

Optional accessories are available for maximum versatility. Please contact your Enerpac representative to help you select the optimum solution for your application.

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

Page: 412

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: 244

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

Torque Wrench Hoses

Series hoses with RSL-Series torque wrenches to ensure the integrity of your hydraulic system.

6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

TORQUE WRENCH SELECTION
(based on hexagon socket sizes)

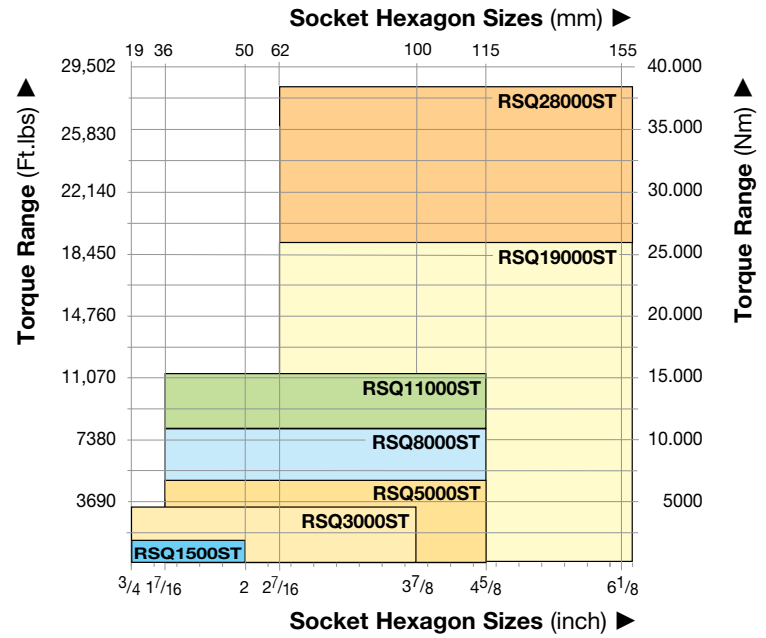

See page 244 for BSH-Sockets.

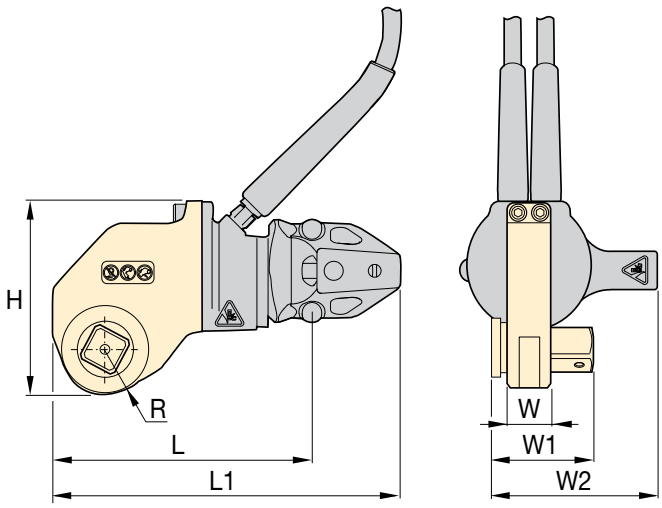

RSL Series

Maximum Torque Output:
1408 - 28,002 ft.lbs

Maximum Torque Output:
1909 - 37,965 Nm

Square Drive Range:
¾ - 2½ inches

Maximum Operating Pressure:
10,000 psi

Safe T™ Torque Lock

The Safe T™ Torque Lock is suitable for all bolted applications from 140 ft-lbs to 11,175 ft-lbs. using a heavy-duty impact socket.

The patented mechanical locking system creates a hands-free torque wrench solution suitable for Enerpac only square drive tools.
Suitable for:
RSQ3000, RSQ5000, RSQ11000

Page: 246

Torque Wrench Pumps

Visit enerpac.com for system matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

▼ SELECTION CHART

Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Square Drive Size (in)	Square Drive Head Model Numbers [1]	Square Drive Torque Wrench Set Model Numbers [2]	Dimensions (in) W	W1	W2	H	L	L1	R	Weight (lbs) Drive Unit (no reaction arm)	Reaction Arm	Square Drive Head
1408	1909	¾	**RSQ1500**	**RSQ1500ST**	1.25	2.30	3.98	4.48	6.29	7.45	0.94	3.4	1.0	2.8
3080	4176	1	**RSQ3000**	**RSQ3000ST**	1.50	2.88	4.89	5.57	7.67	10.30	1.25	5.6	2.2	5.2
5303	7190	1½	**RSQ5000**	**RSQ5000ST**	1.75	3.71	6.31	6.42	9.27	11.67	1.52	8.9	4.0	9.1
7862	10659	1½	**RSQ8000**	**RSQ8000ST**	2.40	4.14	6.30	6.65	9.47	11.78	1.52	10.6	4.3	11.6
11154	15123	1½	**RSQ11000**	**RSQ11000ST**	2.50	4.63	6.70	7.93	11.20	12.40	1.88	11.6	6.6	18.4
18843	25547	2½	**RSQ19000**	**RSQ19000ST**	3.25	6.38	10.42	9.48	13.46	18.97	2.50	20.0	15.7	28.9
28002	37965	2½	**RSQ28000**	**RSQ28000ST**	3.50	6.54	8.93	10.35	14.09	21.07	2.50	22.0	11.1	39.3

[1] When ordering an RSQ Square Drive Head the RSL Drive Unit must be ordered separately.x
[2] An RSQ....ST Torque Wrench Set includes a RSQ Square Drive Head, RSL Drive Unit with short Whip Hoses, and Reaction Arm

▼ Shown: **DSX11000**

Safety and Performance

- **High-strength, lightweight aluminum, slimline design suited for complete operator safety**
- **Fully enclosed drive for maximum safety**
- **Built-in, work-at-height safety tether connection**
- **Retained quick release push-button**
- **Patented, easy-to-use, quick release, retained reaction arm**
- **Fine-tooth ratchet prevents the tool 'locking on'**
- **High-cycle design with fewer moving parts making it a more efficient tool to operate, maintain, or repair**
- **35° rotation angle and rapid return stroke for fast operation**

Simplicity

- **Robust handle which mounts on either side of the tool for extra maneuverability and safer operation**
- **Push-button square drive and reaction arm for fast changes and adjustments**
- **Easily accessible work-at-height connection point**

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**

ATEX certified

- **All DSX tools are CE - ATEX certified**

Setting Industry-First Safety Standards

Work-at-Height Connection

Built-in, work-at-height safety tether.

Fully Retained Reaction Arm

Patented, fully retained reaction arm with easy-to-use quick release, helps prevent injuries when working-at-height.

Secured Square Drive

Retained quick release push- button.

Ergonomic Tool Handle

Robust ergonomic positioning handle comes standard with every DSX tool.

SWH10EA is an eyebolt handle.

Compatible DSX-Series wrenches	Ergonomic Handle (Standard)
DSX1500, 3000, 5000	**SWH6A**
DSX11000	**SWH10A**
DSX25000	**SWH10EA**

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Square Drive Hydraulic Torque Wrenches

Standard are ① ② ③ ④ ⑤.
⑥ is optional.

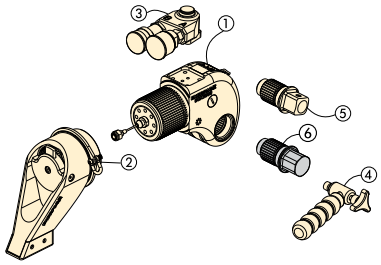

① Drive Unit
② Reaction Arm
③ Aluminum Swivel
④ Ergonomic Tool Handle
⑤ Square Drive
⑥ Allen® Drive (optional)

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

DSX Series

Nominal Torque Output:
24,057 ft.lbs

Square Drive Range:
¾ - 2½ inches

Nose Radius:
0.94 - 2.50 inches

Maximum Operating Pressure:
10,000 psi

TORQUE WRENCH SELECTION
(based on hexagon socket sizes)

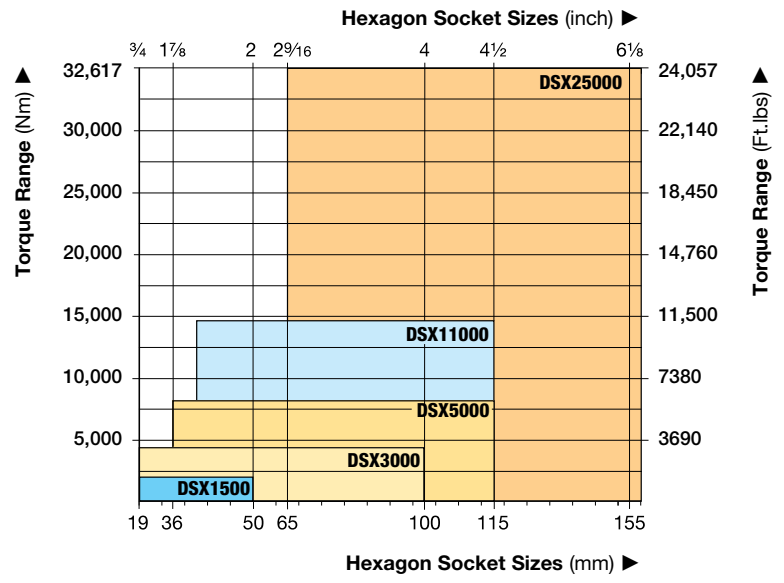

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out.

Page: 245

▼ *The rigid design of the DSX-Series torque wrenches provides durability, reliability and safety.*

Use only Heavy-Duty Impact Sockets

For power driven torquing equipment, according to ISO2725 and ISO1174; DIN 3129 and DIN 3121 or ASME-B107.2/1995.

Page: 248

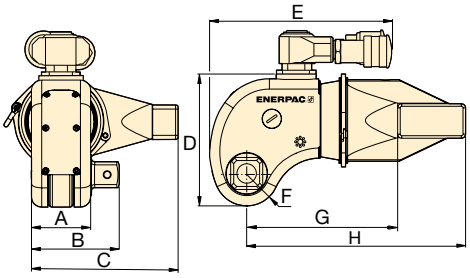

Nominal Torque at 10,000 psi / 690 bar		Minimum Torque at 1000 psi / 69 bar		Square Drive Size (inch)	Square Drive Model No. (included with wrench)	Torque Wrench Model No.	Dimensions (in)								Wt.
(Ft.lbs)	(Nm)	(Ft.lbs)	(Nm)				A	B	C	D	E	F	G	H	(lbs)
1411	1913	141	191	¾	DSX1500-08	**DSX1500**	1.7	2.6	4.2	3.7	5.7	0.94	4.4	6.4	4.8
3233	4383	323	438	1	DSX3000-08	**DSX3000**	2.3	3.4	5.7	5.1	6.7	1.25	5.8	8.5	10.6
5635	7640	563	764	1½	DSX5000-08	**DSX5000**	2.7	4.4	6.8	5.8	7.6	1.50	7.1	10.2	17.9
11,000	14,914	1100	1491	1½	DSX11000-08	**DSX11000**	3.4	5.1	8.5	7.2	8.7	1.88	8.94	12.8	31.7
24,057	32,617	2406	3262	2½	DSX25000-08	**DSX25000**	4.6	6.9	11.3	9.6	10.5	2.50	11.1	18.2	71.7

Maximum Torque Output:
24,057 ft.lbs

Hexagon Size Allen® Drive:
½ - 2¼ inches

Hexagon Size Allen® Drive:
14 - 85 mm

For DSX Series

Torque Wrench	Optional Allen® Drives, Imperial				Optional Allen® Drives, Metric			
								
Model Number (max. torque)	**Hexagon Size** (in)	**Maximum Torque** (Ft.lbs)	**Model Number**	**Dim. B1** (in)	**Hexagon Size** (mm)	**Maximum Torque** (Nm)	**Model Number**	**Dim. B1** (mm)
DSX1500 (1411 Ft.lbs) (1913 Nm)	½	350	**DDA15008**	2.64	**14**	644	**DDA1514**	67
	⅝	690	**DDA15010**	2.64	**17**	1152	**DDA1517**	67
	¾	1200	**DDA15012**	2.64	**19**	1627	**DDA1519**	67
	⅞	1411	**DDA15014**	2.64	**22**	1913	**DDA1522**	67
	1	1411	**DDA15100**	2.64	**24**	1913	**DDA1524**	67
DSX3000 (3233 Ft.lbs) (4383 Nm)	⅝	690	**DDA30010**	3.39	**17**	1152	**DDA3017**	86
	¾	1200	**DDA30012**	3.39	**19**	1627	**DDA3019**	86
	⅞	1900	**DDA30014**	3.39	**22**	2495	**DDA3022**	86
	1	2830	**DDA30100**	3.39	**24**	3376	**DDA3024**	86
	1⅛	3233	**DDA30102**	3.39	**27**	4383	**DDA3027**	86
	1¼	3233	**DDA30104**	3.39	**30**	4383	**DDA3030**	86
	–	–		3.39	**32**	4383	**DDA3032**	86
DSX5000 (5635 Ft.lbs) (7640 Nm)	⅝	690	**DDA50010**	4.41	**17**	1152	**DDA5017**	112
	¾	1200	**DDA50012**	4.41	**19**	1627	**DDA5019**	112
	⅞	1900	**DDA50014**	4.41	**22**	2495	**DDA5022**	112
	1	2830	**DDA50100**	4.41	**24**	3376	**DDA5024**	112
	1⅛	5325	**DDA50102**	4.41	**27**	4610	**DDA5027**	112
	1¼	5635	**DDA50104**	4.41	**30**	7640	**DDA5030**	112
	–	–	**–**	-	**32**	7640	**DDA5032**	112
DSX11000 (11,000 Ft.lbs) (14.914 Nm)	**1¼**	5635	**DDA110104**	5.08	**30**	7640	**DDA11030**	129
	1⅜	9958	**DDA110106**	5.08	**32**	7640	**DDA11032**	129
	1½	9958	**DDA110108**	5.08	**36**	10.846	**DDA11036**	129
	1⅝	11,000	**DDA110110**	5.08	**41**	14.914	**DDA11041**	129
	1¾	11,000	**DDA110112**	5.08	**46**	14.914	**DDA11046**	129
DSX25000 (24,057 Ft.lbs) (32.617 Nm)	**1½**	9958	**DDA250104**	6.93	**36**	10.846	**DDA25036**	176
	1⅝	16,433	**DDA250106**	6.93	**41**	16.107	**DDA25041**	176
	1¾	15,200	**DDA250112**	6.93	**46**	22.777	**DDA25046**	176
	1⅞	22,777	**DDA250114**	6.93	**50**	29.211	**DDA25050**	176
	2	24,057	**DDA250200**	6.93	**55**	32.617	**DDA25055**	176
	2¼	24,057	**DDA250204**	6.93	**60**	32.617	**DDA25060**	176
	–	–	**–**	-	**65**	32.617	**DDA25065**	176
	–	–	**–**	-	**70**	32.617	**DDA25070**	176
	–	–	**–**	-	**75**	32.617	**DDA25075**	176
	–	–	**–**	-	**85**	32.617	**DDA25085**	176

Enerpac professional bolting tools provide reliable controlled torque and tension solutions across the industry.

Portable machining products tackle the most demanding in-situ machining applications.

W-Series torque wrench providing accurate and repeatable results

Large numbers of fasteners require precise application of torque to ensure joint integrity is achieved and maintained. The Enerpac W-Series wrench was selected as it offers simple and reliable operation. The portable Enerpac E-Pulse torque pump was used and is ideal for high volume fastening applications where weight is a critical factor.

Safe, reliable, and repeatable tensioning with compact HydraMax® Tensioners to complete joint integrity

With their compact fit and high load generation, and the flexibility to work with all standard flanges, the Enerpac HM-Series HydraMax® tensioners can be used in almost every industry and in many different applications.

Portable Machining

Mirage® portable machining products tackle the most demanding in-situ machining applications. By replicating machine shop tolerances in-situ, customers can reliably get the job done faster, safer and smarter. *See pages 378-397 for more information.*

Oil & Gas: *Pipeline repair under pressure; Wellhead high-pressure drilling; Raised, RTJ, compact flanges and hubs; Flange stud removal; Re-thread damaged holes*

Power Generation: *Pipe cutting and weld preparation; Wind turbine blade and tower milling; Turbine casing split line repairs; Subsea cutting and decommissioning.*

▼ HMT-Drive Units with interchangeable HLP-Low-Profile Cassette and HSQ-Square Drive Cassette

Modular, Durable, Fast and Efficient Torque for Low-Profile and Square Drive Applications

The HMT-Series is a range of fast, durable and efficient modular hydraulic torque wrenches, enabling you to tackle almost any bolting application. Interchange cassettes with ease, switching the HLP low- profile hexagon cassette with the HSQ square drive whenever your application demands.

As an added benefit, tools and cassettes are interchangeable with many other well-known brands, allowing you the freedom to use the tools at your disposal while reducing the cost of upgrading your legacy torque wrench inventory to high quality Enerpac equipment.

The tool itself has been carefully designed and manufactured, utilizing superior alloys and surface treatments to make it lightweight, up to 25% faster and more than twice as durable as other tools in the same class.

Safety and Performance

- **Supplied with an ergonomic tool safety handle as standard**
- **The HMT Modular Torque/Tool is also supplied with a link pin retainer as standard**

Versatility

- **Interchangeable with other manufacturers**
- **HMT is able to solve all of your bolting challenges quickly and safely, with one or more attachment options, making it suitable for any application**

Simplicity

- **The HMT is part of a modular system which is made up of a single power head and one attachment; the HMT Drive Unit and HLP Hexagon cassette or HSQ Square Drive Cassette**

Accuracy

- **Constant torque output provides accuracy of +/-3% across full stroke**

Torque Wrench Options and Accessories

Optional accessories are available for maximum versatility.

Page: 283

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out. Two hexagon sizes in one tool.

Page: 245

Torque Wrench Pumps

Visit enerpac.com for system matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

Torque Wrench Hoses

Use Enerpac THQ-Series hoses with HMT-Series torque wrenches to ensure the integrity of your hydraulic system.

6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

Drive Units for Hexagon & Square Drive Cassettes

One Drive, Two Tools

One HMT-Hydraulic Torque Wrench fits HLP Low-Profile or HSQ Square Drive cassette.



HMT...HLP



HLP



HSQ

HMT Series

Max. Torque at 10,000 psi:
1541 - 13,489 ft.lbs

Max. Torque at 690 bar:
2089 - 18,289 Nm

Hexagon Range:
1 1/16 - 4 5/8" / 26 - 115 mm

Maximum Operating Pressure:
10,000 psi / 690 bar

HMT-Series, Torque Wrench Options and Accessories

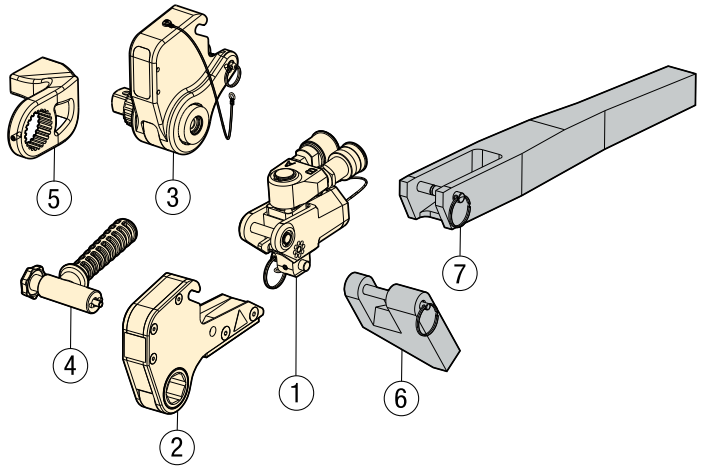

① **HMT**: Drive Unit (page 279)

② **HLP**: Hexagon Cassette (page 280-281)

③ **HSQ**: Square Drive Cassette (page 282-283)

④ **SWH**: Ergonomic Tool Handle (page 282)

⑤ Reaction Arm for HSQ

Optional Parts (for HMT with HLP only)

⑥ **HRP**: Reaction Paddle (page 280)

⑦ **HTE**: Extended Reaction Arm (page 280)

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

HLP Low-Profile Cassettes

For the metric and imperial Low-Profile cassettes see:

Page: 280

HSQ Square Drive Cassettes

For the metric and imperial Square Drive Cassettes see:

Page: 282

▼ SELECTION CHART

Max. Torque Output at 10,000 psi		Min. Torque Output at 1000 psi		Drive Unit Model Number	Dimensions (in)			Wt.	Dimensions (mm)			Wt.
(ft-lbs)	(Nm)	(ft-lbs)	(Nm)		A	B	C	(lbs)	A	B	C	(kg)
1541	2089	154	209	**HMT1500**	4.3	4.1	2.0	2.20	108	104	49	1,0
3750	5084	375	508	**HMT3500**	5.7	5.2	2.6	3.97	146	132	66	1,8
7562	10252	756	1025	**HMT7500**	7.1	6.4	3.2	7.05	180	163	82	3,2
13489	18289	1349	1829	**HMT13000***	8.5	7.4	3.9	4.40	216	187	98	9,7

* Note: HMT13000 only available for HLP-low profile hexagon cassettes.

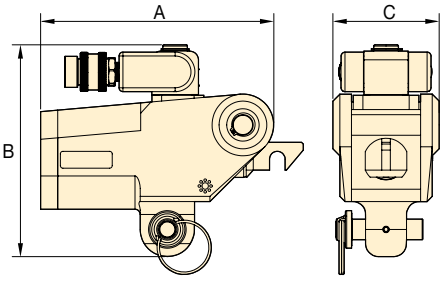

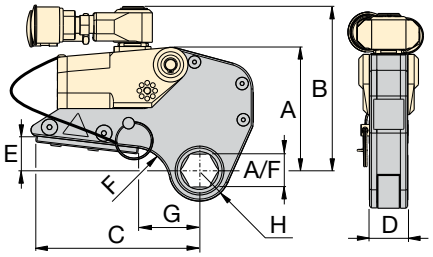

Hexagon Range:
1 1/16 - 4 5/8 inches

Hexagon Range:
26 - 115 mm

Maximum Operating Pressure:
10,000 psi

HLP Series

▼ **SELECTION CHART**

IMPORTANT: HMT-drive units must be ordered separately to operate the HLP-Hexagon Cassettes.

Drive Unit Model Number	Hexagon Size (in)	Hexagon Size (mm)	Hexagon Cassette Model Number	Maximum Torque Output (ft-lbs)	Maximum Torque Output (Nm)	Dimensions (in) A	B	C	D	E	F	G	H	Wt. (lbs)	Dimensions (mm) A	B	C	D	E	F	G	H	Wt. (kg)
HMT1500	1 1/16	26	HLP1101	1541	2089	4.48	5.32	5.35	1.2	1.13	1.18	2.01	1.00	3.53	114	135	136	31,5	29	30	51	25	1,6
	1 1/8	-	HLP1102	1541	2089	4.48	5.32	5.35	1.2	1.13	1.18	2.01	1.00	3.53	114	135	136	31,5	29	30	51	25	1,6
	1 3/16	30	HLP1103	1541	2089	4.48	5.32	5.35	1.2	1.13	1.18	2.01	1.00	3.53	114	135	136	31,5	29	30	51	25	1,6
	1 1/4	32	HLP1104	1541	2089	4.48	5.32	5.35	1.2	1.13	0.95	2.01	1.08	3.53	114	135	136	31,5	29	24	51	27	1,6
	1 5/16	33	HLP1105	1541	2089	4.48	5.32	5.35	1.2	1.13	0.95	2.01	1.08	3.53	114	135	136	31,5	29	24	51	27	1,6
	1 3/8	35	HLP1106	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	1.89	1.19	3.53	114	135	136	31,5	29	14	48	30	1,6
	1 7/16	36	HLP1107	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	1.89	1.19	3.53	114	135	136	31,5	29	14	48	30	1,6
	1 1/2	38	HLP1108	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.30	3.53	114	135	136	31,5	29	14	51	33	1,6
	1 9/16	-	HLP1109	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.30	3.53	114	135	136	31,5	29	14	51	33	1,6
	1 5/8	41	HLP1110	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.30	3.53	114	135	136	31,5	29	14	51	33	1,6
	1 11/16	-	HLP1111	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.30	3.53	114	135	136	31,5	29	14	51	33	1,6
	1 3/4	-	HLP1112	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.38	3.53	114	135	136	31,5	29	14	51	35	1,6
	1 13/16	46	HLP1113	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.01	1.38	3.53	114	135	136	31,5	29	14	51	35	1,6
	1 7/8	-	HLP1114	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.52	3.53	114	135	136	31,5	29	14	60	39	1,6
	1 15/16	-	HLP1115	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.52	3.53	114	135	136	31,5	29	14	60	39	1,6
	2	50	HLP1200	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.52	3.75	114	135	136	31,5	29	14	60	39	1,7
	2 1/16	-	HLP1201	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.52	3.75	114	135	136	31,5	29	14	60	39	1,7
	2 1/8	-	HLP1202	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.65	3.75	114	135	136	31,5	29	14	60	42	1,7
	2 3/16	55	HLP1203	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.65	3.75	114	135	136	31,5	29	14	60	42	1,7
	2 1/4	-	HLP1204	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.65	3.75	114	135	136	31,5	29	14	60	42	1,7
	2 5/16	-	HLP1205	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.65	3.75	114	135	136	31,5	29	14	60	42	1,7
	2 3/8	60	HLP1206	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.71	3.75	114	135	136	31,5	29	14	60	44	1,7
	2 7/16	62	HLP1207	1541	2089	4.48	5.32	5.35	1.2	1.13	0.55	2.36	1.71	3.75	114	135	136	31,5	29	14	60	44	1,7
HMT3500	1 3/8	35	HLP3106	3750	5084	6.02	6.57	7.24	1.7	1.59	1.89	3.09	1.30	8.60	153	167	184	42,0	41	48	79	33	3,9
	1 7/16	36	HLP3107	3750	5084	6.02	6.57	7.24	1.7	1.59	1.89	3.09	1.30	8.60	153	167	184	42,0	41	48	79	33	3,9
	1 1/2	38	HLP3108	3750	5084	6.02	6.57	7.24	1.7	1.59	1.81	3.16	1.42	8.60	153	167	184	42,0	41	46	80	36	3,9
	1 9/16	-	HLP3109	3750	5084	6.02	6.57	7.24	1.7	1.59	1.81	3.16	1.42	8.60	153	167	184	42,0	41	46	80	36	3,9
	1 5/8	41	HLP3110	3750	5084	6.02	6.57	7.24	1.7	1.59	1.81	3.16	1.42	8.60	153	167	184	42,0	41	46	80	36	3,9
	1 11/16	-	HLP3111	3750	5084	6.02	6.57	7.24	1.7	1.59	1.81	3.16	1.42	8.60	153	167	184	42,0	41	46	80	36	3,9
	1 3/4	-	HLP3112	3750	5084	6.02	6.57	7.24	1.7	1.59	1.58	3.08	1.52	8.60	153	167	184	42,0	41	40	78	39	3,9
	1 13/16	46	HLP3113	3750	5084	6.02	6.57	7.24	1.7	1.59	1.58	3.08	1.52	8.60	153	167	184	42,0	41	40	78	39	3,9
	1 7/8	-	HLP3114	3750	5084	6.02	6.57	7.24	1.7	1.59	1.42	3.05	1.63	8.60	153	167	184	42,0	41	36	77	41	3,9
	1 15/16	-	HLP3115	3750	5084	6.02	6.57	7.24	1.7	1.59	1.42	3.05	1.63	8.60	153	167	184	42,0	41	36	77	41	3,9
	2	50	HLP3200	3750	5084	6.02	6.57	7.24	1.7	1.59	1.42	3.05	1.63	8.60	153	167	184	42,0	41	36	77	41	3,9
	2 1/16	-	HLP3201	3750	5084	6.02	6.57	7.24	1.7	1.59	1.42	3.05	1.63	8.82	153	167	184	42,0	41	36	77	41	4,0
	2 1/8	-	HLP3202	3750	5084	6.02	6.57	7.24	1.7	1.59	1.18	2.97	1.74	8.82	153	167	184	42,0	41	30	75	44	4,0
	2 3/16	55	HLP3203	3750	5084	6.02	6.57	7.24	1.7	1.59	1.18	2.97	1.74	8.82	153	167	184	42,0	41	30	75	44	4,0
	2/4	-	HLP3204	3750	5084	6.02	6.57	7.24	1.7	1.59	1.18	2.97	1.74	8.82	153	167	184	42,0	41	30	75	44	4,0
	2 5/16	-	HLP3205	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.68	1.85	9.04	153	167	184	42,0	41	16	68	47	4,1
	2 3/8	60	HLP3206	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.68	1.85	9.04	153	167	184	42,0	41	16	68	47	4,1
	2 7/16	62	HLP3207	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	1.85	9.04	153	167	184	42,0	41	16	71	47	4,1
	2 1/2	63	HLP3208	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	1.96	9.04	153	167	184	42,0	41	16	71	50	4,1
	2 9/16	65	HLP3209	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	1.96	9.04	153	167	184	42,0	41	16	71	50	4,1
	2 5/8	-	HLP3210	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	2.07	9.04	153	167	184	42,0	41	16	71	53	4,1
	2 11/16	-	HLP3211	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	2.07	9.04	153	167	184	42,0	41	16	71	53	4,1
	2 3/4	70	HLP3212	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	2.07	9.04	153	167	184	42,0	41	16	71	53	4,1
	2 13/16	-	HLP3213	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	2.07	9.04	153	167	184	42,0	41	16	71	53	4,1
	2 7/8	-	HLP3214	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.80	2.07	9.04	153	167	184	42,0	41	16	71	53	4,1
	2 15/16	75	HLP3215	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.99	2.19	9.04	153	167	184	42,0	41	16	76	56	4,1
	3	-	HLP3300	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.99	2.19	9.04	153	167	184	42,0	41	16	76	56	4,1
	3 1/16	-	HLP3301	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.99	2.19	9.04	153	167	184	42,0	41	16	76	56	4,1
	3 1/8	80	HLP3302	3750	5084	6.02	6.57	7.24	1.7	1.59	0.63	2.99	2.19	9.04	153	167	184	42,0	41	16	76	56	4,1



Optional Parts for HLP-Hexagon Cassettes

- Full torque rated
- Includes pin to secure onto HLP-cassette
- ⑥ HRP: allows offset reaction when in-line reaction point is not available
- ⑦ HTE: Increases tool fit in restricted areas.

For HMT with HLP-Series Hexagon Cassettes	Reaction Paddle Model No. ⑥	Extended Reaction Arm Model No. ⑦
HMT1500 + HLP1	**HRP15**	**HTE15**
HMT3500 + HLP3	**HRP35**	**HTE35**
HMT7500 + HLP7	**HRP75**	**HTE75**
HMT13000 + HLP13	**HRP130**	**HTE130**

HLP-Series Hexagon Cassettes for HMT Drive Units

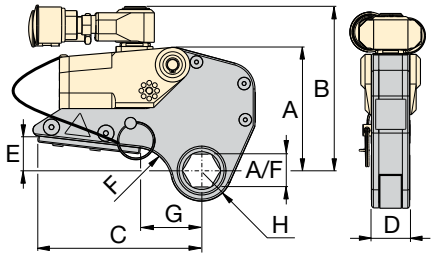

Hexagon Range:
1 1/16 - 4 5/8 inches

Hexagon Range:
26 - 115 mm

Maximum Operating Pressure:
10,000 psi

HLP Series

▼ **SELECTION CHART**

IMPORTANT: HMT-drive units must be ordered separately to operate the HLP-Hexagon Cassettes.

Drive Unit Model Number	Hexagon Size		Hexagon Cassette Model Number	Maximum Torque Output		Dimensions (in)								Wt.	Dimensions (mm)								Wt.
	(in)	(mm)		(ft-lbs)	(Nm)	A	B	C	D	E	F	G	H	(lbs)	A	B	C	D	E	F	G	H	(kg)
HMT7500	2 3/16	55	HLP7203	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.65	3.39	1.91	15.65	193	203	227	52,6	46	42	86	49	7,1
	2 1/4	-	HLP7204	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.65	3.39	1.91	15.65	193	203	227	52,6	46	42	86	49	7,1
	2 5/16	-	HLP7205	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.65	3.39	1.91	15.65	193	203	227	52,6	46	42	86	49	7,1
	2 3/8	60	HLP7206	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.18	3.15	1.99	15.65	193	203	227	52,6	46	30	80	51	7,1
	2 7/16	62	HLP7207	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.18	3.15	1.99	15.65	193	203	227	52,6	46	30	80	51	7,1
	2 1/2	63	HLP7208	7562	10.252	7.60	8.01	8.94	2.1	1.81	1.18	3.15	1.99	15.65	193	203	227	52,6	46	30	80	51	7,1
	2 9/16	65	HLP7209	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.87	3.15	2.07	15.65	193	203	227	52,6	46	22	80	53	7,1
	2 5/8	-	HLP7210	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.79	3.15	2.19	15.65	193	203	227	52,6	46	20	80	56	7,1
	2 11/16	-	HLP7211	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.79	3.15	2.19	15.65	193	203	227	52,6	46	20	80	56	7,1
	2 3/4	70	HLP7212	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.79	3.15	2.19	17.42	193	203	227	52,6	46	20	80	56	7,9
	2 13/16	-	HLP7213	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.79	3.15	2.19	17.42	193	203	227	52,6	46	20	80	56	7,9
	2 7/8	-	HLP7214	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.79	3.15	2.19	17.42	193	203	227	52,6	46	20	80	56	7,9
	2 15/16	75	HLP7215	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.15	2.26	17.42	193	203	227	52,6	46	17	80	58	7,9
	3	-	HLP7300	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.38	17.42	193	203	227	52,6	46	17	86	61	7,9
	3 1/16	-	HLP7301	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.38	17.42	193	203	227	52,6	46	17	86	61	7,9
	3 1/8	80	HLP7302	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.38	17.42	193	203	227	52,6	46	17	86	61	7,9
	3 1/4	-	HLP7304	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.52	17.42	193	203	227	52,6	46	17	86	64	7,9
	-	85	HLP7085M	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.52	17.42	193	203	227	52,6	46	17	86	64	7,9
	3 3/8	-	HLP7306	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.39	2.52	17.42	193	203	227	52,6	46	17	86	64	7,9
	3 7/16	-	HLP7307	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.50	2.52	17.64	193	203	227	52,6	46	17	89	64	8,0
	3 1/2	-	HLP7308	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.50	2.64	17.64	193	203	227	52,6	46	17	89	67	8,0
	-	90	HLP7090M	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.74	2.64	17.64	193	203	227	52,6	46	17	95	67	8,0
	3 9/16	-	HLP7309	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.74	2.78	17.64	193	203	227	52,6	46	17	95	71	8,0
	3 3/4	95	HLP7312	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.74	2.89	18.08	193	203	227	52,6	46	17	95	71	8.2
	3 7/8	-	HLP7314	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.74	2.89	18.08	193	203	227	52,6	46	17	95	74	8.2
	3 15/16	100	HLP7315	7562	10.252	7.60	8.01	8.94	2.1	1.81	0.67	3.74	2.89	18.08	193	203	227	52,6	46	17	95	74	8,2
HMT13000	2 7/16	62	HLP13207	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 1/2	63	HLP13208	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 9/16	65	HLP13209	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 5/8	67	HLP13210	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 11/16	68	HLP13211	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 3/4	70	HLP13212	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 13/16	71	HLP13213	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 7/8	73	HLP13214	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.95	4.69	2.28	24.3	204	242	276	63,4	57	75	119	58,0	11,0
	2 15/16	75	HLP13215	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.69	2.40	24.3	204	242	276	63,4	57	70	119	61,0	11,0
	3	77	HLP13300	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.56	24.3	204	242	276	63,4	57	70	124	65,0	11,0
	3 1/16	78	HLP13301	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.56	24.3	204	242	276	63,4	57	70	124	65,0	11,0
	3 1/8	80	HLP13302	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.56	24.3	204	242	276	63,4	57	70	124	65,0	11,0
	3 3/16	81	HLP13303	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.58	24.3	204	242	276	63,4	57	70	124	65,5	11,0
	3 1/4	83	HLP13304	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.58	24.3	204	242	276	63,4	57	70	124	65,5	11,0
	3 5/16	84	HLP13305	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.58	24.3	204	242	276	63,4	57	70	124	65,5	11,0
	–	85	HLP13085M	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.58	24.3	204	242	276	63,4	57	70	124	65,5	11,0
	3 3/8	86	HLP13306	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.76	4.88	2.58	24.3	204	242	276	63,4	57	70	124	65,5	11,0
	3 7/16	–	HLP13307	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.36	4.88	2.76	24.3	204	242	276	63,4	57	60	124	70,0	11,0
	3 1/2	89	HLP13308	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.36	4.88	2.76	24.3	204	242	276	63,4	57	60	124	70,0	11,0
	–	90	HLP13090M	13.489	18.289	8.03	9.53	10.87	2.50	2.25	2.36	4.88	2.76	26.5	204	242	276	63,4	57	60	124	70,0	12,0
	3 9/16	91	HLP13309	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.34	4.33	2.91	26.5	204	242	276	63,4	57	34	110	74,0	12,0
	3 5/8	92	HLP13310	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.34	4.33	2.91	26.5	204	242	276	63,4	57	34	110	74,0	12,0
	3 11/16	94	HLP13311	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.34	4.33	2.91	26.5	204	242	276	63,4	57	34	110	74,0	12,0
	3 3/4	95	HLP13312	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.34	4.33	2.91	26.5	204	242	276	63,4	57	34	110	74,0	12,0
	3 13/16	97	HLP13313	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.69	2.95	26.5	204	242	276	63,4	57	44	119	75,0	12,0
	3 7/8	99	HLP13314	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.69	2.95	26.5	204	242	276	63,4	57	44	119	75,0	12,0
	3 15/16	100	HLP13315	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.69	2.95	26.5	204	242	276	63,4	57	44	119	75,0	12,0
	4	102	HLP13400	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.88	3.11	26.5	204	242	276	63,4	57	44	124	79,0	12,0
	4 1/16	–	HLP13401	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.88	3.11	26.5	204	242	276	63,4	57	44	124	79,0	12,0
	4 1/8	105	HLP13402	13.489	18.289	8.03	9.53	10.87	2.50	2.25	1.73	4.88	3.11	26.5	204	242	276	63,4	57	44	124	79,0	12,0
	4 3/16	–	HLP13403	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.33	3.21	28.7	204	242	276	63,4	57	24	110	81,5	13,0
	4 1/4	108	HLP13404	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.33	3.21	28.7	204	242	276	63,4	57	24	110	81,5	13,0
	4 5/16	110	HLP13405	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.33	3.21	28.7	204	242	276	63,4	57	24	110	81,5	13,0
	4 3/8	111	HLP13406	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0
	4 7/16	113	HLP13407	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0
	4 1/2	–	HLP13408	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0
	4 9/16	–	HLP13409	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0
	–	115	HLP13115M	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0
	4 5/8	–	HLP13410	13.489	18.289	8.03	9.53	10.87	2.50	2.25	0.95	4.69	3.45	28.7	204	242	276	63,4	57	24	119	87,5	13,0

▼ HMT drive unit with HSQ square drive cassette

Modular, Durable, Fast and Efficient Torque for Low Profile and Square Drive Applications

Safety and Performance

- Innovative design that completely encloses all moving parts and minimizes pinch points
- Supplied reaction arm as standard
- Fully adjustable 360 degree in-line reaction arm
- Fine tooth ratchet prevents locking-on

Simplicity

- Simple robust design with just three moving parts for reduced maintenance
- Push button, quick release, reversible square drive

Versatility

- The reaction arm, positioned around the square drive instead of the back of the drive unit, provides you with the possibility to turn the drive unit away from an obstacle

Accuracy

- Constant torque output provides accuracy of +/-3% across full stroke

ATEX certified

- All HMT tools are CE - ATEX certified

Ergonomic Tool Handle

Robust ergonomic positioning handle comes standard with every HMT Drive Unit.

Compatible HMT-Series wrenches	Ergonomic Handle (Standard)
HMT1500, 3500, 7500	**SWH6A**
HMT13000	**SWH10A**

Back-Up Spanners

Hands free tool to be used to stop back nut from turning during make up or break out. Two hexagon sizes in one tool.

Page: 245

Torque Wrench Hoses

Use Enerpac THQ-Series hoses with HMT-Series torque wrenches to ensure the integrity of your hydraulic system.

6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

HSQ, Square Drive Hydraulic Torque Wrenches

Bolting Integrity Software

Visit enerpac.com to access our free on-line bolting sofware application.
A comprehensive on-line software solution for Bolted Joint integrity.

Integral databases hold data for:

- BS1560, MSS SP44, API 6A and 17D flanged joints
- Common gasket materials and configurations
- Comprehensive range of bolt materials
- Comprehensive range of lubricants
- Enerpac's Controlled Bolting Equipment including: Torque Multipliers, Hydraulic Wrenches and Bolt Tensioning tools

Custom Joint information can also be entered.

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application data sheet and Joint completion report.

Page: 416

HSQ Series

Maximum Torque at 10.000 psi:
1541 - 7562 Ft.lbs

Maximum Torque at 690 bar:
2089 - 10.252 Nm

Square Drive Range:
¾ - 1½ inch

Maximum Operating Pressure:
10.000 psi / 690 bar

TORQUE WRENCH SELECTION (based on socket size range)

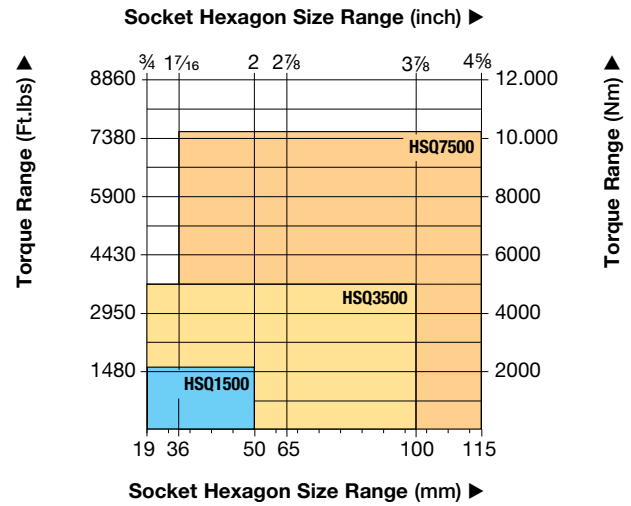

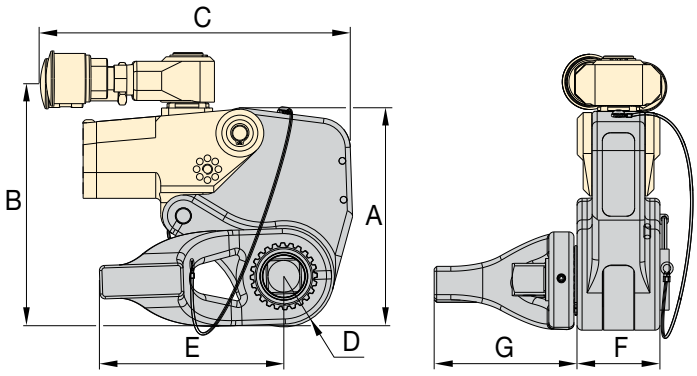

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: 244

Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

Torque Wrench Pumps

Visit enerpac.com for system matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.

Page: 291

▼ **SELECTION CHART**

Max. Torque Output (ft-lbs)	Max. Torque Output (Nm)	Square Drive Size (in)	Sq. Drive Cassette Model Number*	Dimensions (in) A	B	C	D	E	F	G	Wt. (lbs)	Dimensions (mm) A	B	C	D	E	F	G	Wt. (kg)
1541	2089	¾	HSQ1500	5.71	6.61	6.85	1.19	2.36	1.95	3.29	8.16	145	168	174	30	60	50	84	3,7
3750	5084	1	HSQ3500	7.54	8.23	7.95	1.52	3.07	2.58	4.35	13.01	192	209	202	39	78	66	111	5,9
7562	10252	1½	HSQ7500	9.60	10.08	9.25	1.99	4.33	3.23	6.32	25.13	244	256	235	51	110	82	161	11,4

*** IMPORTANT:** HMT-drive units must be ordered separately to operate the HSQ-Square Drive Cassettes.

▼ Shown from left to right: **E291, E393, E494**

Accurate, Efficient Torque Multiplication

When accurate make-up or break-out of stubborn fasteners requires high torque

- **High-efficiency planetary gear sets achieve high output torque from low input torque**
- **Most models operator protected by anti-backlash device**
- **Multiplier output accuracy ± 5% of input torque**
- **Reversible, tighten or loosen bolts**
- **Reaction bar or reaction plate type**
- **Angle-of-turn protractor standard on E300 series models**
- **Reaction plate models offer increased versatility with reaction point locations**
- **E300 and E400 series replaceable shear drives provide overload protection of internal power train**
- **One replacement shear drive is included with each E300 and E400-Series models**

Typical Torque Multiplier Applications

- Locomotives
- Power plants
- Pulp and paper mills
- Refineries
- Chemical plants
- Mining and construction
- Off-road equipment
- Shipyards
- Cranes

▼ **SELECTION CHART**

Torque Multiplier Type	Nominal Torque Output (Ft.lbs)	Nominal Torque Output (Nm)	Model Number
Reaction Bar Multiplier	750	1020	**E290PLUS**
	1000	1358	**E291**
	1200	1627	**E391**
	2200	2983	**E392**
	3200	4340	**E393**
Reaction Plate Multiplier	2200	2983	**E492**
	3200	4339	**E493**
	5000	67879	**E494**
	8000	10,846	**E495**

Manual Torque Multipliers

Enerpac manual torque multipliers provide efficient torque multiplication in wide clearance applications and when external power sources are not available.

Manual torque multipliers are used in most industrial, construction, and equipment maintenance applications. Hydraulic torque wrenches are better suited for tight tolerance, flange and repetitious bolting applications.

Use Reaction Bar Models:

- where space is limited
- where multiple reaction points are available
- when portability is desirable

Use Reaction Plate Models:

- above 3200 Ft-lbs. output torque
- on flanges and applications where neighboring bolt or nut is available to react against
- when extreme reaction forces are generated

E Series

Nominal Output Torque:
750 - 8000 Ft.lbs

Torque Ratio:
3:1 - 52:1

Multiplier Output Ratio Accuracy:
± 5 %



◀ **Selector Pawl**
Models with anti-backlash protection have directional selector pawls. Set the pawl for clockwise or counter-clockwise rotation.



◀ **Shearable Square Drive**
Designed to provide overload protection on E300- and E400-series multiplier power train by shearing when excess input torque is applied. Internal shear pin prevents tool from falling off bolt.



▲ **Angle-of-Turn Protractor**
E391, E392 and E393 models include an angle-of-turn protractor (scale) to tighten fasteners using a "torque turn" method. Allows accurate measuring a specific number of degrees of rotation.

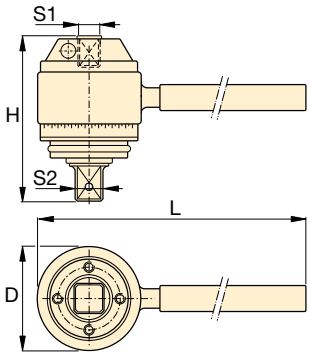

Reaction Bar Type [1)]

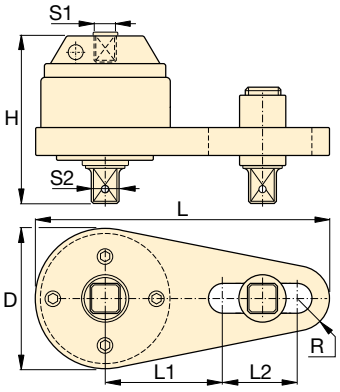

Reaction Plate Type [1)]

CAUTION!
Never use impact type air tools for power driving torque multipliers. Torque multiplier drive train damage will occur.

BSH-Series Sockets
Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: 244

Back-Up Spanners
Hands free tool to be used to stop back nut from turning during make up or break out. Two hex sizes in one tool.

Page: 245

Input Torque (Ft.lbs)	Input Torque (Nm)	Torque Ratio (estimate)	Input Female Square Drive S1 (in)	Output Male Square Drive S2 (in)	Output Male Square Drive Replaceable Shear Drive Model No.	Over-load Protec-tion	Anti-Back-lash	Dimensions (in) D	H	L	L1	L2	R	Wt. (lbs)	Model Number
250	339	3 : 1	½	¾	–	No	No	2.8	3.3	8.5	–	–	–	4.0	**E290PLUS**
333	452	3 : 1	½	¾	–	No	No	2.8	3.3	17.4	–	–	–	5.5	**E291**
200	271	6 : 1	½	¾	E391SDK	Yes	No	3.9	4.0	19.6	–	–	–	9.0	**E391**
162	220	13.6 : 1	½	1	E392SDK	Yes	Yes	4.1	5.7	19.6	–	–	–	15.2	**E392**
173	235	20.25 : 1	½	1	E393SDK	Yes	Yes	4.1	6.5	19.6	–	–	–	18.3	**E393**
162	219	13.6 : 1	½	1	E392SDK	Yes	Yes	4.9	5.5	14.0	5.5	4.9	1.3	17.2	**E492**
173	234	18.5 : 1	½	1	E393SDK	Yes	Yes	4.9	6.4	14.0	5.5	4.9	1.3	19.6	**E493**
189	256	26.5 : 1	½	1½	E494SDK	Yes	Yes	5.6	8.7	14.9	7.0	3.5	1.7	34.0	**E494**
208	154	52 : 1	½	1½	E495SDK	Yes	Yes	5.8	10.7	15.2	7.0	3.5	1.9	50.3	**E495**

[1)] E200 and E400-series do not have an Angle-of-Turn Protractor (scale).
User must verify manual torque wrench accuracy prior to use to ensure accurate final output torque.

▼ **PTW1000**

Continuous Rotation Controlled Torque



Calibration Certificate

All PTW tools are CE declared and are shipped complete with a calibration certificate.

CE

FRL120C, Filter-Regulator-Lubricator with Air Hose

All PTW-Series tools are shipped complete with standard reaction arm, and Filter-Regulator-Lubricator (FRL120C).

MCS-Series, Mobile Calibration System

To check torque accuracy, run calibration tests and create calibration certificates prior to the use of continuous rotation torque tools in various applications while on a job site.

Page: 290

Productivity

- **High speed continuous rotation for constant torque output**
- **Low friction planetary gearbox design minimizes wear and extends uptime**

Safety

- **Ergonomic, low vibration design reduces fatigue and the risk of vibration related injuries for the operator**
- **Low noise air motor provides quiet, consistent performance for indoor and outdoor applications**

Convenience

- **Provided with standard reaction arm; wide assortment of custom arms and accessories are available**
- **Available with or without Filter-Regulator-Lubricator (FRL)**
- **Unique calibration certificate provided with each tool**

◀ *The PTW1000 makes quick work of this flange maintenance job.*

▼ *PTW-Series Pneumatic Torque Wrenches are ideal for applications where speed and precision are critical, such as track maintenance.*

PTW-Series Pneumatic Torque Wrenches

Enerpac PTW-Series Pneumatic Torque Wrenches are designed for applications that require speed and control.

The standard package includes a Torque Wrench with a calibration certificate, an FRL (Filter/Regulator/Lubricator), and a 10 ft. (3 m) long, ½" (13 mm) diameter air hose, which connects the FRL to the wrench.

Once the air hoses are connected, the operator simply adjusts the air pressure on the FRL to achieve the desired torque using the calibration certificate. After this, the tool is ready to go to work!*

The air source used with the PTW system must be regulated and/or limited to 120 psi (8.3 bar), and must be capable of providing a volume of at least 50 CFM (85 CMH) at 100 psi (6.9 bar). A separate ½" (13 mm) hose (not included) must be used to connect the FRL to the air supply.

*See instruction manual for comprehensive instructions

PTW Series

Nominal Output Torque:
6000 Ft.lbs

Square Drive Range:
¾ - 1 - 1½ inches

Accessories

Enerpac offers a full line of accessories including a range of reaction arms and drives.

Page: 288

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: 244

Back-Up Spanner

Hands free tool to be used to stop back nut from turning during make up or break out. Two hex sizes in one tool.

Page: 245

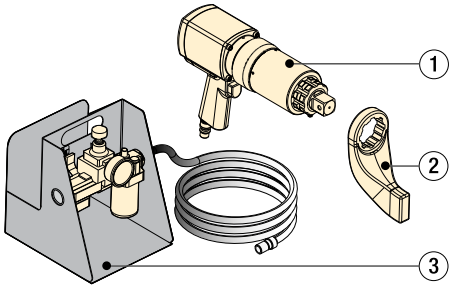

① PTW Torque Wrench
② Standard Reaction Arm
③ FRL120C Filter-Regulator-Lubricator with 10-foot air hose







▼ SELECTION CHART

All tools are shipped complete with standard reaction arm and FRL*.

Minimum Torque		Nominal Torque		Square Drive	Model Number*	RPM	Dimensions (in)				Weight**
(Ft.lbs)	(Nm)	(Ft.lbs)	(Nm)	(in)			A	B	C	D	(lbs)
300	407	1000	1356	¾	**PTW1000-75C**	12.6	10.70	3.27	2.83	5.12	17.4
300	407	1000	1356	1	**PTW1000C**	12.6	10.70	3.27	2.83	5.12	18
500	678	2000	2712	1	**PTW2000C**	8.0	11.26	3.27	3.11	5.24	19.5
900	1220	3000	4067	1	**PTW3000C**	3.1	13.50	3.27	3.74	5.24	23
1300	1763	6000	8135	1½	**PTW6000C**	2.5	14.40	4.49	5.00	7.00	39

* To order without FRL and hose, remove "C" suffix from model number (e.g. PTW3000).
** Weight does not include reaction arm. Reaction arm weight for PTW1000, PTW2000, PTW3000 is 2.9 lbs. and for the PTW6000 is 7.75 lbs.

▼ Shown: **Accessories for PTW-Series Torque Wrenches**

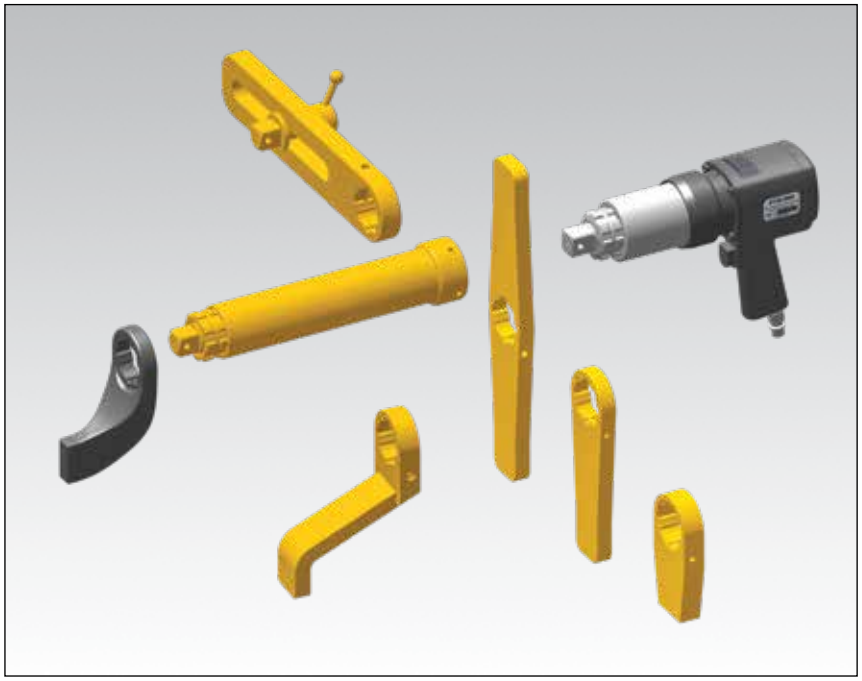

- **Accessories for further extending the application range of pneumatic torque wrenches**
- **Extended drives increase tool fit in restricted access areas**

PTW-Series Torque Wrenches

Enerpac offers the following accessories to support a wide variety of applications in industries such as mining, power generation and oil and gas. For additional custom accessories not pictured here, please contact Enerpac.

Applications

PTW-Series Pneumatic Wrenches are designed for applications that require speed and control.

Mining
- Track maintenance
- Undercarriage maintenance
- Wheel maintenance
- Shovel maintenance

Power Generation
- Turbine bolts
- Tower segments
- Turbine casings

Oil & Gas
- Pipe flanges
- Valves
- Manway covers
- Pressure vessels

▼ *Shovel and Track maintenance*

▼ *Wheel maintenance*

Torque Wrench Accessories for PTW-Series

TORQUE WRENCH SELECTION*

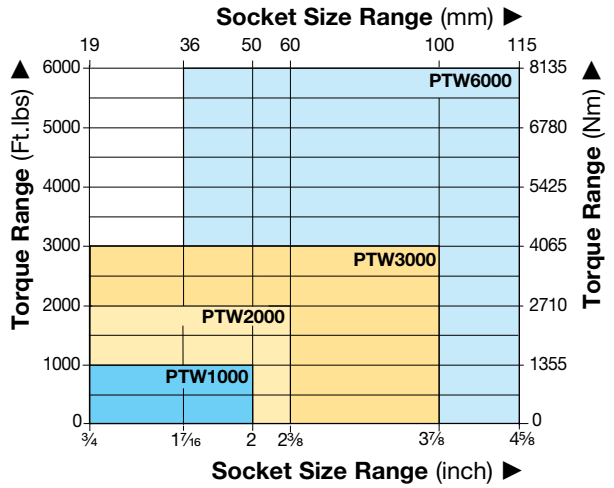

PTW Series

Nominal Output Torque:
6000 Ft.lbs

Square Drive Range:
¾ - 1 - 1½ inches

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: 244

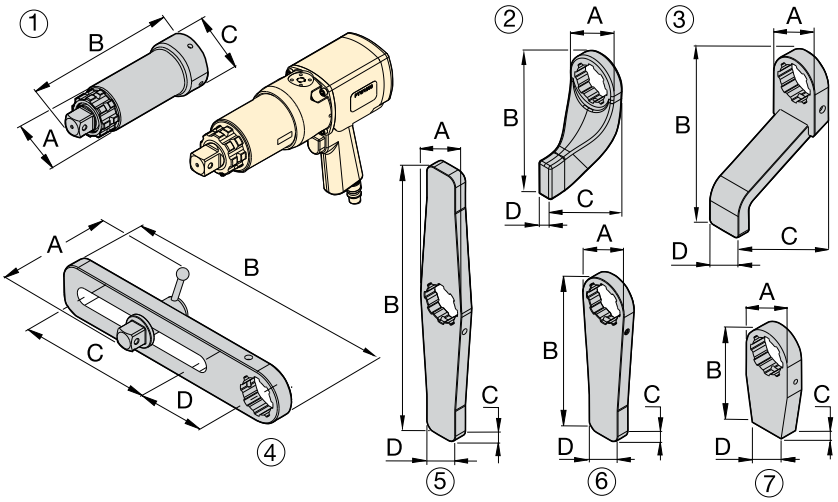

▼ Optional accessories for use with PTW1000, PTW2000, PTW3000 models

No.	Description	Model No.	Application	Dimensions in inches A	B	C	D
1	Extended Drive, 6 inch (152 mm)	**ED6TWS**	Nose extension, primarily for truck wheel bolts	2.44	8.11	2.87	—
1	Extended Drive, 12 inch (305 mm)	**ED12TWS**		2.44	15.12	2.87	—
1	Extended Drive, 18 inch (457 mm)	**ED18TWS**		2.44	20.12	2.87	—
2	Standard Reaction Arm	**RATWS**	Standard arm included with PTW model	2.99	6.77	4.02	0.83
3	Extended Reaction Arm	**ERATWS**	Long plate for use with deep well sockets	2.87	5.91	7.95	2.01
4	Sliding Reaction Arm	**SLRATWS**	For widely spaced and uneven bolt centers	4.41	15.00	7.99	4.02
5	Double Straight Reaction Arm	**DSATWS**	Reduces time to reposition arm *	2.87	15.98	0.75	4.02
6	Straight Reaction Arm	**SRATWS**	Long plate for wide spaced reaction points	2.87	9.45	0.75	2.01
7	Blank Reaction Arm **	**BLTWS**	Weldable blank for custom applications **	2.83	5.94	0.98	2.01
▼ For use with PTW6000							
1	Extended Drive 6 inch (152 mm)	**ED6TWL**	Nose extension, primarily for truck wheel bolts	3.31	9.13	4.02	—
1	Extended Drive 12 inch (305 mm)	**ED12TWL**		3.31	15.12	4.02	—
2	Standard Reaction Arm	**RATWL**	Standard arm included with PTW model	4.02	9.02	5.75	1.26
3	Extended Reaction Arm	**ERATWL**	Long plate for use with deep well sockets	4.02	10.00	7.24	2.52
4	Sliding Reaction Arm	**SLRATWL**	For widely spaced and uneven bolt centers	5.98	16.50	7.48	4.49
5	Double Straight Arm	**DSATWL**	Reduces time to reposition arm *	4.02	20.00	1.26	2.24
6	Straight Reaction Arm	**SRATWL**	Long plate for wide spaced reaction points	4.02	12.01	1.26	2.24
7	Blank Reaction Arm **	**BLTWL**	Weldable blank for custom applications **	4.02	5.98	1.26	2.24

* Time to reposition arm when repeatedly moving from tightening to loosening.

** ⚠ WARNING: Blank reaction arms must be heat-treated to HRc 38-42 prior to use.

▼ **MCS7500C, Mobile Calibration System**

MCS Series

Nominal Output Torque:
148 - 7375 Ft.lbs

Square Drive Range:
1½ inches

Accuracy

The calibration system is a calibrated instrument qualified in a UKAS certified laboratory. The accuracy of the MCS7500C is calibrated to meet or exceed:1% of FSD from 2% to 8% of torque range and 1% of reading from 8% to 100% of torque range.

Versatility

- **Accurately measures torque output for continuous rotation tools and hydraulic (*) square drive torque wrenches from 148-7375 Ft.lbs (200-10,000 Nm)**
- **Adaptable design enables use with a large variety of Enerpac and competitive wrenches**
- **Internal Li-ion battery pack, external power via 5V DC USB power supply**

Performance

- **Certificate Manager feature enables quick and easy creation of calibration certificates**
- **Tool database feature allows specific wrench data and calibration results to be recorded and saved for future use**
- **Each MCS comes with a standard ISO17025 calibration certificate**

Ease of Use

- **Compact design facilitates easy transport, allowing calibration to be carried out in the shop, on jobsites, or even in a vehicle**
- **Integrated digital interface enables torque values to be displayed, saved, printed or transferred to a computer**

* Additional Reaction Block and appropriate Adaptor is required with the use of S- and RSL-Series square drive hydraulic wrenches

Female Reducer Set

The Female Reducer Set consists of two reducers: 1½ x 1 inch and 1½ x ¾ inch. To be ordered separately as **MCS7500RS.**

Additional Reaction Block and Adaptor

A heavy-duty adjustable reaction block in combination with one of the three adaptors is required to facilitate the use with S- and RSL-Series Square Drive Wrenches as well as most competitive hydraulic wrenches to maximum 7375 Ft.lbs (10.000 Nm).

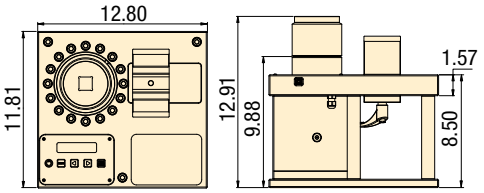

▼ **SELECTION CHART**

Minimum Measurable Torque Output (Ft.lbs)	Minimum Measurable Torque Output (Nm)	Nominal Measurable Torque Output (Ft.lbs)	Nominal Measurable Torque Output (Nm)	Female Square Drive (in)	Model Number**	Description	Weight (lbs)
148	200	7375	10,000	1½	**MCS7500C**	MCS with carrying case	87

** Not suitable for use with impact tools or low-profile torque wrenches.

Selection Matrix – Optimum Wrench-Pump Combinations

For optimum speed and performance Enerpac recommends the following system set-up with wrench-pump-hose combinations. For other combinations, consult your Enerpac bolting expert or your authorized Enerpac distributor.

		ELECTRIC PUMPS					AIR DRIVEN PUMPS	
		Cordless XC-Series	E-Pulse® E-Series	TQ-Series	ZU4T-Series	ZE-T-Series	LAT-Series	ZA4T-Series
Speed:								
Oil Flow at 10,000 psi:		15 in^3/min	32 in^3/min	30 in^3/min	60 in^3/min	60-120 in^3/min	25 in^3/min	60 in^3/min
Reservoir Capacity:		0.5 gallon	0.8 gallon	1 gallon	1.2 - 1.8 gal.	1.2 - 5.2 gal.	0.8 gal.	1.2 - 1.8 gal.
Duty Cycle:		Intermittent	Heavy-Duty	Standard	Heavy-Duty	Heavy-Duty	Standard	Heavy-Duty
Weight:								
Field/Factory Work:		Field/Factory	Field/Factory	Field/Factory	Field	Factory	Field	Field
	S1500X	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal
	S3000X							
	S6000X	–	Acceptable	Acceptable			Acceptable	
	S11000X							
	S25000X							
	W2000X	Optimal	Optimal	Optimal			Optimal	
	W4000X							
	W8000X	–	Acceptable	Acceptable			Acceptable	
	W15000X							
	W22000X							
	W35000X							
	RSL1500	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal
	RSL3000							
	RSL5000							
	RSL8000	–	Acceptable	Acceptable			Acceptable	
	RSL11000							
	RSL19000							
	RSL28000							
	DSX1500	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal
	DSX3000							
	DSX5000	–	Acceptable	Acceptable			Acceptable	
	DSX11000							
	DSX25000							
	HMT1500	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal	Optimal
	HMT3500							
	HMT7500	Acceptable						
	HMT13000	–	Acceptable	Acceptable			Acceptable	

XC-Series, Portable Cordless Pumps
The XC battery torque wrench pump is ideal for maintenance bolting applications at sites that do not have access to power or where having extension cords or air hoses could cause trip hazards.

E-Series, E-Pulse Electric Torque Wrench Pumps
Ideal for high volume fastening applications where weight is critical. Features an interactive pendant for operation, programming and diagnostics.

TQ700 Series Electric Torque Wrench Pumps
Designed for both portability and production to deliver superior bolting speed.

ZU4T Electric Torque Wrench Pumps
Works well with long extension cords or generator driven electrical power supplies. Available in **Pro** and **Classic** formats.

ZU4T Pro Pumps have an LCD feature to display torque or pressure, selectable torque wrench, and self-diagnostics.

ZU4T Classic Pumps feature an analog gauge and a basic electrical package to deliver durable, safe and efficient hydraulic power.

ZE-T-Series Electric Torque Wrench Pumps
Features LCD to display torque or pressure values, and self-diagnostics. With induction motor, making the ZE-Series the coolest and quietest pumps in their class.

LAT-Series Lightweight Torque Air Pumps
Combines compact design and high productivity for bolting applications in areas hard to access with larger air powered pumps.

ZA4T-Series, Air Driven Torque Wrench Pumps
This air driven pump is best suited to power medium to large size torque wrenches.

THQ-Series, Torque Wrench Hoses
Use Enerpac THQ700-Series twin hoses with all torque wrenches to ensure the integrity of your hydraulic system.

▼ **XC1502TB**

Portable Battery Pump for Torque Applications

- **Ideal for maintenance bolting applications requiring portability and convenience**
- **Interactive pendant provides visual and vibratory feedback of pump operation**
- **User can set pressure and operate in manual or auto-cycle mode**
- **Superior run-time with 5Ah, 28V battery**
- **Brushless DC motor extends motor life and reduces maintenance**
- **20-foot detachable pendant control, with option to use trigger control as well**
- **4-inch glycerin-filled gauge for easy viewing**
- **User-adjustable relief valve can be locked when desired pressure is set**

28-Volt Battery

The **XC28V5** with Lithium-Ion technology for maximum battery performance.

Battery Charger

1-hour quick charger.

XC115VC	115 VAC
XC230VC	230 VAC

Roll Cage

A roll cage accessory is available for all XC models. Please order model number **XCRCTK.**

Torque Wrenches

The following wrenches are ideal for use with the XC Cordless Torque Wrench Pump:

Torque Wrench Series

S	W	RSL	DSX	HMT
S1500X	W2000X	RSL1500	DSX1500	HMT1500
S3000X	W4000X	RSL3000	DSX3000	HMT3500
		RSL5000		HMT7500

Larger wrenches will work with the pump, battery run time and application speed will be impacted.

Page: 239

The XC-Series Cordless Torque Wrench pump is ideal for maintenance applications in the PowerGen, Oil & Gas and MRO markets. This portable pump is perfect for remote locations, sites that do not have access to power or where trip hazards are a concern.

The interactive pendant allows the user to set and clear pressure and operate in manual or auto-cycle mode.

The pump has an easily accessible user adjustable valve for precise pressure control.

Fasteners Torqued On One Charge

Torque Wrench	Nut AF (in)	Stud (in)	Pressure (psi)	Torque (ft-lbs)	Fasteners Torqued
S3000X	2⅜"	1½"	4800	1500	32
W2000X	2⅜"	1½"	5000	1000	52

XC Series

Useable Oil Capacity:
120 in³

Flow at Rated Pressure:
15 in³/minute

Motor Size:
0.5 hp

Maximum Operating Pressure:
10,000 psi

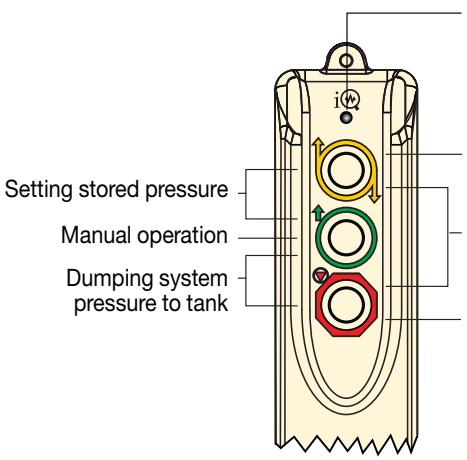

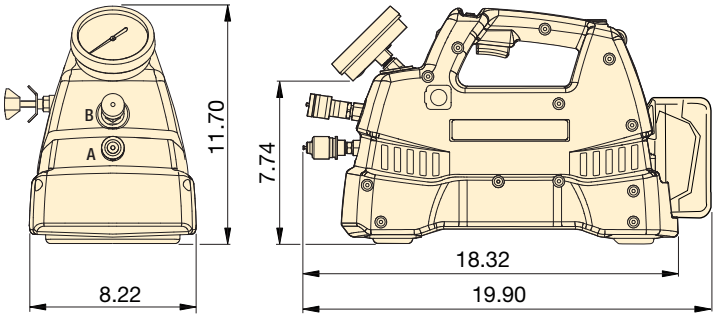

Twin Torque Wrench Hoses

Use Enerpac THQ700 series twin hoses with 10,000 psi torque pumps.

6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

OIL FLOW vs. PRESSURE

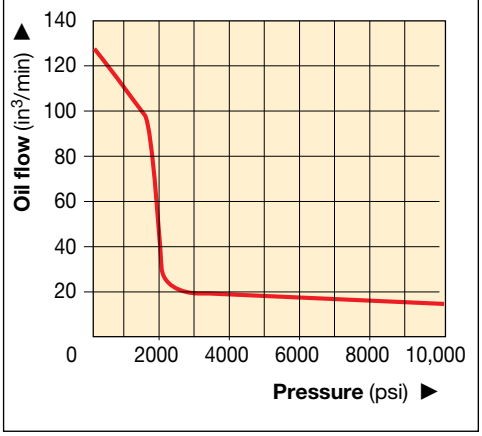

Pump Type	Useable Oil Capacity (in³)	Model Number	Output Flow Rate (in³/min) No Load	Output Flow Rate (in³/min) 2000 psi	Output Flow Rate (in³/min) 10,000 psi	Included with Pump	Weight (includes oil) (lbs)
Cordless Pump Kit	120	**XC1502TB**	125	30	15	2 batteries and 115V charger	29.0
Cordless Pump Kit	120	**XC1502TE**	125	30	15	2 batteries and 230V charger	29.0
Cordless Pump	120	**XC1502T***	125	30	15	No batteries or charger	26.6

* Batteries and charger not included.

▼ EP3504TB E-Pulse Torque Wrench Pump

Performance

- Two-stage pump with high by-pass pressure: 60 in^3/min at 3000 psi, 32 in^3/min at 10,000 psi
- Smart controls enable motor to maintain constant power across the pressure range
- 24V DC power regulator minimizes effects of poor power supply
- Six-piston block design provides even flow for smooth operation of tool

Durability

- High-efficiency permanent magnet, direct drive motor enables continuous use and long service life
- Built-in thermal protection
- System components enclosed for protection
- IP Rating: IP54 on the Pump, IP67 on the Pendant
- Integrated heat exchanger minimizes heat buildup

Convenience

- Integrated calibrated pressure gauge
- Pendant and cord management system
- Draining oil not required for pump element maintenance
- Convenient oil fill port, oil level indicator and automatic breather

Productivity through innovation

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

Torque Wrenches

The following wrenches are ideal for use with the XC Cordless Torque Wrench Pump:

Torque Wrench Series

S	W	RSL	DSX	HMT
S1500X	W2000X	RSL1500	DSX1500	HMT1500
S3000X	W4000X	RSL3000	DSX3000	HMT3500
		RSL5000	DSX5000	HMT7500

Larger wrenches will work with the pump, battery run time and application speed will be impacted.

Page: 239

THQ Series Torque Wrench Hoses

Use Enerpac THQ700 series twin hoses with 10,000 psi torque wrenches and torque pumps.

10,000 psi	
6 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

E-Pulse Torque Wrench Pump

The Enerpac E-Pulse Torque Wrench Pump, through its innovative design, is ideal for high volume fastening applications where weight is a critical factor. Smart controls enable the motor to maintain constant power providing higher flow than "traditional" ½ hp pumps.

The durable aluminum housing, integrated heat exchanger and highly efficient permanent magnet motor minimize heat buildup in the toughest environments. The interactive pendant provides the operator a number of usage options for optimal efficiency. The E-Pulse Torque Wrench Pump is the pinnacle of bolting equipment.

E Series

Useable Reservoir Capacity:
0.8 gallon

Flow at Rated Pressure:
32 in³/minute

Motor Size:
0.85 hp

Maximum Operating Pressure:
10,000 psi

Torque Wrench
20-ft. cord

Interactive Torque Wrench Pendant

- User can set pressure and operate in manual or auto-cycle mode
- Intelligent Auto-Cycle enables press and release actuation to cycle wrench until final torque is achieved

FLOW vs. PRESSURE

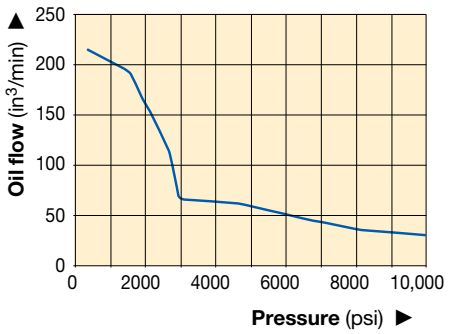



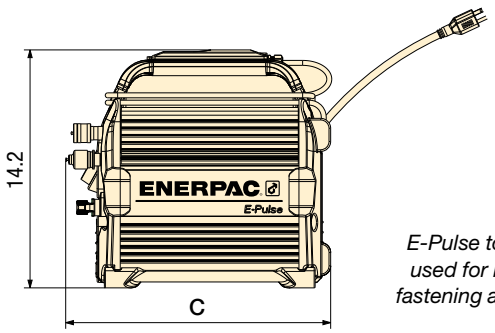

E-Pulse torque pump used for high volume fastening applications. ▶

Number of Wrenches Pump can Operate	Useable Oil Capacity (gal)	Model Number	Output Flow Rate (in³/min) 14.5 psi	2538 psi	5075 psi	10,000 psi	Motor Voltage (VAC)	Plug Type	Current Draw (Amps)	Sound Level (dBA)	Dimension C (in)	Weight (with oil) (lbs)
1	0.8	**EP3504TB**	220	130	58	32	100-120	NEMA 5-15	12	70-85	15.8	44.9
		EP3504TI	220	130	58	32	200-250	NEMA 6-15	7	70-85	15.8	44.9
		EP3504TE	220	130	58	32	200-250	Schuko CEE 7/7	7	70-85	15.8	44.9
2	0.8	**EP3504TB-M***	220	130	58	32	100-120	NEMA 5-15	12	70-85	16.9	47.9
		EP3504TI-M*	220	130	58	32	200-250	NEMA 6-15	7	70-85	16.9	47.9
		EP3504TE-M*	220	130	58	32	200-250	Schuko CEE 7/7	7	70-85	16.9	47.9

* Pump model with multi-port manifold.

▼ TQ700B

Lightweight Electric Torque Wrench Pump

- **Optimized flow technology delivers up to 50% faster bolting than competing pumps**
- **Compact and lightweight design fits through tight openings and provides easy handling**
- **Built-in protection for controls, gauge, and pendant for job-site durability**
- **IP55 rating for superior dust and water protection**
- **Advanced brushless motor provides for quiet, continuous operation, high voltage tolerance, and low maintenance**
- **Heat exchanger prevents breakdown of oil during heavy usage in hot environments**
- **Simple pressure setting and convenient pendant control for hassle-free operation**

▼ *The TQ700B and the W-Series wrenches are a productive combination in wind applications.*

Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: 239

Pendant Control

The **TQ700** comes equipped with a 20-foot pendant cord which allows the user to pressurize the pump from a distance increasing productivity and speed of setup.

Four-Port Manifold

The **TQ700** offers an optional four wrench manifold as an accessory (TQM) factory installed. (Add suffix “M” at the end of the model number. For example: **TQ700EM)**

Twin Torque Wrench Hoses

Use Enerpac THQ-Series twin hoses with 10,000 psi torque wrenches and torque pumps.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

Gauge Overlay Kit

Gauge overlay kits are also available separately.

GT4015Q includes overlays for all S-, W-, RSL-, DSX and HMT-Series Torque Wrenches.

TQ700 Series Pump Applications

The **TQ700 Series** pump is ideal for powering hydraulic wrenches for the Power Generation and Wind Markets.

Bolting speed is more complex than how much flow per minute the pump produces. The key is optimizing the flow rate across the entire bolting cycle. With more oil flowing at the right time and at the right volume, you achieve the optimized flow for a hydraulic bolting system.

The result of this optimized flow is more bolts tightened faster and a more productive work team.

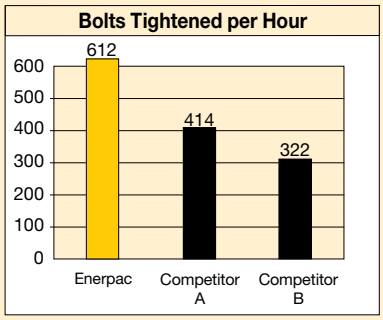

Internal laboratory testing based on standard torquing procedure on a pipe flange with 14, 1⅞" bolts.

TQ Series

Reservoir Capacity:
1 gallon

Flow at Rated Pressure:
30 in³/minute

Maximum Operating Pressure:
10,000 psi

IP55 Rating for Superior Dust and Water Protection

The IP Code (or Ingress Protection Rating) classifies and rates the degrees of protection provided against the intrusion of solid objects and water in mechanical casings and electrical enclosures.

An IP55 rating means the TQ700 offers complete protection against contact with mechanical and electrical components, and that dust will not enter in a sufficient quantity to interfere with the operation of the equipment.

The IP55 rating also means water jets sprayed against the TQ700 from any direction will not have any harmful effects.

Dimensions shown in inches.

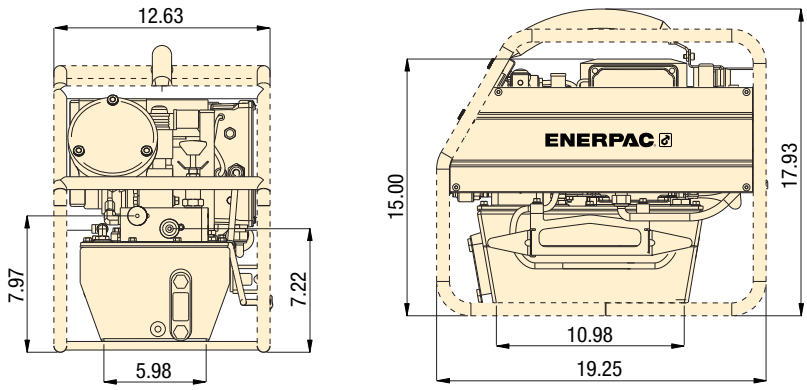

▼ *The TQ700B and the W-Series wrenches are a productive combination.*

▼ SELECTION CHART

For Use with Torque Wrenches	Pressure Rating (psi)	Model Number [1]	Useable Oil Capacity (gal)	Motor Size (hp)	Motor Electrical Specifications (Volt - Ph - Hz)	Sound Level (dBA)	Wt. (lbs)
All S, W, RSL, DSX & HMT-Series wrenches	10,000	**TQ700B**	1	1.0	115 - 1 - 50/60	82 - 85	68
	10,000	**TQ700E** [2]	1	1.0	230 - 1 - 50	82 - 85	66
	10,000	**TQ70I** [3]	1	1.0	230 - 1 - 60	82 - 85	66

1) All models meet CE safety requirements and all TÜV requirements
2) European plug and CE EMC directive compliant
3) With NEMA 6-15 plug

▼ ZU4204TB-Q (Pro-Series) and ZU4204BB-Q (Classic)

Z Tough. Dependable. Innovative. CLASS

- **Features *Z-Class* high-efficiency pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps**
- **Powerful 1.7 hp universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics**
- **High-strength, molded composite shroud protects motor and electrical components, while providing an ergonomic, non-conductive handle for easy transport**
- **Low-voltage pendant provides additional safety for the operator**
- **Relief valve adjustment range 1800 - 10,000 psi**

Pro-Series

- **LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump**
- **Auto cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed. (Pump can be used with or without auto cycle feature)**

Back-lit LCD Display for Pro Series

Back-lit LCD and Pressure Transducer featuring Auto-Cycle Technology.

- Digital read-out and "Autocycle" setting
- "Auto-Cycle" setting easily programmable
- Torque wrench model is selectable
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges
- Easy-viewing variable rate display
- Display pressure in bar, MPa or psi

◀ *Any brand of hydraulic torque wrench can be powered by the portable ZU4T-Series torque wrench pump.*

Z-Class – A Pump For Every Application

Patented *Z-Class* pump technology provides high by-pass pressures for increased productivity—important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4T Hydraulic Pumps are built to power small to large torque wrenches.

Classic Electric Torque Wrench Pump

- The Classic has an analog gauge and traditional electro-mechanical components (transformers, relays and switches) in place of solid-state electronics.

  The Classic delivers durable, safe and efficient hydraulic power.

Pro Series Electric Torque Wrench Pump

- Digital (LCD) display features a built-in hour meter, pressure and torque display, and shows self-diagnostic, cycle-count and low voltage warning information.
- AutoCycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed. (Pump can be used with or without AutoCycle feature).

ZU4T Series

Reservoir Capacity:
1.2 and 1.8 gallons

Flow at 10,000 psi:
60 in³/minute

Motor Size:
1.7 hp

Maximum Operating Pressure:
10,000 psi

Overlay Kit with Gauge

Available separately for use with ZU4T-Series Classic: **GT4015Q** includes gauge and torque overlays for all S-, W-, RSL-, DSX- and HMT-Series torque wrenches.

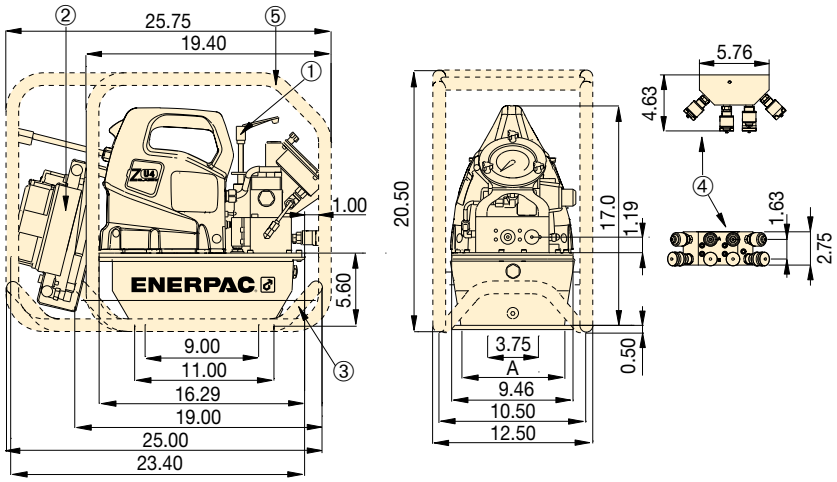

ZU4T-Series Torque Wrench Pumps

Reservoir Capacity (gallons)	A (in)
1.2	6.0
1.8	8.1

Dimensions shown in inches

① User adjustable relief valve
② Heat exchanger
③ Skidbar
④ 4-wrench manifold
⑤ Roll cage

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

OIL FLOW AND CURRENT vs PRESSURE

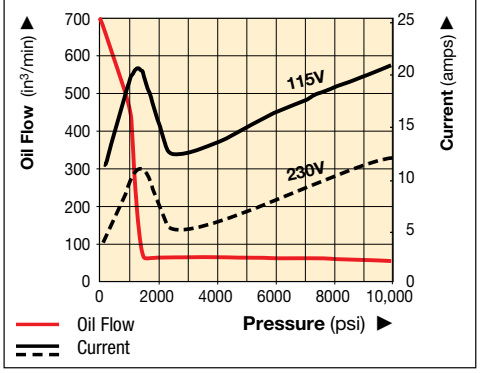

ZU4T-Series Torque Pumps

ZU4T-Series Performance Chart							
Motor Size	Output Flow Rate (in³/min)				Motor Electrical Specification	Sound Level	Relief Valve Adjustment Range
(hp)	100 psi	700 psi	5,000 psi	10,000 psi	(Volt - Phase - Hz)	(dBA)	(psi)
1.7	700	535	76	60	115 - 1 - 50/60 208-240 - 1 - 50/60	85-90	1800 - 10,000

▼ Select a pump from the model matrix at the bottom of the page.

The functionality of the pump can be determined by the model number. Utilize the guide below to select the best pump for the application.

Z	U	4	2	08	T	B	-	Q	H	R
1 Product Type	2 Motor Type	3 Flow Group	4 Valve Type	5 Reservoir Capacity	6 Valve Operation	7 Voltage		Must be a Q	8 Factory installed Accessories	

1 Product Type
Z = Pump series

2 Motor Type
U = Universal motor

3 Flow Group
4 = 60 in^3/min @ 10,000 psi

4 Valve Type
2 = Torque wrench valve

5 Reservoir Capacity
04 = 1.2 gallons
08 = 1.8 gallons

6 Valve Operation
T = Solenoid valve with pendant, LCD electric and pressure transducer
B = Solenoid valve with pendant, classic electrical

7 Voltage
B = 115V, 1 ph, 50/60 Hz
E = 208-240V, 1 ph, 50/60 Hz (with European plug CE RF compliant)
I = 208-240V, 1 ph, 50/60 Hz (with NEMA 6-15 plug)

8 Factory Installed Accessories
H = Heat exchanger
K = Skid Bar
M = 4-wrench manifold
R = Roll cage

Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump selection matrix.

Page: 291

▼ *Most hydraulic torque wrenches can be powered by the Enerpac ZU4T-Series torque wrench pump.*

▼ ZU4T-SERIES CLASSIC PUMP MODELS

ZU4T Classic Model Numbers	Reservoir Capacity (gal)	Factory Installed Accessories: Heat Exchanger	Roll Cage	Skid Bar	4-Wrench Manifold	Wt. w/oil (lbs)
ZU4204BB-Q (I, E)	1.2					71.5
ZU4208BB-Q (I, E)	1.8					77.5
ZU4204BB-QH (I, E)	1.2	●				88
ZU4208BB-QH (I, E)	1.8	●				87
ZU4204BB-QR (E)	1.2		●			81
ZU4208BB-QR (E)	1.8		●			87
ZU4204BB-QHR (E)	1.2	●	●			90
ZU4208BB-QHR (I, E)	1.8	●	●			96
ZU4208BB-QHK (I, E)	1.8	●		●		92.5
ZU4208BB-QHM (I, E)	1.8	●			●	92
ZU4208BB-QMR (E)	1.8		●		●	93
ZU4208BB-QHMR (I, E)	1.8	●	●		●	102

▼ ZU4T-SERIES PRO PUMP (LCD) MODELS

ZU4T PRO Model Numbers	Reservoir Capacity (gal)	Factory Installed Accessories: Heat Exchanger	Roll Cage	Skid Bar	4-Wrench Manifold	Wt. w/oil (lbs)
ZU4204TB-Q (I, E)	1.2					68.5
ZU4208TB-Q (I, E)	1.8					74.5
ZU4204TB-QH (I, E)	1.2	●				78
ZU4208TB-QH (I, E)	1.8	●				84
ZU4204TB-QR (E)	1.2		●			78
ZU4208TB-QR (E)	1.8		●			84
ZU4204TB-QHR (E)	1.2	●	●			87
ZU4208TB-QHR (I, E)	1.8	●	●			93
ZU4208TB-QHK (I, E)	1.8	●		●		89.5
ZU4208TB-QHM (I, E)	1.8	●			●	89
ZU4208TB-QMR (E)	1.8		●		●	90
ZU4208TB-QHMR (I, E)	1.8	●	●		●	99

4-Wrench Manifold

- **For simultaneous operation of multiple torque wrenches**

Accessory Kit No.	Can be used on ZU4T-Series torque wrench pumps
ZTM-Q [1]	for 10,000-psi torque wrenches

[1] For 4-Wrench Manifold add 6 lbs to pump weight

Skidbar

- **Provides greater pump stability on soft or uneven surfaces**
- **Provides easy two-handed lift**

Accessory Kit No.	Can be used on ZU4T-Series torque wrench pumps
SBZ-4	1.2 and 1.8 gallon[1]
SBZ-4L	1.2 and 1.8 gallon[2]

[1] Without heat exchanger 5 lbs.
[2] With heat exchanger 5.5 lbs.

ZU4T Series

Reservoir Capacity:
1.2 and 1.8 gallons

Flow at 10,000 psi:
60 in³/minute

Motor Size:
1.7 hp

Maximum Operating Pressure:
10,000 psi

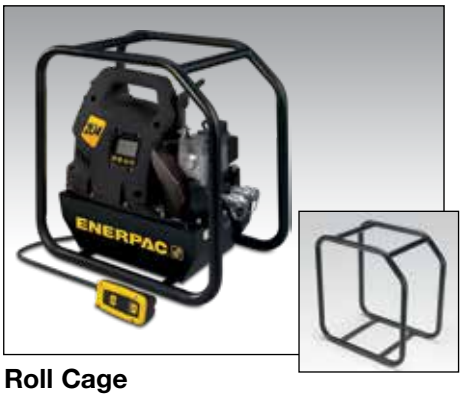

Roll Cage

- **Protects pump**
- **Provides greater pump stability**

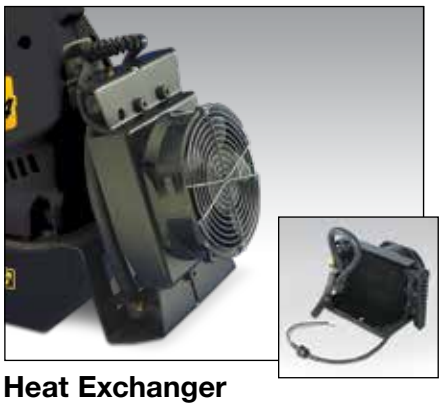

Heat Exchanger

- **Removes heat from the bypass oil to provide cooler operation**
- **Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components**

Accessory Kit No. [3]	Can be used on ZU4T-Series torque wrench pumps
ZRC-04	1.2 and 1.8 gallon reservoir [1]
ZRC-04H	1.2 and 1.8 gallon reservoir [2]

[1] For use with pumps without a heat exchanger fitted
[2] For use with pumps with a heat exchanger fitted
[3] For Roll Cage add 9.5 lbs to pump weight

Accessory Kit No.	Can be used with:
ZHE-U115	115V pumps
ZHE-U230	230V pumps

Heat Exchanger adds 9 lbs. to pump weight.

Thermal Transfer * Btu/h	Maximum pressure (psi)	Maximum oil flow (GPM)	Voltage (VDC)
900	300	7.0	12

* At 116 in³/min at 70° F ambient temperature. Do not exceed maximum oil flow and pressure ratings.
Heat exchanger is not suitable for water-glycol or high water-based fluids.

▼ **ZE4204TB-QHR**

Z Tough. Dependable. Innovative. CLASS

- **Auto-Cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (Pump can be used with or without Auto-Cycle feature)**
- **LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump**
- **Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments**
- **High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh environments**

Back-lit LCD Display

- Digital pressure or torque read-out
- Programmable "Auto-Cycle" setting
- "Auto-Cycle" setting easily programmable
- Torque wrench model is selectable
- Display torque in Nm or Ft.lbs
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet and Joint Completion Report. Custom Joint information can also be entered.

Page: 416

◀ *The ZE4T torque wrench pumps are perfectly matched for this W2000X wrench.*

ZE4T and ZE5T Oil Flow and Current vs. Pressure

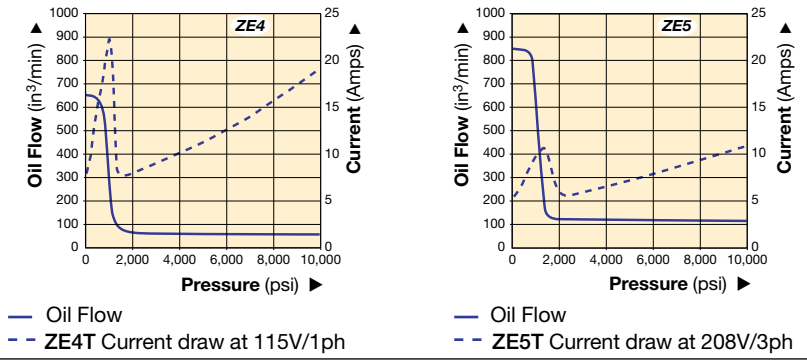

— Oil Flow
- - **ZE4T** Current draw at 115V/1ph

— Oil Flow
- - **ZE5T** Current draw at 208V/3ph

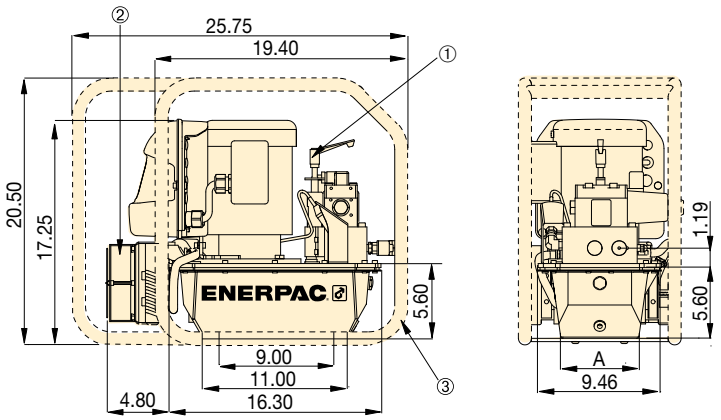

Reservoir Capacity (gallons)	A (in)	B (in)
1.2	6.0	13
1.8	8.1	13
5.2	16.6	19.2

Dimensions shown in inches.
① User adjustable relief valve
② Heat exchanger
③ Roll cage

▼ PERFORMANCE CHART

Pump Series	Output Flow Rate (in³/min)				Motor Size		Relief Valve Adjustment Range	Sound Level
	100 psi	700 psi	5,000 psi	10,000 psi	hp	RPM	(psi)	(dBA)
ZE4T	650	600	62	60	1.5	1750	1000 - 10,000	75
ZE5T	850	825	123	120	3.0	1750	1000 - 10,000	75

Model Numbers [1]	Reservoir Capacity (gal)	Factory Installed Accessories: Heat Exchanger	Roll Cage	4-Wrench Manifold	Weight w/oil (lbs)
ZE4204TB-QR (E)	1.2		●		120
ZE4204TB-QHR (E)	1.2	●	●		129
ZE4208TB-QHR (E)	1.8	●	●		135
ZE4208TB-QHMR (E)	1.8	●	●	●	141
ZE5204TJ-QHR (G, W)	1.2	●	●		142
ZE5208TJ-QHR (G, W)	1.8	●	●		148
ZE5208TJ-QHMR (G, W)	1.8	●	●	●	154
ZE5220TJ-QHR (G, W)	5.2	●	●		194

[1] "**B**" suffix model numbers shown are 115 VAC, 1-phase, 50/60 Hz.
"**E**" indicates pump available in 208-240V, 1 phase, 50/60 Hz with European plug and CE EMC compliant.
Model number order example: **ZE4204TE-QR**.
"**J**" indicates pump available in 460-480V, 3-phase, 50/60Hz. Model number order example: **ZE5208TJ-QHR**.
"**G**" indicates pump available in 208-240V, 3-phase, 50/60 Hz. Model number order example: **ZE5208TG-QHR**.
"**W**" indicates pump available in 380-415V, 3-phase, 50/60 Hz. Model number order example: **ZE5208TW-QHR**.

ZE4T ZE5T Series

Reservoir Capacity:
1.2 - 5.2 gallons

Flow at 10,000 psi:
60 - 120 in³/minute

Motor Size:
1.5 - 3.0 hp

Maximum Operating Pressure:
10,000 psi



Torque Wrench Pump Selection Matrix
For optimum speed and performance see the torque wrench pump selection matrix.
Page: **291**

Accessories
Descriptions can be found in the ZU4T section.
Page: **301**

Torque Wrench Hoses
Use Enerpac twin safety hoses to connect your torque wrench to the pump.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

▼ LA2504TX-QR, Hydraulic Torque Wrench Pump

Lightweight and Compact

Improved Operator Efficiency and Ergonomics

- Easy to lift, transport and maneuver
- Hand carry where no crane, hoist or elevator is available
- One person transport up ladders and stairs
- Ideal for use on narrow or constrained scaffolding, catwalks, pipe racks and lifts

High Productivity

- Proven 3-piston design provides leading fastening and breakout speed to stay on time and under budget
- ATEX certified to meet worksite compliance requirements

Reduce Equipment Downtime

- Roll cage with reinforcement to support and protect FRL
- Rugged 1/2" air supply connection with integrated roll cage support
- Key components are easy to access and service

Standard Features

- 15 foot pendant cord for mobility around work site
- 4 inch calibrated gauge with certificate, scale in psi and bar
- Roll cage and FRL



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump selection matrix.

Page: 291

Torque Wrenches

Optimized for use with Enerpac Hydraulic Torque Wrenches.

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: 239

Twin Torque Wrench Hoses

Use Enerpac **THQ700** Series twin hoses with 10,000 psi pumps.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

ATEX Certified

The LAT-Series air-driven pumps are tested and certified according to the ATEX Directive 2014/34/EU.

The explosion protection is for Equipment Group II, Equipment Category 2 (Hazardous Area Zone 1), in Gas and/or Dust atmospheres.

Each LAT-Series air-driven pump contains the following markings:
Ex IIC T4 Gc,
Ex IIIC T135°C Dc

Ex II 2 GD CE

LAT-Series Hydraulic Torque Wrench Pump

The Enerpac LAT Torque Wrench Pump combines compact design and high productivity for bolting applications in areas hard to access with larger air powered pumps.

Whether on an offshore platform, refinery or mine—anywhere in the world, the pump is built for the toughest worksite environments.

Featuring a proven Enerpac piston design, reinforced FRL support and air supply connection, the LAT will provide years of reliable service with fastening and breakout speeds to keep you on schedule and under budget.

LAT Series

Reservoir Capacity:
0.8 gallon

Useable Reservoir Capacity:
0.5 gallon

Flow at Rated Pressure:
25 in³/minute

Maximum Operating Pressure:
10,000 psi

▼ Rugged 1/2" air supply connection with integrated roll cage support

▼ Roll cage design supports and protects FRL

OIL FLOW vs. PRESSURE

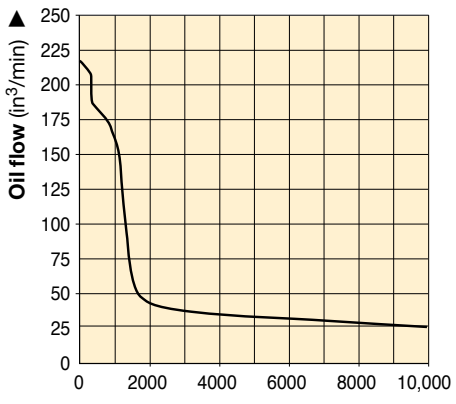

▼ Proven 3 piston design provides leading speed

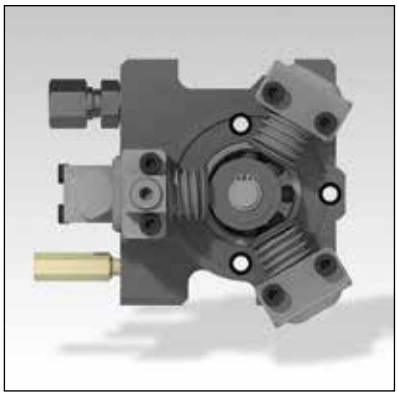

▼ Skid Rail accessory bolts to bottom of reservoir to prevent wear from rough surfaces Part No. **DD8365920K**

▼ LAT-Series, the portable and compact torque pump.

Reservoir Capacity (gal)	Model Number	Output Flow Rate (in³/min) No Load	5000 psi	10,000 psi	Valve Type	Air Pressure Range psi	Air Consumption (scfm)	Sound Level (dBA)	Dimensions (in) L	W	H	Weight with Oil (lbs)
0.8	**LA2504TX-QR**	214	34	25	4-way, 2-pos.	65-100	65	87-90	17.1	9.8	14.8	39.6

▼ **ZA4204TX-QR**

Z CLASS
Tough.
Dependable.
Innovative.

- **Two-speed operation and high by-pass pressure reduces cycle time for improved productivity**
- **Glycerin filled pressure gauge with transparent overlays in Ft.lbs and Nm for Enerpac torque wrenches provide a quick torque reference**
- **Regulator-Filter-Lubricator with removable bowls and auto drain is standard**
- **Ergonomic pendant allows remote operation up to 20 feet**
- **Valve technology reduces oil operating temperatures and withstands contaminants to increase pump reliability**



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump selection matrix.

Page: **291**

Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

ZA4208TX-QR0P PowaPak™ Air Torque Pump

ZA4T Pump with stainless steel roll cage and certified lifting eye.

▼ *Most hydraulic torque wrenches can be powered by the Enerpac ZA4-Series torque wrench pump.*

ZA4T-Series Pump Applications

The ZA4T-Series pump is best suited to power medium to large size torque wrenches.

Patent-pending *Z-Class* technology provides high by-pass pressures for increased productivity. Its high power-to-weight ratio and compact design make it ideal for applications which require easy transport of the pump.

For further application assistance contact your local Enerpac office.

ATEX Certified

The ZA4T-series pumps are tested and certified to conform to the EU-ATEX Directive, 2014/34/EU.

The explosion protection is for Equipment Group II, Equipment Category 2 (Hazardous Area Zone 1), in Gas and /or Dust atmospheres.

The ZA4T-series pumps are marked with: Ex II 2 GD ck T4.

II 2 GD ck T4
DEKRA 0602

ZA4T Series

Reservoir Capacity:
1.2 and 1.8 gallons

Flow at 10,000 psi:
60 in³/minute

Air Consumption:
20 - 100 scfm

Maximum Operating Pressure:
10,000 psi

Accessory Options

Available by placing the following additional suffix at the end of the model number:

K = Skidbar
M = 4-wrench manifold
R = Roll cage

Page: 309

OIL FLOW vs PRESSURE

100 psi dynamic air pressure at 70 scfm

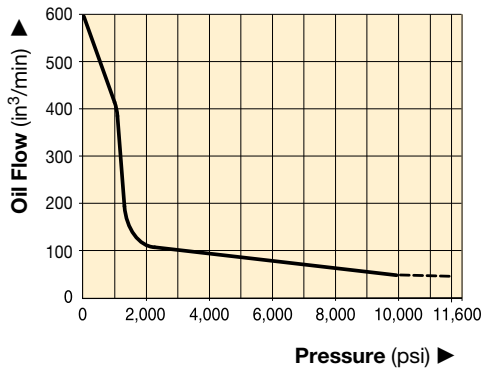

Gauge Overlay Kit

Gauge overlay kits are also available separately.

GT4015Q includes overlays for all S-, W-, RSL-, DSX and HMT-Series Torque Wrenches.

▼ *ZA4208TX-QR for improved wrench performance and torque control at low pressure.*

▼ COMMON PUMP MODELS

For Use With Torque Wrenches	Maximum Operating Pressure (psi)	Model Number 1)	Reservoir Capacity (gal)	Weight with Oil (lbs)
For all S-, W-, RSL-, DSX and HMT-Series wrenches	**10,000**	**ZA4204TX-Q**	1.2	94
	10,000	**ZA4208TX-Q**	1.8	100
	10,000	**ZA4204TX-QR***	1.2	101
	10,000	**ZA4208TX-QR***	1.8	112

* With roll cage
1) All models meet CE safety requirements and all TÜV requirements.

ZA4T Ordering Matrix and Specifications

ENERPAC

▼ This is how a ZA4T-Series pump model number is built up:

Z	A	4	2	08	T	X	-	Q	M	R
1	2	3	4	5	6	7		8	8	8
Product Type	Motor Type	Flow Group	Valve Type	Reservoir Size	Valve Operation	Voltage		Must be Q	Options	Options

1 Product Type

Z = Pump Series

2 Motor Type

A = Air motor

3 Flow Group

4 = 60 in^3/min @ 10,000 psi

4 Valve Type

2 = Torque Wrench Valve

5 Reservoir Capacity

04 = 1.2 gallon
08 = 1.8 gallons

6 Valve Operation

T = Air operated valve with pendant

7 Voltage

X = Not applicable

8 Factory installed features and options

Q = 10,000-psi coupler for use with S-, W- RSL-, DSX- and HMT-Series or other wrenches
K = Skidbar
M = 4-wrench manifold
R = Roll cage

How to Order Your ZA4T-Series Torque Pump

Ordering Example: Model No. ZA4208TX-QMR

10,000-psi pump for use with Enerpac S, W, RSL, DSX, and HMT-Series and other 10,000-psi torque wrenches, 2-gallon reservoir, 4-wrench manifold, and roll cage.

Refer to the torque wrench pump selection matrix for optimum wrench, pump and hose combinations.

Dimensions shown in inches.

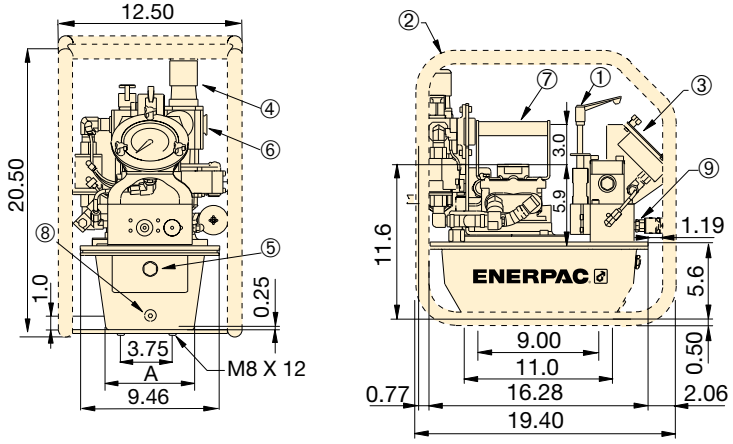

① User adjustable relief valve
② Roll bar cage (optional)
③ Gauge with overlays
④ Filter/lubricator/regulator
⑤ Oil level sight gauge
⑥ Air input 1/2" NPTF
⑦ Standard handle
⑧ Oil drain
⑨ 1/4"-18 NPTF Oil Outlet

ZA4T-Series Torque Pumps

Reservoir Size (useable gallons)	A (in)
1	6.0
1.75	8.1

ZA4T Performance

Output Flow Rate (in^3/min)				Dynamic Air Pressure Range	Air Consumption	Sound Level at 100 psi Dynamic	Relief Valve Adjustment Range
100 psi	700 psi	5,000 psi	10,000 psi	(psi)	(scfm)	(dBA)	(psi)
600	500	80	60	60-100	20-100	80-95	1,400-10,000*

* Pump type (-Q) shown.

▼ *Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.*

Torque Pump Options

Skidbar

- **Provides greater pump stability on soft or uneven surfaces**
- **Provides two-handed lift**

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
SBZ-4	1.2 and 1.8-gallon reservoir

* Add suffix **K** for factory installation. Skidbar weight 4.9 lbs.

Ordering Example:
Model No. ZA4208TX-QK

4-Wrench Manifold

- **For simultaneous operation of multiple torque wrenches**
- **Can be factory installed or ordered separately**

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
ZTM-Q	for 10,000 psi torque wrenches

* Add suffix **M** for factory installation. Manifold weight 7.9 lbs.

Ordering Example:
Model No. ZA4208TX-QM

ZA4T Series

Reservoir Capacity:
1.2 and 1.8 gallons

Flow at 10,000 psi:
60 in^3/minute

Air Consumption:
20 - 100 scfm

Maximum Operating Pressure:
10,000 psi

ZA4208TX-QR0P PowaPak™ Air Torque Pump

ZA4T-Series Pump with stainless steel roll cage and certified lifting eye.

Twin Torque Wrench Hoses

Use Enerpac **THQ700** series twin hoses with 10,000 psi pumps.

10,000 psi	
6.5 feet long, 2 hoses	**THQ702T**
19.5 feet long, 2 hoses	**THQ706T**
39 feet long, 2 hoses	**THQ712T**

10,000 psi Spin-on Couplers

- **Mounted on:**
  - **Torque wrench pumps with suffix "Q"**
  - **S, W, RSL, DSX and HMT-Series wrenches**
  - **THQ-Series hoses**
  - **4-Wrench manifold ZTM-Q**

Roll Cage

- **Protects pump**
- **Provides greater pump stability**

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
ZRC-04	1.2 and 1.8-gallon reservoir

* Add suffix **R** for factory installation. Roll bar cage weight 7.5 lbs.

Ordering Example:
Model No. ZA4208TX-QR

▼ HM10 Hydramax® Topside Tensioner

- **Fifteen load cells from ¾" to 4" / M20 to M100**
- **Twin ports for quick connection of multiple tools**
- **High bolt-load capacity at maximum 21,750 psi (1500 bar)**
- **Long-stroke capability of 9/16 inch (15 mm) with over stroke elimination**
- **HM01 to HM05: mechanical over-stroke prevention, no spring return; HM06 to HM15: relief valve for over-stroke prevention, spring return**
- **Quick release bridge**
- **Stroke indicator**
- **Captive socket – eliminates falling object risk**
- **Interchangeable adapter kits available**
- **Anti-slip grip for more secure handling**
- **HM-Series HydraMax® Tensioners comply to following: Machine Directive 2006/42/EC, ASME B30.1, EN-ISO 4413:2010, EN-ISO 12100:2010**

◀ *Enerpac HM-Series HydraMax® tensioners have been designed to generate high-bolt loads associated with compact flanges, while providing versatility for maximum bolt coverage.*

High Bolt Load Capacities, Superior Performance

HydraMax® Topside Tensioners

The HM-Series tensioners have been designed to fit all standard flanges, including ANSI, API and compact flanges based on Norsok L005 and generates 30% more load capacity than traditional tensioners.

Tensioning Pumps, Hoses and Couplers

High-pressure pumps, hoses and fittings matched for use with the Enerpac Bolt Tensioners.
See enerpac.com

Page: 325

Ultra-High Pressure

This tool operates at ultra high-pressure, use only the specified fittings and hoses designed for these pressures.

How to Order HydraMax® Tensioners

To provide maximum flexibility, Load Cells are ordered separately from Adaptor and Bridge Kits. Example, to order a complete tensioner for a M24 x 3 threaded bolt order:

1 x Load Cell: **HM03-LC**

1 x Adaptor and Bridge Kit: **HM03BPM-NRS02430**

Bolting Integrity Software

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application Data Sheet, and Joint Combination report. Custom Joint information can also be entered.

Page: 416

Thread and Pitch Sizes

Contact Enerpac for different thread or pitch sizes. Alternative size adaptor kits can be supplied upon request.



Minimum Stud Protrusion



X = Minimum socket rotation 60°

Nearest obstruction

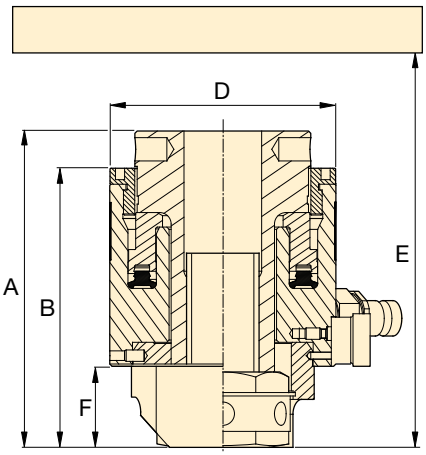

HM Series

Bolt Range:
¾ - 1½" | M20 - M39

Maximum Load Capacity:
15.1 - 70.2 tons

Stroke:
0.39 - 0.59 inch *

Maximum Operating Pressure:
21,750 psi

* Stroke HM01 models 0.39 inch
Strokes all other HM-models 0.59 inch

Load Cell Model Number*	Thread Size	Adaptor and Bridge Kit Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (tons)	Dimensions (in) A	B	C	D	E min.	F	N min.	Load Cell Weight (lbs)	Adaptor and Bridge Kit Weight (lbs)
HM01-LC	M20 x 2,5	HM01BPM-NRS02025	1.39	15.1	4.4	3.8	0.6	2.7	7.8	1.1	2.0	3.5	1.3
	¾"- 10UN	HM01BP-NRS0750U10	1.39	15.1	4.4	3.8	0.6	2.7	7.8	1.1	2.0	3.5	1.3
HM02-LC	M20 x 2,5	HM02BPM-NRS02025	1.92	20.9	4.7	4.1	0.6	2.9	8.2	1.1	2.1	4.0	2.0
	M22 x 2,5	HM02BPM-NRS02225	1.92	20.9	4.7	4.1	0.6	2.9	8.2	1.1	2.1	4.0	2.0
	¾"- 10UN	HM02BP-NRS0750U10	1.92	20.9	4.7	4.1	0.6	2.9	8.2	1.1	2.0	4.0	2.0
	⅞"-9UN	HM02BP-NRS0875U09	1.92	20.9	4.7	4.1	0.7	2.9	8.2	1.1	2.2	4.0	1.8
HM03-LC	M20 x 2,5	HM03BPM-NRS02025	2.52	27.4	4.7	4.1	0.6	3.2	8.3	1.1	2.2	4.9	2.4
	M22 x 2,5	HM03BPM-NRS02225	2.52	27.4	4.7	4.1	0.6	3.2	8.3	1.1	2.3	4.9	2.4
	M24 x 3	HM03BPM-NRS02430	2.52	27.4	4.7	4.1	0.8	3.2	8.3	1.1	2.3	4.9	2.4
	¾"- 10UN	HM03BP-NRS0750U10	2.52	27.4	4.7	4.1	0.6	3.2	8.3	1.1	2.2	4.9	2.4
	⅞"- 9UN	HM03BP-NRS0875U09	2.52	27.4	4.7	4.1	0.7	3.2	8.3	1.1	2.3	4.9	2.4
	1"- 8UN	HM03BP-NRS1000U08	2.52	27.4	4.9	4.3	0.8	3.2	8.5	1.3	2.4	4.9	2.4
HM04-LC	M22 x 2,5	HM04BPM-NRS02225	3.35	36.4	5.0	4.4	0.7	3.5	9.1	1.1	2.4	6.0	3.5
	M24 x 3	HM04BPM-NRS02430	3.35	36.4	5.1	4.4	0.8	3.5	9.1	1.1	2.5	6.0	3.5
	M27 x 3	HM04BPM-NRS02730	3.35	36.4	5.3	4.6	0.8	3.5	9.3	1.3	2.5	6.0	3.7
	M30 x 3,5	HM04BPM-NRS03035	3.35	36.4	5.4	4.7	0.9	3.5	9.4	1.4	2.6	6.0	3.7
	⅞"- 9UN	HM04BP-NRS0875U09	3.35	36.4	5.1	4.4	0.7	3.5	9.1	1.1	2.4	6.0	3.5
	1"- 8UN	HM04BP-NRS1000U08	3.35	36.4	5.3	4.6	0.8	3.5	9.3	1.3	2.5	6.0	3.7
	1⅛"- 8UN	HM04BP-NRS1125U08	3.35	36.4	5.4	4.7	0.9	3.5	9.4	1.4	2.6	6.0	3.7
HM05-LC	M24 x 3	HM05BPM-NRS02430	4.27	46.4	5.1	4.5	0.7	3.9	9.2	1.1	2.7	7.3	4.2
	M27 x 3	HM05BPM-NRS02730	4.27	46.4	5.3	4.7	0.8	3.9	9.4	1.3	2.7	7.3	4.4
	M30 x 3,5	HM05BPM-NRS03035	4.27	46.4	5.5	4.8	0.9	3.9	9.5	1.4	2.8	7.3	4.4
	M33 x 3,5	HM05BPM-NRS03335	4.27	46.4	5.6	4.9	1.1	3.9	9.6	1.5	2.8	7.3	4.6
	1"-8UN	HM05BP-NRS1000U08	4.27	46.4	5.3	4.7	0.8	3.9	9.4	1.3	2.7	7.3	4.6
	1⅛"-8UN	HM05BP-NRS1125U08	4.27	46.4	5.5	4.8	0.9	3.9	9.5	1.4	2.7	7.3	4.6
	1¼"-8UN	HM05BP-NRS1250U08	4.27	46.4	5.6	4.9	1.1	3.9	9.6	1.5	2.8	7.3	4.6
HM06-LC	M30 x 3,5	HM06BPM-NRS03035	6.45	70.2	5.6	5.0	0.9	4.6	9.7	1.4	3.1	9.9	6.2
	M33 x 3,5	HM06BPM-NRS03335	6.45	70.2	5.7	5.1	1.1	4.6	9.8	1.5	3.2	9.9	6.4
	M36 x 4	HM06BPM-NRS03640	6.45	70.2	5.9	5.2	1.3	4.6	9.9	1.6	3.3	9.9	6.6
	M39 x 4	HM06BPM-NRS03940	6.45	70.2	6.0	5.3	1.3	4.6	10.0	1.8	3.3	9.9	6.8
	1⅛"- 8UN	HM06BP-NRS1125U08	6.45	70.2	5.6	5.0	0.9	4.6	9.7	1.4	3.1	9.9	6.2
	1¼"- 8UN	HM06BP-NRS1250U08	6.45	70.2	5.7	5.1	1.1	4.6	9.8	1.5	3.2	9.9	6.4
	1⅜"- 8UN	HM06BP-NRS1375U08	6.45	70.2	5.9	5.2	1.3	4.6	9.9	1.6	3.2	9.9	6.6
	1½"- 8UN	HM06BP-NRS1500U08	6.45	70.2	6.0	5.3	1.3	4.6	10.0	1.8	3.3	9.9	6.8

* Tommy bar is included with Load Cell

Thread and Pitch Sizes

Contact Enerpac for different thread or pitch sizes. Alternative size adaptor kits can be supplied upon request.

HM Series

Bolt Range:
1¼ - 2" | M33 - M52

Maximum Load Capacity:
83.9 - 131.9 tons

Stroke:
0.59 inch

Maximum Operating Pressure:
21,750 psi



Minimum Stud Protrusion



X = Minimum socket rotation 60°

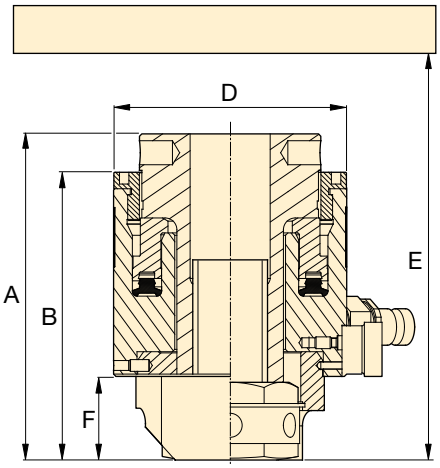

Load Cell Model Number *	Thread Size	Adaptor and Bridge Kit Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (tons)	Dimensions (in) A	B	C	D	E min.	F	N min.	Load Cell Weight (lbs)	Adaptor and Bridge Kit Weight (lbs)
HM07-LC	M33 x 3,5	HM07BPM-NRS03335	7.72	83.9	5.7	5.0	1.1	5.0	9.7	1.5	3.4	11.5	7.5
	M36 x 4	HM07BPM-NRS03640	7.72	83.9	5.8	5.2	1.3	5.0	9.8	1.6	3.4	11.5	7.7
	M39 x 4	HM07BPM-NRS03940	7.72	83.9	5.9	5.3	1.3	5.0	9.9	1.8	3.5	11.5	7.9
	M42 x 4,5	HM07BPM-NRS04245	7.72	83.9	6.1	5.4	1.3	5.0	10.0	1.9	3.6	11.5	8.2
	1¼"- 8UN	HM07BP-NRS1250U08	7.72	83.9	5.7	5.0	1.1	5.0	9.7	1.5	3.4	11.5	7.5
	1⅜"- 8UN	HM07BP-NRS1375U08	7.72	83.9	5.8	5.2	1.3	5.0	9.8	1.6	3.4	11.5	7.7
	1½"- 8UN	HM07BP-NRS1500U08	7.72	83.9	5.9	5.3	1.3	5.0	9.9	1.8	3.5	11.5	7.9
	1⅝"- 8UN	HM07BP-NRS1625U08	7.72	83.9	6.1	5.4	1.3	5.0	10.0	1.9	3.5	11.5	8.2
HM08-LC	M36 x 4	HM08BPM-NRS03640	9.10	98.9	5.9	5.2	1.3	5.4	9.9	1.6	3.6	13.9	8.6
	M39 x 4	HM08BPM-NRS03940	9.10	98.9	6.0	5.3	1.3	5.4	10.0	1.8	3.7	13.9	8.8
	M42 x 4,5	HM08BPM-NRS04245	9.10	98.9	6.1	5.5	1.3	5.4	10.1	1.9	3.8	13.9	9.0
	M45 x 4,5	HM08BPM-NRS04545	9.10	98.9	6.2	5.6	1.5	5.4	10.3	2.0	3.8	13.9	9.7
	1⅜"- 8UN	HM08BP-NRS1375U08	9.10	98.9	5.9	5.2	1.3	5.4	9.9	1.6	3.6	13.9	8.6
	1½"- 8UN	HM08BP-NRS1500U08	9.10	98.9	6.0	5.3	1.3	5.4	10.0	1.8	3.7	13.9	8.8
	1⅝"- 8UN	HM08BP-NRS1625U08	9.10	98.9	6.1	5.5	1.3	5.4	10.1	1.9	3.7	13.9	9.0
	1¾"- 8UN	HM08BP-NRS1750U08	9.10	98.9	6.2	5.6	1.5	5.4	10.3	2.0	3.8	13.9	9.7
HM09-LC	M39 x 4	HM09BPM-NRS03940	10.59	115.2	6.0	5.4	1.3	5.7	10.0	1.8	3.9	14.3	11.0
	M42 x 4,5	HM09BPM-NRS04245	10.59	115.2	6.1	5.5	1.3	5.7	10.1	1.9	3.9	14.3	13.4
	M45 x 4,5	HM09BPM-NRS04545	10.59	115.2	6.2	5.6	1.5	5.7	10.3	2.0	4.0	14.3	11.2
	M48 x 5	HM09BPM-NRS04850	10.59	115.2	6.4	5.7	1.6	5.7	10.4	2.1	4.0	14.3	12.1
	1½"- 8UN	HM09BP-NRS1500U08	10.59	115.2	6.0	5.4	1.3	5.7	10.0	1.8	3.8	14.3	11.2
	1⅝"- 8UN	HM09BP-NRS1625U08	10.59	115.2	6.1	5.5	1.3	5.7	10.2	1.9	3.9	14.3	11.2
	1¾"- 8UN	HM09BP-NRS1750U08	10.59	115.2	6.2	5.5	1.5	5.7	10.1	2.0	4.0	14.3	13.2
	1⅞"- 8UN	HM09BP-NRS1875U08	10.59	115.2	6.4	5.7	1.6	5.7	10.4	2.1	4.0	14.3	11.9
HM10-LC	M42 x 4,5	HM10BPM-NRS04245	12.20	132.6	6.3	5.6	1.3	6.1	10.5	1.9	4.1	18.3	12.6
	M45 x 4,5	HM10BPM-NRS04545	12.20	131.9	6.4	5.7	1.5	6.1	10.6	2.0	4.2	18.3	12.6
	M48 x 5	HM10BPM-NRS04850	12.20	131.9	6.5	5.8	1.6	6.1	10.7	2.1	4.3	18.3	13.4
	M52 x 5	HM10BPM-NRS05250	12.20	131.9	6.7	6.0	1.7	6.1	10.8	2.3	4.3	18.3	13.9
	1⅝"- 8UN	HM10BP-NRS1625U08	12.20	131.9	6.3	5.6	1.3	6.1	10.5	1.9	4.1	18.3	12.6
	1¾"- 8UN	HM10BP-NRS1750U08	12.20	131.9	6.4	5.7	1.5	6.1	10.6	2.0	4.2	18.3	12.3
	1⅞"- 8UN	HM10BP-NRS1875U08	12.20	131.9	6.5	5.9	1.6	6.1	10.7	2.1	4.2	18.3	13.2
	2"- 8UN	HM10BP-NRS2000U08	12.20	131.9	6.7	6.0	1.7	6.1	10.8	2.3	4.3	18.3	13.9

* Tommy bar is included with Load Cell

HM-Series, HydraMax® Topside Tensioners



Minimum Stud Protrusion



X = Minimum socket rotation 60°

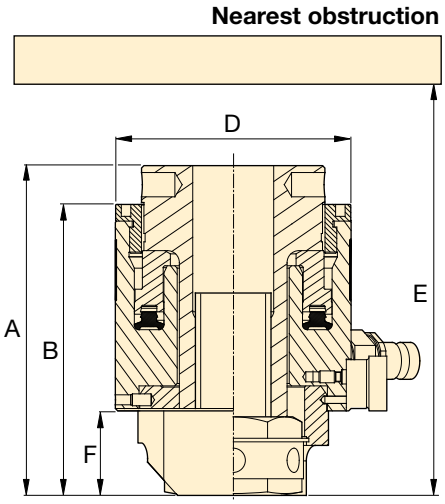

HM Series

Bolt Range:
1¾ - 4" | M45 - M100

Maximum Load Capacity:
171 - 522 tons

Stroke:
0.59 inch

Load Cell Model Number *	Thread Size **	Adaptor and Bridge Kit Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (tons)	Dimensions (in) A	B	C	D	E min.	F	N min.	Load Cell Weight (lbs)	Adaptor and Bridge Kit Weight (lbs)
HM11-LC	M45 x 4,5	HM11BPM-NRS04545	15.74	171.1	6.6	5.7	1.5	6.9	10.8	2.0	4.6	23.1	16.3
	M48 x 5	HM11BPM-NRS04850	15.74	171.1	6.7	5.8	1.6	6.9	10.9	2.1	4.6	23.1	17.4
	M52 x 5	HM11BPM-NRS05250	15.74	171.1	6.8	6.0	1.7	6.9	11.0	2.3	4.7	23.1	17.9
	M56 x 5,5	HM11BPM-NRS05655	15.74	171.1	7.2	6.3	2.0	6.9	11.4	2.6	4.8	23.1	20.1
	M60 x 5,5	HM11BPM-NRS06055	15.74	171.1	7.2	6.3	2.0	6.9	11.4	2.6	4.9	23.1	19.2
	1¾"- 8UN	HM11BP-NRS1750U08	15.74	171.1	6.6	5.7	1.5	6.9	10.8	2.0	4.6	23.1	16.5
	1⅞"- 8UN	HM11BP-NRS1875U08	15.74	171.1	6.7	5.8	1.6	6.9	10.9	2.1	4.6	23.1	17.4
	2"- 8UN	HM11BP-NRS2000U08	15.74	171.1	6.8	6.0	1.7	6.9	11.0	2.3	4.7	23.1	17.9
	2¼"- 8UN	HM11BP-NRS2250U08	15.74	171.1	7.2	6.3	2.0	6.9	11.4	2.6	4.8	23.1	19.4
HM12-LC	M48 x 5	HM12BPM-NRS04850	19.72	214.4	6.7	5.8	1.6	7.6	11.0	2.1	5.0	29.3	21.4
	M52 x 5	HM12BPM-NRS05250	19.72	214.4	6.8	6.0	1.7	7.6	11.2	2.3	5.1	29.3	21.6
	M56 x 5,5	HM12BPM-NRS05655	19.72	214.4	7.2	6.3	2.0	7.6	11.5	2.6	5.2	29.3	23.6
	M60 x 5,5	HM12BPM-NRS06055	19.72	214.4	7.2	6.3	2.0	7.6	11.5	2.7	5.2	29.3	22.9
	M64 x 6	HM12BPM-NRS06460	19.72	214.4	7.3	6.5	2.2	7.6	11.7	2.7	5.3	29.3	24.5
	1⅞"- 8UN	HM12BP-NRS1875U08	19.72	214.4	6.7	5.8	1.6	7.6	11.0	2.1	5.0	29.3	21.2
	2"- 8UN	HM12BP-NRS2000U08	19.72	214.4	6.8	6.0	1.7	7.6	11.2	2.3	5.1	29.3	21.6
	2¼"- 8UN	HM12BP-NRS2250U08	19.72	214.4	7.2	6.3	2.0	7.6	11.5	2.6	5.2	29.3	22.9
	2½"- 8UN	HM12BP-NRS2500U08	19.72	214.4	7.3	6.5	2.2	7.6	11.7	2.7	5.3	29.3	23.8
HM13-LC	M64 x 6	HM13BPM-NRS06460	26.29	285.9	7.7	6.8	2.2	8.6	12.2	2.7	5.8	38.8	32.0
	M68 x 6	HM13BPM-NRS06860	26.29	285.9	7.7	6.8	2.2	8.6	12.2	2.7	5.9	38.8	36.4
	M72 x 6	HM13BPM-NRS07260	26.29	285.9	8.0	7.1	2.5	8.6	12.5	3.1	6.0	38.8	35.3
	M76 x 6	HM13BPM-NRS07660	26.29	285.9	8.1	7.3	2.7	8.6	12.7	3.2	6.0	38.8	35.9
	2½"- 8UN	HM13BP-NRS2500U08	26.29	285.9	7.7	6.8	2.2	8.6	12.2	2.7	5.8	38.8	31.3
	2¾"- 8UN	HM13BP-NRS2750U08	26.29	285.9	8.0	7.1	2.5	8.6	12.5	3.1	5.9	38.8	34.8
	3"- 8UN	HM13BP-NRS3000U08	26.29	285.9	8.1	7.3	2.7	8.6	12.7	3.2	6.3	38.8	34.8
HM14-LC	M72 x 6	HM14BPM-NRS07260	36.35	395.3	8.0	7.1	2.5	10.2	12.6	3.1	6.8	56.9	45.9
	M76 x 6	HM14BPM-NRS07660	36.35	395.3	8.1	7.3	2.7	10.2	12.7	3.2	6.8	56.9	47.0
	M80 x 6	HM14BPM-NRS08060	36.35	395.3	8.1	7.3	2.7	10.2	12.7	3.2	6.9	56.9	46.7
	M85 x 6	HM14BPM-NRS08560	36.35	395.3	8.5	6.5	2.7	10.2	11.9	3.6	7.0	56.9	50.5
	M90 x 6	HM14BPM-NRS09060	36.35	395.3	8.7	7.8	3.1	10.2	13.3	3.8	7.1	56.9	51.4
	3"- 8UN	HM14BP-NRS3000U08	36.35	395.3	8.1	7.3	2.7	10.2	12.7	3.2	6.8	56.9	45.0
	3¼"- 8UN	HM14BP-NRS3250U08	36.35	395.3	8.5	6.5	2.7	10.2	11.9	3.6	7.0	56.9	50.0
	3½"- 8UN	HM14BP-NRS3500U08	36.35	395.3	8.7	7.8	3.1	10.2	13.3	3.8	7.2	56.9	52.7
HM15-LC	M90 x 6	HM15BPM-NRS09060	48.06	522.7	8.7	7.8	3.1	11.7	13.3	3.8	7.8	71.6	66.1
	M95 x 6	HM15BPM-NRS09560	48.06	522.7	8.9	8.1	3.2	11.7	13.5	4.0	7.9	71.6	74.3
	M100 x 6	HM15BPM-NRS10060	48.06	522.7	9.1	8.3	3.5	11.7	13.7	4.2	8.0	71.6	77.4
	3½"- 8UN	HM15BP-NRS3500U08	48.06	522.7	8.7	7.8	3.1	11.7	13.3	3.8	7.8	71.6	65.0
	3¾"- 8UN	HM15BP-NRS3750U08	48.06	522.7	8.9	8.1	3.2	11.7	13.5	4.0	7.9	71.6	72.3
	4"- 8UN	HM15BP-NRS4000U08	48.06	522.7	9.1	8.3	3.5	11.7	13.7	4.2	8.3	71.6	75.0

* Tommy bar is included with Load Cell

**Contact Enerpac for different thread or pitch sizes. Alternative size adaptor kits can be supplied upon request.

▼ **GT-Series Topside Bolt Tensioners**

Accurate & Reliable Extreme Performance Bolt Tensioner

- **Seven load cells from ⅝" to 4 inches or from M16 to M105**
- **Twin ports for quick connection of multiple tools**
- **Only one size of bridge per size of load cell**
- **Detachable and rotational bridge simplifies tool positioning**
- **Full bridge window – increased access to socket**
- **Captive socket – eliminates falling object risk**
- **Piston stroke indicator**
- **Black surface treatment protects against corrosion**
- **Anti-slip grip for more secure handling**
- **Universal and multi-use tool**
- **GT-Series tensioners comply to Machine Directive 2006/42/ CE. ASME B30.1, EN-ISO 4413:2010 and EN-ISO 12100:2010**

Tensioning Pumps, Hoses and Couplers

High-pressure pumps, hoses and fittings matched for use with the Enerpac Bolt Tensioners.

See enerpac.com

Page: 325

How to Order

To provide maximum flexibility Load Cell and Bridges are ordered separately from Adaptor Kits.

Example, to order a complete tensioner for a M36 x 4 threaded bolt order:
1 x Load Cell and Bridge: **GT2-LCB**
1 x Adaptor Kit: **GT2PM-NRS03640**

Load Cell and Bridge Model Number *	Thread Size	Adaptor Kit Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (ton)	Dimensions (in) A	B	C	D	E min.	F	N min.	Load Cell and Bridge Weight (lbs)	Adaptor Kit Weight (lbs)
GT1-LCB	M16 x 2	GT1PM-NRS01620	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.2	6.6	3.5
	M18 x 2,5	GT1PM-NRS01825	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.3	6.6	3.3
	M20 x 2,5	GT1PM-NRS02025	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.3	6.6	3.1
	M24 x 3	GT1PM-NRS02430	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.4	6.6	2.9
	M27 x 3	GT1PM-NRS02730	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.5	6.6	2.6
	M30 x 3,5	GT1PM-NRS03035	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.6	6.6	2.2
	⅝"- 11UN	GT1P-NRS0625U11	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.2	6.6	3.5
	¾"- 10UN	GT1P-NRS0750U10	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.3	6.6	3.1
	⅞"- 9UN	GT1P-NRS0875U09	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.4	6.6	2.9
	1"- 8UN	GT1P-NRS1000U08	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.5	6.6	2.6
	1⅛"- 8UN	GT1P-NRS1125U08	2.32	25.2	5.3	4.4	1.1	3.4	9.6	1.7	2.6	6.6	2.2
GT2-LCB	M30 x 3,5	GT2PM-NRS03035	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	2.9	9.0	5.7
	M33 x 3,5	GT2PM-NRS03335	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.0	9.0	5.3
	M36 x 4	GT2PM-NRS03640	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.1	9.0	4.9
	M39 x 4	GT2PM-NRS03940	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.2	9.0	4.2
	1⅛"- 8UN	GT2P-NRS1125U08	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	2.9	9.0	5.7
	1¼"- 8UN	GT2P-NRS1250U08	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.0	9.0	5.3
	1⅜"- 8UN	GT2P-NRS1375U08	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.1	9.0	4.9
	1½"- 8UN	GT2P-NRS1500U08	4.15	45.1	5.4	4.4	1.4	4.2	8.9	1.6	3.2	9.0	4.4

* Tommy bar is included with Load Cell

Thread and Pitch Sizes

Contact Enerpac for different thread or pitch sizes. Alternative size adaptor kits can be supplied upon request.

GT Series

Bolt Range:
⅝" - 4" | M16 - M105

Maximum Load Capacity:
86.4 - 444.9 tons

Stroke:
0.39 inch

Maximum Operating Pressure:
21,750 psi



Minimum Stud Protrusion



X = Minimum socket rotation 60°

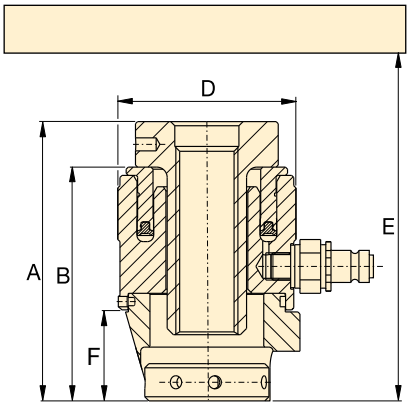

Load Cell and Bridge Model Number *	Thread Size	Adaptor Kit Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (ton)	Dimensions (in) A	B	C	D	E min.	F	N min.	Load Cell and Bridge Weight (lbs)	Adaptor Kit Weight (lbs)
GT3-LCB	M39 x 4	GT3PM-NRS03940	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	3.8	15.4	12.6
	M42 x 4,5	GT3PM-NRS04245	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	3.9	15.4	11.9
	M45 x 4,5	GT3PM-NRS04545	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.0	15.4	11.0
	M48 x 5	GT3PM-NRS04850	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.1	15.4	10.4
	M52 x 5	GT3PM-NRS05250	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.2	15.4	9.3
	1½"- 8UN	GT3P-NRS1500U08	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	3.7	15.4	12.6
	1⅝"- 8UN	GT3P-NRS1625U08	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	3.9	15.4	11.7
	1¾"- 8UN	GT3P-NRS1750U08	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.0	15.4	11.0
	1⅞"- 8UN	GT3P-NRS1875U08	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.1	15.4	10.1
	2"- 8UN	GT3P-NRS2000U08	7.95	86.4	6.3	5.0	1.8	5.4	10.1	2.2	4.2	15.4	9.3
GT4-LCB	M52 x 5	GT4PM-NRS05250	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	4.8	26.9	23.6
	M56 x 5,5	GT4PM-NRS05655	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	4.9	26.9	22.3
	M60 x 5,5	GT4PM-NRS06055	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	5.0	26.9	20.7
	M64 x 6	GT4PM-NRS06460	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	5.1	26.9	19.4
	M68 x 6	GT4PM-NRS06860	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	5.2	26.9	17.9
	2"- 8UN	GT4P-NRS2000U08	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	4.7	26.9	23.6
	2¼"- 8UN	GT4P-NRS2250U08	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	5.0	26.9	21.4
	2½"- 8UN	GT4P-NRS2500U08	15.17	164.9	7.1	5.6	2.4	6.9	11.1	2.8	5.2	26.9	18.7
GT5-LCB	M68 x 6	GT5PM-NRS06860	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	5.8	38.3	38.1
	M72 x 6	GT5PM-NRS07260	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	5.9	38.3	36.2
	M76 x 6	GT5PM-NRS07660	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	6.0	38.3	34.2
	M80 x 6	GT5PM-NRS08060	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	6.1	38.3	32.2
	2½"- 8UN	GT5P-NRS2500U08	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	5.8	38.3	39.2
	2¾"- 8UN	GT5P-NRS2750U08	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	6.0	38.3	35.9
	3"- 8UN	GT5P-NRS3000U08	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	6.2	38.3	32.6
	3¼"- 8UN	GT5P-NRS3250U08	23.37	254.2	8.0	6.2	3.1	8.3	11.9	3.4	6.3	38.3	28.9
GT6-LCB	M80 x 6	GT6PM-NRS08060	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	6.6	61.3	49.2
	M85 x 6	GT6PM-NRS08560	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	6.7	61.3	46.3
	M90 x 6	GT6PM-NRS09060	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	6.9	61.3	42.8
	M95 x 6	GT6PM-NRS09560	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	7.0	61.3	39.7
	3¼"- 8UN	GT6P-NRS3250U08	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	6.8	61.3	45.6
	3½"- 8UN	GT6P-NRS3500U08	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	7.1	61.3	41.4
	3¾"- 8UN	GT6P-NRS3750U08	29.41	319.8	8.6	6.8	3.2	9.4	12.7	3.7	7.4	61.3	37.0
GT7-LCB	M100 x 6	GT7PM-NRS10060	40.90	444.9	9.6	7.2	3.5	10.9	13.1	4.3	7.7	84.2	62.8
	M105 x 6	GT7PM-NRS10560	40.90	444.9	9.6	7.2	3.5	10.9	13.1	4.3	7.8	84.2	60.2
	4"- 8UN	GT7P-NRS4000U08	40.90	444.9	9.6	7.2	3.5	10.9	13.1	4.3	8.0	84.2	60.2

* Tommy bar is included with Load Cell

▼ Aquajack® Tensioner EAJ2LC with Quick Fastening Nut

- **Compact design**
- **Long piston stroke**
- **Misalignment compensation**
- **Quick, simple hose connection**
- **Visible piston stroke indication**
- **'No spill' overstroke elimination**
- **Quick fastening or solid reaction nut**

▼ *Guaranteed to save time and increase efficiency, Aquajack® tensioners improve diver safety, productivity and reduce diver fatigue.*

The Most Cost-Effective Solution to Subsea Bolt or Stud Tightening

Quick Fastening Nut Design

Easily positioned in poor visibility conditions, Aquajack® subsea tensioners feature a compact design and long piston stroke. The unique Split Nut® design of these tools allows rapid application to long bolts and damaged threads, and rapid tool removal.

No Oil Spillage or Over-Stroking

Innovative tool design ensures maximum tool strokes can be used without over-stroking the piston or oil spillage. Guaranteed to save time and increase efficiency, Aquajack® subsea tensioners improve diver safety, productivity and reduce diver fatigue.

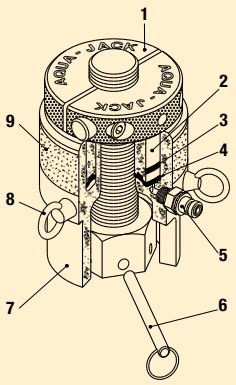

1. Quick Fastening Reaction Nut
2. Long Piston Stroke
3. Maximum Stroke Indicator Band
4. Self-Energizing Seals
5. Hose Connections (2x)
6. Tommy Bar
7. Compact Body Design
8. Lifting Eyes
9. Anti-Slip Tool Surface



Hose Reel and Stand

Stainless steel stand with 21,750 psi hoses from 98 up to 885 ft. lengths. All hose reels are built up with multiple 98 ft. length hoses.

Page: 325

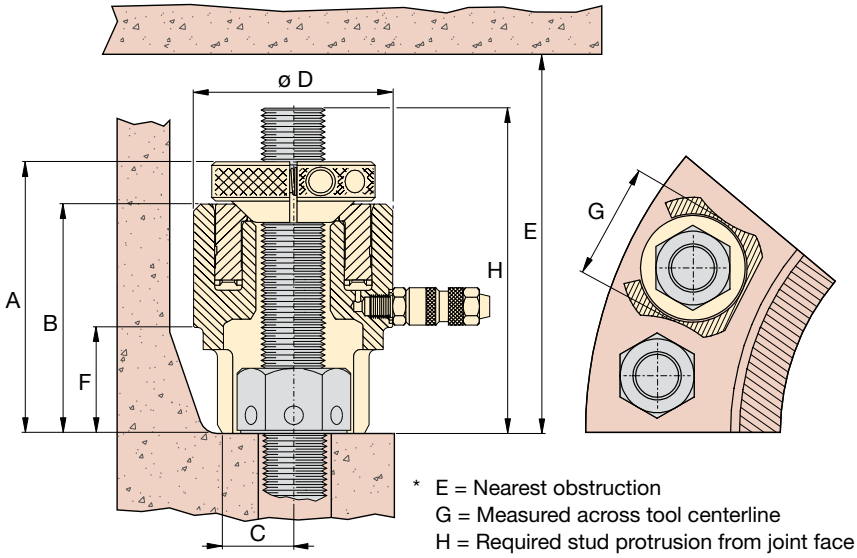

* E = Nearest obstruction
G = Measured across tool centerline
H = Required stud protrusion from joint face

EAJ Series

Bolt Range:
¾" - 3½" | M20 - M90

Maximum Load Capacity:
17.0 - 260 tons

Maximum Operating Pressure:
21,750 psi

Load Cell Model Number *	Thread Size	Quick Fastening Nut Model Number	Cylinder Effective Area (in²)	Maximum Load Capacity (ton)	Stroke (in)	Dimensions (in) A	B	C	D	E *	F	G *	H *	Tool Wt. (lbs)
EAJ1LC	¾" - 10 UN	EAJ1QFN0750U10	1.56	17.0	0.79	4.49	3.58	0.75	2.60	8.54	1.38	2.09	4.69	3.31
	7/8" - 9 UN	EAJ1QFN0875U09												
	M20 x 2,5	EAJ1QFNM02025												
	M22 x 2,5	EAJ1QFNM02225												
EAJ2LC	1" - 8 UN	EAJ2QFN1000U08	2.57	28.0	1.18	5.79	4.72	0.98	3.23	11.38	1.97	2.44	5.98	6.61
	M24 x 2,5	EAJ2QFNM02425												
	M27 x 3,0	EAJ2QFNM02730												
	1⅛" - 8 UN	EAJ2QFN1125U08												
	M30 x 3,5	EAJ2QFNM03035												
EAJ3LC	1¼" 8 UN	EAJ3QFN1250U08	3.91	42.6	1.18	6.20	5.16	1.10	3.86	12.09	2.28	3.07	6.42	9.92
	M33 x 3,5	EAJ3QFNM03335												
	1⅜" - 8 UN	EAJ3QFN1375U08												
	M36 x 4,0	EAJ3QFNM03640												
EAJ4LC	1½" - 8 UN	EAJ4QFN1500U08	5.71	62.2	1.18	6.73	5.35	1.30	4.49	12.56	2.48	3.58	6.93	13.23
	M39 x 4,0	EAJ4QFNM03940												
	1⅝" - 8 UN	EAJ4QFN1625U08												
	M42 x 4,5	EAJ4QFNM04245												
EAJ5LC	1¾" - 8 UN	EAJ5QFN1750U08	9.16	99.6	1.18	7.24	5.75	1.57	5.47	13.46	2.76	4.49	7.44	19.84
	M45 x 4,5	EAJ5QFNM04545												
	1⅞" - 8 UN	EAJ5QFN1875U08												
	M48 x 5,0	EAJ5QFNM04850												
	2" - 8 UN	EAJ5QFN2000U08												
	M52 x 5,0	EAJ5QFNM05250												
EAJ6LC	M56 x 5,5	EAJ6QFNM05655	12.88	140.2	1.18	7.91	6.34	1.93	6.46	14.45	3.23	5.43	8.11	28.66
	2¼" - 8 UN	EAJ6QFN2250U08												
	M60 x 5,5	EAJ6QFNM06055												
	2½" - 8 UN	EAJ6QFN2500U08												
	M64 x 6,0	EAJ6QFNM06460												
EAJ7LC	M68 x 6,0	EAJ7QFNM06860	19.17	208.6	1.18	9.06	7.01	2.95	7.56	15.75	3.74	6.06	9.25	41.89
	2¾" - 8 UN	EAJ7QFN2750U08												
	M72 x 6,0	EAJ7QFNM07260												
	M76 x 6,0	EAJ7QFNM07660												
	3" - 8 UN	EAJ7QFN3000U08												
EAJ8LC	M80 x 6,0	EAJ8QFNM08060	23.98	260.9	1.18	9.72	7.60	2.68	8.39	16.22	4.29	7.17	9.92	54.01
	3¼" - 8 UN	EAJ8QFN3250U08												
	M85 x 6,0	EAJ8QFNM08560												
	3½" - 8 UN	EAJ8QFN3500U08												
	M90 x 6,0	EAJ8QFNM09060												

* Tommy Bar is included with Load Cell.

▼ PGT-Series Single-Stage and Double-Deck Tensioners

High Precision, Low Maintenance

Tensioner Pumps

Electric, pneumatic and manual high-pressure tensioning pumps are available for use with Enerpac hydraulic tensioners.

Page: 239

Hoses and Fittings

High-pressure hoses and fittings for use with Enerpac tensioning systems are available.

Page: 325

- **PGT-Series Bolt Tensioners are designed for critical fastening applications in wind, steam and gas turbines**
- **A broad range of single stage and double deck tensioners provide high performance in tight spaces associated with Power Generation applications**
- **PGT-Series Bolt Tensioners are loaded with performance enhancing features such as Auto-Retract Pistons, Cycle Counters and a premium coating to offer the ultimate in efficiency, durability and ease of use**

Description	PGTS Single Stage	PGTD Double Deck
Auto-Retract Piston	✔	✔
Zinc Coating	✔	✔
Geared Nut-Rundown	✔	✔
Over-stroke Indicator	✔	✔
Over-stroke Preventer	✔	✔
Single Male Fitting	✔	✔
Swivel Manifold	✚	✚
Cycle Counter	–	✚

✔ = **Standard on tensioner**
✚ = **Possible option**
– = **Option not available**

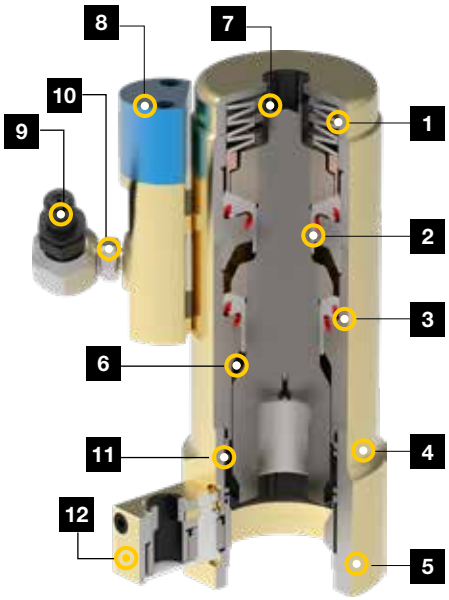

▲ The model above illustrates a typical tool configuration. Actual model configurations vary.

1. **Auto-retract piston:** Simplifies use and improves speed of operation.
2. **Long-life puller:** For maximum durability.
3. **Long-life seals:** For maximum durability and extended service life intervals.
4. **Corrosion protection:** Zinc coating provides best-in-class corrosion resistance.
5. **Interchangeable bridge**: For optimal application fit.
6. **Over-stroke preventer:** Mechanically prevents over-stroke, extending cylinder life.
7. **Over-stroke indicator:** Extends cylinder life by helping to prevent over-stroking of cylinder.
8. **Optional counter:** Helps indicate when maintenance is due to maximize uptime.
9. **Quick-disconnect coupler:** For safe, simple hydraulic connection.
10. **Optional 360^0 swivel**: available for additional hose positioning flexibility.
11. **Spring-loaded nut engagement**: Keeps socket positioned on nut for faster and easier seating process.
12. **Auto-engage nut rundown:** For rapid and accurate seating of nuts.

Options

Fitting Type

SW = Swivel manifold with single male fitting
Example: **PGTS2436SW**

Cycle-Counter

C = Cycle Counter (not available on PGTS-models)
Example: **PGTD3655SWC**

① Puller bar square drive
② Swivel manifold with single male fitting
③ Single male fitting
④ Nut run down gear box

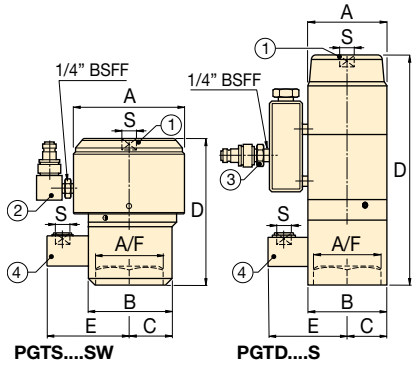

PGT Series

Bolt Range:
M20 - M72

Load Range:
23 - 334 tons

Maximum Operating Pressure [1]:
19,575 - 21,750 psi

[1] Max. Pressure varies, see specification table for details.

▼ SPECIFICATION TABLE

Tensioner Type	Thread Diameter (mm)	Model Number (with single male fitting)	Nut Size A/F (in)	Max. Pressure (psi)	Hyd. Pres. Area (in^2)	Max. Load Cap. (tons)	Stroke (in)	Dimensions (in) A	B	C	D	E	S* (in)	Weight (lbs)	Bolt Protrusion (in) min.	max.
Single Stage	M20 x 2,5	**PGTS2030S**	1.18	21,750	2.10	22.9	0.28	2.52	2.52	1.26	3.19	3.07	⅜	4.41	1.73	2.17
	M24 x 3,0	**PGTS2436S**	1.42	21,750	3.02	32.8	0.28	3.03	3.03	1.22	3.86	3.20	⅜	6.39	1.93	2.44
	M27 x 3,0	**PGTS2742S**	1.65	21,750	4.10	44.6	0.31	3.62	2.95	1.34	5.08	3.27	⅜	10.58	2.36	2.76
	M30 x 3,5	**PGTS3046S**	1.81	21,750	4.97	54.0	0.31	3.90	3.35	1.50	5.28	3.46	⅜	12.79	2.68	2.87
	M33 x 3,5	**PGTS3350S**	1.97	21,750	6.14	66.8	0.31	4.17	3.54	1.57	5.59	3.54	⅜	14.88	2.95	3.94
	M36 x 4,0	**PGTS3655S**	2.17	21,750	6.92	75.3	0.35	4.37	3.54	2.19	5.04	3.75	½	14.11	2.90	3.74
	M39 x 4,0	**PGTS3960S**	2.36	21,750	8.62	93.8	0.39	4.86	4.09	1.81	6.30	3.78	⅜	21.54	3.50	4.53
	M42 x 4,5	**PGTS4265S**	2.56	21,750	9.70	105.6	0.39	5.28	4.53	2.65	6.97	3.90	½	20.94	3.11	4.53
	M45 x 4,5	**PGTS4570S**	2.76	21,750	11.63	126.6	0.39	5.63	4.69	2.07	6.61	4.02	⅜	29.10	3.86	4.57
	M48 x 5,0	**PGTS4875S**	2.95	21,750	13.00	141.5	0.39	5.98	4.92	2.20	6.22	4.17	⅜	29.32	4.06	4.69
	M52 x 5,0	**PGTS5280S**	3.15	21,750	15.65	170.2	0.39	6.50	5.28	2.30	6.73	4.25	⅜	39..46	4.17	4.65
	M56 x 5,5	**PGTS5685S**	3.35	21,750	18.08	196.7	0.39	6.97	5.59	2.44	6.69	4.41	⅜	44.97	4.57	5.04
	M60 x 5,5	**PGTS6090S**	3.54	21,750	20.89	227.3	0.39	7.48	5.98	2.60	7.32	4.53	⅜	54.59	4.86	5.39
	M64 x 6,0	**PGTS6495S**	3.74	21,750	23.74	258.3	0.39	7.87	6.26	2.70	8.15	4.65	½	67.68	5.39	5.91
	M68 x 6,0	**PGTS68100S**	3.94	21,750	27.11	295.0	0.39	8.41	6.65	2.85	8.11	4.84	½	75.62	5.35	5.83
	M72 x 6,0	**PGTS72105S**	4.13	21,750	30.69	333.9	0.39	8.86	7.01	2.99	8.78	4.96	½	88.85	5.94	6.57
Double Deck	M24 x 3,0	**PGTD2436S**	1.42	19,575	3.55	34.8	0.24	4.69	3.03	1.22	7.28	3.19	⅜	10.14	2.09	2.34
	M27 x 3,0	**PGTD2742S**	1.65	19,575	4.56	44.6	0.24	4.92	2.95	1.34	7.72	3.28	⅜	11.57	2.36	2.68
	M30 x 3,5	**PGTD3046S**	1.81	19,575	5.31	52.0	0.28	5.28	3.35	1.46	7.68	3.46	⅜	12.70	2.36	2.76
	M33 x 3,5	**PGTD3350S**	1.97	19,575	6.62	64.8	0.28	5.59	3.03	1.52	8.19	3.54	⅜	14.70	2.56	3.03
	M36 x 4,0	**PGTD3655S**	2.17	19,575	7.74	75.8	0.31	5.98	3.27	1.61	8.58	3.66	½	17.06	2.76	3.43
	M39 x 4,0	**PGTD3960S**	2.36	19,575	9.70	95.0	0.39	6.26	4.09	1.89	10.47	3.78	⅜	27.56	3.31	3.66
	M42 x 4,5	**PGTD4265S**	2.56	19,575	10.64	104.2	0.39	6.69	4.09	2.05	9.78	3.90	½	25.02	3.23	3.58
	M45 x 4,5	**PGTD4570S**	2.76	19,575	12.93	126.6	0.39	6.97	4.69	2.09	11.57	4.09	⅜	38.91	3.82	4.21
	M48 x 5,0	**PGTD4875S**	2.95	19,575	14.62	143.1	0.39	4.53	4.92	2.26	11.97	4.17	⅜	44.31	4.06	4.45
	M52 x 5,0	**PGTD5280S**	3.15	19,575	17.50	171.3	0.39	4.88	5.28	2.40	12.91	4.25	⅜	57.54	4.33	4.94
	M56 x 5,5	**PGTD5685S**	3.35	19,575	20.06	196.4	0.39	5.20	5.59	2.56	13.62	4.41	⅜	66.14	4.61	5.22
	M60 x 5,5	**PGTD6090S**	3.54	19,575	23.30	228.2	0.39	5.55	5.98	2.78	14.65	4.53	⅜	81.90	4.92	5.63
	M64 x 6,0	**PGTD6495S**	3.74	19,575	26.54	259.9	0.39	5.94	6.26	2.99	15.20	4.69	½	94.80	5.24	6.00
	M68 x 6,0	**PGTD68100S**	3.94	19,575	30.25	296.2	0.39	6.30	6.69	3.15	15.67	4.84	½	109.13	5.43	6.30
	M72 x 6,0	**PGTD72105S**	4.13	19,575	34.06	333.6	0.39	6.73	6.97	3.48	16.89	4.96	½	132.50	5.75	6.73

* Dimension S = Square Drive of Puller Bar and Gear Box.

▼ FTR-Series Foundation Bolt Tensioner

High Precision, Low Maintenance

- **FTR-Series Foundation Bolt Tensioners provide fast, accurate and easy tightening of external or internal ring wind tower foundations**
- **Standard models are available for 75, 150 ksi and metric style Williams, Dyson and Macalloy® bar types**
- **Long-stroke options accelerate process with single-pull tensioning**

FTR-Series Foundation Bolt Tensioners

FTR-Series Foundation Bolt Tensioners are designed specifically for tensioning wind tower foundation bolts. These tensioners provide the speed and precision required by this critical application.

Potential thread fit problems are eliminated through the use of existing rebar hex nuts as a reaction point.

The FTR-Series includes long-stroke models, which provide greater speed and ease of use by enabling applications to be completed in a single pull.

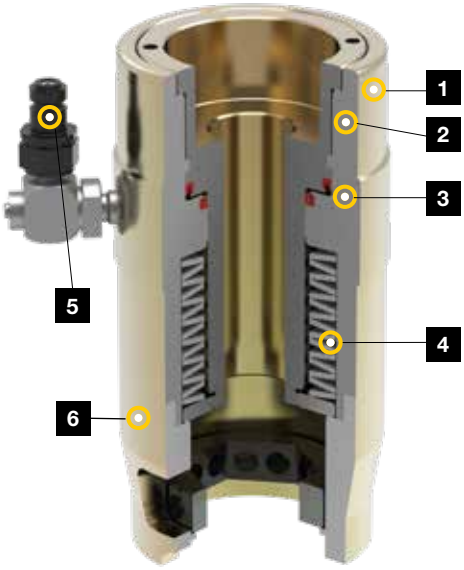

1. **Corrosion protection:** Zinc coating provides best-in-class corrosion resistance.
2. **Over-stroke indicator:** Extends life by helping to prevent over-stroking of cylinder.
3. **Long-life seals:** For maximum durability and extended service life intervals.
4. **Auto-retract piston:** Simplifies use and improves speed of operation.
5. **Quick-disconnect coupler:** For safe, simple hydraulic connection. *OPTIONAL 360° swivel available for additional hose positioning flexibility.*
6. **Interchangeable bridge**: For optimal application fit.

▼ *FTR-Series Foundation Bolt Tensioner. Manual wrench (not included) required to apply up to 22 Ft.lbs of torque during installation of models that feature run down gears.*

▼ This is how a FTR-Series Foundation Bolt Tensioner Model Number is Built Up:

FTR	75	14	20	SW	G
1 Product Type	2 Bar Grade	3 Bar Size Designation	4 Stroke	5 Fitting Type	6 Run Down Gear

1 Product Type
FTR = Foundation Tensioner, Round

2 Bar Grade
75 = 75 ksi
150 = 150 ksi
(or metric designation)

3 Bar Size Designation
Example: 14 = No. 14 bar

4 Maximum Stroke
Example: 20 = 20 mm (**0.79** inch) max. stroke

5 Fitting Type
SW = Includes swivel manifold with single male fitting

6 Run Down Gear
G = Includes Run Down Gear (available in select models)

FTR Series

Load Range:
0 - 308 tons

Maximum Operating Pressure*:
21,750 psi / 1500 bar

* Max. Pressure varies, see specification table for details.

Tensioner Pumps
Electric, pneumatic and manual high-pressure tensioning pumps are available for use with Enerpac hydraulic tensioners.
Page: 239

Hoses and Fittings
High-pressure hoses and fittings for use with Enerpac tensioning systems are available.
Page: 325

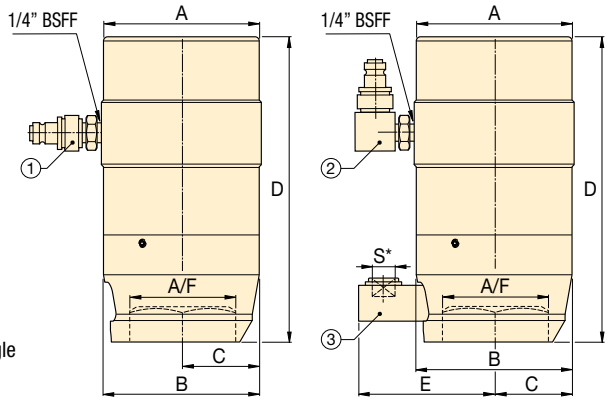

① Single male fitting
② Swivel manifold with single male fitting
③ Nut run down gear box

FTR....S **FTR....SWG**

▼ SPECIFICATION TABLE

Bar Grade	Bolt Diameter (in)	Bolt Diameter (mm)	Bar Size Designation	Model Number	Nut A/F (in)	Maximum Pressure (psi)	Hydraulic Pressure Area (in^2)	Load Capacity (tons)	Stroke (in)	Dimensions (in) A	B	C	D	E	Wt. (lbs)	Min. Bolt Protrusion (in)
75 ksi	1.38	35	#10	FTR751010S	2.00	17,400	4.86	42.3	0.39	3.90	3.48	1.74	6.42	–	12.9	7.87
	1.38	35	#10	FTR751025S	2.00	17,400	4.84	42.1	0.98	4.53	4.02	1.65	8.64	–	24.1	9.84
	1.50	38	#11	FTR751110S	2.25	21,750	4.86	52.8	0.39	3.90	3.86	1.50	7.01	–	12.1	8.66
	1.50	38	#11	FTR751125SG	2.25	21,750	4.84	52.7	0.98	4.53	4.02	2.01	8.92	3.78	25.3	10.24
	1.88	48	#14	FTR751420S	2.75	16,965	9.44	80.1	0.79	5.20	5.20	2.60	10.55	–	40.2	12.40
150 ksi	1.44	37	1.25	FTR15012510S	2.25	16,965	8.34	90.8	0.39	4.37	4.33	1.57	7.01	–	18.2	8.66
	1.56	40	1.375	FTR15013810S	2.50	21,750	8.34	90.8	0.39	4.37	4.33	1.50	7.01	–	17.8	8.86
	2.75	70	2.50	FTR15025025S	4.25	21,750	28.27	307.5	1.00	8.44	8.35	3.39	13.68	–	127.8	17.72
10.9	1.42	36	36	FTR1093610SG	2.36	21,750	5.92	64.4	0.39	4.02	3.90	1.57	6.93	3.74	19.0	7.68

Gear box square drive dimension S = 1/2 inch.

▼ FTE-Series Elliptical Foundation Tensioner

High Precision, Low Maintenance

- **FTE-Series Foundation Bolt Tensioners provide fast and accurate performance in difficult, narrow access foundation tensioning applications**
- **Standard models are available for 75, 150 ksi and metric style Williams, Dyson and Macalloy® bar types**
- **Ideal universal solution that fits both standard and narrow access applications**

FTE-Series, Foundation Bolt Tensioners

Similar to Standard Foundation Tensioners, Elliptical Tensioners were designed specifically for foundation fastening applications on wind towers, and utilize the existing hex nut as a reaction point in order to eliminate thread fit misalignment.

Unlike Standard FTR-Series Tensioners, FTE-Series Tensioners feature an elliptical geometry, which enables fit in narrow access foundation applications, without reducing load capabilities.

Operators may access the nut with a Tommy bar rather then employing the use of an offset rundown gear.

Elliptical tensioners are ideal for close clearance applications, or as a universal tool that will work in nearly any foundation application, whether standard or narrow access.

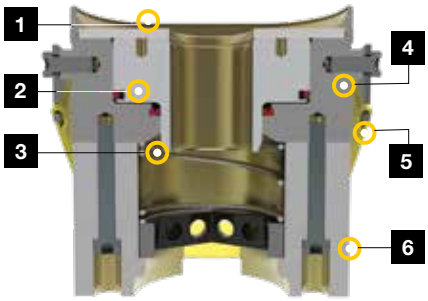

1. **Max. stroke Indicator:** Extends life by helping to prevent over-stroking of cylinder.
2. **Long-life seals:** For maximum durability and extended service life intervals.
3. **Auto-retract piston:** Simplifies use and improves speed of operation.
4. **Elliptical form**: Provides access to close clearance applications.
5. **Corrosion protection:** Zinc coating provides best-in-class corrosion resistance.
6. **Quick-disconnect coupler** *(not shown)*: For safe, simple hydraulic connection. *OPTIONAL 360° swivel available for additional hose positioning flexibility.*

▼ *FTE-Series, Foundation Bolt Tensioner, designed to fit both standard and narrow access foundation applications.*

Foundation Bolt Tensioners (Elliptical)

▼ This is how an FTE-Series Foundation Bolt Tensioner Model Number is Built Up:

FTE	75	10	SW
1 Product Type	2 Bar Grade	3 Bar Size Designation	4 Fitting Type

1 Product Type

FTE = Foundation Tensioner, Elliptical

2 Bar Grade

75 = 75 ksi
150 = 150 ksi
(or metric designation)

3 Bar Size Designation

Example: 10 = No. 10 bar

4 Fitting Type

S = Includes single male fitting
SW = Includes swivel manifold with single male fitting

FTE Series

Load Range:
0 - 86 tons

Maximum Operating Pressure*:
21,750 psi / 1500 bar

* Maximum pressure varies, see specification table for details.

Tensioner Pumps

Electric, pneumatic and manual high-pressure tensioning pumps are available for use with Enerpac hydraulic tensioners.

Page: 239

Hoses and Fittings

High-pressure hoses and fittings for use with Enerpac tensioning systems are available.

Page: 325

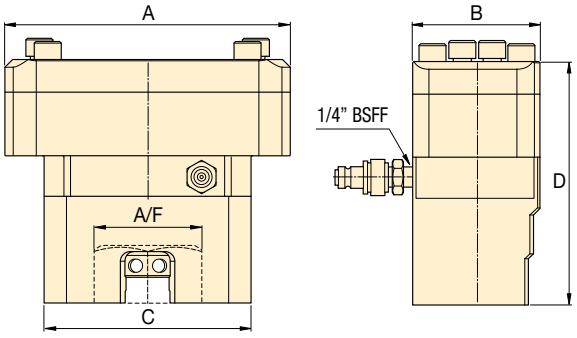

▼ SPECIFICATION TABLE

Bar Grade	Bolt Diameter (in)	Bolt Diameter (mm)	Bar Size Designation	Model Number	Nut A/F (in)	Maximum Pressure (psi)	Hydraulic Pressure Area (in^2)	Load Capacity (tons)	Stroke (in)	Dimensions (in) A	B	C	D	Wt. (lbs)	Min. Bolt Protrusion (in)
75 ksi	1.38	35	#10	**FTE7510S**	2.00	17,400	4.82	41.9	0.39	6.69	3.23	5.59	5.81	18.19	7.87
	1.50	38	#11	**FTE7511S**	2.25	21,750	4.82	52.4	0.39	6.69	3.23	5.59	5.81	18.19	8.66
150 ksi	1.44	37	1.25	**FTE150125S**	2.25	17,400	7.86	68.4	0.39	8.74	3.90	6.34	8.01	41.67	9.45
	1.56	40	1.375	**FTE150138S**	2.50	21,750	7.86	85.6	0.39	8.74	3.90	6.34	8.01	40.81	9.06
8.8	1.42	36	36	**FTE8836S**	2.36	21,750	4.82	52.4	0.39	5.59	3.23	5.59	5.81	21.32	7.09

▼ HPT1500

HPT
Series

Reservoir Capacity:
155 in³

Flow at Rated Pressure:
0.037 in³/stroke

Maximum Operating Pressure:
21,750 psi (1500 bar)

Ultra High-Pressure

These pumps operate at ultra high-pressure, use only the specified fittings and hoses designed for these pressures.

Page: 325

Applications

The Enerpac HPT high-pressure Hand Pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts.

Page: 239

- **Lightweight and portable high-pressure hand pump**
- **Two-speed operation displaces a larger volume of oil per stroke, reducing cycle times for many testing applications**
- **Includes a gauge and coupler for direct connection to Enerpac Bolt Tensioners**
- **Integrated relief valve set at 21,750 psi**

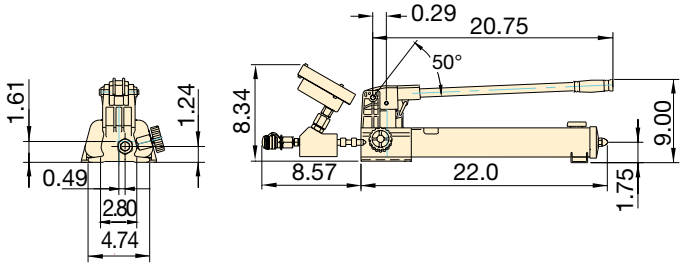

▼ 21,750 PSI ULTRA-HIGH PRESSURE PUMP

Pump Type	Usable Oil Capacity (in³)	Model Number	Pressure Rating (psi) 1st stage	Pressure Rating (psi) 2nd stage	Oil Displacement per Stroke (in³) 1st stage	Oil Displacement per Stroke (in³) 2nd stage	High Pressure Oil Port with Female Coupler	Wt. (lbs)
Two Speed	155	**HPT1500**	200	21,750	0.99	0.037	1/4" BSPP + BR50	19

Ultra-High Pressure Hoses & Couplers

- **Hose Reel and Stand: Stainless steel stand with 21,750 psi hoses from 98.42 up to 885.8 ft. lengths**
- **All hose reels are built up with multiple 98.42 ft. length hoses**
- **Wide offering of hoses and system components to complete your tensioning system**
- **Can be used for subsea fastening systems**
- **Hoses can be inter-connected in multi-tool set-ups using nipples, couplers, T-pieces and Y-Pipe assemblies**

HT, B Series

Hose Length:
3.28 - 98.42 feet

Hose Reel & Stand:
98.42 - 885.8 feet

Maximum Operating Pressure:
21,750 psi (1500 bar)

21,750 PSI HOSE REEL & STANDS

Model Number		Stainless Steel Hose Reels with Stand (Hose with female half BR150 and male half BH150 couplers)
HT15000RS		Reel & Stand Assembly, No Fitting
HT15000HRS		Hose Reel & Stand, No Hose
HT15100HRS		Hose Reel & Stand, with 100 ft. hose
HT15200HRS		Hose Reel & Stand, with 200 ft. hose
HT15300HRS		Hose Reel & Stand, with 300 ft. hose
HT15400HRS		Hose Reel & Stand, with 400 ft. hose
HT15500HRS		Hose Reel & Stand, with 500 ft. hose
HT15600HRS		Hose Reel & Stand, with 600 ft. hose
HT15700HRS		Hose Reel & Stand, with 700 ft. hose
HT15900HRS		Hose Reel & Stand, with 900 ft. hose

21,750 PSI HOSES

Model Number	Hoses	Hose End 1	Hose End 2	Length (ft)
HT1503		1/4 BSPM 120° Cone	1/4 BSPM 120° Cone	3.28
HT1510		1/4 BSPM 120° Cone	1/4 BSPM 120° Cone	9.84
HT15100		1/4 BSPM 120° Cone	1/4 BSPM 120° Cone	98.42
HT1503HR *		BH150	BR150	3.28
HT1506HR *		BH150	BR150	5.90
HT1510HR *		BH150	BR150	9.84
HT1520HR *		BH150	BR150	20
HT15100HR *		BH150	BR150	98.42
HT1503RR *		BR150	BR150	3.28
HT1506RR *		BR150	BR150	5.90
HT1510RR *		BR150	BR150	9.84
HT1520RR *		BR150	BR150	20

* Includes dust caps
H = Male Nipple (BH150); R = Female Coupling (BR150)

21,750 PSI COUPLERS

Description (Includes dust caps)	Accessories	Complete Set	Female Half	Male Half
Quick Disconnect Coupler		B150	BR150	BH150
Quick Disconnect Coupler and Adaptor Kit		BW150AW	–	–
Quick Disconnect Blanking Coupler Set*		B150B	BR150B	BH150B

21,750 PSI T-PIECES

Model Number	shown HT15TPMMF	End 1	End 2	End 3
HT15TPMMF		1x BH150	1x BH150	1x BR150
HT15TPMMM		1x BH150	1x BH150	1x BH150

21,750 PSI Y-PIPE ASSEMBLIES

Model Number	shown HT1506YTPMMF	End 1 Hose	End 2 Hose	End 3 T-Pieces
HT1506YPMMF		HT1506HR	HT1506HR	HT15TPMMF
HT1510YPMMF		HT1510HR	HT1510HR	HT15TPMMF
HT1506YPFMF		HT1506RR	HT1506RR	HT15TPMMM
HT1510YPFMF		HT1510RR	HT1510RR	HT15TPMMM

Y-Pipe Assembly: 1+2 = Adaptor; 3 = Stainless Steel T with 1/4" BSPM;
4 = Male Nipple (BH150); 5 = Female Coupling (BR150); 6 = Hose

Tensioning Every Single Stud in a Joint Simultaneously

▲ *Multi-Stud Tensioning Set-Up.*

MULTI-STUD TENSIONERS

Enerpac Multi-Stud Tensioning (MST) systems are capable of tensioning every single stud in a joint simultaneously. By applying a predictable and accurate pre-load to all studs, problems associated with conventional bolt tightening techniques are avoided. Typical Enerpac Multi-Stud Tensioning applications include:

Manway, Hand Hole & Inspection Covers

MST systems are the fastest and most accurate means of loosening and tightening studs on Primary and Secondary Manway Covers, Hand-Hole and Inspection Ports in nuclear facilities. Using special ram areas and strong lightweight materials, the MST's reduce bolting time by as much as 75%.

Coolant Pump

A custom slimline tensioning system for a Nuclear Reactor Coolant Pump, using six equally spaced tensioners and tightening studs in four passes, has reduced bolting times by 25% and significantly increased tensioning accuracy.

Wind Turbine Blade Assembly

Using an Enerpac MST has allowed wind turbine blade assembly times to be reduced by approx. 65% while bolt load accuracy and consistency have improved, resulting in better joint life and reduced maintenance requirements. The MST, comprising four tool segments, is capable of simultaneously tensioning up to 88 bolts connecting a 125 ft. long blade to a bearing slew ring.

MST - Multi-Stud Tensioners

This tool can be custom designed, and built, for virtually any nuclear facility. We specialize in addressing difficult projects that demand accurate loads within tight space envelopes, while also seeking ease of operation and performance.

- Designed in segments enabling the operator to easily and quickly connect each segment to the joint and link together to provide simultaneous loading.
- Very accurate and fast closure system for large tensioning applications on pumps, valves, and steam generators, for example.
- For ease of handling on-site, Enerpac MST systems can be supplied with an integral lifting frame and trolley.

▲ *Multi-Stud Tensioner.*

▲ *Multi-Stud Tensioning application.*

Ultra High-Pressure Air Pump

▼ **ATP1500**

ATP Series

Ex II 2 GD ck T4
IBExU 070/10
CE

Reservoir Capacity:
1.0 gallon

Flow at Rated Pressure:
4 in³/min.

Maximum Operating Pressure:
21,750 psi (1500 bar)

- **General purpose, high-pressure air-driven pump unit for products requiring up to 21,750 psi hydraulic pressure**
- **Compact, lightweight, rugged steel frame for protection and easy handling**
- **Prelubricated pump element, does not require an air line lubricator**
- **Easily adjustable output pressure control**
- **Integrated and protected easy-to-read glycerine-filled gauge**
- **Safety relief-valve limits output pressure**
- **ATEX Certified**

The ATP-series pump is tested and certified according to the Equipment Directive 94 / 9 / EC “ATEX Directive”. The explosion protection is for equipment group II, equipment category 2 (hazardous area zone 1), in gas and/or dust atmospheres.
The ATP-series pump is marked with: Ex II 2 GD ck T4.

Ultra High-Pressure

These pumps operate at ultra high-pressure, use only the specified fittings and hoses designed for these pressures.

Page: 325

Applications

The ATP-pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts.

Page: 239

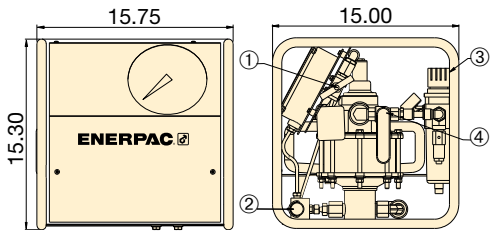

① HPT Shut-off Valve
② 1/4" BSPP HPT Out Port
③ Filter/Regulator
④ Air On/Off Valve

OIL FLOW vs. PRESSURE

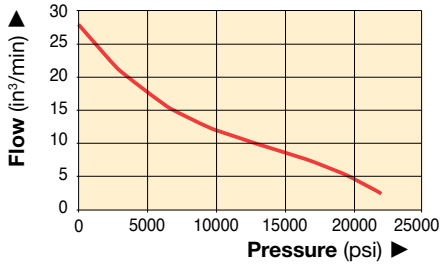

Flow (in³/min) at 90 psi air input

21,750 PSI HIGH PRESSURE PUMP

Pump Type	Useable Oil Capacity (gal)	Model Number	Pressure Rating (psi)	Output Flow Rate at 0 psi (in³/min)	Output Flow Rate at 21,750 psi (in³/min)	Air Pressure Range (psi)	Air Consumption (sfcm)	Sound Level (dBA)	Wt. (lbs)
Two Speed	1.0	**ATP1500**	21,750	26	4	80-90	70	70	65

▼ ZUTP1500SB-H

Reliability, Power and Precision

- **High-efficiency Universal Motor draws lower amps for superior performance in remote locations with low power quality**
- **Two-stage pump design provides high flow at low pressure for fast system fills and controlled flow at high pressure for safe and accurate operation**
- **Compact and lightweight design fits through tight openings and provides easy handling**
- **Panel mounted 6" pressure gauge, with polycarbonate cover, is set into the protective metal shroud for improved visibility and safety**
- **Easily accessible manual override valve to release pressure if power is lost**
- **Safety relief valve limits output pressure**

Applications

The Enerpac ZUTP-Series electric pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts.

Page: 239

Ultra-High Pressure

These pumps operate at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: 325

Bolting Integrity Software

Visit **www.enerpac.com** to access our free on-line bolting software application and obtain information on tool selection, bolt load calculations and tool pressure settings. A combined application data sheet and joint completion report is also available.

Page: 416

◀ *The ZUTP1500 pump is rugged, lightweight, compact for tight openings, and delivers hassle-free operation of bolt tensioning in remote locations with up to two times the speed of competitive pumps.*

ZUTP-Tensioning Pumps

The ZUTP-Series of pumps achieve high pressure without the need for an intensifier. This allows for low maintenance, resulting in less cost for the end-user.

ZUTP-S with Solenoid Valve

The **ZUTP1500-S Series** with pendant-operated solenoid valve is ideal for multiple bolt tensioning applications as it allows for single-person operation. The operator can pressurize and depressurize the tensioner directly from the pendant.

ZUTP Series

Reservoir Capacity:
1 gallon

Flow at Rated Pressure:
20.0 in³/min.

Motor Size:
1.7 hp

Maximum Operating Pressure:
21,750 psi

Oil Flow and Current vs. Pressure

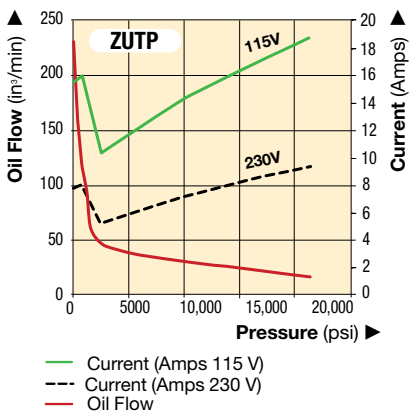

Oil Flow and Current vs. Pressure

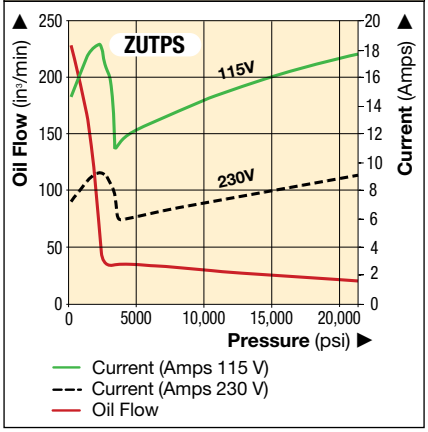

ZUTP

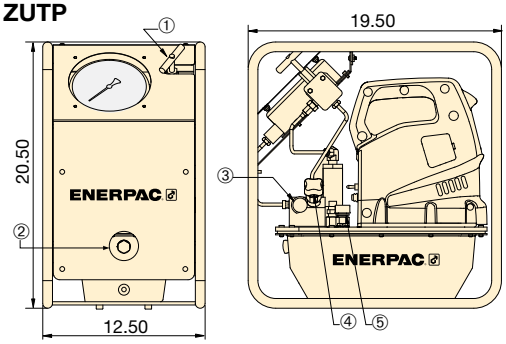

① Release Valve
② Sight Glass
③ Out Port
④ User Adjustable Relief Valve
⑤ Breather

ZUTPS

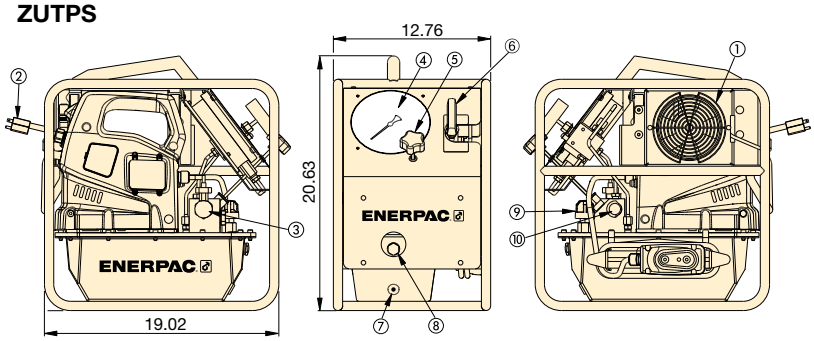

① Heat Exchanger (optional)
② Power Cord
③ Solenoid Dump Valve
④ Pressure Gauge
⑤ User Adjustable Relief Valve
⑥ Manual Release Valve
⑦ Oil Drain
⑧ Oil Level Sight Glass
⑨ Breather
⑩ Outlet Port with CEJN Coupler (116 Series)

Pump Type	Useable Oil Capacity (gal)	Valve Type	Model Number [1]	Pressure Rating (psi)	Output Flow Rate at 0 psi (in³/min)	Output Flow Rate at 21,750 psi (in³/min)	Motor Electrical Specification (50 Hz)	Motor Size (hp)	Sound Level (dBA)	Wt. (lbs)
Two Speed	1.0	Solenoid	**ZUTP1500SB**	21,750	230	20	115 VAC, 1-ph	1.7	89	65
			ZUTP1500SE [2]				230 VAC, 1-ph [2]			
			ZUTP1500SI [3]				230 VAC, 1-ph [3]			
Two Speed	1.0	Solenoid	**ZUTP1500SB-H** [4]	21,750	230	20	115 VAC, 1-ph	1.7	89	75
			ZUTP1500SE-H [2] [4]				230 VAC, 1-ph [2]			
			ZUTP1500SI-H [3] [4]				230 VAC, 1-ph [3]			
Two Speed	1.0	Manual	**ZUTP1500B**	21,750	230	20	115 VAC, 1-ph	1.7	89	65
			ZUTP1500E [2]				230 VAC, 1-ph [2]			
			ZUTP1500I [3]				230 VAC, 1-ph [3]			

[1] All models meet CE safety requirements and all TÜV requirements.
[2] European plug and CE EMC directive compliant.
[3] With NEMA 6-15 plug.
[4] Pumps come with factory installed heat exchangers

▼ From left to right: **ATM4, ATM9, ATM2**

The Faster, Simpler and Safer Way to Align Flanges

- **Enerpac ATM-Series tools rectify twist and rotational misalignment quickly, safely, and without the need for an external power source**
- **Appropriate for use on most ANSI, API, BS and DIN flanges**
- **No slings, hooks or lifting gear required**
- **Can be installed and used in any position (horizontally or vertically)**
- **Portable, lightweight design enables easy transport and use, even in remote locations**
- **Stays stable in position under full load**
- **Reduces set-up time: no need for chains, pulleys or rigs**
- **Safety strap helps provide secure operation**
- **Each ATM-model contains a tool and kit box**

Adjustable Reach

The highly adjustable reach of the wing and drop leg on the ATM4 and ATM9 allows precise alignment.

Gauge and Adaptor

The ATM9 includes P142 hand pump and HC7206C 6 ft. long hose. Enerpac recommend the use of the pressure gauge **GP10S** and gauge adaptor **GA4** for easy mounting of the gauge onto your system or use GA45GC Gauge Adaptor Assembly.

TFA-Series Wind Turbine Tower Flange Alignment Tools

The TFA Wind Turbine Tower Flange Alignment Tools have been developed to aid the alignment of large flanges on the inside of wind turbine towers during their assembly or installation.

Page: **356**

▼ *The compact ATM2 is actuated by simply hand turning the crank.*

▼ *The ATM9 is shown here with optional pressure gauge and gauge adaptor.*

Applications

Enerpac ATM-Series Tools help correct flange misalignment, and allow bolts to be placed into joints. This alignment takes place during pipework construction, or maintenance.

These tools provide pipe installers and maintenance personnel with some of the simplest, safest and most productive solutions available for flange alignment in the market today.

① Extendable wing provides usage on wide variety of flanges.

② Portable, light weight design enables easy transport and use.

③ Hand-adjustable base for easy positioning by a single operator.

④ Safety strap helps provide secure operation from a horizontal or vertical position.

ATM4

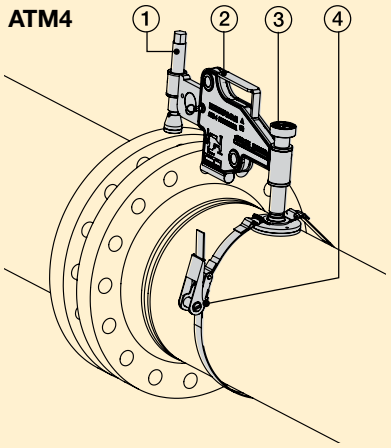

ATM Series

Minimum Bolt Size:
0.63 - 1.40 inches

Flange Wall Thickness:
0.55 - 9.00 inches

Maximum Lifting Force:
1 - 10 tons

Cylinder-Pump Sets

Hydraulic cylinders, jacks and lifting wedges can also be used to assist in pipe line positioning and aligning.

Page: 63

Pipe Flange Face Tool

The portable, hand powered tool **FF120** makes even the hardest to reach pipe flanges resurfaceable in a safe and convenient way.

Page: 340

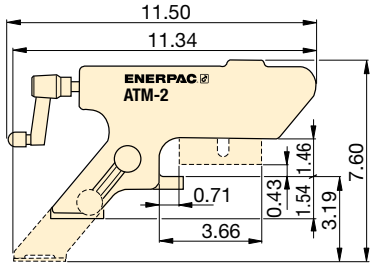

ATM2

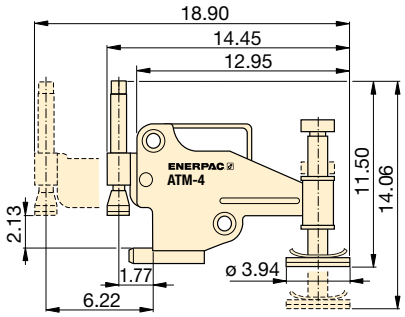

ATM4

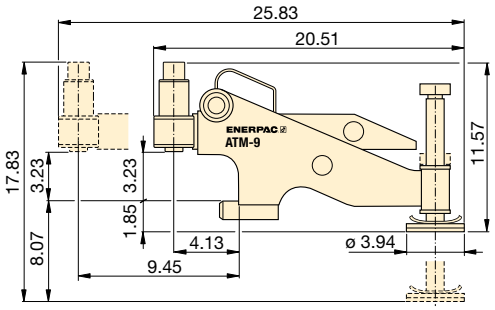

ATM9

Maximum Lifting Force (ton)*	Maximum Lifting Force (kN)*	Model Number	Minimum Bolt Size** (in)	Minimum Bolt Size** (mm)	Flange Wall Thickness (max) (in)	Flange Wall Thickness (max) (mm)	Wt. (lbs)
1	10	ATM2	0.63	16	0.55 - 3.29	14 - 82	3.5
4	40	ATM4	0.95	24	1.18 - 5.23	30 - 133	19
10	90	ATM9**	1.40	35,5	3.66 - 9.00	93 - 228	32

* At 10,000-psi maximum operating pressure.
** ATM9 includes an Enerpac hand pump and hydraulic hose (gauge and adaptor sold separately). ATM9 weight includes tool only.

▼ *The ATM-Series – the faster, simpler and safer way to align flanges.*

▼ FSC14, FSM8 and FSH14 with Safety Blocks SB1

Practical, Portable and Lightweight

- **Integrated wedge concept: friction-free, smooth, parallel wedge movement eliminates flange damage and spreading arm failure**
- **Unique interlocking wedge design: no first step bending and risk of slipping out of joint**
- **Requires very small access gap of only 0.24 inch (6 mm)**
- **Stepped spreader arm design: each step can spread under full load**
- **Few moving parts means durability and low maintenance**
- **Safety block SB1 included with FSC14, FSH14 and FSM8**
- **Ratchet spanner SW22 included with FSM8 mechanical spreader**
- **Single-acting cylinder included with FSH14 hydraulic spreader**

FSC14 with Integrated Hand Pump

Powered by a built-in hydraulic hand pump, the FSC14 is a ready-to-use tool – no making or breaking hydraulic connections. This compact tool delivers 14 US tons of force and requires a clearance gap as small as 0.24 inch.

Stepped Blocks FSB1

Use this pair of stepped blocks to increase wedge opening up to 3.16 in. (80 mm). Fits **FSC, FSH** and **FSM** models.

AM-Series Control Manifolds

For simultaneously and even spreading of flange joints, 180° apart with FSH14.

152

Flange Maintenance Tools

Secure-Grip flange speading tools for application on flanges with a small gap.

Page: 352

◀ *Two FSH14 spreaders used simultaneously with Enerpac handpump, hoses and AM21 control manifold.*

Flange Spreading Wedges

The flange spreading tools have been developed to aid and simplify the maintenance of flange joints. No longer will those tasked with separating flanges have to rely on using ropes and pulleys, podgers, tirfors, come-alongs or hammers – there is a safe, quick and effective alternative, the Enerpac range of spreaders. These spreaders use mechanical and hydraulic principles for separating flanges and can spread small, medium or large flange joints. Tool selection is made on the basis of the access gap between the flange faces, the flange size and the required scope of work.

FSC, FSH, FSM Series

Tip Clearance / Maximum Spread[1]:
0.24 / 3.16 inches

Maximum Spread Force:
8 - 14 tons

Maximum Operating Pressure:
10,000 psi (FSH-14)

Safety Lanyard FSC1

Recommended safety accessory to compliment the safe hands-free bolting. Includes steel cable with carabiners.



Tool Pump Sets

The hydraulic flange spreader is available as a **set** (pump, tool, gauge, gauge adaptor, couplers and hose) for your ordering convenience.

Spreader Model No.	Hand Pump Model No.	Set Model Number
FSH14	P392	**STF14H**

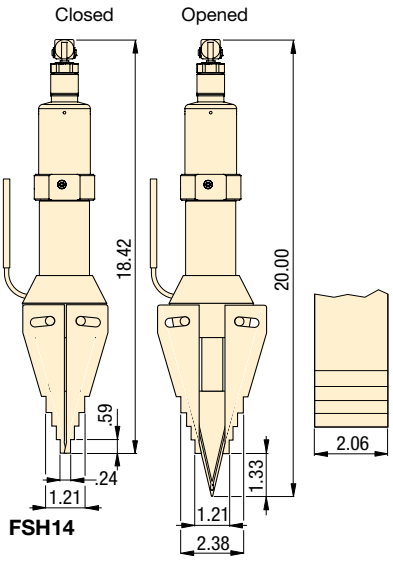

Max. Spreading Force (ton)	Model Number	Tip Clearance (in)	Max. Spread[1] (in)	Type	Oil Capacity (in^3)	Wt. (lbs)
14	**FSC14**	0.24	3.16	Integral hydraulics	–	19.8
14	**FSH14***	0.24	3.16	External hydraulics	4.76	15.7
8	**FSM8**	0.24	3.16	Mechanical	–	14.3

[1] Using stepped blocks FSB1.
* Available as Tool Pump Set, see note on this page.

▼ *Flange maintenance and joint separation with FSH14 Hydraulic Wedge Spreader.*

▼ Shown from left to right: **NC3241, NC1019, NC1924**

The Safest and Easiest Way to Remove Corroded and Frozen Nuts

- **Compact and ergonomic design, easy to use**
- **Unique angled head allows flush access**
- **Two blade design (NC-D models) for time saving operation – nuts are split from two sides in one action**
- **Single-acting, spring return cylinder**
- **Heavy-duty chisels can be reground**
- **Nut Splitters include spare chisel, spare set screw and wrench used to secure the chisel**
- **A CR400 coupler is standard**

▼ *Enerpac hydraulic nut splitters – the safest and easiest way to remove corroded and frozen nuts*



Tool-Pump Kits

Hydraulic Nut Cutters are available as sets (pump, tool, gauge, adaptor and hose) for your ordering convenience.

Nut Splitter Model Number	Hand Pump Model Number	Nut Splitter Set Model Number
NC1924	P392	**STN1924H**
NC2432	P392	**STN2432H**
NC3241	P392	**STN3241H**

High-Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **148**

GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: **162**

Single-Acting Hydraulic Nut Splitters

Frozen or Corroded Nuts

Often nuts are difficult to remove, while loosening using tightening tools is possible, it generally requires larger equipment and is time consuming.

The use of cutting torches or hammers and chisels can cause damage to the joint components, requires significantly longer setup and operational time, and can present a potential safety risk.

Hydraulic Nut Splitters

Nut splitting with the Enerpac Hydraulic Nut Splitters is the safest method. It takes less time and avoids costly damage to joint components.

The head design fitted with heavy-duty chisels permits the splitting of nuts on a wide variety of applications. With the two blade models nuts are split from two sides in one action.

NC, STN Series

Bolt Range:
0.31 - 1.88 inches

Hexagon Nut Range:
0.50 - 2.88 inches

Capacity:
5 - 90 tons

Maximum Operating Pressure:
10,000 psi

For Nut Splitter Model No.	Replacement Chisel Model Number	
	Moving	Static
NC1019	**NCB1019**	–
NC1924	**NCB1924**	–
NC2432	**NCB2432**	–
NC3241	**NCB3241**	–
NC4150	**NCB4150**	–
NC5060	**NCB5060**	–
NC6075	**NCB6075**	–
NC1924D	**NCB1924**	**NCB1924D**
NC2432D	**NCB2432**	**NCB2432D**
NC3241D	**NCB3241**	**NCB3241D**

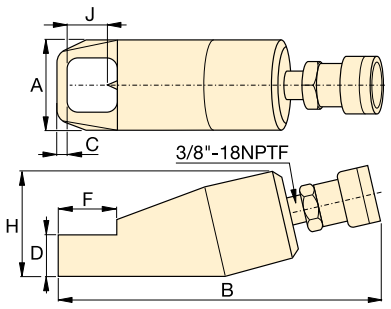

Single Blade Models (NC)

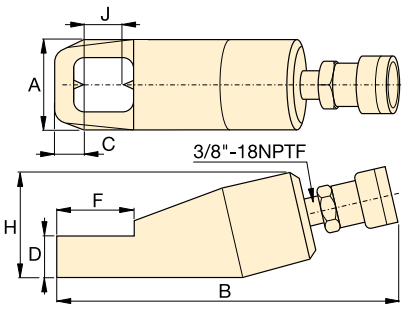

Double Blade Models (NC-D)

	Bolt Range (in)	Hexagon Nut Range (in)	Maximum Cutting Force (ton)	Oil Capacity (in^3)	Model Number	Dimensions (in) A	B	C	D	F	H	J	Weight (lbs)
	0.31-0.50	0.50-0.75	5	0.92	**NC1019**	1.57	6.69	0.27	0.75	1.10	1.89	0.83	1.8
	0.50-0.63	0.75-0.94	10	1.22	**NC1924 ***	2.17	7.52	0.32	1.02	1.57	2.44	0.98	4.4
	0.63-0.88	0.94-1.13	15	3.66	**NC2432 ***	2.52	8.74	0.39	1.22	2.01	2.83	1.30	6.6
	0.88-1.13	1.13-1.56	20	4.88	**NC3241 ***	2.95	9.61	0.67	1.42	2.60	3.46	1.69	9.7
	1.13-1.38	1.56-2.00	35	9.46	**NC4150**	3.70	11.34	0.83	1.77	2.91	4.13	2.13	18.0
	1.38-1.50	2.00-2.25	50	14.64	**NC5060**	4.17	12.52	0.91	2.13	3.54	5.04	2.36	26.0
	1.50-1.88	2.38-2.88	90	30.00	**NC6075**	6.14	15.47	1.02	2.83	4.33	7.13	3.15	75.1
	0.50-0.63	0.75-0.94	10	1.22	**NC1924D**	2.13	6.61	0.87	0.98	1.97	2.60	1.02	8.4
	0.63-0.88	0.94-1.13	15	3.66	**NC2432D**	2.52	10.83	0.98	1.22	2.56	3.07	1.30	11.9
	0.88-1.13	1.13-1.56	20	4.88	**NC3241D**	3.03	12.00	1.22	1.46	3.15	3.54	1.69	15.9

Ordering Notes: Maximum allowable hardness to split is HRc-44. Not to be used on square nuts or stainless steel.
* Available as Tool-Pump set, see note on page 334.

▼ Shown from left to right: **NSH1927, NSC1927**

Designed to Meet the Challenges of Bolted Pipeline Flange Joints

- **NSC-Series with built-in small hand pump – useful for subsea applications and working at heights**
- **Quick and easy cutting tip replacement**
- **Drop-tested revolving anchor point and safety lanyard**
- **Revolving composite handle for vibration and shock isolation**
- **Nut Splitters include set of hexagon keys and following spare parts:**
  – cutting tip
  – tip retention screw
  – spare alignment screw
- **CR400 female half coupler is standard (NSH)**

NSC-Series Nut Splitters with Integral Hand Pump

Powered by a built-in hydraulic hand pump, the NSC-Series are a ready-to-use tool – no need for hose, separate hand pump or couplings.

Carrying Case

Nut splitters (up to NSH6575) come in a carry case for portability and easy storage.

Safety Lanyard FSC1

Standard Safety Lanyard with each nut splitter. Includes steel cable with carabiners.

▼ *The sharp cutting tip and opposing convex reaction point encourages more efficient splitting by spreading the nut open rather than squashing the nut onto the stud. This makes it easier to rotate the nut for the second cut.*

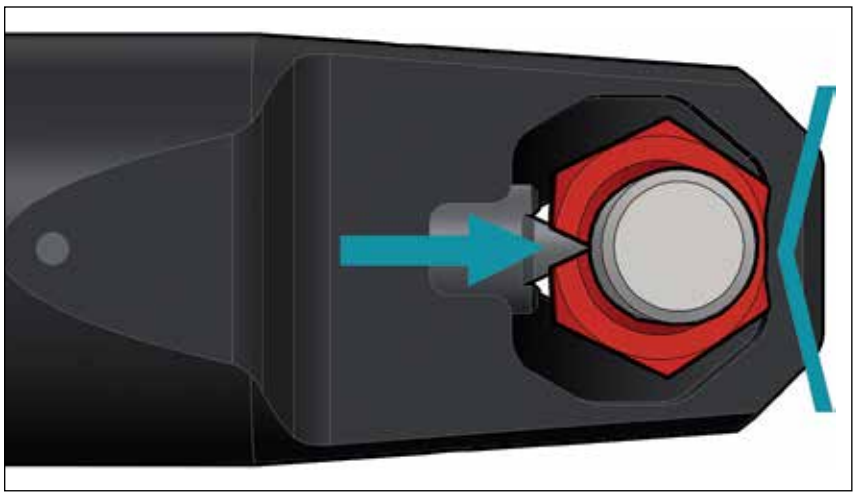

Single-Acting Integral & Hydraulic Nut Splitters

Frozen or Corroded Nuts

Often nuts are difficult to remove, while loosening using tightening tools is possible, it generally requires larger equipment and is time consuming.

The use of cutting torches or hammers and chisels can cause damage to the joint components, requires significantly longer setup and operational time, and can present a potential safety risk.

Hydraulic Nut Splitters

Nut splitting with the Enerpac Hydraulic Nut Splitters is the safest method. It takes less time and avoids costly damage to joint components. The head design fitted with heavy-duty chisels permits the splitting of nuts on a wide variety of applications. With the two blade models nuts are split from two sides in one action.

NSC, NSH Series

Bolt Range:
½ - 1⅞ inches

Hexagon Nut Range:
0.75 - 2.95 inches

Capacity:
12 - 50 tons

Maximum Operating Pressure:
10,000 psi (NSH-Series)

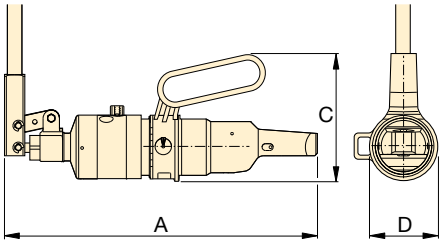

NSC

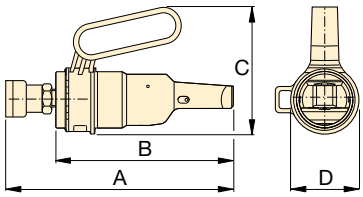

NSH

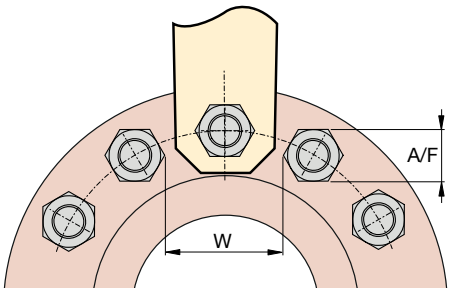

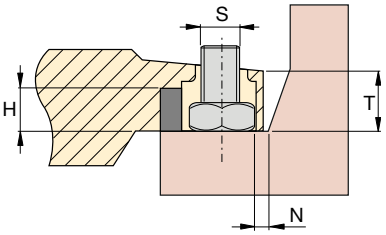

High-Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

Joint Separation Tools

Flange Spreaders (FSC, FSH, FSM-Series) provide quick and easy joint separation using hydraulic or mechanical force.

Page: 332

▼ NUT SPLITTER SPECIFICATIONS

Bolt Range (in)	Hexagon Nut Range A/F (in)	Maximum Cutting Force (ton)	Oil Capacity (in^3)	Model Number	Nut Splitter Type	Dimensions (in) A	B	C	D	H max.	N min.	S max.	T	W min.	Wt. (lbs)	Cutting Tip Service Kit Model No.
½ - ⅝	0.75 - 1.06	12	–	NSC1927	Integral pump	13.9	–	6.0	3.2	0.71	0.45	0.96	1.04	2.11	12.8	NSH1927CTK
¾ - ⅞	0.94 - 1.26	15	–	NSC2432		14.6	–	6.0	3.2	0.98	0.35	1.04	1.26	2.26	13.9	NSH2432CTK
½ - ⅝	0.75 - 1.06	12	2.8	NSH1927	Hydraulic	10.1	8.4	6.0	3.2	0.71	0.45	0.96	1.04	2.11	7.7	NSH1927CTK
¾ - ⅞	0.94 - 1.26	15	2.8	NSH2432		10.4	8.7	6.0	3.2	0.98	0.35	1.04	1.26	2.26	8.8	NSH2432CTK
⅞ - 1⅛	1.42 - 1.81	20	4.9	NSH3646		11.4	9.4	6.7	3.7	1.34	0.63	1.53	1.73	3.20	15.2	NSH3646CTK
1¼ - 1⅝	2.00 - 2.56	36	14.0	NSH5065		14.8	12.7	8.3	7.3	1.77	0.90	1.93	2.05	4.25	24.0	NSH5065CTK
1⅝ - 1⅞	2.56 - 2.95	50	20.0	NSH6575		15.6	13.6	8.7	7.9	2.15	1.06	2.40	2.56	5.31	54.0	NSH6575CTK

Ordering Notes: Maximum allowable hardness to split is ASTM A194 Gr 2H. Not to be used on square nuts or stainless steel.

▼ Shown: **NSH31 with NSPH3, NSH41 with NSPH4**

Versatile, reliable and trouble-free operation

- **Designed to fit standard BS/ANSI flanges**
- **Blade positioning scale to eliminate bolt damage**
- **Adjustable cutting depth**
- **Ergonomically designed and positioned handle**
- **Interchangeable power heads with cutting blade**
- **Single-acting spring return power head (NSPH)**
- **Double-acting power head (NSPH-D):**
  – for subsea operation
- **Nut splitters include spare chisel, spare set screw and wrench used to secure the chisel**
- **CR400 female half coupler standard on NSPH**
- **CR400 + CH604 couplers standard on NSPH-D**

ATEX certified
- **All NSH-tools are CE - ATEX certified**

Blade Positioning Scale

The power head can be adjusted to preset the blade cutting distance in order to prevent damage to the bolt thread as the nut is cut.

The blade positioning scale can be used with the following bolt and nut forms:
- Unified bolt threads (UN) with heavy series hexagon nuts
- Metric bolt threads (M) with standard series hexagon nuts

Steel Hand Pumps

The **P80** and **P84** two-speed hand pumps are ideal to operate nut splitters. The P84 can be used to power the double-acting tools.

Page: 88

High-Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 148

Single- and Double-Acting Hydraulic Nut Splitters

Hydraulic Nut Splitters

These Hydraulic Nut Splitters are the ideal tools for removing seized and corroded nuts, eradicating the need for unsafe grinding or flame cutting.

They are designed with a single acting spring return cylinder and boast a 360 degree rotation, lockable handle improving operator safety.

The heavy-duty blades can also be easily removed to enable replacement blades to be fitted.

Operator Safety

To improve operator safety an ergonomic, adjustable handle is available which can be easily fitted to the Nut Splitter.

This lightweight, durable accessory can prevent injuries such as trapped fingers by eliminating the need to hold the tool itself.

ATEX Certified: Ex II 2 G c T6

These Nut Splitters are tested and certified to conform to the 94/9/EC "ATEX Directive".

The explosion protection is for Equipment Group II, Equipment Category 2 (Hazardous Zone Area 1) in Gas and/or Dust atmospheres.

NSH Series

Bolt Range:
1¾ - 3½ inches

Hexagon Nut Range:
2¾ - 5⅜ inches

Maximum Operating Pressure:
10,000 psi

Joint Separation Tools

Flange Spreaders (FSC, FSH, FSM-Series) provide quick and easy joint separation using hydraulic or mechanical force.

Page: 332

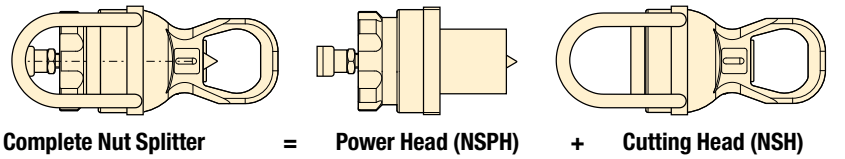

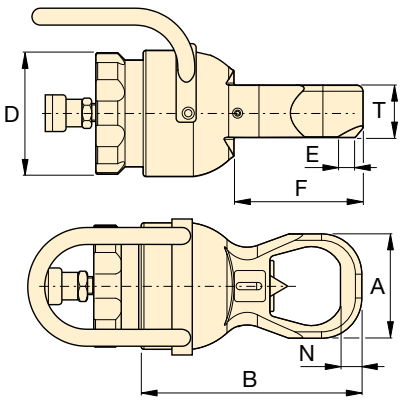

NSPH + NSH

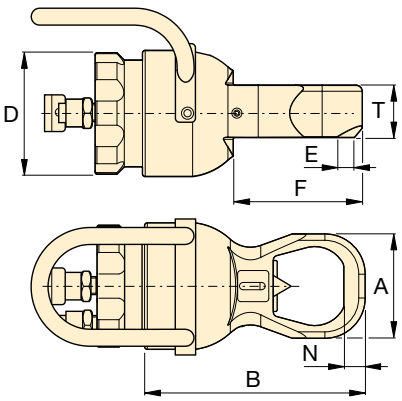

NSPH-D + NSH

For Power Head Model No.		Cutting Tip Service Kit Model No.
NSPH3	NSPH3D	NSPH3CTK
NSPH4	NSPH4D	NSPH4CTK

▼ NUT SPLITTER SPECIFICATIONS

Bolt Range (in)	Hexagon Nut Range A/F (in)	Maximum Cutting Force (ton)	Oil Capacity (in³)	Model Numbers Nut Splitter Components					Dimensions (in)							Weight Cutting + Power Head (lbs)
				Cutting Head	Wt. (lbs)	Power Heads Single-acting	Power Heads Double-acting	Wt. (lbs)	A	B	D	E	F	N	T	
1¾ - 2	2¾ - 3⅛	**115**	33.5	**NSH31**	44.1	**NSPH3**	**NSPH3D**	48.5	5.2	12.1	7.5	0.3	7.4	1.1	3.2	92.6
1¾ - 2¼	2¾ - 3½	**115**	33.5	**NSH32**	46.3	**NSPH3**	**NSPH3D**	48.5	5.9	12.7	7.5	0.6	7.9	1.2	3.2	94.8
1¾ - 2½	2¾ - 3⅞	**115**	33.5	**NSH33**	48.5	**NSPH3**	**NSPH3D**	48.5	6.3	13.0	7.5	0.4	7.9	1.3	3.2	97.0
1¾ - 2¾	2¾ - 4¼	**115**	33.5	**NSH34**	48.5	**NSPH3**	**NSPH3D**	48.5	6.8	13.5	7.5	0.4	8.0	1.4	3.2	97.0
2¾ - 3	4¼ - 4⅝	**195**	67.0	**NSH41**	69.9	**NSPH4**	**NSPH4D**	83.8	7.4	14.5	9.3	0.2	9.1	1.4	4.4	153.7
2¾ - 3½	4¼ - 5⅜	**195**	67.0	**NSH42**	95.9	**NSPH4**	**NSPH4D**	83.8	8.6	15.5	9.3	0.1	9.7	1.4	4.4	179.7

Ordering Notes: Maximum allowable hardness to split is ASTM A194 Gr 2H. Not to be used on square nuts or stainless steel.

▼ **FF120**

Safe, Efficient and Accurate Refacing of Flat Pipe Flange Surfaces

- **Refacing made easy — hand-operated machine tool can be set up anywhere without the need for air, electric or hydraulic power support**
- **Lightweight and portable — easily transported to remote locations for increased productivity**
- **Adjustable cutting range for flange diameters between 1-12 inches [25,4-304,8 mm]**
- **Interchangeable collets for ID mounting range from 1-6 inches allowing the user to work on many different flanges with minimal time between set-ups**
- **Interchangeable lead screws suitable for refacing damaged raised-face (RF) or flat-face (FF) joint flanges**
- **Tool body with expanding collets centers itself providing real concentric operation**

▼ *The Enerpac FF120 used to face a pipe flange.*

Complete In-Wheeled Carrying Case

The **FF120** comes as portable set 33 lbs (15 kg). Can be transported, easy set-up and operated by a single technician. **Set includes**:

- **FFL**-kit with locators, O-Rings and extensions
- **FSS**-kit with feed screw and nut ½"-20 UN for surface roughness Ra 64 - 96 µin.
- **FSF**-kit with feed screw and nut ½"-11 UNF for surface roughness Ra 125 - 250 µin.

Joint Separation Tools FSC, FSH and FSH-Series

Parallel wedge spreaders provide quick and easy joint separation using hydraulic or mechanical force.

Page: 332

Flange Alignment Tools

The ATM-Series provide safe and high-precision flange alignment tools that fit most commonly used ANSI, API, BS and DIN flanges.

Page: 330

Controlled Tightening and Loosening

Use Enerpac Bolting Tools to seal the joint to the precise torque or tension required: torque multipliers, torque wrenches and hydraulic bolt tensioners.

Page: 239

Quick Face, Mechanical Flange Face Tool

Mechanical Flange Face Tool

Portable, hand powered tool makes even the hardest to reach pipe flanges resurfaceable in a safe and convenient way.

Makes Refacing Easy

A simple and cost effective solution – the FF120 turns a two man operation with heavy equipment, compressors and portable generators into a one man job.

The FF120 has interchangeable lead screws that make it suitable for resurfacing damaged flat-faced, raised-face or lens-ring joint flanges to the high safety standards required.

FF120 is not suitable for lens-ring joint flanges or ring type joint (RTJ) flanges.

After selecting the correct lead screw for the operation, the tool body is inserted in the pipe end and centres itself with adjustable locators to provide real concentric operation.

The tool arm is then rotated by hand using a worm-gear mechanism to provide a perfect spiral "gramophone" finish.

The tool can be adjusted with a calibrated slide to define cut depth and the correct finish.

Surface Finish and Accuracy

A serrated finish with 30-55 grooves per inch and a resultant roughness of between Ra 125-492 micro inches (3,2-12,5 µm).

The FF120 has same precision and quality of finish as a lathe.

Cost-effective Solution

Small and portable enough to be a permanent addition to your equipment range, Enerpac's FF120 is the perfect solution to all of your small diameter facing problems.

For more portable machining tools, see page 379.

FF Series

Pipe Flange Cutting Diameter Range:
1 - 12 inch (25-305 mm)

Internal Pipe Mounting Diameter Range:
1 - 6 inch (25-152 mm)

Average Roughness:
125 - 492 µin (3,2-12,5 µm)

1. Hand-operated cold work tool – no need for external power and hot work permits.
2. Calibrated cross slide for accurate cutting control.
3. Adjustable cutting head for reface of flat flange surfaces of pipes with flange OD facing range ø 1-12 inch [25,4-304,8 mm].
4. Interchangeable lead screws enable selection of surface finish between Ra 125-492 µin.
5. Utilizes standard 3/8 inch or 10 mm tool steel.
6. Range of interchangeable collets allow the tool to accommodate ø 1 - 6 inch [25,4 - 152,4 mm] pipe ID.
7. Tool body with expanding collets centers in the bore ensuring concentric and accurate set-up.

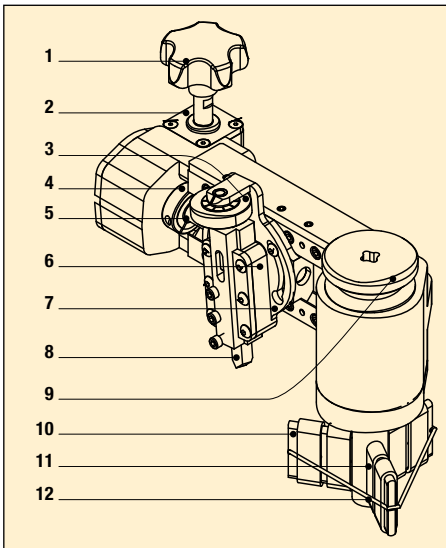

1. Feed Knob
2. Gear Box
3. Cutting Depth Adjustment with indicator: .005 inch (0,127 mm) per mark
4. Locking Collar
5. Lead/Feed Screw
6. Tool Block
7. Swivel Slide
8. HSS 3/8" Tool Bits
9. Mandrel Locking Knob
10. Locator Extensions
11. Adjustable Locators
12. O-Ring

Dimensions shown in inches.

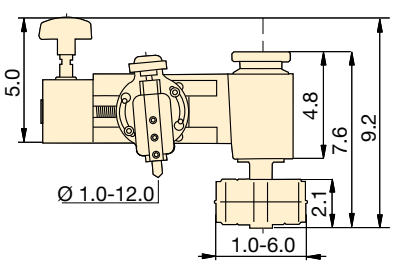

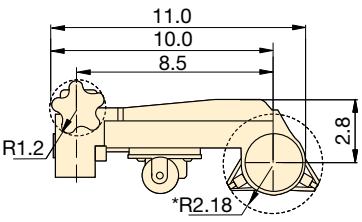

* without locator extensions.

▼ *The Enerpac FF120 Quick Face has same precision and quality of finish as powered machines.*

▼ TOOL SELECTION CHART

Pipe Flange Cutting Diameter Range		Internal Pipe Mounting Diameter Range		Cutting Result Roughness (Ra µ)		Model Number	Wt.
(in)	(mm)	(in)	(mm)	(in)	(m)		(lbs)
1.0 - 12.0	25,4 -304,8	1.0 - 6.0	25,4-152,4	125 - 492	3,2 - 12,5	**FF120**	15

The Equalizer range of patented flange spreading tools have been developed to aid and simplify the maintenance of flange joints. No longer will those tasked with separating flanges have to rely on using ropes and pulleys, podgers, tirfors, come-alongs or hammers – there is a safe, quick and effective alternative, the Equalizer range of spreaders. These spreaders use mechanical and hydraulic principles for separating flanges and can spread small, medium or large flange joints. Tool selection is made on the basis of the access gap between the flange faces, the flange size and the required scope of work.

SWi Flange Spreading Wedges



An innovative flange spreading wedge for use on small, medium or large flange joints with a minimum access gap of 0.16 inch. The SWi range includes ATEX approved options.

The SWi range has set the new standard for spreading flange joints powerfully, efficiently, effectively and safely. The tools offer the following features and benefits:

- Wider spreading - using the Standard Stepped Block accessories means the SWi range offers up to 30% more flange spreading distance than a traditional SW tool.
- Unrivalled power - the tools now offer up to 27 ton of spreading force when used in pairs, which provides additional confidence when spreading.
- Narrower jaws - the SWi5TE tools are only 1.97 inches wide to help them fit more easily between flange bolts.
- Fully rotational handle – the handle swivels 360° around the wedge head, so that the SWi tools can be used comfortably in all orientations.
- Easier maintenance – end-users will appreciate the ease with which the tools can be maintained. The supplied hex-key and a two-step process is all that's required to disassemble and reassemble the tools.
- No pinch points – the SWi range of tools has been engineered to overcome finger pinch-points.

MG Flange Spreading Tool



A mechanical tool for small diameter, low pressure flanges with a minimum access gap of 0.08 inch.

For use on smaller, lower pressure flange joints, this portable and flexible tool can be assembled in two alternative configurations that gives it twice the application range from one tool. The tool is locked onto the flange joint by the spreading bar preventing the risk of it falling from the flange joint.

SG Flange Spreading Tools



A unique flange spreader that is ideal for situations where there is no access gap or where there is a spacer, a wafer or butterfly valve positioned between the flanges.

Unique Secure-Grip tools spread by locking into the flange bolt holes and pulling the mating flanges away from each other, the Secure Grip flange spreaders are locked on to the flanges when under load making them arguably the world's safest flange spreading tools.

VC Valve Change-Out Tools



Using the same technology as the SG flange spreaders, the VC range has been developed for valve removal applications.

The VC Range of Valve Change-Out tools has been developed to assist in the removal of valves, spades/spacers or gaskets from large flange joints. The span of the tool is longer than a standard Secure-Grip Flange Spreader and is adjustable to enable the tool to operate in a range of applications.

Flange Maintenance Tools – Overview

Capacity (US tons)	Spreading Distance (inches)	Tool Type and Function	Series		Page
8.7 - 27	**0.16 - 4.1**	**Flange Spreading Tools and Kits** Flange Spreading Wedges	**SWi**		**344** ▶
15.7 - 27	**0.24 - 4.1**	**Flange Spreading Tools and Kits** Flange Spreading Wedges, ATEX Certified	**SWi**		**346** ▶
4.2 - 16.9	**0 - 4.53**	**Flange Spreading Tools and Kits** Hydraulic and Mechanical	**SG**		**348** ▶
20.2 - 28.1	**0 - 4.72**	**Flange Spreading Tools and Kits** Hydraulic	**SG**		**350** ▶
11.2	**0 - 22.8**	**Flange Spreading Tools and Kits** Secure-Grip Valve Change-Out Tools, Hydraulic	**VC**		**352** ▶
7.6	**0.08 - 1.06**	**Flange Spreading Tools and Kits** Mechanical	**MG**		**354** ▶
11.2	**22.4 - 0**	**Flange Pulling Tools** Hydraulic	**FC**		**355** ▶
4.5 - 30.3	**1.7 - 2.6**	**Flange Alignment Tools and Kits** Wind Turbine Tower Flange Alignment Tools Hydraulic and Mechanical	**TFA**		**356** ▶
18 - 67 in^3 2-Speed	**–**	**Hydraulic Sealed Hand Pumps** Standard and ATEX-Certified	**HP**		**357** ▶
6.5 - 20 ft	**–**	**Hydraulic Hoses** Standard and ATEX-Certified	**144 302**		**357** ▶

▼ SWi5TI-S

SWi Series

FLANGE SPREADING WEDGES

Spreading Force:
8.7 - 27 tons

Spreading Distance:
0.16 - 4.1 inches

Maximum Operating Pressure:
10,000 psi *

* Only relevant for hydraulic tools

- **Practical, portable and lightweight**
- **Revolving handle to aid horizontal or vertical spreading**
- **Removable handle for improved access**
- **No finger pinch point**
- **Increased step-depth on upper steps**
- **Safety lanyard length, 39 inches**
- **Forged key components for strength and reliability**
- **Rapid disassembly and assembly**
- **Narrow jaw teeth – improved tool wear**

CAUTION
A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

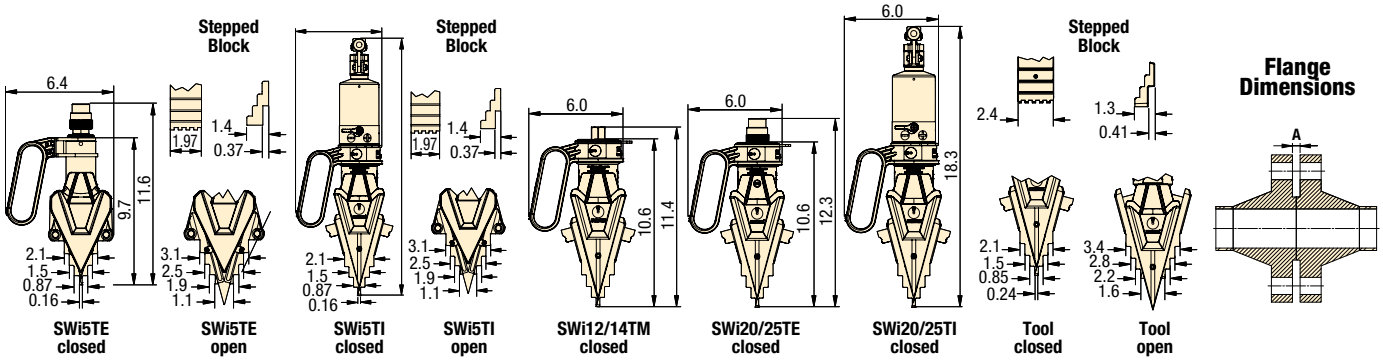

Model Number	Type	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum * (in)	Flange Dimensions Minimum Access Gap A (in)	Jaw Width (in)	Tool Weight (lbs)	Kit Weight (lbs)	Case Dimensions (in)	Tool Number
SWi5TE-S	External Hydraulic	8.7	4	0.16	1.97	11.4	19.1	22.8 x 13.4 x 7.1	SWi5TE
SWi5TE-T	External Hydraulic	8.7	4	0.16	1.97	11.4	31.7	22.8 x 13.4 x 7.1	SWi5TE
SWi5TI-S	Integral Hydraulic	8.7	4	0.16	1.97	15.4	23.1	22.8 x 13.4 x 7.1	SWi5TI
SWi1214TMSTDSPB	Mechanical	15.7	4.1	0.24	2.4	13.7	28.7	22.8 x 13.0 x 6.5	SWi12/14TM
SWi2025TEMINSPB	External Hydraulic	27	4.1	0.24	2.4	14.1	25.6	22.8 x 13.0 x 6.5	SWi20/25TE
SWi2025TESTDSPB	External Hydraulic	27	4.1	0.24	2.4	14.1	45.6	36.2 x 19.7 x 8.1	SWi20/25TE
SWi2025TEMAXSPB	External Hydraulic	27	4.1	0.24	2.4	14.1	72.8	36.2 x 19.7 x 8.1	SWi20/25TE
SWi2025TISTDSPB	Integral Hydraulic	27	4.1	0.24	2.4	18.7	20.4	22.8 x 13.0 x 6.5	SWi20/25TI

* Using stepped blocks.

SWi5TE - Hydraulic Flange Spreading Wedge

SWi5TE-S - SWi5TE S Kit

1 x SWi5TE Flange Spreading Tool
1 x Standard Safety Block
1 x Lanyard
1 x Moulded Plastic Carry Case with Protective Foam Inserts

SWi5TE-T - SWi5TE T Kit

2 x SWi5TE Flange Spreading Tools
2 x Standard Safety Blocks
2 x Lanyards
1 x Moulded Plastic Carry Case with Protective Foam Inserts

1640016-01 - SWi5TE Stepped Block Kit

1 x Pair of SWi5TE Stepped Blocks
2 x M6 CSK Hex Screw
2 x Retaining Washer
1 x SWi5TE Large Safety Block
2 x Hex Key

SWi12/14TM - Mechanical Flange Spreading Wedge

SWi1214TMSTDSPB - SWi12/14TM STD Kit

1 x SWi12/14TM Flange Spreading Tool
1 x Torque Wrench with 22 mm Socket
1 x Set of Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Moulded Plastic Carry Case

SWi20/25TE - Hydraulic Flange Spreading Wedge

SWi2025TEMINSPB - SWi20/25TE MIN Kit

1 x SWi20/25TE Flange Spreading Tool
1 x Set Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Moulded Plastic Carry Case

SWi2025TESTDSPB - SWi20/25TE STD Kit

1 x SWi20/25TE Flange Spreading Tool
1 x 10,000 psi Hydraulic Hose, 6.5' with 90° Elbow
1 x 10,000 psi HP350S Single-Port Sealed Hand Pump with Gauge
1 x Set Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Moulded Plastic Carry Case

SWi2025TEMAXSPB - SWi20/25TE MAX Kit

2 x SWi20/25TE Flange Spreading Tools
2 x 10,000 psi Hydraulic Hoses, 6.5' with 90° Elbow
1 x 10,000 psi HP550D Twin-Port Sealed Hand Pump with Gauge
2 x Set Safety Blocks
2 x Pair of Stepped Blocks
2 x Lanyards
2 x Hex Keys
1 x Moulded Plastic Carry Case

SWi5TI - Integral Hydraulic Flange Spreading Wedge

SWi5TI-S - SWi5TI S Kit

1 x SWi5TI Flange Spreading Tool
1 x Standard Safety Block
1 x Lanyard
1 x Moulded Plastic Carry Case with Protective Foam Inserts

1640016-01 - SWi5TE Stepped Block Kit

1 x Pair of SWi5TE Stepped Blocks
2 x M6 CSK Hex Screw
2 x Retaining Washer
1 x SWi5TE Large Safety Block
2 x Hex Key

SWi20/25TI - Integral Hydraulic Flange Spreading Wedge

SWi2025TISTDSPB - SWi20/25TI STD Kit

1 x SWi20/25TI Flange Spreading Tool
1 x Set of Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Carry-Strap
1 x Moulded Plastic Carry Case

▼ SWi20/25TEEX

SWi Series

ATEX CERTIFIED FLANGE SPREADING WEDGES

Spreading Force:
15.7 - 27 tons

Spreading Distance:
0.24 - 4.1 inches

Maximum Operating Pressure:
10,000 psi *

* Only relevant for hydraulic tools

- **ATEX certified**
- **Practical, portable and lightweight**
- **Revolving handle to aid horizontal or vertical spreading**
- **Removable handle for improved access**
- **No finger pinch-point**
- **Increased step-depth on upper steps**
- **Safety lanyard length, 39 inches**
- **Forged key components for strength and reliability**
- **Rapid disassembly and assembly**
- **Narrow jaw teeth – improved tool wear**

CAUTION
A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

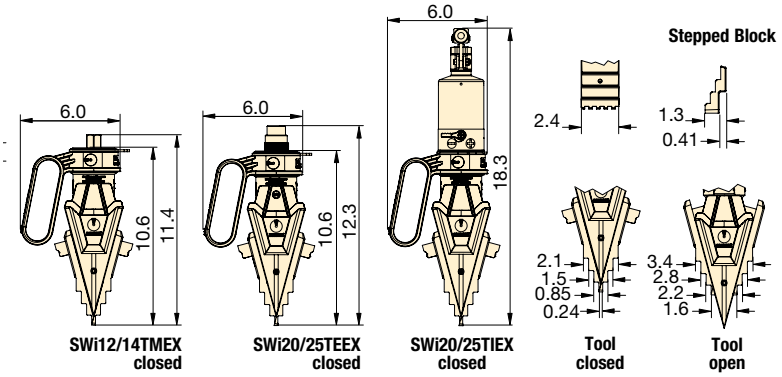

Flange Dimensions



Model Number	Type	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum * (in)	Flange Dimensions Minimum Access Gap A (in)	Jaw Width (in)	Tool Weight (lbs)	Kit Weight (lbs)	Case Dimensions (in)	Tool Number
SWi1214TMSTDEX	Mechanical	15.7	4.1	0.24	2.4	13.7	37.5	22.8 x 15.7 x 7.1	SWi12/14TMEX
SWi2025TEMINEX	External Hydraulic	27	4.1	0.24	2.4	14.1	33.1	22.8 x 15.7 x 7.1	SWi20/25TEEX
SWi2025TESTDEX	External Hydraulic	27	4.1	0.24	2.4	14.1	60.6	26.8 x 22.0 x 7.1	SWi20/25TEEX
SWi2025TEMAXEX	External Hydraulic	27	4.1	0.24	2.4	14.1	85.5	36.6 x 23.6 x 7.1	SWi20/25TEEX
SWi2025TISTDEX	Integral Hydraulic	27	4.1	0.24	2.4	18.7	38.6	22.8 x 15.7 x 7.1	SWi20/25TIEX

* Using stepped blocks.

SWi12/14TMEX -
ATEX Certified Mechanical Flange Spreading Wedge

II 2G Ex h IIB T5 Gb
II 2D Ex h IIIC T185°F Db

SWi1214TMSTDEX - SWi12/14TMEX STD Kit

1 x SWi12/14TMEX Flange Spreading Tool
1 x ATEX Torque Wrench with 22 mm Socket
1 x Set of Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Aluminium Carry Case with Protective Foam Inserts

SWi20/25TIEX -
ATEX Certified Integral Hydraulic Flange Spreading Wedge

II 2G Ex h IIB T5 Gb
II 2D Ex h IIIC T212°F Db

SWi2025TISTDEX - SWi20/25TIEX STD Kit

1 x SWi20/25TIEX Flange Spreading Tool
1 x Set of Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Carry-Strap
1 x Aluminium Carry Case with Protective Foam Inserts

SWi20/25TEEX -
ATEX Certified Hydraulic Flange Spreading Wedge

II 2G Ex h IIB T5 Gb
II 2D Ex h IIIC T212°F Db

SWi2025TEMINEX - SWi20/25TEEX MIN Kit

1 x SWi20/25TEEX Flange Spreading Tool
1 x Set Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Aluminium Carry Case with Protective Foam Inserts

SWi2025TESTDEX - SWi20/25TEEX STD Kit

1 x SWi20/25TEEX Flange Spreading Tool
1 x 10,000 psi ATEX Hydraulic Hose, 6.5 ft. with 90° Elbow
1 x 10,000 psi HP350S ATEX Single-Port Sealed Hand Pump with Gauge
1 x Set Safety Blocks
1 x Pair of Stepped Blocks
1 x Lanyard
1 x Hex Key
1 x Aluminium Carry Case with Protective Foam Inserts

SWi2025TEMAXEX - SWi20/25TEEX MAX Kit

2 x SWi20/25TEEX Flange Spreading Tools
2 x 10,000 psi ATEX Hydraulic Hose, 6.5 ft. with 90° Elbow
1 x 10,000 psi HP550D ATEX Twin-Port Sealed Hand Pump with Gauge
2 x Set Safety Blocks
2 x Pair of Stepped Blocks
2 x Lanyards
2 x Hex Keys
1 x Aluminium Carry Case with Protective Foam Inserts

These tools have been designed for use in potentially explosive atmospheres which is:

- Group II (Non-mining equipment)
- Equipment **category 2** where explosive atmosphere is likely to occur in normal operation
- Can be applied in **zones 1** and **2** of gaseous explosive atmospheres and in **zones 21** and **22** of dust explosive atmosphere
- **Gas G** or **Dust D** with type of protection **Ex h** for non-electrical equipment
- Suitable for use with **Group IIB** of a gases and vapours (Ethylene group) and **Group IIIC** of dust (conductive dust)
- For hydraulic tools **T5** means that minimum ignition temperature of gas or vapor >**212°F**; **T212°F** means that minimum ignition temperature of a dust cloud ≥**302°F** and minimum ignition temperature of a 0.2 inch (5mm) dust layer ≥**347°F**
- For mechanical tools **T6** means that minimum ignition temperature of gas or vapor >**185°F; T185°F** means that minimum ignition temperature of a dust cloud ≥**261.5°F** and minimum ignition temperature of a 0.2 inch dust layer ≥ **320°F**

These tools have been designed and manufactured in accordance with the following transposed harmonized European standards:

- **EN ISO 80079-36:2016** Explosive atmospheres - Part 36: Non-electrical equipment for explosive atmospheres - Basic method and requirements;
- **EN ISO 80079-37:2016** Explosive atmospheres - Part 37: Non-electrical equipment for explosive atmospheres

  - Non-electrical type of protection constructional safety "c", control of ignition sources "b", liquid immersion "k"

▼ **SG11TM**

Range of Application
For a detailed range of application please request the Secure-Grip Mechanical or Hydraulic Operator Instruction Sheet.

- **For use on all flange types with bolt-hole sizes ranging from 0.69 inches to 2.44 inches**
- **Unique expanding collet technology**
- **Little or no access gap required**
- **Secure bolt-hole locking mechanism**

CAUTION
A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

OPERATING BENEFITS

- **Time-saving, simple operation**
- **Measurable, controlled flange spreading force**
- **Virtually universal, the Secure-Grip Flange Spreader range covers ANSI, DIN, SPO, ASME, API and BS flanges**



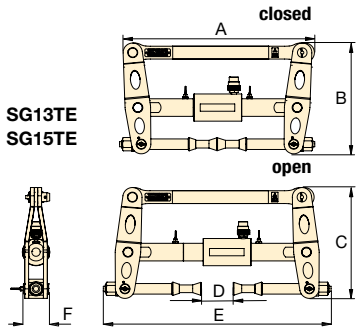

Flange Dimensions



Model Number	Type *	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum (in)	Flange Dimensions (in)		Tool Dimensions (in)						Tool Weight (lbs)	Kit Weight (lbs)	Case Dimensions (in)	Tool Number
				Minimum Access Gap A	Bolt-hole Diameter B	A	B	C	D	E	F				
SG4TMSTD	M	4.2	2.95	0	0.69 - 0.91	15.7	7.5	7.2	3.0	15.2	1.9	9.9	28.2	20.5x14.8x6.5	SG4TM
SG6TMSTD	M	6.7	3.15	0	0.94 - 1.18	18.4	9.6	9.9	3.1	17.5	2.0	16.5	35.3	25.2x21.3x6.5	SG6TM
SG11TMSTD	M	12.4	3.54	0	1.18 - 1.54	20.3	9.8	10.4	3.5	18.2	2.4	23.1	44.1	25.2x21.3x6.5	SG11TM
SG13TESTD	H	14.6	4.53	0	1.50 - 1.93	20.3	11.9	12.4	4.5	24.8	2.8	47.4	89.3	35.0x22.4x6.5	SG13TE
SG15TESTD	H	16.9	3.94	0	1.87 - 2.44	23.6	13.6	15.0	3.9	28.3	3.1	57.3	99.2	35.0x22.4x6.5	SG15TE

* M = Mechanical
H = Hydraulic

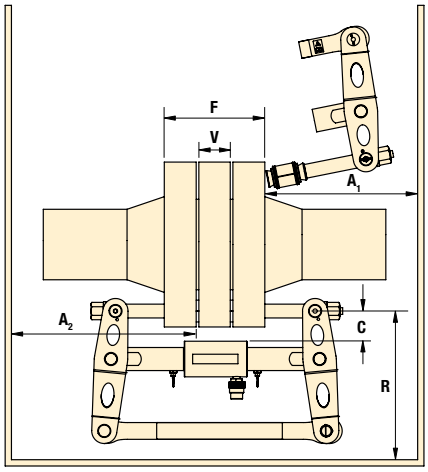

Spreading Force:
4.2 - 16.9 tons

Spreading Distance:
0 - 4.53 inches

Maximum Operating Pressure:
10,000 psi *

* Only relevant for hydraulic tools

SG Series

Model Number	Flange Joint Thickness F			Valve / Spacer Thickness V			Flange Clearance C		Radial Space R		Axial Space (for installation) A_1		Axial Space (installed) A_2		Tool Number
	Min. (in)	Max. (in)	Measured: From / To	Min. (in)	Max. (in)	Measured: From / To	Max. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	
SG4TMSTD	2.4	7.3	Outside face of flange / Outside face of flange	0*	1.8*	Inside face of flange / Inside face of flange	2.0	Bolt-hole circle / Largest OD of valve/ spacer	6.7	Bolt-hole circle / Closest obstruction	6.7	Outside face of flange / Closest obstruction	7.9	Inner face of flange / Closest obstruction	SG4TM
SG6TMSTD	2.4	8.3		0*	2.0*		2.2		9.1		7.9		9.2		SG6TM
SG11TMSTD	3.8	9.4		0*	2.4*		2.4		9.4		8.8		10.2		SG11TM
SG13TESTD	4.7	12.2		0*	3.7*		2.8		11.0		12.2		10.2		SG13TE
SG15TESTD	5.5	15.7		0*	3.1*		3.1		14.6		15.0		12.4		SG15TE

* Short Collet Holder Kits (SCH) are available which can offer improved range of application.

SG4TM MECHANICAL TOOL KIT

1 X SG4TM Tool
1 X 6" Vernier Calliper
1 X 3/8" Drive Torque Wrench and 16 mm Socket
1 X Safety Block
2 X M16 (5/8") Collets
2 X M20 (3/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

SG6TM MECHANICAL TOOL KIT

1 x SG6TM Tool
1 X 6" Vernier Calliper
1 X 3/8" Drive Torque Wrench and 21 mm Socket
1 x Safety Block
2 x M24 (7/8") Collets
2 x M27 (1") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

SG11TM MECHANICAL TOOL KIT

1 x SG11TM Tool
1 x 6" Vernier calliper
1 x 1/2" Drive torque wrench and 24 mm socket
1 x Safety block
2 x M30 (1-1/8") Collets
2 x M33 (1-1/4") Collets
2 x M36 (1-3/8") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

SG13TE HYDRAULIC TOOL KIT

1 x SG13TE Tool
1 x 10,000 psi HP550S Single Port Sealed Hand Pump with Gauge
1 x 10,000 psi Hydraulic Hose, 78.7"
1 x 6" Vernier Calliper
1 x 1/2" Square Drive Flexible Handle
1 x 1-1/8" Socket
1 x Safety Block
2 x M39 (1-1/2") Collets
2 x M42 (1-5/8") Collets
2 x M45 (1-3/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

SG15TE HYDRAULIC TOOL KIT

1 x SG15TE Tool
1 x 10,000 psi HP550S Single Port Sealed Hand Pump with Gauge
1 x 10,000 psi Hydraulic Hose, 78.7"
1 x 12" Vernier Calliper
1 x 1/2" Square Drive Flexible Handle
1 x 1/2" Socket
1 x Safety Block
2 x M48 (1-7/8") Collets
2 x M52 (2") Collets
2 x M56 (2-1/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

▼ **SG18TE & SG25TE**

- **Applicable for larger-sized flanges**
- **Actuated by an external hand pump**
- **Suitable for bolt holes from 2.34 to 4.25 inches**

Range of Application
For a detailed range of application please request the Secure-Grip In-Line Hydraulic Operator Instruction Sheet.

CAUTION
A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

SG18TE

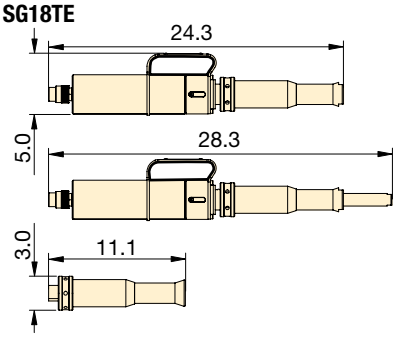

SG25TE

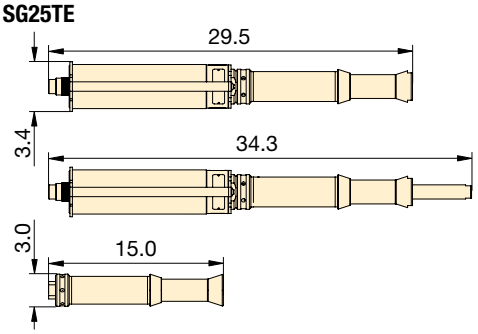

Flange Dimensions



Model Number	Type	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum (in)	Flange Dimensions (in)		Tool Weight (lbs)	Kit Weight (lbs)	Case Dimensions (in)	Tool Number
				Minimum Access Gap A	Bolt-hole Diameter B				
SG18TESTD	Hydraulic	20.2	3.93	0	2.34 - 2.95	30.9	99.2	35 x 22.4 x 6.5	SG18TE
SG25TESTD	Hydraulic	28.1	4.72	0	2.95 - 4.25	52.9	110.2	35 x 22.4 x 6.5	SG25TE

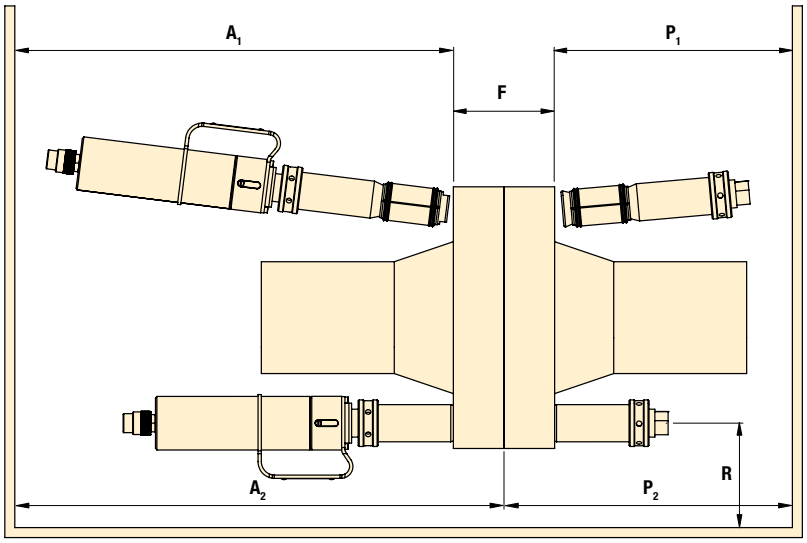

SG Series

Spreading Force:
20.2 - 28.1 tons

Spreading Distance:
0 - 4.72 inches

Maximum Operating Pressure:
10,000 psi

Model Number	Flange Joint Thickness F			Radial Space R		Axial Space (for installation) A_1		Axial Space (installed) A_2		Axial Plug Space (for installation) P_1		Axial Plug Space (installed) P_2		Tool No.
	Min. (in)	Max. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	Min. (in)	Measured: From / To	
SG18TESTD	7.5	17.7	Outside face of flange/ Outside face of flange	2.2	Bolt-hole circle / Closest obstruction	24.4	Outside face of flange/ Closest obstruction	35.4	Inner face of flange/ Closest obstruction	11.1	Outside face of flange/ Closest obstruction	11.1	Inner face of flange/ Closest obstruction	SG18TE
SG25TESTD	8.3	22.4		2.2		29.5		43.3		15.0		15.0		SG25TE

SG18TE HYDRAULIC TOOL KIT

1 x SG18TE Tool
1 x Spreading Plug
1 x 10,000 psi HP550S Single Port Sealed Hand Pump with Gauge
1 x 10,000 psi Hydraulic Hose, 6.5'
1 x 12" Vernier Calliper
1 x 0.5" Spacer Plate
1 x 5mm Allen Key
1 x 2.0" Spacer
1 x Safety Block
2 x M60 (2-3/8") Collets
2 x M64 (2-1/2") Collets
2 x M70 (2-3/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

SG25TE HYDRAULIC TOOL KIT

1 x SG25TE Tool
1 x Spreading Plug
1 x 10,000 psi HP550S Single Port Sealed Hand Pump with Gauge
1 x 10,000 psi Hydraulic Hose, 6.5'
1 x 12" Vernier Calliper
1 x 0.5" Spacer Plate
1 x Safety Block
1 x Aluminium Carry Case with Protective Foam Inserts

SG25TE COLLETS (AVAILABLE SEPARATELY)

Model Number	Description
673601-01	2 x M76 (3'') Collets
673901-01	2 x M80 (3-1/4'') Collets
674501-01	2 x M84 (3-3/8'') Collets
674801-01	2 x M90 (3-1/2'') Collets
675101-01	2 x M95 (3-3/4'') Collets
675601-01	2 x M100 (4'') Collets

▼ VC10TE

Valve Change-Out Tools

- Assists in the removal of wafer/butterfly valves, spades/spacers or gaskets from large flange joints
- Tool span is longer than a standard Secure-Grip Flange Spreader
- Adjustable to enable the tool to operate in a range of situations

PATENTED SECURE-GRIP SYSTEM:

- Unique expanding collet technology
- Secure bolt-hole locking mechanism
- Unique technology makes the Secure-Grip arguably the safest flange spreader for maintenance tasks involving the removal/ inserting of Valves and Blinds
- Virtually universal, the Secure-Grip Flange Spreader range will cover ANSI, DIN, Norsok L005, ASME, API and BS Flanges
- Time-saving, simple operation

CAUTION

A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

The Actuator and Extension

Subassembly can be assembled into 4 different configurations to suit a variety of applications. For a detailed range of application please request the VC10 Operator Instruction Sheet.

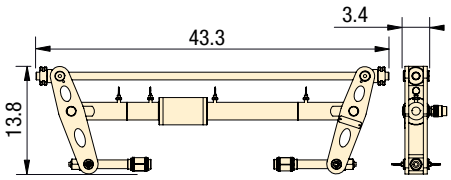

Flange Dimensions



Model Number	Type*	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum (in)	Flange Dimensions (pulg) Minimum Access Gap A	Flange Dimensions (pulg) Bolt-hole Diameter B	Tool Kit Weight (2 per Maxi Kit) (lbs)	Pump Kit Weight (lbs)	Gross Kit Weight (lbs)	Tool Case Dimensions (in)	Pump Case Dimensions (in)	Tool Number
VC10/13TESTD	H	11.2	22.8	0	1.50 - 1.93	110	60	170	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/13TE
VC10/13TEMAX	H	11.2	22.8	0	1.50 - 1.93	110	66	287	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/13TE
VC10/15TESTD	H	11.2	22.0	0	1.87 - 2.44	117	60	176	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/15TE
VC10/15TEMAX	H	11.2	22.0	0	1.87 - 2.44	117	66	300	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/15TE
VC10/18TESTD	H	11.2	20.2	0	2.34 - 2.95	128	60	187	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/18TE
VC10/18TEMAX	H	11.2	20.2	0	2.34 - 2.95	128	66	322	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/18TE
VC10/25TESTD	H	11.2	19.3	0	2.95 - 4.25	128	60	187	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/25TE
VC10/25TEMAX	H	11.2	19.3	0	2.95 - 4.25	128	66	322	21.7 x 47.2 x 6.7	21.7 x 47.2 x 6.7	VC10/25TE

* H = Hydraulic

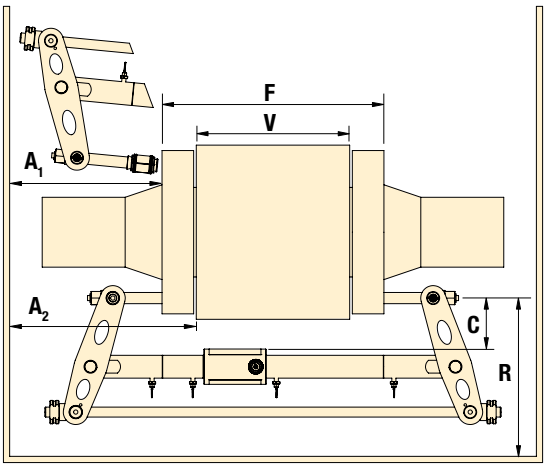

VC Series

Spreading Force:
11.2 tons

Spreading Distance:
0 - 22.8 inches

Maximum Operating Pressure:
10,000 psi

Model Number	Flange Joint Thickness F			Valve / Spacer Thickness V			Flange Clearance C	Radial Space R	Axial Space (for installation) A_1	Axial Space (installed) A_2	Tool Number
	Min. (in)	Max. (in)	Measured: From / To	Min. (in)	Max. (in)	Measured: From / To	Measured: From / To	Measured: From / To	Measured: From / To	Measured: From / To	
VC10/13TESTD	4.3	27.2	Outside face of flange / Outside face of flange	0*	22.8*	Inside face of flange / Inside face of flange	Bolt-hole circle / Largest OD of valve/spacer - max. 5.1"	Bolt-hole circle / Closest obstruction - min. 14.2"	Outside face of flange / Closest obstruction - min. 11.8"	Inner face of flange / Closest obstruction - min. 14.6"	VC10/13TE
VC10/13TEMAX	4.3	27.2		0*	22.8*						VC10/13TE
VC10/15TESTD	5.1	27.2		0*	22.0*						VC10/15TE
VC10/15TEMAX	5.1	27.2		0*	22.0*						VC10/15TE
VC10/18TESTD	6.9	27.2		0*	20.2*						VC10/18TE
VC10/18TEMAX	6.9	27.2		0*	20.2*						VC10/18TE
VC10/25TESTD	7.9	27.2		0*	19.3*						VC10/25TE
VC10/25TEMAX	7.9	27.2		0*	19.3*						VC10/25TE

* Short Collet Holder Kits (SCH) are available which can offer improved range of application.

TOOL KITS (1 PER STD KIT, 2 PER MAX KIT)

VC10/13TE
1 x VC10/13TE Tool
2 x M39 (1-1/2") Collets
2 x M42 (1-5/8") Collets
2 x M45 (1-3/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

VC10/18TE
1 x VC10/18TE Tool
2 x M60 (2-3/8") Collets
2 x M64 (2-1/2") Collets
2 x M70 (2-3/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

VC10/15TE
1 x VC10/15TE Tool
2 x M48 (1-7/8") Collets
2 x M52 (2") Collets
2 x M56 (2-1/4") Collets
1 x Aluminium Carry Case with Protective Foam Inserts

VC10/25TE
1 x VC10/25TE Tool
1 x Aluminium Carry Case with Protective Foam Inserts

PUMP KITS

For STD Tool Kits
1 x 10,000 psi HP550S Single Port Hydraulic Hand Pump
1 x Hydraulic Gauge with Manifold
1 x 10,000 psi Hydraulic Hose, 6.5'
1 x Secure Grip Safety Block
1 x Square Drive Flexible Handle
1 x Vernier Calliper
1 x Aluminium Carry Case with Protective Foam Inserts

For MAX Tool Kits
1 x 10,000 psi HP1000D Twin Port Hydraulic Hand Pump
2 x Hydraulic Gauges with Manifolds
2 x 10,000 psi Hydraulic Hoses, 6.5'
2 x Secure Grip Safety Blocks
1 x Square Drive Flexible Handle
1 x Vernier Calliper
1 x Aluminium Carry Case with Protective Foam Inserts

Collet Sizing

It is important that the correct size of collet is used. An undersized collet could allow the collet holder to pull through its bore. An oversized collet has the potential to become jammed in the bolt-hole.

Range of Application

For a detailed range of application please request the Hydraulic Secure-Grip Valve Change-Out Tool Operator Instruction Sheet.

VC10/25TE COLLETS (AVAILABLE SEPARATELY)

Model Number	Description
673601-01	2 x M76 (3'') Collets
673901-01	2 x M80 (3-1/4'') Collets
674501-01	2 x M84 (3-3/8'') Collets
674801-01	2 x M90 (3-1/2'') Collets
675101-01	2 x M95 (3-3/4'') Collets
675601-01	2 x M100 (4'') Collets

▼ MG7TM

MG Series

FLANGE SPREADING TOOL

Spreading Force:
7.6 tons

Spreading Distance:
0.08 - 1.06 inches

- **Reversible leg design giving greater range of applications**
- **Unique double-angled wedge produces a greater spreading force without reducing spreading distance**
- **Robust lightweight tool**
- **Spreading force of 7.6 ton**

OPERATING BENEFITS

- **Locks on to flange joint**
- **Safe, quick and easy operation**
- **Saves time and cost**

Range of Application

For a detailed range of application please request the MG7TM Operator Instruction Sheet.

CAUTION

A minimum of two Flange Spreading Tools must be used when opening flange joints. This will enable the operator to maintain an equal spreading distance across the flange faces.

MG7TMSTD Standard Kit

1 x MG7TM Tool
2 x Spreading Bar
1 x Moulded Plastic Carry Case

Tool retracted and advanced using large (Ø 0.8 in) spreading bar

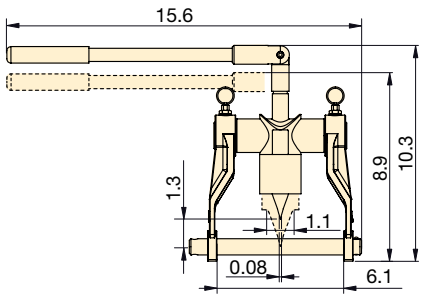

Tool retracted and advanced using small (Ø 0.6 in) spreading bar

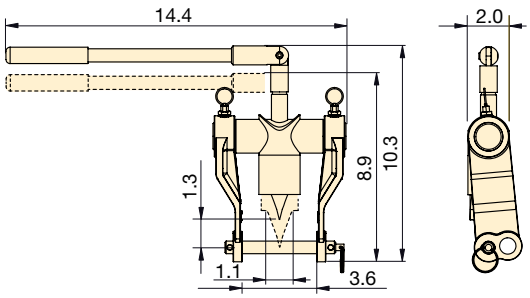

Flange Dimensions



Model Number	Type	Maximum Spreading Force Per Tool (ton)	Spreading Distance Maximum (in)	Flange Dimensions Minimum Access Gap A (in)	Wedge Width (in)	Tool Weight (lbs)	Kit Weight (lbs)	Case Dimensions (in)	Tool Number
MG7TMSTD	Mechanical	7.6	1.06	0.08	1.8	11.02	12.13	14.2 x 11.8 x 3.5	MG7TM

▼ FC10TE

FC
Series

FLANGE CLOSING TOOLS

Closing Force:
11.2 tons

Closing Distance:
22.4 - 0 inches

Maximum Operating Pressure:
10,000 psi

CAUTION
A minimum of two flange closing tools must be used when flange pulling. This will enable the operator to maintain an even gap between flange faces and prevent flange / gasket damage.

- **Applicable to all flanges with a bolt-hole diameter of 1 inch or greater, including ANSI, DIN, Norsok L005, ASME and BS flanges**
- **Slide and lock collet system**
- **Low profile tool**
- **Can be used on all vertical and horizontal flanges including ANSI, API, BS, DIN & Norsok L005**
- **Robust yet lightweight**
- **Subsea compatible**
- **Reciprocating hydraulic action**

OPERATING BENEFITS

- **Reduction in operator fatigue**
- **Reduction in pinch point**
- **Quick and easy to use**

FC10TESTD STD Kit

1 x FC10TE Tool
1 x 10,000 psi Hydraulic Hose, 6.5' long
1 x 10,000 psi HP550S Single Port Sealed Hand Pump with Gauge
1 x Aluminium Carry Case with Protective Foam Inserts

FC10TEMAX MAX Kit

2 x FC10TE Tool
2 x 10,000 psi Hydraulic Hoses, 6.5' long
1 x 10,000 psi HP550D Twin Port Sealed Hand Pump with Gauge
1 x Aluminium Carry Case with Protective Foam Inserts

Flange Dimensions

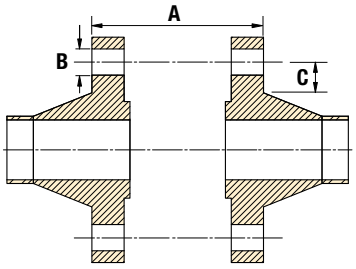

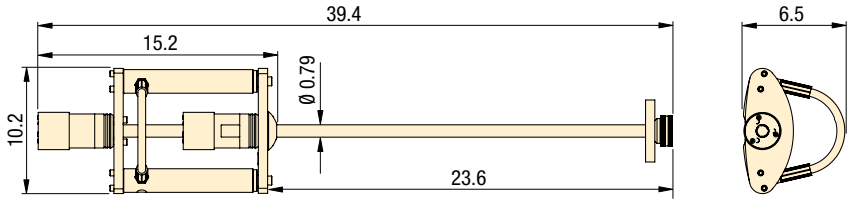

Model Number	Type	Maximum Closing Force Per Tool (ton)	Closing Distance (in)	Flange Dimensions (in) A	B min.	C min.	Tool Weight (lbs)	Kit Weight (lbs)	Box/Case Dimensions (in)	Tool Number
FC10TESTD	Hydraulic	11.2	22.4	0.63-22.4	1*	1.3	24.3	51.8	35.0 x 22.4 x 6.5	FC10TE
FC10TEMAX	Hydraulic	11.2	22.4	0.63-22.4	1*	1.3	24.3	80.5	35.0 x 22.4 x 6.5	FC10TE

* For hole diameter greater than 1.7 inches, please contact Enerpac.

▼ TFA15TI

TFA
Series

WIND TURBINE TOWER FLANGE ALIGNMENT TOOLS

Hook Force:
4.5 - 30.3 tons

Aligning Distance:
1.7 - 2.6 inches

The TFA Wind Turbine Tower Flange Alignment Tools have been developed to aid the alignment of large flanges on the inside of wind turbine towers during their assembly or installation.

- **Assists in aligning / de-ovalizing large internal pipe flanges**
- **Helps resolve bolt-hole misalignment within tower sections of wind turbine towers**
- **Can be used both on and offshore**

TFA4TM Mechanical Tool Kit

1 x TFA4TM Tool
1 x Torque Wrench
1 x Moulded Plastic Carry Case

TFA12TE / TFA15TE External Hydraulic Tool Kit

1 x TFA12TE or TFA15TE Tool
1 x Safety Lanyard
1 x Aluminium Carry Case with Protective Foam Inserts

TFA12TI / TFA15TI Internal Hydraulic Tool Kit



1 x TFA12TI ***or*** TFA15TI Tool
1 x Aluminium Carry Case with Protective Foam Inserts



Flange Dimensions

TFA4TM

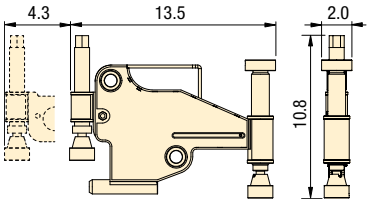

TFA12TE
TFA15TE

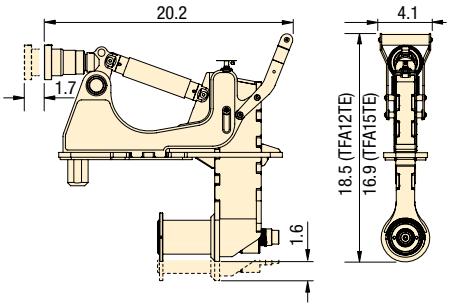

TFA12TI
TFA15TI

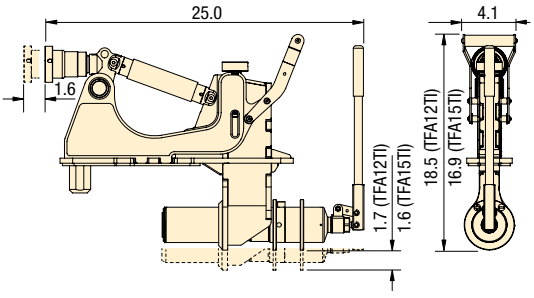

Model Number	Type*	Maximum Hook Force Per Tool (ton)	Maximum Aligning Distance (in)	Maximum Operating Pressure (psi)	Flange Dimensions (in) A	B	C	D min	E	F min	Tool Weight (lbs)	Kit Weight (lbs)	Box/Case Dimensions (in)	Tool Number
TFA4TMSTD	M	4.5	1.7	-	1.4-5.3	0-2.2	0-9.1	0.98	0-4.1	0.94	17.9	39.7	23.6 x 14.6 x 7.9	TFA4TM
TFA12TEMIN	H	27.0	2.6	7,400	5.1-7.0	4.3-9.5	0-16.6	1.8	3.4-4.9	2.4	42.5	62.6	25.2 x 21.3 x 6.5	TFA12TE
TFA15TEMIN	H	30.3	2.6	10,000	3.5-5.4	4.3-9.5	0-16.6	1.8	3.4-4.9	2.4	41.7	61.7	25.2 x 21.3 x 6.5	TFA15TE
TFA12TISTD	H	27.0	2.6	-	5.1-7.0	4.4-9.5	0-16.6	1.8	3.4-4.9	2.4	48.3	68.3	23.0 x 35.4 x 6.3	TFA12TI
TFA15TISTD	H	30.3	2.6	-	3.5-5.4	4.4-9.5	0-16.6	1.8	3.4-4.9	2.4	47.4	67.5	23.0 x 35.4 x 6.3	TFA15TI

* M = Mechanical
H = Hydraulic

▼ **HP350DMIN**

HP
Series

HYDRAULIC SEALED HAND PUMPS

Maximum Pressure Rating:
1st Stage: 197 psi
2nd Stage: 10,000 psi

Pump Type:
2-Speed

- **HP-S, HP-D and HP-SD pump ranges are operable at all angles and are highly resistant to accidental spillage of hydraulic fluid (certified)**
- **The Single-Port and Twin-Port Hand Pumps are also available with ATEX rating, which are certified for use in hazardous areas II 2G Ex h IIB T5 Gb, II 2D Ex h IIIC T212° F Db**

Pump Ratings

The Hydraulic Single Port,Twin Port and Double-Acting Hand-Pump (and hoses) are tailored for use with hydraulic equipment. Each pump's output is regulated to 10,000 psi and is delivered from threaded 3/8" NPT output ports. The pumps and hoses can be used with any 10,000 psi rated hydraulic equipment within their oil capacity specification. The HP range of hydraulic hand-pumps have been designed with a seal oil reservoir, which allows the pumps to be used in any orientation without the risk of oil spills or air contamination.

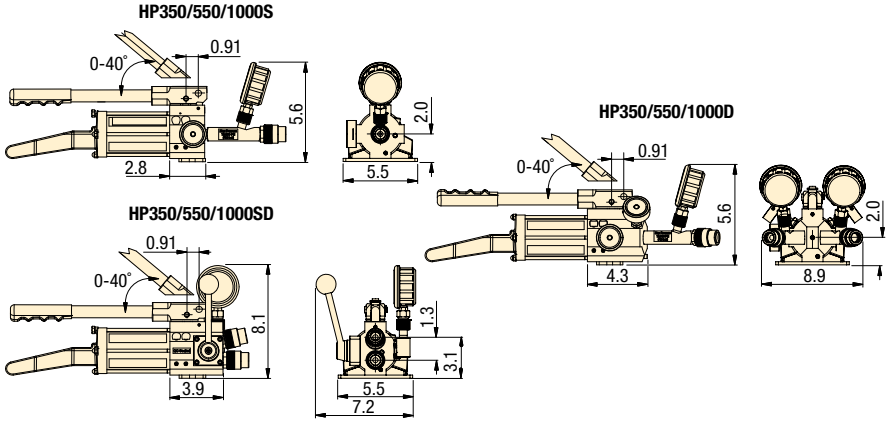

10,000 PSI HOSES
AVAILABLE TO PURCHASE SEPARATELY

Model Number	Description
302701-01	Hydraulic Hose 78.7"
302702-01	Hydraulic Hose 157.5"
302705-01	Hydraulic Hose 118.1"
302706-01	Hydraulic Hose 196.9"
302707-01	Hydraulic Hose 236.2"
1440008-01	ATEX Hydraulic Hose 78.7"
1440013-01	ATEX Hydraulic Hose 157.5"
1440014-01	ATEX Hydraulic Hose 236.2"

Model Number Hand Pump Kit		Type*	Nominal Oil Capacity (in^3)	Useable Oil Capacity (in^3)	Oil Volume per Stroke (in^3)		Max. Handle Effort (lbf)	Piston Stroke (in)	Overall Length (in)	Box Dimensions (in)	Pump Weight (lbs)	Kit Weight (lbs)	Tool Number
Standard	ATEX				1st Stage	2nd Stage							
HP350SMIN	**HP350SMINEX**	SA, SP	21.4	18.3	0.221	0.047	72.75	0.71	21.8	9.8 x 7.1 x 23.6	9.7	10.8	HP350S
HP550SMIN	**HP550SMINEX**	SA, SP	33.6	35.4	0.221	0.047	55.12	0.71	25.3	9.8 x 7.1 x 27.6	11.2	13.0	HP550S
HP1000SMIN	**HP1000SMINEX**	SA, SP	61.0	67.7	0.221	0.047	46.30	0.71	34.1	9.8 x 7.1 x 35.4	13.4	15.7	HP1000S
HP350DMIN	**HP350DMINEX**	SA, TP	21.4	18.3	0.221	0.047	72.75	0.71	22.8	9.8 x 7.1 x 23.6	14.3	15.9	HP350D
HP550DMIN	**HP550DMINEX**	SA, TP	33.6	35.4	0.221	0.047	55.12	0.71	26.3	9.8 x 7.1 x 27.6	15.9	17.9	HP550D
HP1000DMIN	**HP1000DMINEX**	SA, TP	61.0	67.7	0.221	0.047	46.30	0.71	35.2	9.8 x 7.1 x 35.4	15.7	20.5	HP1000D
HP350SDMIN	**N/A**	DA	21.4	18.3	0.221	0.047	72.75	0.71	18.0	9.8 x 7.1 x 23.6	11.7	12.5	HP350SD
HP550SDMIN	**N/A**	DA	33.6	35.4	0.221	0.047	55.12	0.71	22.8	9.8 x 7.1 x 27.6	12.6	13.2	HP550SD
HP1000SDMIN	**N/A**	DA	61.0	67.7	0.221	0.047	46.30	0.71	30.3	9.8 x 7.1 x 35.4	13.0	13.9	HP1000SD

* SA = Single Acting
SP = Single Port
DA = Double Acting
TP = Twin Port

Enerpac Heavy-Lifting Technology

ENERPAC

Enerpac's Heavy-Lifting Technology provides customers with tailored solutions, combining hydraulics, steel fabrication and electronic controls for safe, precise movement of heavy loads. Global Leader providing best in class solutions for safe and precise positioning of heavy loads.

With more than 60 years supporting industrial markets, Enerpac has gained the unique and in-depth expertise that is respected by industrial professionals around the world. Across every continent, Enerpac's network of application engineers, authorized distributors and technical service centers can reach any location, and deliver innovative solutions, technical assistance and quality products.

Enerpac's complete line of standard and customized products and a unique systems approach offers the benefits of safety and efficiency to applications where high forces are required.

Whether constructing a signature bridge across a deep valley, lifting a national landmark for seismic retrofit or simultaneously testing hundreds of foundation pilings to support a new building, Enerpac will supply the hydraulic solutions to get the job done safely and efficiently.

Precision lift and position of heavy loads

Synchronous superlift and launch

Bridge lifting and launching

Jacking with high capacity precision control

Synchronous hoisting and load positioning

Incremental bridge lifting

Transportation

Special high-tonnage cylinders for the Pioneering Spirit lifting beams

Heavy-Lifting Technology Section Overview

Capacity (tons)	Capabilities	Series		Page
140 - 280	Skidding Systems	LH HSK		360 ▶
17 - 1405	Heavy-Lifting Strand Jacks	HSL		362 ▶
110 - 1178	Telescopic Hydraulic Gantries	SL SBL		364 ▶
138 - 825	Jack-Up Systems	JS		366 ▶
60 - 250	SyncHoist	SHS SHAS		368 ▶
50 - 100	Trolley System	ETR		370 ▶
67	Self-Propelled Modular Transporter	SPMT		372 ▶
	Lifting Solutions			373 ▶

▼ Shown: **HSK1250 Skidding System**

HSK-Series, Skidding Systems

- **PTFE skid pads with dimpled surface for low friction and long lifetime**
- **Easy to replace skid pads, no tools necessary**
- **Bi-directional operation using push-pull cylinders avoid the need to reposition cylinders for switching direction**
- **Large load support surface on the skid beams for distributing load**
- **Bottom of skid shoes equipped with stainless steel sliding plates**

LH-Series, Low-Height Skidding System

- **Low starting height saves time and increases versatility**
- **Intuitive pump controls (SFP-Series Split-Flow Pump)**
- **Easily reversible to change skidding direction**
- **Portable design for quick setup**

Ideal Jack and Slide Solution

Skidding Systems

The skidding system is comprised of a series of skid beams moved by hydraulic push-pull cylinders, travelling over a pre-constructed track.

A series of special PTFE coated pads are placed on the skid tracks to reduce friction. The PTFE surface is matched with a sliding plate under the Enerpac skid beams, designed to achieve minimum friction coefficients.
The skid beams are connected by hoses to a hydraulic electric or diesel driven powerpack.

In addition to our standard skidding systems, Enerpac can create customized skidding systems to meet your specific requirements.

Controls

Enerpac offers several options for controlling our skidding systems.

Wireless Controls allows the operator the freedom to view the skidding operation from multiple locations while providing complete control of all system functions.

Manual controls offer a cost-effective solution by utilizing manual hydraulic valves mounted directly on the skidding system power unit.

▼ *LH400 series skidding system used to remove an obsolete press from a facility to make room for new equipment.*

▼ *HSKJ1250 Skid Shoe Jack.*

Skidding Systems

Enerpac Skidding Systems are available in several versions:

- **B-Series (Skid Beam)** utilizes a tall skid beam with built-in push-pull cylinders. Skidding direction can be easily switch by flipping a lever on the attached gripper box.
- **J-Series (Skid Jack)** provides the same functionality as the B-Series with the added benefit of having a built-in cylinder for lifting or leveling the load.
- **LH-Series (Low-Height)** includes low-height skid beams that can fit in tight spaces while still offering high capacity.

HSK LH Series

Capacity:
140 - 280 tons

Stroke Push/Pull:
23.62 inches

Lifting Stroke*:
6.89 inches

* HSKJ Skid shoe jack version only.

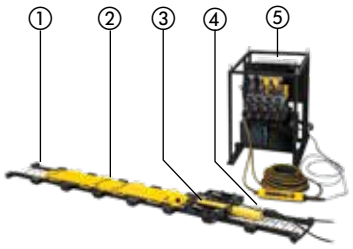

LH-Series Skidding System Requirements

① Skid Track (required)
② Skid Beam (required)
③ Push-Pull Cylinder Unit (required)
④ Hydraulic Hoses (required)
⑤ Split-Flow Electric Pump (required)
⑥ Track Support (optional, not shown)
⑦ Storage/Transport Frame (optional, not shown)
⑧ Pump Cart (optional, not shown)

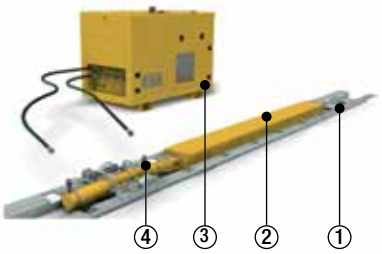

HSK-Series Skidding System Requirements

① Skid Track
② Skid Beam
③ Hydraulic Power Pack
④ Hydraulic Push-Pull Unit

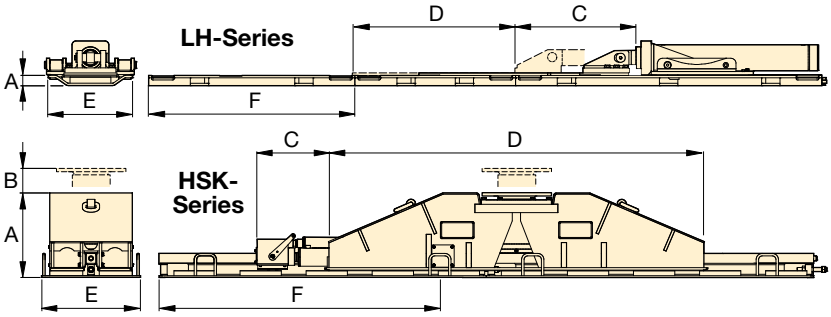

Skid Tracks

Include specially constructed and easily replaceable PTFE coated pads. Skid track is sold separately.

Hydraulic Power Packs

Enerpac offers a comprehensive range of hydraulic power packs that are optimized for use with Skidding Systems.

Low-Height Skidding and Turntable

See pages 78-82 of this catalog for full details on these versatile products.

Maximum Capacity (per push-pull unit)* (ton)	Maximum Push-Pull Capacity (ton) Push	Pull	Model Number	Skid Beam Height (with track) A (in)	Lifting Stroke B (in)	Push-Pull Stroke C (in)	Skid Beam Length D (in)	Skid Track Width E (in)	Skid Track Length F (in)	Skid Beam Weight (lbs)	Skid Track Weight (lbs)
140	**25**	**18**	**HSKB1250**	12.17	–	23.62	98.43	15.75	78.06	1,631	265
140	**25**	**18**	**HSKJ1250**	19.76	6.89	23.62	66.54	15.75	78.06	1,742	265
280	**45**	**30**	**HSKB2500**	14.72	–	23.62	118.11	23.62	76.61	2,249	640
280	**45**	**30**	**HSKJ2500**	23.62	6.89	23.62	70.23	23.62	76.61	3,197	640
200	**25**	**11**	**LH400 ****	3.62	–	23.62	42.52	18.31	37.60	139	148

* Note: Multiple push-pull units are combined to offer greater capacity. Typical setup is two or more units.
** Low-Height Skidding System. See pages 78-81 for details and components.

▼ Shown: **HSL50006 Strand Jack**

Heavy Lifting Strand Jacks

High Capacity - Precision Control

- **Precision control of synchronous lifting and lowering**
- **Can be controlled by a single operator from a central location for increased safety**
- **Automated locking - unlocking operation**
- **Two strand sizes: 0.62" (15.7 mm) and 0.71" (18 mm)**
- **Telescopic strand guide pipes prevent bird caging**
- **Internal components are coated with an anti-corrosion coating, making it suitable for marine environments**
- **Lifting anchor included with all strand jacks**
- **Lloyds witness tested to 125% of maximum working load**

Strand Jacks

Enerpac strand jacks are the strand jacks of choice for customers seeking precise synchronous control with heavy lifting capacity in an economical, compact, and reliable foot print.

Enerpac strand jacks are powered by electrical or diesel driven hydraulic power packs and controlled by Enerpac's proprietary SCC-Smart Cylinder Control System to ensure full control of lifting and lowering operations.

Enerpac continually improves reliability, durability, and safety of their strand jacks, making them an industry standard for heavy lifting.

▼ *Shown: HSL85007 Strand Jack System used on Enerpac custom Self-Erecting Tower.*

▼ *Enerpac's SCC-Smart Cylinder Control System simplifies synchronous operation with intuitive controls and a user-friendly graphical interface.*

Heavy Lifting Strand Jacks

Strand Jacks

A strand jack can be considered a linear winch. In a strand jack, a bundle of steel strands are guided through a main "lifting" jack. Above and below the cylinder are anchor systems with wedges that grip the strand bundle simultaneously. Lifting and lowering a load is achieved by hydraulically controlling the main jack and both mini jacks alternately.

In the case of system pressure loss, the wedges are mechanically closed automatically, holding the suspended load in place.

Today, strand jacks are widely recognized as the most sophisticated heavy lifting solution. They are used all over the world to erect bridges, load out offshore structures, and lift/lower heavy loads where the use of conventional cranes is neither economical nor practical.

HSL Series

Capacity:
17 - 1405 tons

Stroke:
9.8 - 23.6 inches

Maximum Operating Pressure:
5,000 psi

Shown: HSL20006 Strand Jack

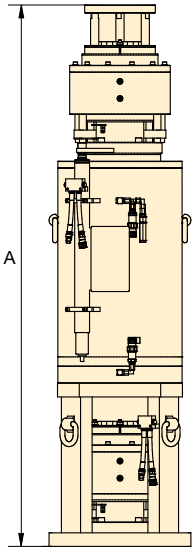



① Strand Guide
② Top Mini Jack
③ Main Lifting Jack
④ Counter Balance Valve
⑤ Bottom Mini Jack
⑥ Chair

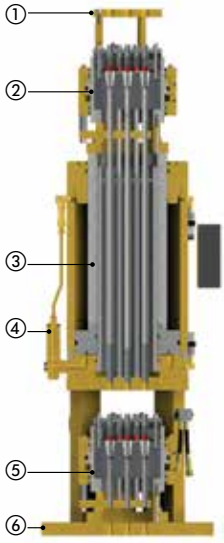

Strand Diameter inch (mm)	Capacity (tons)	Model Number	No. of Strands	Stroke (in)	A (in)	B (in)	C (in)	D (in)	Wt. (lbs)
0.62 (15.7)	34	**HSL3006**	3	18.9	72.9	13.8	19.7	2.3	1,102
	79	**HSL7006**	7	18.9	75.4	14.2	22.6	3.7	1,411
	225	**HSL20006**	19	18.9	78.4	20.6	25.6	6.7	2,860
	337	**HSL30006**	31	18.9	80.6	26.5	26.5	8.5	4,820
	562	**HSL50006**	48	18.9	84.1	28.9	28.9	10.7	6,930
0.71 (18)	17	**HSL1507**	1	9.8	48.9	8.7	8.7	0.8	220
	51	**HSL4507**	3	18.9	68.0	13.8	19.7	2.9	1,102
	67	**HSL6007**	4	18.9	69.0	15.7	24.6	3.5	1,433
	112	**HSL10007**	7	18.9	75.8	16.1	24.6	4.6	1,874
	225	**HSL20007**	12	18.9	78.8	20.6	25.6	6.5	3,086
	337	**HSL30007**	19	18.9	80.9	26.5	26.5	8.3	4,290
	506	**HSL45007**	31	18.9	87.5	28.9	28.9	10.7	6,724
	731	**HSL65007**	43	18.9	88.1	33.5	33.5	13.8	8,690
	955	**HSL85007**	55	18.9	94.6	35.4	35.4	14.3	11,023
	1124	**HSL100007**	66	18.9	100.7	43.0	43.0	17.2	16,865
	1405	**HSL125007**	84	23.6	104.6	43.3	43.3	18.0	18,298

▼ **Strand Jack Accessories –**
Contact Enerpac for assistance at **enerpac.com/contact-us**

SLPP-Series Hydraulic Power Packs

Enerpac offers a comprehensive range of hydraulic power packs that are optimized for use with their industry leading strand jacks.

SG-Series Strand Guide

Provides a guide for the strand as a strand jack lifts the load.

SR-Series Strand Recoiler

Passively pays in or pays out strands while jacking and lowering.

SD1 Strand Dispenser

Essential to safely unbundle a new strand coil.

Lifting Anchor

Each Strand Jack includes a lifting anchor for attaching strand to the load.

▼ Shown: **SBL1100 with Skid Tracks, Header Beams and Side Shifts**

Precision Lift and Position of Heavy Loads

The Ultimate in Safety and Control

- **Self-contained hydraulics and electronics**
- **Intelli-Lift wireless control system**
- **Self-propelled wheels or tank rollers**
- **Foldable boom on SBL600, SBL900 and SBL1100 to enable easy transport and set-up**
- **Full range of supplementary equipment: header beams, lifting lugs, side shift, skid tracks**
- **Lloyds witness tested to 120% of maximum working load**
- **All gantries comply to ASME B30.1, CE, UKCA and other safety standards**

Intelli-Lift

The Intelli-Lift wireless control system is included with all Enerpac hydraulic gantries. The Intelli-Lift controller offers superior safety and control and includes the following features:

- Encrypted bi-directional communication that eliminates interference from other devices
- Remote operation using multi-channel wireless (2.4 GHz) or wired (RS-485) control
- High and low speed settings
- Automatic synchronization of lifting with an accuracy of 0.95 inch (24 mm)
- Automatic synchronization of travelling with an accuracy of 0.60 inch (15 mm)
- Overload and stroke alarms
- Remote side shift control
- Emergency stop switch

▼ *Enerpac SBL-Series hydraulic gantries are used in a variety of applications to install turbines, transformers and other power generation equipment all over the world.*

Maximum Capacity (4 legs) (tons)	Model Number	Retracted Height A (ft)
110	SL100	6.73
220	SL200	8.96
330	SL300	8.91
450	SL400N	8.94
450	SL400	10.39
585	SBL500	9.97
674	SBL600	14.11
1009	SBL900	16.42
1178	SBL1100	14.34

Hydraulic Gantries

Hydraulic Gantries are a safe, efficient way to lift and position heavy loads in applications where traditional cranes will not fit and permanent overhead structures for job cranes are not an option.

Hydraulic Gantries are placed on skid tracks to provide a means for moving and placing heavy loads, many times with only one pick.

Enerpac offers three series of Hydraulic Gantry systems:

- **SL-Series Super Lift**

  The cost-effective SL-Series Super Lift offer control and stability for everyday lifting applications below 450 ton up to 30 feet.

- **SBL-Series Super Boom Lift**

  The heavy-duty SBL-Series Super Boom Lift boom style gantries offer increased lifting capacity of over 450 ton to heights of almost 40 feet.

All Enerpac gantries are delivered with specific properties and control systems to ensure optimum stability and safety.

SL, SBL Series

Capacity:
110 - 1178 tons

Lift Height:
11.17 - 39.38 feet

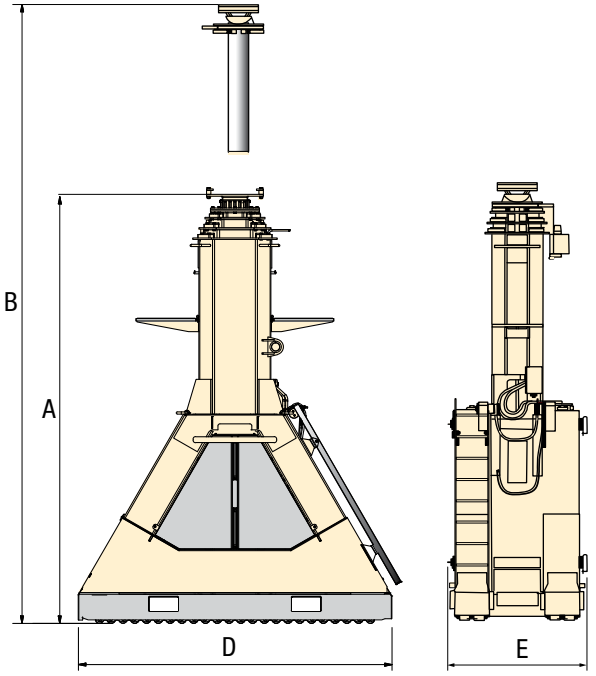

Drawing shows SBL-series, SL-Series without boom.

Stage 1 Max. Height B (ft)	Stage 1 Max. Cap. (4 legs) (ton)	Stage 2 Max. Height B (ft)	Stage 2 Max. Cap. (4 legs) (ton)	Stage 3 Max. Height B (ft)	Stage 3 Max. Cap. (4 legs) (ton)	Base Length D (in)	Base Width E (in)	Weight per Leg (with oil) (lbs)	Model Number (4 legs)
11.17	110	15.59	66	–	–	55.12	34.65	3825	**SL100**
15.47	220	21.98	150	–	–	55.12	34.65	4850	**SL200**
15.11	337	22.01	220	–	–	66.93	34.65	7165	**SL300**
14.31	450	19.76	337	25.26	220	66.93	34.65	7937	**SL400N**
17.14	450	23.73	450	29.99	208	79.65	50.75	10,141	**SL400**
16.40	585	22.66	585	28.27	337	78.39	50.43	15,466	**SBL500**
21.33	674	28.22	562	34.78	416	128.74	64.65	19,842	**SBL600**
27.24	1009	37.09	664	–	–	135.98	55.43	29,432	**SBL900**
22.98	1178	31.72	760	39.38	424	135.98	55.43	26,345	**SBL1100**

▼ **Additional Accessories –**
Contact Enerpac for assistance at **enerpac.com/contact-us**

Skid Tracks

Skid tracks used for leveling and load distribution. Available in two standard lengths, 10 feet and 20 feet.

Header Beams

Sold in pairs and includes lifting points and fork pockets for easy positioning on gantry towers.

Available in 26.24 ft., 32.80 ft. and 39.36 ft. lengths.

Powered Side Shift

Electric propulsion controlled by standard gantry controls. Each set consists of 4 units.

Lifting Anchors

Designed to transfer the load to the top of the header beam. Can accommodate a 250 ton shackle or attach directly to the lifted load.

▼ From left to right: **JS125, JS250, JS500, JS750 Jack-Up System** (one lifting tower shown)

Incremental Lifting System – Synchronously Lift and Mechanically Hold

- **Self-contained hydraulics in each Jack-Up unit for uncluttered work area**
- **Synchronously lift loads with multiple Jack-Up units. The most common system set-up includes four Jack-Up units but can be expanded to include more**
- **Lifting barrels are stacked together to mechanically hold the load**
- **Up to 5% side load capacity depending on capacity and lift height**
- **Computer controls for operating the Jack-Up System with automatic and manual lifting settings**

Typical Applications

- Bridge maintenance
- Lifting and lowering of heavy equipment
- Lifting, lowering and levelling of heavy structures and buildings
- De-propping/load transfer from temporary steel work.

Computer Controls

Enerpac Jack-Up Systems provide precision control suitable for many demanding lifting and lowering applications. The comprehensive self-contained design features simple to use software.

- Automatic synchronization of multiple networked lift points
- Center of Gravity calculation
- Overload and stroke alarms
- Emergency stop switch at Jack-Up units and controls

▼ *Enerpac JS500 used in bridge construction and de-commissioning.*

▼ *Enerpac Jack-Up System hoists 1500-ton span on Fore River Bridge.*

▼ *Undecking an 1500-ton Electric Rope Shovel in a Copper Mine with a JS500 Jack-Up System for bearing inspection and maintenance.*

Enerpac Jack-Up Systems

The Jack-Up System is a custom developed multi-point lifting system. A typical system setup includes four jack-up units, one positioned under each corner of a load.

Example: A four unit setup with JS250 has a lifting capacity of 1100 ton (275 ton per unit). The lifting frame of a jack up unit contains four hydraulic lifting cylinders, one in each corner, which lift the load using the stacked steel barrels.

A load is lifted in increments as barrels are slid into the system, lifted, and stacked; forming 'lifting towers'. A jack up system is operated and controlled by a computer control unit.

Each unit's lifting and lowering operations occur simultaneously; the computer control unit's synchronous technology maintains the balance of the load.

JS Series

Capacity per Lifting Tower:
138 - 825 tons

Lifting Height:
Up to 20 - 66 feet

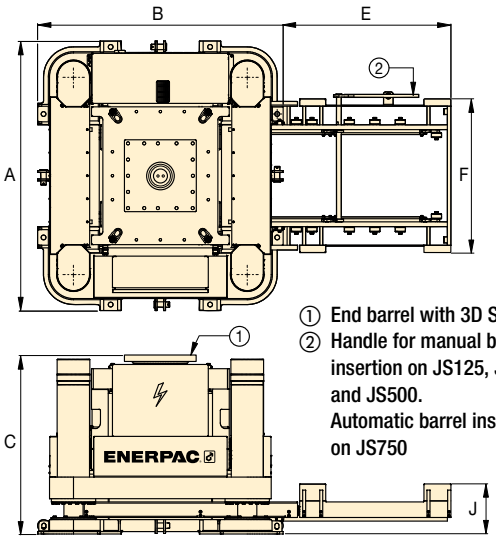

① End barrel with 3D Swivel
② Handle for manual barrel insertion on JS125, JS250 and JS500.
Automatic barrel insertion on JS750

Jack-Up Systems (JS)



Steel Barrel (BLJS)

▼ Steel Barrel

For use with Jack-Up System	Barrel Set Model Number	Number of Barrels per Set	Barrel Dimensions (in)			Weight per Barrel
			L	W	H	(lbs)
JS125	**BLJS125**	4	23.62	23.62	11.81	231
JS250	**BLJS250**	4	45.28	45.28	19.69	792
JS500	**BLJS500**	4	66.93	66.93	27.56	2090
JS750	**BLJS750**	4	90.55	90.55	39.37	5170

Jack-up System Smart Box

The **Smart Box SBJS-V4** is Enerpac's proprietary control platform. It allows an operator to control up to 8 jack-up towers simultaneously with one **SBLT1** standard laptop.

- Single operator control from a central location provides safe and reliable operation
- Synchronous lift /lower and load control between the lifting positions
- Automatic lifting and lowering cycles
- Displays individual and accumulative stroke/load
- Simple graphical user interface

Adjustable Top Barrel

Includes double-acting lock nut cylinder with swivel saddle. Cylinder can be extended to contact the load. Provides ability to adjust starting height of each leg, ensuring safe and stable lifting. Must be operated with separate pump.

Trolleys & Skid Tracks

Allows horizontal travel of jack-up systems.

▼ Jack-Up Systems

Capacity per Tower	Model Number	Maximum Sideload	Maximum Lifting Speed	Base Frame Dimensions (in)			Barrel Loading System (in)			Electric Power Pack	Weight per Jack-Up Unit *	Weight End Barrel (3D Swivel)
(ton)			(ft/hr)	A	B	C	E	F	J	hp	(lbs)	(lbs)
138	**JS125**	3% @ 19.6 ft	16	47.25	43.31	37.60	27.56	27.56	8.07	12	5280	1254
275	**JS250**	3% @ 32.8 ft	13	88.58	80.71	58.07	52.81	52.81	16.46	20	16,500	5280
550	**JS500**	4% @ 49.2 ft	13	110.25	90.55	66.93	69.75	69.75	18.03	40	30,250	8470
825	**JS750**	5% @ 65.6 ft	13	144.50	127.95	93.50	98.25	98.25	29.29	40	52,800	19,800

* Weight per Jack-Up unit, excluding end barrel or barrel sets.

▼ SHS-Series 4-Point SyncHoist System

Accurate Hoisting and Load Positioning Enhancing a Crane's Capability

- **High-precision load maneuvering using one crane**
- **Reduces the risk of damage from oscillations of wire rope due to crane jogging and sudden starts/stops**
- **Vastly improving worker safety, operating speed and control**
- **PLC-controlled hydraulics turn lifting into high-accuracy hoisting and load positioning system**
- **Double-acting push/pull cylinders with load-holding valves for added safety**
- **Increased efficiency compared to conventional load positioning methods**

Options for system management and control:

- **Manual control: system warning functions**
- **Automatic control: fully PLC-monitorized system with programmable functions using touch screen and system warning functions**
- **Wireless control: self-contained hydraulics with hand-held control**

Synchronous Hoisting

Enerpac SyncHoist is a unique crane product for below-the-hook positioning of heavy loads that require precision placement. The SyncHoist system may reduce the number of cranes needed and reduce the costs of multiple picks.

Functions

- High precision horizontal and vertical load positioning
- Pre-programmed positioning, tilting and aligning.

Applications

- Positioning of rotor, stator and propeller blades of wind turbines
- Positioning of roof sections, concrete elements, steel structures
- Positioning of turbines, transformers, fuel rods
- Precise machinery loading, mill rod changes, bearing changes
- Precise positioning of pipe lines, blow out valves
- Positioning and aligning of ship segments prior to assembly.

▼ *Bridge segments are hoisted from the ground, being positioned with a 4-point SyncHoist system with fully monitorized cylinders.*

▼ *Rigging engineers used the SyncHoist system to precisely monitor and adjust each lifting point independently, or together in a synchronized manner to position the 1140 ton nuclear plant module.*

▼ *Offshore wind turbine base foundations installed with a wireless SHAS-SyncHoist System to ensure the foundation remained vertical during lowering and positioning.*

SyncHoist - High Precision Load Positioning

What is SyncHoist?

Enerpac SyncHoist is a hydraulically operated auxiliary attachment for high precision load positioning for cranes. The SyncHoist system can be used for pre-programmed positioning, tilting and aligning of loads.

- Complete system tested in compliance with European lifting directive and safety requirements.

SyncHoist improves safety, operating speed and control of load movement

Geometric positioning of heavy loads in a horizontal and vertical plane are frequently done using more than one crane. Synchronizing movements between cranes are difficult and risky. The lifting inaccuracy can result in damage to the load and support structures and puts workers at risks. The SyncHoist system can be used for controlled hydraulic horizontal and vertical material handling.

System management and control

Contact Enerpac for the following options, or other customized stroke, capacity and control configurations.

1. Manual control

- Valves with manual levers
- Warnings for thermal motor protection
- Visual check: oil level, filter indicator.

2. Automatic control

- Load and stroke monitoring, and stroke control
- PLC-control and touch screen
- Solenoid valves with pendant
- Pre-programmable motions and data recording
- System warnings for:
  - maximum cylinder load control setting
  - stroke and position control
  - thermal motor protection
  - oil level and filter indicator.

Autonomous (wireless) system SHAS-Series

- Wireless remote control
- Only one electric power connection per lifting point
- Integrated hydraulics, PLC and controls
- No need for hydraulic hoses and cables
- No need for mid-hoist disconnection of hoses and movement of pump.

SHS, SHAS Series

Capacity:
60 - 250 tons

Maximum Stroke:
19.69 - 59.06 inches

Accuracy Over Full Stroke:
± 0.040 inches

Maximum Operating Pressure:
10,000 psi

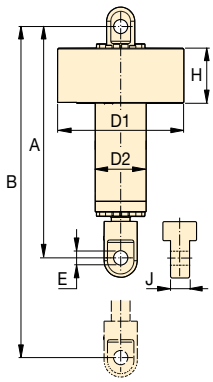

Capacity (ton)	Total Load (ton)	Cylinder Stroke (in)	Model Number [1] 460-480 VAC, 3 ph - 60 Hz	Control System	Motor Size (hp)	Number of Pump Outlets and Oil Flow [2] (in^3/min)	Cylinder Dimensions (in) A	B	D1	D2	E	H	J	Wt. (lbs) [3]
4 x 60	240	19.69	SHS45520MJ	Manual	10	4 x 85	51.18	70.87	27.17	9.65	2.32	15.16	3.15	992
		39.37	SHS45540MJ				70.87	110.24						1378
		59.06	SHS45560MJ				90.55	149.61						1764
		19.69	SHS45520AJ	Automatic	20	4 x 128	51.18	70.78	27.17	9.65	2.32	15.16	3.15	992
		39.37	SHS45540AJ				70.87	110.25						1378
		59.06	SHS45560AJ				90.55	149.61						1764
4 x 94	376	19.69	SHS48520MJ	Manual	15	4 x 128	52.36	72.05	27.17	10.43	2.83	15.16	3.94	1102
		39.37	SHS48540MJ				72.05	111.42						1543
		59.06	SHS48560MJ				91.73	150.79						1984
		19.69	SHS48520AJ	Automatic	20	4 x 128	52.36	72.05	27.17	10.43	2.83	15.16	3.94	1102
		39.37	SHS48540AJ				72.05	111.42						1543
		59.06	SHS48560AJ				91.73	150.79						1984
4 x 120	480	39.37	SHS411040MJ	Manual	15	4 x 128	23.03	112.40	30.71	12.40	3.35	15.55	4.88	2138
		59.06	SHS411060MJ				92.72	151.77						2723
		39.37	SHS411040AJ	Automatic	20	4 x 128	73.03	112.40	30.71	12.40	3.35	15.55	4.88	2138
		59.06	SHS411060AJ				92.72	151.77						2723
4 x 120	480	39.37	SHAS411040WU [4]	Wireless	4 x 5	–	73.03	112.40	41.85	12.40	3.36	21.26	4.88	2608
		59.06	SHAS411060WU [4]				92.72	151.77						3192
4 x 250	1000	39.37	SHAS422540WU [4]	Wireless	4 x 10	–	84.25	123.62	48.62	16.54	5.59	22.83	7.48	7097
		59.06	SHAS422560WU [4]				103.94	143.31						7527

[1] With 4 cylinders and one 460-480 VAC-3 phase-60 Hz power pack (suffix J). For 400 VAC-3 phase-50 Hz power pack change suffix J into W. Example: **SHS45560MW**.
[2] Pump and cylinders include 4x 82 feet hydraulic hoses with couplers. [3] Weight per cylinder.
[4] **WU** = with US electrical wiring. Change into suffix "**WE**" for EU-market. Example: **SHAS411060WE**.

▼ **ETR50H, Enerpac Trolley System** (shown with Trolley Tracks)

Safe & Synchronized Travel

- **High transport speed**
  - **— 164 ft/hour loaded**
  - **— 328 ft/hour unloaded**
- **Suited for repetitive movements**
- **Runs on simple flat steel plate**
- **Ease of maintenance**
  - **– long maintenance intervals**
  - **– no consumables**
- **Clean usage – electric driven**
- **Built-in synchronization – no need for forced external mechanical connection to synchronize movements**
- **Easy transport - compact design**
- **Hydraulic lifting cylinder option available**
- **Kits to accommodate other lifting options also available**

Product Overview

The ETR-Series Trolley System is comprised of electrically-driven trolleys which can carry heavy loads along a fixed track system. The entire system is controlled by a hand-held wireless control system. A typical system is comprised of 4 trolleys, 2 tracks and one controller. Trolley tracks and controller must be ordered separately.

Control Panel and Cables

Operate up to 8 trolleys (same capacity each) using control panel with included wireless controller.

- Automatic synchronization of traveling with an accuracy of 0.39 inch (10 mm)
- Dual-band radio with automatic frequency search
- Wireless remote operation
- High and low speed settings
- Emergency stop switch
- Control cables operate trolley and provide feedback to controller

Control Panel

Model No. 460-480 VAC, 32A	Dimensions (in)			Wt.
	L	W	H	(lbs)
ETR-CPJ8	50.81	23.62	43.25	551

Control Cables

Model No.	Description
ETR-CBL-15	50-foot control cable
ETR-CBL-25	82-foot control cable

▼ *The trolley system speeds up offshore wind transition piece load out: the transition pieces are positioned in the clamping frames and moved along the track.*

▼ *ETR series electric trolley undergoing factory acceptance testing prior to shipment.*

Enerpac Electric Trolley System

ETR-Trolley System

The Trolley System provides an alternative method with increased benefits over traditional skidding methods.

Load movements are more stable due to the continuous movement and ability to precisely control travel speed including acceleration and deceleration.

Key features:

Low speed: 82 feet/hour
High speed: 164 feet/hour
Accuracy: 0.38 inches
Sideload: 1.5% rated load
Sound Level: < 80 dBA

ETR Series

Capacity Per Trolley:
50 - 100 tons

Travel Speed (Loaded):
82 - 164 ft/hour

Motor Power:
0.5 - 1.0 hp

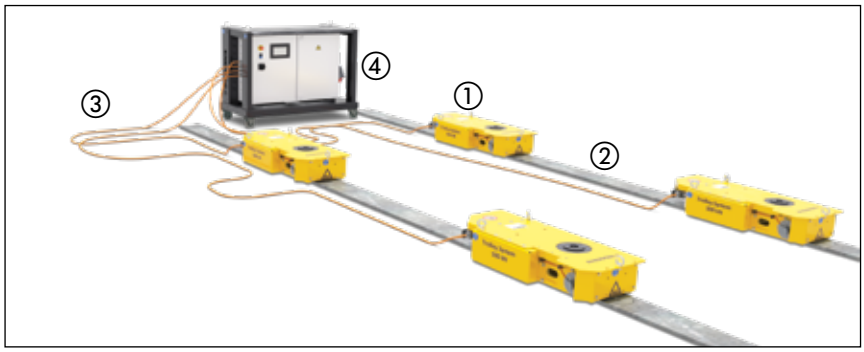

① Electric Trolley - ETR-Series
② Track Plate - ETR-TP-015 or ETR-TP-030
③ Control Cable - ETR-CBL-15 or ETR-CBL-25
④ Control Panel (inc. wireless remote) - ETR-CPJ8
⑤ Split-Flow Electric Pump - SFP-Series. Not shown. Optional for units with hydraulic cylinders.

Additional Mounting Options

Mounting kits are available to accommodate other lifting and rigging solutions.

Kit Model No.	Description
ETR50-SMK	Enerpac SCJ50 on ETR50
ETR100-SMK	Enerpac SCJ100 on ETR100
ETR50-BMK	Swivel beam mount on ETR50
ETR100-BMK	Swivel beam mount on ETR100

Trolley Track Plates

Track plates provide level guidance and support for the trolley. Two plates placed side-by-side are used for operation of ETR100-Series Trolleys. Maximum inclination of tracks is 0.2°.

Model No.	Trolley Track Plates (in)
ETR-TP-015	59" track plate
ETR-TP-030	118" track plate

ETR50

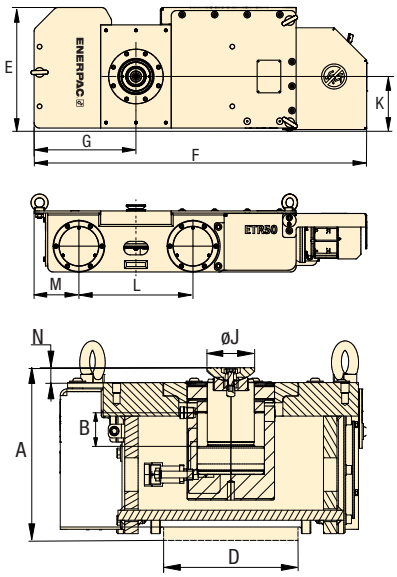

ETR100

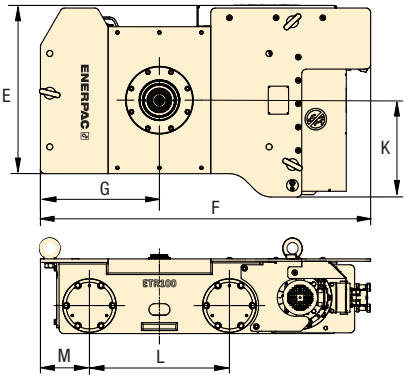

Capacity per Trolley Unit (ton)	Model Number (one unit)	Motor Power (hp)	A (in)	B (in)	D (in)	E (in)	F (in)	G (in)	J (in)	K (in)	L (in)	M (in)	N (in)	Wt. (lbs)
50	ETR50	0.5	9.65	N/A	7.87	17.95	48.23	14.76	4.92	7.95	16.54	6.50	0.39	684
	ETR50H		10.12	1.97					2.80				0.87	705
100	ETR100	1.0	13.62	N/A	15.75	32.32	55.71	20.08	6.69	16.34	23.62	8.27	0.59	1874
	ETR100H		13.74	3.94					2.80				0.75	1896

[1] ETR50H includes HCG502 and CATS50. ETR100H includes HCG1004 and CATS101.
[2] ETR100 series uses two track plates side-by-side.

▼ Shown: **SPMT600-360**

SPMT
Series

Capacity (per transporter):
67 tons

Transport Speed (unloaded-loaded):
1.9 - 1.0 mph

Motor Size:
75 hp

- **Modular design for multiple configurations**
- **Minimized height and slim design are ideal for in-plant operation**
- **Intelli-Drive wireless control system is intuitive and easy to use**
- **One power pack can operate 2-3 trailers maximum depending on model**
- **Two trailers and power pack can be shipped inside a 20 ft. container**
- **Hydraulic power unit is tier-4 diesel engine for reduced emissions**

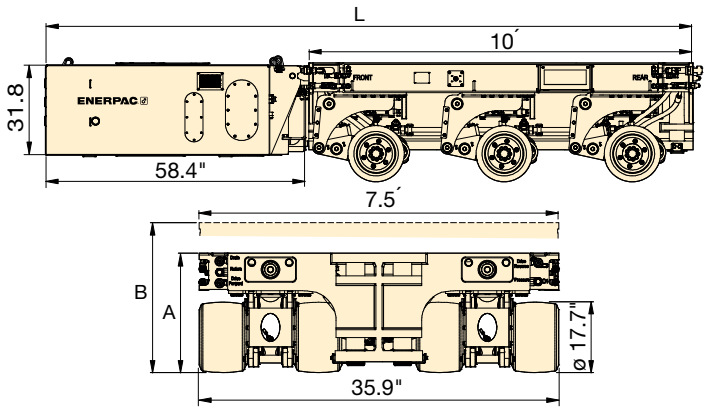

Self-Propelled Modular Transporter

The Enerpac Self-Propelled Modular Transporter (SPMT) features a minimized height and slim design, which makes it very easy to operate in confined spaces. Each wheel unit has a steering function as well as a lifting cylinder at its disposal. Wheel propulsion is established by wheel drives.

The SPMT is operated by the Intelli-Drive Remote Controller. This remote controller can be used both hard wired and wireless (based on radio frequency).

The SPMT is a modular system comprised of trailers with 3 axle lines each and diesel hydraulic power units (HPU). Depending on the model number, the trailers and HPUs can be configured to a maximum of 4 trailers in 2 rows (4x2) or 6 trailers in 2 rows (6x2).

This is the maximum setup of units that can work together on just one Intelli-Drive Remote Controller.



crab



carousel

Capacity (per transporter) (ton)	Transporter Model Number	Maximum Configuration (transporters in rows)	Steering Range (degrees)	Steering Mode crab	Steering Mode carousel	Retracted Height A (in)	Average Travel Height B (in)	Overall Length L (ft)	Lifting Stroke (in)	Wt. (SPMT) (lbs)	HPU * Model No.	Wt. (HPU*) (lbs)
67	**SPMT600-100**	4 x 2	±50°	•	–	30.20	37.76	14.96	15.12	15,432	**MTPP-100**	5512
	SPMT600-360	6 x 2	±179°	•	•	30.07	37.64	17.02	15.12	17,637	**MTPP-360**	5512

** HPU = 75 hp Power Pack Diesel. HPU is sold separately.*

FROM SIMPLE TO COMPLEX – LIFTING SOLUTIONS FOR YOUR APPLICATION

For those who do the heavy lifting today, the stakes are high and the challenges complex. We know our customers put their reputations and physical well-being on the line to get the job done right. We take that very seriously.

Backed by a global legacy of ultra-reliable quality and superior precision, Enerpac Heavy Lifting Technology is pushing the industry forward with a wide range of advanced solutions that first and foremost ensure our customers operate safely and productively every day. It isn't about being compliant, or "as good" as the next guy; we outpace the competition by delivering technically superior solutions that are easy to design, safe to use and built to outlast.

CONSULTATIVE APPROACH TO HEAVY LIFTING

From the very first discussion to gain an understanding of your application to solution design, training and ongoing field support of your operators, you will find a structured process and a team of application experts who will advise you towards a successful solution.

SOLUTION CONSULTATION

- Requirements Specifications
- Selecting the Right Solution for Your Application

DESIGN & MANUFACTURING

- Design & Engineering
- Manufacturing Excellence

TESTING & TRAINING

- Quality Assurance
- Operation & Safety Training

ON-DEMAND SUPPORT

- On-the-job Application Engineer Support
- Routine Maintenance & Repair Services

SOLUTION CONSULTATION

- Requirements Specifications
- Selecting the Right Solution for your Application

Since the late 1950's, Enerpac has been steadfast in their commitment to work closely with customers to understand their lift needs and work-site environment. Not all lifts are the same. There are several factors that must be taken into consideration before recommending the best solution.

APPLICATION CONSIDERATIONS

LOAD CAPACITY
How much weight needs to be lifted, moved and/or positioned?

LIFT HEIGHT
How high does the load need to be lifted? Are there restrictions above or below the load?

TYPE OF LIFT
Will you lift from above or below?

SPACE
How much space is available to complete the task?

TIME
How the job needs to be completed within a set timeframe due to operational or environmental factors.

TRANSPORTATION
Does the load need to be transported as well as being lifted? How far and how often?

TOTAL COST OF OWNERSHIP
What productivity, labor or training costs need to be factored into the solution to make it the best long-term investment.

Because Enerpac engineers have designed solutions for a variety of applications over the years, they are well-equipped to minimize risks and to recommend a simpler solution that others may overlook. Built on a world-class reputation for developing products that meet the most common lifting applications, once your specifications are in the hands of the Enerpac experts, you are sure to receive a comprehensive recommendation that will save time and money while ensuring safety above all else.

Design & Manufacturing

Enerpac has the most complete offering of standard heavy lifting and positioning tools in the market. These products are designed to highest standards of performance and offer great flexibility to meet the demands of even the most challenging applications. Our manufacturing facility adheres to world-class production planning and inventory management to ensure your product arrives at your facility on time as specified.

DESIGN & MANUFACTURING

- Design & Engineering
- Manufacturing Excellence

Design & Engineering

Enerpac engineers are experienced in the latest software, rapid prototyping, failure analysis methods and engineering standards. This allows us to continuously improve and expand our product offering to meet ever changing needs of the market.

- CE, Machinery Directive 2006/42/E
- ASME: B30.1

Assembly & Quality Assurance

- All Enerpac products are assembled by highly trained individuals, working safely and efficiently from start to finish.
- The Hengelo, NL facility that manufactures the Enerpac heavy-lifting equipment holds several quality certifications.
- ISO 9001: 2015
- ISO 3834-2: 2005
- ISO 14001: 2015
  ISO 45001: 2018

Fabrication & Machining

- A dedicated steel fabrication and certified welding facility manufactures product components and support structures for the most demanding heavy-lifting applications.
- Complete in-house production is delivered using the latest CNC and conventional turning machines plus a full range of milling and boring equipment.

TESTING & TRAINING

- Quality Assurance
- Operation & Safety Training

The Enerpac facility, that makes and builds your heavy-lifting equipment, holds several quality system certifications giving you extra confidence in the safety and reliability of your heavy-lifting equipment. Whether your first lift or move is scheduled upon taking delivery of your new equipment or months later, you will have access to the dedicated Heavy-Lifting team to support your training or troubleshooting needs.

Factory Acceptance Testing (FAT)

Customers are invited to witness FAT, often combined with operator training. Under witness of Lloyd's Register, all equipment is functionally tested to maximum capacity, and in many cases up to 125% of rated load. Additional testing to meet standards compliance, government regulations or specific customer requirements are performed and documented at the same time.

Documentation

Upon delivery of your new heavy-lifting equipment, an operator's manual outlines the configuration of your system, detailed operating instructions with safety guidelines, and maintenance recommendations.

Training

Customers who attend factory acceptance training at Enerpac's facility can also receive a day of training on their heavy lifting equipment. Additional training or on-site custom training can also be arranged.

On-Demand Support

Once you take possession of your new heavy-lifting equipment, you have on-demand access to our field support team. And support continues with ongoing maintenance or system upgrades throughout the life of your assets.

ON-DEMAND SUPPORT

- On-the-Job Application Engineer Support
- Routine Maintenance & Repair Services

On-the-Job Field Support

Should you ever require extra support while using your Enerpac Heavy-Lifting system on the job, our dedicated application engineers will work closely to guide your operators on appropriate use of our equipment. And to ensure job safety, they will travel to your job site as needed to ensure your project is completed timely and without incident.

Product Warranty

All Enerpac Heavy-Lifting equipment is built to stringent specifications and built to last. Should you ever encounter a defect in materials or workmanship under normal use, it will be remedied through our standard one-year warranty program.

Maintenance & Repair

Downtime is minimized with fast delivery of repair parts and consumables stocked at several locations worldwide. For those that want the added confidence of specialized technicians, the Enerpac Maintenance & Repair team are ready to perform your maintenance or repair services for you.

Since joining the Enerpac portfolio, the design innovation of Mirage machines has continued to deliver new products that help get the job done faster, safer, and smarter. Explore the full product line from flange facing machines, milling machines, hot tapping, drilling and tapping machines to clamshell pipe cutters, decommissioning and band saws. All backed by Enerpac training, application support and service.

Specialist Support, Experience and Expertise

Design and Innovation

On-Site Machine Tools are the result of over 25 years of expertise and innovation. The pioneering spirit continues under Enerpac ownership through our commitment to new product development. Watch for more new tools being launched in the near future!

Continuous Improvement

Our specialist manufacturing operation is ISO9001 certified. This means we drive a culture of continuous improvement. Our team members are encouraged to find ways to improve today, tomorrow, and long into the future.

Specialist Support, Experience and Expertise

Each machining project presents difficult and unique challenges. Making the right choice for your next and any future projects can be complex. That is why our team is eager to support you through every step on your journey. Whether it is choosing the right specification, commissioning your machine, or maintenance - we're with you all the way.

Utilities

Nuclear

Oil & Gas

Petrochemicals

Power Generation

Ship Building, Maintenance and Repair

Wind Power

Construction and Mining

On-Site Machining Tools – Overview

Machining Capacities	On-Site Machining Tools	Series	Page
ø 1 - 161 inches ø 25,4 - 4100 mm	**Internal Mount Flange Facing Machines** Create the right flange sealing surface	FF MM-I	380 ▶
ø 0 - 80 inches ø 0 -2032 mm	**External Mount Flange Facing Machines** Create the right flange sealing surface	MM-E	381 ▶
ø 2 - 86 inches ø 51 - 2184 mm	**DL Ricci Clamshell Pipe Cutting and Beveling Machines** Narrow Body, Mid-Size and Heavy-Duty	DLR	382 ▶
ø 98 - 315 inches ø 2500 - 8000 mm	**General Orbital Milling Machines** Machine large flanges accurately and efficiently	OM	384 ▶
ø 70 - 181 inches ø 1800 - 4600 mm	**Wind Power Orbital Milling Machines** Machine large flanges accurately and efficiently	WP	385 ▶
40 - 120 inches 1000 - 3000 mm	**Linear Milling Machines** On-site milling with workshop precision 2 and 3-axis configuration	LMR MR, MRY GM	 386 ▶
ø 1/2 - 60 inches ø 12.7 - 1524 mm	**Hot Tapping Machines and Line Stopping Actuators** Built to deliver power where it matters most	HTM, LPH MHT, CHT LSA	388 ▶
ø 6 - 60 inches ø 152 - 1524 mm	**Decommissioning Diamond Wire and Band Saws** Cutting the toughest materials	MDWS BS	390 ▶
ø 2 - 12 inches ø 51 - 305 mm	**Drilling and Tapping Machines** Make light work of the toughest applications	HT T DDU	392 ▶
ø ⅞ - 11 inches ø 22 - 279 mm	**GeniSYS™ IV Portable 3-axis CNC Mill** Removal of cracked or broken studs and refurbishment of damaged threads	GeniSYS™	394 ▶
ø ¾ - 40 inches ø 19 - 1016 mm	**Inline Isolation and Test Tools** Piping Isolation and Pressure Testing	MITT	396 ▶

Internal Mount Flange Facing Machines

FF120
- Mechanical tool manually operated
- Simple to operate
- Lightweight - only 15 lbs (6,8kg)
- Multiple leadscrew options allow for manually driven, continuous fixed feeds for ASME standard surface finishes
- Calibrated slide to define cut depth and correct finish

MM305I and MM610I
- Swivel tool post for groove details, reduces the need for separate accessories
- Supplied with a range of two quick-set base sizes for improved onto site operation
- Collet base allows for efficient machine mounting and centering

MM860I and MM1000I
- 360° swivel tool post for groove details, reduces the need for separate accessories (power feed on MM1000I)
- Supplied with a range of three quick-set base sizes for improved onto site operation
- Adjustable height clamping jaws for efficient machine setting

MM1500I
- Power feed 360° swivel tool post for groove details, reduces the need for separate accessories
- Supplied with a range of three quick-set base sizes for improved onto site operation
- Adjustable height clamping jaws for efficient machine setting

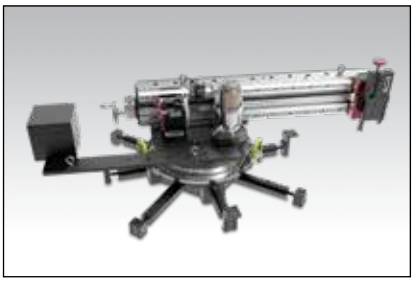

MM2000I
- Power feed 360° swivel tool post for groove details, reduces the need for separate accessories
- Supplied with a range of two quick-set base sizes for improved onto site operation
- Adjustable height clamping jaws for efficient machine setting.

MM3000I and MM4500I
- Power feed 360° swivel tool post for groove details, reduces the need for separate accessories
- Supplied with a range of three quick-set base sizes for improved onto site operation
- Adjustable height clamping jaws for efficient machine setting
- Milling accessories available with the hydraulic drive version.

Flange Facing Machines

Flange Facers are known for precision construction, the results they deliver, and how easy they are to set up on-site. These high-performing machines produce continuous groove facing feeds to ASME standards for the oil & gas, power generation and petrochemical industries.

MM-I Series feature
- Hardened slideways for long-term accuracy
- High torque, low noise drive
- Heat exchanger machining accessories available on most models.

Applications
- Heat exchanger flanges
- Hub profiles
- Lens ring joints and raised face flanges
- Recessed gaskets and spigots
- Ring type joint grooves (RTJ)
- SPO compact flanges
- Swivel ring and TECHLOK flanges
- Welding preparations.

▼ *MM860I machine to ensure flange joint integrity.*

Internal Mount Flange Facing Machines

Flange Facing Diameter Range		Machine Model Number	Drive Power Options	
(inch)	(mm)		Pneum.	Hydr.
1 – 12	25 – 305	**FF120 ***		
2 – 12	51 – 305	**MM305I**	●	
2 – 24	51 – 610	**MM610I**	●	
6 – 34	152 – 864	**MM860I**	●	
6 – 40	152 – 1016	**MM1000I**	●	
12 – 60	305 – 1524	**MM1500I**	●	●
24 – 80	610 – 2032	**MM2000I**	●	●
5 – 120	127 - 3048	**MM3000I**	●	●
83 – 161	2100 – 4100	**MM4500I**		●

* FF120 is not suitable for lens-ring flanges or ring type joints (RTJ) flanges.

External Mount Flange Facing Machines

MM200E
- Preloaded cross roller bearing drive, ensuring robust, accurate, repeatable machining
- Hardened slideways for long-term accuracy
- Swivel tool post for groove details, reduces the need for separate accessories
- Continuous fixed feed for ASME standard surface finish
- Quick-set integrated clamping jaws

MM300E
- Preloaded cross roller bearing drive, ensuring robust, accurate, repeatable machining
- Hardened slideways for long-term accuracy
- Swivel tool post for groove details, reduces the need for separate accessories
- Multiple continuous fixed feeds for ASME standard surface finishes
- Quick-set integrated clamping jaws

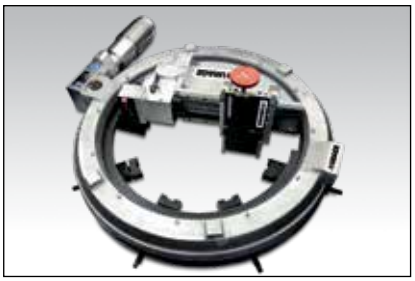

MM600E
- Preloaded cross roller bearing drive, ensuring robust, accurate, repeatable machining
- Hardened slideways for long-term accuracy
- Power feed 360° swivel tool post for groove details, reduces the need for separate accessories
- Multiple continuous fixed feeds for ASME standard surface finishes
- Quick-set integrated clamping jaws

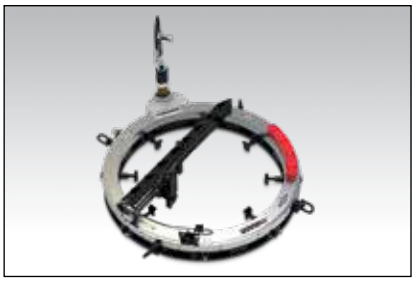

MM760E, MM1000E, MM1250E, MM1500E, MM1775E, MM2000E
- Continuous variable auto-feed for ASME standard finishes
- Choice of pneumatic and hydraulic drive motors
- Quick-set radial clamping adjustment
- Quick-set axial adjustment jaws
- Heavy-duty bearing construction for high metal removal rates and accuracy
- Heat exchanger kits for back facing and slot machining in one operation.

External Mount Flange Facing Machines

Flange Facing Diameter Range		Machine Model Number	Drive Power Options	
(inch)	(mm)		Pneum.	Hydr.
0 – 8	0 – 203	**MM200E**	●	
0 – 12	0 – 305	**MM300E**	●	
0 – 24	0 – 610	**MM600E**	●	
0 – 30	0 – 762	**MM760E**	●	●
0 – 40	0 – 1016	**MM1000E**	●	●
0 – 50	0 – 1270	**MM1250E**	●	●
0 – 60	0 – 1524	**MM1500E**	●	●
0 – 70	0 – 1778	**MM1775E**	●	●
0 – 80	0 – 2032	**MM2000E**	●	●

FF MM Series

Internal Mount Facing Diameter:
1 - 161" / 25,4 - 4100 mm

External Mount Facing Diameter:
0 - 80" / 0 - 2032 mm

Cutting Resultant Roughness:
Ra 125-492 µin / 3,2-12,5 µ

Surface Finish and Accuracy

All Flange Facing Machines provide a serrated finish with 30-55 grooves per inch and a resultant roughness of between Ra 3,2-12,5µ (125-492 micro inches). Geared multiple continuous groove-facing feeds for a gramophone finish (ASME Standard).

▼ *MM600E external mount flange facing machine to ensure flange joint integrity.*

Narrow Body & Mid-Size Clamshell Cutters

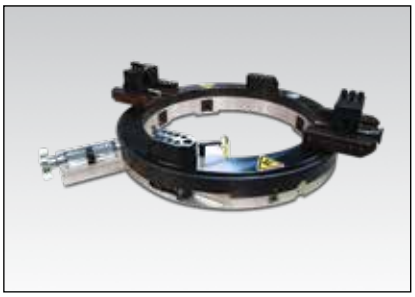

DLR-NB12, NARROW BODY CLAMSHELL CUTTER

- NB or "Narrow Body" portable clamshells are ideal when space is at a premium
- Standard NB-series cover a range from 2 to 36" outside diameter (51 to 914 mm)
- Narrow body design: ideal when space is at a premium or obstructions are present
- Pneumatic, hydraulic, and electric drive options
- Several different drive options are available to best position the motor for a specific machining application
- Accepts a wide range of accessories to increase performance and expand capabilities
- Full range of bevel and cutting tools available

DLR-MS30, MID-SIZE CLAMSHELL CUTTER

- Mid-size machines weigh less than the HD heavy-duty series, but provide greater rigidity than the NB-narrow body series
- Standard MS-series cover a range from 4 to 50" outside diameter (105 to 1270 mm)
- Increased maneuverability and greater clearance than the HD series
- Several different drive options are available to best position the motor for a specific machining application
- Accepts a wide range of accessories to increase performance and expand capabilities
- Full range of bevel and cutting tools available

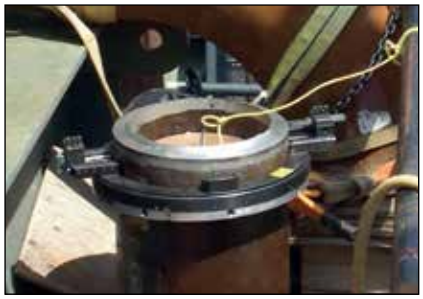

◀ *NB-model narrow body clamshell cutter.*

DL Ricci Clamshell Cutters

Clamshell cutters in the Enerpac range remain true to the pioneering designs that made DL Ricci the 'go-to' brand for machinists worldwide. Outstanding performance and a comprehensive choice have seen them used widely for applications in new construction, decommissioning, component replacement, fabrication, and maintenance.

Robust and efficient pipe cutting and beveling

Designed for any industry that needs pipe or tube cutting, or any pipe end preparation weld repair. This may be in the oil & gas sector, power generation, ship building/dock yards, or processing plants during maintenance and shutdowns.

Applications

- Pipe cutting
- Weld preparation
- Cutting materials, including super duplex, carbon steel, stainless steel, Hastelloy® and Incoloy®
- For pipe diameters up to 86 inches (2184 mm)
- Ideal for projects beyond the usual clamshell configuration – using a wide range of purpose designed accessories.

Included as Standard with Each Machine:

- Clamshell body
- Locators and extensions covering the full range
- Slides
- Motor and mounting
- Air caddy
- Tool kit
- Manual
- Shipping crate

NB Narrow Body Series Clamshell Cutters

Mounting Outside Diameter (min. - max.)		Machine Model Number	Drive Power Options		
(inch)	(mm)		Pneumatic	Hydraulic	Electric
2 – 4½	51 – 114	**DLR-NB4**	●	●	
2⅜ – 6⅝	60 – 168	**DLR-NB6**	●	●	
3½ – 8⅝	89 – 219	**DLR-NB8**	●	●	●
4½ – 10¾	114 – 273	**DLR-NB10**	●	●	●
6⅝ – 12¾	168 – 324	**DLR-NB12**	●	●	●
8⅝ –14	219 – 356	**DLR-NB14**	●	●	●
10⅝ – 16	219 – 406	**DLR-NB16**	●	●	●
12¾ – 18	324 – 457	**DLR-NB18**	●	●	●
14 – 20	356 – 508	**DLR-NB20**	●	●	●
18 – 24	457 – 609	**DLR-NB24**	●	●	●
20 – 26	508 – 660	**DLR-NB26**	●	●	●
22 – 28	559 – 711	**DLR-NB28**	●	●	●
24 – 30	610 – 762	**DLR-NB30**	●	●	●
26 – 32	661 – 813	**DLR-NB32**	●	●	●
30 – 36	762 – 914	**DLR-NB36**	●	●	●

MS Mid-Size Series Clamshell Cutters

Mounting Outside Diameter (min. - max.)		Machine Model Number	Drive Power Options	
(inch)	(mm)		Pneumatic	Hydraulic
4⅛ – 13	105 – 330	**DLR-MS12**	●	●
7⅜ – 16¼	187 – 413	**DLR-MS16**	●	●
9⅜ – 18¼	238 – 464	**DLR-MS18**	●	●
11⅜ – 20¼	289 – 514	**DLR-MS20**	●	●
15⅜ – 24¼	391 – 616	**DLR-MS24**	●	●
19⅜ – 28¼	492 – 718	**DLR-MS28**	●	●
21⅜ – 30¼	543 – 769	**DLR-MS30**	●	●
23⅜ – 32¼	594 – 819	**DLR-MS32**	●	●
27⅜ – 36¼	695 – 921	**DLR-MS36**	●	●
27⅞ – 36¾	708 – 934	**DLR-MS365**	●	●
33⅜ – 42¼	848 – 1073	**DLR-MS42**	●	●
39⅜ – 48¼	1000 – 1226	**DLR-MS48**	●	●

HD Heavy-Duty Clamshell Cutters

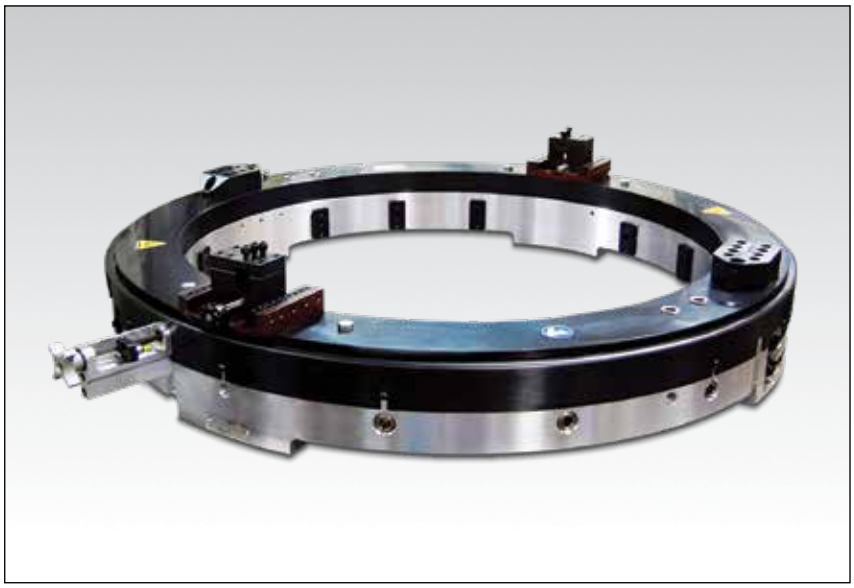

DLR-HD54, HEAVY-DUTY CLAMSHELL CUTTER

- **Robust body design - ideal for large diameter heavy-wall pipe applications**
- **16 heavy-duty models cover a range of 20 - 86" outside diameter (508 - 2184 mm)**
- **Pneumatic and hydraulic drive options**
- **Fully adjustable heavy-duty bearing design provides greater serviceability**
- **Stepped and keyed gear clamps equipped with a through bolt provide a positive fit at each assembly joint**
- **Accepts a wide range of accessories to increase performance and expand capabilities**
- **Full range of bevel and server tools available**

HD Heavy-Duty Series Clamshell Cutters

Mounting Outside Diameter (min. - max.)		Machine Model Number	Drive Power Options	
(inch)	(mm)		Pneumatic	Hydraulic
20 – 32	508 – 813	**DLR-HD32**	•	•
24 – 36	610 – 914	**DLR-HD36**	•	•
27 – 39	686 – 990	**DLR-HD39**	•	•
31 – 43	787 – 1092	**DLR-HD43**	•	•
33 – 45	838 – 1143	**DLR-HD45**	•	•
36 – 48	915 – 1219	**DLR-HD49**	•	•
38 – 50	966 – 1270	**DLR-HD50**	•	•
41 – 53	1042 – 1346	**DLR-HD53**	•	•
42 – 54	1067 – 1360	**DLR-HD54**	•	•
43 – 55	1092 – 1397	**DLR-HD55**	•	•
45 – 57	1143 – 1448	**DLR-HD57**	•	•
48 – 60	1220 – 1524	**DLR-HD60**	•	•
54 – 66	1372 – 1676	**DLR-HD66**	•	•
60 – 72	1524 – 1828	**DLR-HD72**	•	•
68 – 80	1728 – 2032	**DLR-HD80**	•	•
74 – 86	1880 – 2184	**DLR-HD86**	•	•

DLR Series



Outside Mounting Diameter Range:
2 - 86 inches

Outside Mounting Diameter Range:
51 - 2184 mm

Recommended Accessories for Clamshell Cutters

Other clamshell accessories available. Details available on request.

Counter-bore Swivel Head Modules

- 10 inch size available
- Match boring applications
- Up to 60 degree adjustability in the head
- Internal diameter bevelling.

Description	Part Number
2 inch travel	**F0108A1224AA-SK**
6 inch travel	**F0108A1224AB-SK**

Low Profile Tool Slide

- Brings cut line closer to the back of machine
- Allows cutting & bevelling on short pipe sections
- Use for facing, RTJ grooves and compound angle weld preparations.

Description	Part Number
Low profile slide	**F0130A0016XX**

Out-of-round Tool Block Slide

- Dual compensating Spring Assembly
- Rides on OD of pipe and tracks the contour
- For up to 1 inch out-of-round.

Description	Part Number
Out of round slide	**F0130A0022XX**
Tripper for NB models	**F0145A0019XX**
Tripper for MS models	**F0145A0020XX**
Tripper for HD models	**F0145A0028XX**

▼ OM6000 Orbital Milling Machine

OM Series

Cutting Diameter Range:
98 - 315 inches

Cutting Diameter Range:
2500 - 8000 mm

General Orbital Milling Machines

Orbital milling machines are designed to deliver fast material removal and achieve high accuracy across large flange diameters.

Applications

- Machining crane bearing faces
- Repairing drag lines
- Machining large flanges
- Machining ship thruster flanges

Machine large flanges accurately and efficiently

- **Precision flatness tolerances across large diameters**
- **Hydraulic high torque anti-backlash drive**
- **Precision preloaded linear rotary drive**
- **Adjustable fast-set hydraulic chuck**
- **Rigid and adjustable mounting base**

▼ *Machining crane bearing face.*

▼ *Milling a ship thruster flange.*

General Orbital Milling Machines

Cutting Diameter Range (min. - max.) (inch)	Cutting Diameter Range (min. - max.) (mm)	Machine Model Number	Hydraulic Power Drive
98 – 178	2500 - 4500	**OM4500**	•
98 – 237	2500 – 6000	**OM6000**	•
138 – 315	3500 – 8000	**OM8000**	•

Wind Power Orbital Milling Machines

▼ **WP3500 Wind Power Orbital Milling Machine**

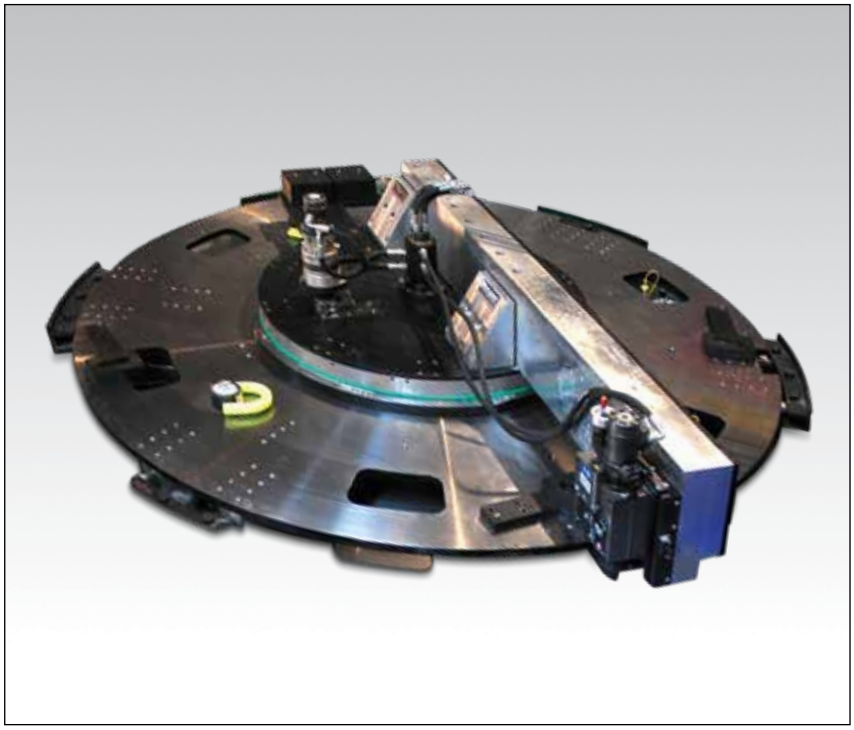

WP
Series

Cutting Diameter Range:
70 - 181 inches

Cutting Diameter Range:
1800 - 4600 mm

Wind Power Orbital Milling Machines

The wind power orbital milling range is designed especially for companies manufacturing wind turbine rotor blades and towers.

Applications

- Wind turbine blade root end milling
- Wind tower flange machining.

Machine large flanges accurately and efficiently

- **Fully packaged system; includes trolley, power unit and base**
- **Accurate and repeatable process time**
- **Minimum distortion, fast mount hydraulic base**
- **Adjustable arm for different diameters**
- **Patented hydraulic mounting system for blade and tower production**
- **Direct drive spindle**
- **High torque anti-backlash drive**

▼ *Wind tower machining with WP4600.*

Wind Power Orbital Milling Machines

Cutting Diameter Range (min. - max.) (inch)	(mm)	Machine Model Number	Hydraulic Power Drive
70 – 96	1800 - 2450	**WP2500**	•
90 – 137	2300 – 3500	**WP3500**	•
110 – 181	2800 – 4600	**WP4600**	•

▼ *WP3500 milling turbine blade end.*

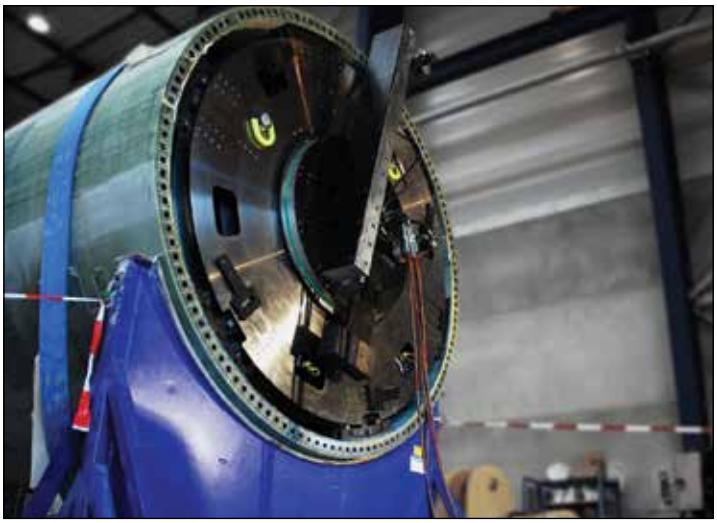

2-Axis Milling Machines

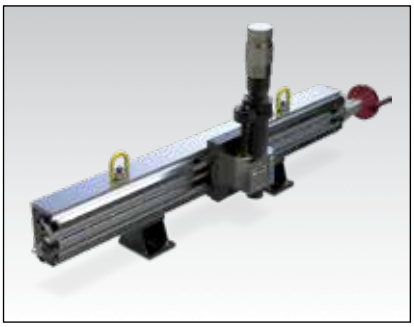

LMR1000, 2-AXIS MILLING MACHINE

- Ideal for lightweight applications
- Hand feed to main axis; auto feed optional
- Features ER40 Collet with ISO30 spindle option
- Choice of Pneumatic and Hydraulic drive

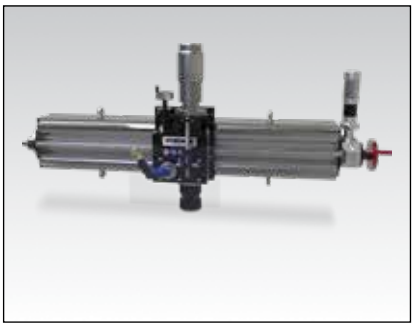

MR1000, 2-AXIS MILLING MACHINE

- Induction hardened 'V' rails ensure accuracy and durability
- Ball-screw feed
- Hand and auto feed to main axis
- Direct drive ISO 40 spindle
- Choice of Pneumatic and Hydraulic drive
- Variety of mounting options include bolting, switch magnets, pipe chain clamps and gantry

LMR, MR, MRY Series

X-Axis Maximum Stroke:

40 - 120" / 1,0 - 3,0 m

Y-Axis Maximum Stroke (MRY-Series only):

12 inches / 305 mm

3-Axis Milling Machines

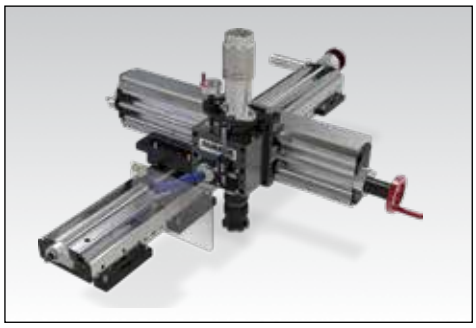

MRY1500, 3-AXIS MILLING MACHINE

- Induction hardened 'V' rails ensure accuracy and durability
- Ball-screw feed
- Hand and auto feed to main axis
- Direct drive ISO 40 spindle
- Choice of pneumatic and hydraulic drive
- Variety of mounting options including: bolting, switch magnets, chain clamps and gantry

▼ *MRY Milling machine on a heat exchanger.*

2-Axis Linear Milling Machines

X-Axis Maximum Stroke		Machine Model Number	Drive Power Options	
(inch)	(mm)		Pneumatic	Hydraulic
40	1000	**LMR1000**	●	●
60	1500	**LMR1500**	●	●
80	2000	**LMR2000**	●	●
40	1000	**MR1000**	●	●
60	1500	**MR1500**	●	●
80	2000	**MR2000**	●	●
120	3000	**MR3000**	●	●

3-Axis Linear Milling Machines

X-Axis Maximum Stroke		Y-Axis Maximum Stroke		Machine Model Number	Drive Power Options	
(inch)	(mm)	(inch)	(mm)		Pneumatic	Hydraulic
60	1500	12	305	**MRY1500**	●	●
80	2000	12	305	**MRY2000**	●	●
120	3000	12	305	**MRY3000**	●	●

Gantry Milling Machine

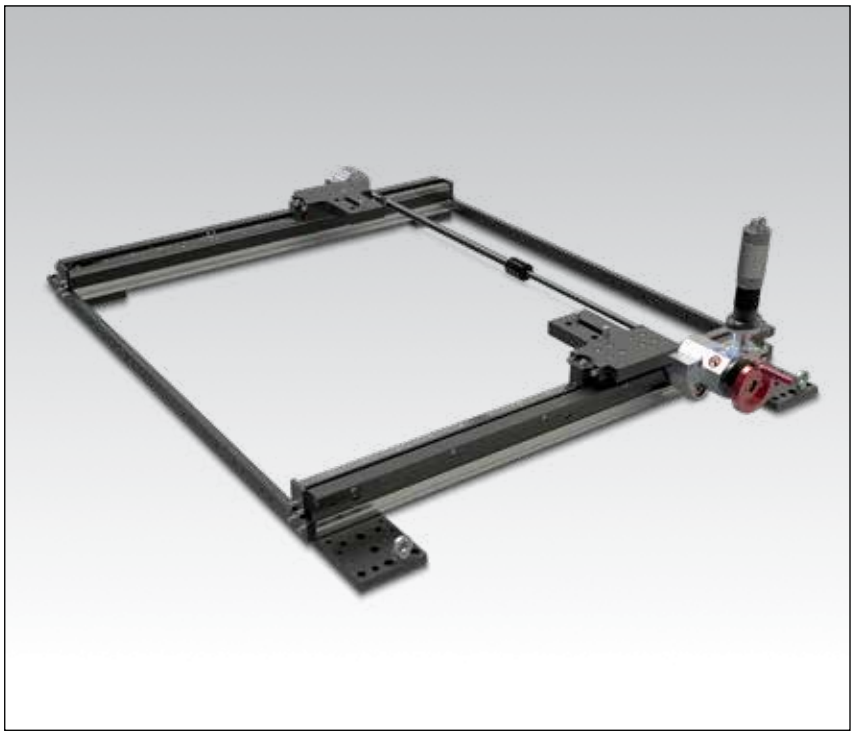

GMRF1000, GANTRY RAIL KIT

- **Modular jointing system for lengths up to 32.8 ft (10 m)**
- **Linear rail and precision carriages**
- **Quick set up with jacking system**
- **Auto and manual feed**
- **Optional quick-set magnets for mounting**

GMRF
Series

X-Axis Maximum Stroke:
40 - 394" / 1,0 - 10,0 m

Y-Axis Maximum Stroke:
40 - 118"/ 1,0 - 3,0 m

Linear Milling Machines – Take workshop precision to your next on-site milling project

These precise and robust milling machines are available in 2- and 3-axis configurations. Each includes the latest workshop tool technology in a portable format. For a fast and efficient set-up, you can choose our optional switch magnets.

Applications

- Motor and pump mounting pads
- Aerospace machining
- Crane pedestals
- Heat exchanger repair
- Shaft keyways
- Steel mill housings
- Turbine split-line machining

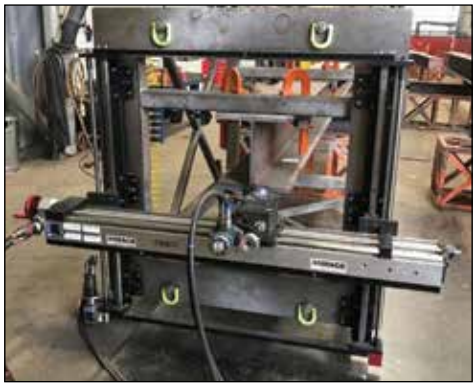

I-Beam end face milling with a GMRF1000. ▶

Gantry Milling Machine

Feed Type	X-Axis Max. Stroke Options [1]		Y-Axis Max. Stroke Options [2]		Machine Model Number	Drive Power Options	
	(inch)	(m)	(inch)	(m)		Pneumatic	Hydraulic
Rack Feed	40 - 394	1.0 - 10.0	40 - 118	1.0 - 3.0	**GMRF1000**	•	•

[1] Common base module 39 inches.

[2] MR milling rail required. Extension kits available.

▼ **HTM100**

HTM, MANUAL HOT TAPPING

- Operates to 1480 psi (102 bar)
- Versatile hot taps, bypass lines and completion plugs
- Manual rotation and feed
- Optional pneumatic feed
- 2-inch NPT connection
- Lightweight construction.

HTM, LPHT, MHT Series

Tapping Diameters:
½ - 60 inches

Maximum Stroke:
18 - 150 inches

Maximum Operating Pressure:
285 - 1480 psi

▼ **LPHT312**

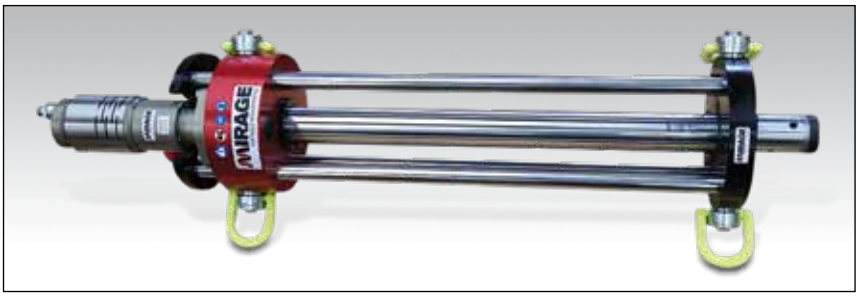

▼ **MHT312**

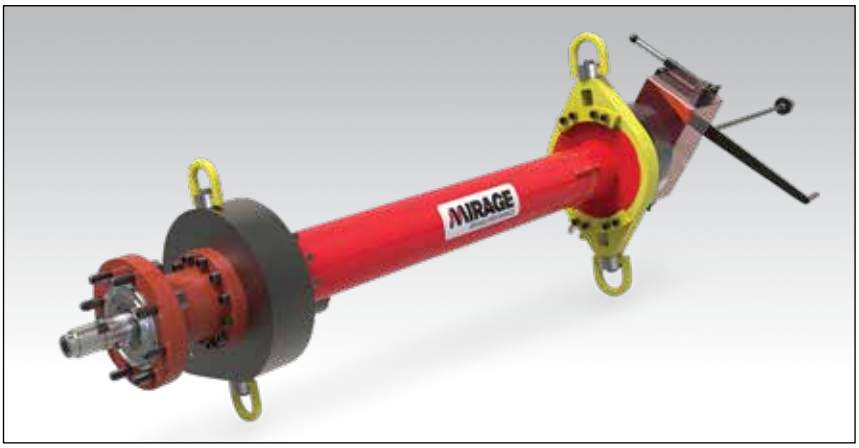

LPHT312, LOW PRESSURE HOT TAPPING

- Operates up to 285 psi (20 bar)
- Pneumatic or hydraulic drive
- Depth-stop to ensure correct hot tap distance

MHT, HOT TAPPING MACHINES

- Pressure rating up to 1480 psi (102 bar)
- Helical geared drive situated close to the cutter
- Hydraulic and pneumatic drive options
- Industry standard connection flanges
- Compatible with industry standard tooling
- Fast traverse feed motors available
- Cutter holders included
- Interchangeable seal cartridge

Hot Tapping – Built to deliver power where it matters most

Hot tapping is a high-pressure intervention, and our range of hot tapping machines can help towards a safe and effective solution. Industry-leading innovations used include a helical gear drive located as close to the cutting head as possible for maximum efficiency, rotary pressure seals, and four fixed feeds.

Applications

- Construction tie-ins
- Gas distribution
- Petrochemical pipelines
- Subsea pipelines
- Temporary installation
- Transmission pipelines
- Valve installation and repair
- Water main pipelines
- Wellhead maintenance

▼ *On-site hot tapping with MHT312.*

Hot Tapping Machines

Tapping Diameters (Min. - Max.)		Maximum Stroke		Max. Operating Pressure		Machine Model Number	Drive Power Options	
(inch)	(mm)	(inch)	(mm)	(psi)	(bar)		Pneumatic	Hydraulic
½ – 4	12.7 – 102	18	457	1480	102	**HTM100**	*	*
½ – 6	12.7 – 152	32	813	1480	102	**HTM150XL**	*	*
3 – 12	76.2 – 305	30	762	285	20	**LPHT312**	•	•
3 – 12	76.2 – 305	42	1067	1480	102	**MHT312**	•	
4 – 20	102 – 508	72	1829	1480	102	**MHT420**		•
8 – 24	203 – 609	80	2032	1480	102	**MHT824**		•
12 – 36	76.2 – 914	110	2794	1480	102	**MHT1236**		•
12 – 42	76.2 – 1066	132	3353	1480	102	**MHT1242**		•
24 – 60	203 – 1524	150	3810	1480	102	**MHT2460**		•

* HTM has manual rotation and feed.

▼ CHT3000

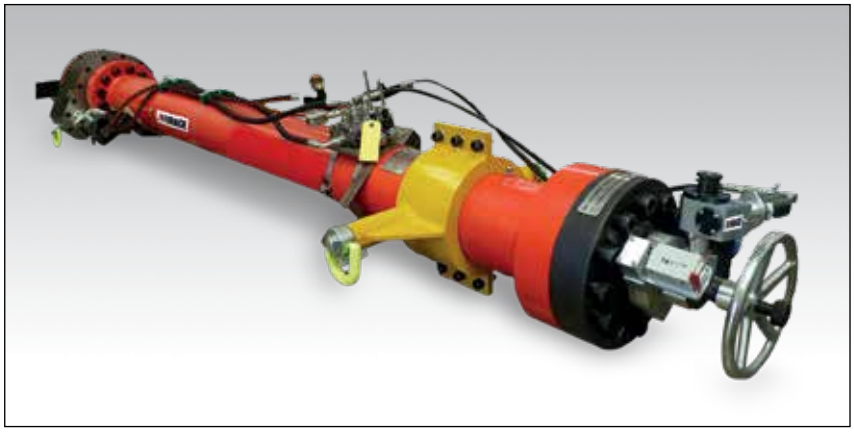

CHT, LSA Series



Tapping Diameters:
3 - 48 inches

Maximum Stroke:
43 - 150 inches

Maximum Operating Pressure:
1480 - 5000 psi

▼ LSA1420-H

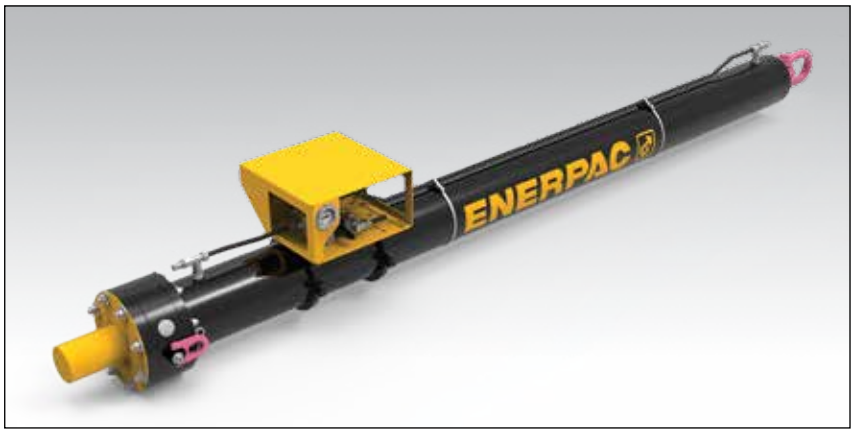

LSA-Series Line Stopping Actuators

Line Stopping Actuators (LSA) are used in conjunction with the required line stop head and housings to carry out line stops in surface or subsea environments. The range is designed for easy use on pipelines in various materials and differing wall thickness. Their use provides temporary pipeline isolation, temporary or permanent bypass and no costly interruption of service.

CHT, HOT TAPPING MACHINES

- Working pressure capacity up to 5000 psi (350 bar)
- Drive as close to the cut enhances cut efficiency
- Auto feed — infinitely variable for differing cut conditions
- Constant pressure seal monitoring ports
- Internally pressure balanced for higher-pressure applications
- Industry standard connection flanges
- Compatible with standard industry tooling

LSA, LINE STOPPING ACTUATOR

- Series of four hydraulic line stop actuators covering a plugging head size range of 4 to 48 inches (102 - 1219 mm)
- Maximum working pressure of 1480 psi (102 bar) at 181 ˚F (83 ˚C)
- Failsafe mechanical lock prevents control rod movement
- Anti-rotation feature to ensure aligned plugging head deployment
- Hydraulic control situated at the working end of the cylinder for ease of use
- Visible control bar depth control.

▲ *CHT3000 hot tapping application for petrochemical pipeline installation.*

CHT-Hot Tapping Machines and LSA-Line Stopping Actuators

Tapping Diameters (Min. - Max.)		Maximum Stroke		Max. Operating Pressure		Machine Model Number	Drive Power
(inch)	(mm)	(inch)	(mm)	(psi)	(bar)		Hydraulic
3 – 12	76 – 305	43	1092	5000	350	**CHT1000**	•
3 – 16	76 – 406	66	1676	5000	350	**CHT1675**	•
6 – 24	152 – 609	80	2032	5000	350	**CHT2000**	•
12 – 48	305 – 1219	150	3810	5000	350	**CHT3000**	•
4 – 12	102 – 305	72	1829	1480	102	**LSA412-H**	•
14 – 20	356 – 508	105	2667	1480	102	**LSA1420-H**	•
22 – 36	559 – 914	140	3556	1480	102	**LSA2236-H**	•
38 – 48	965 – 1219	140	3556	1480	102	**LSA3848-H**	•

▼ *CHT2000 hot tapping offshore application.*

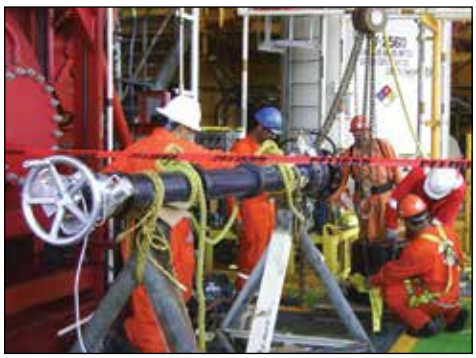

▼ MDWS1638-H

MDWS
Series

Cutting Diameters:
6 - 60 inches

Decommissioning Saws

A range of portable saws for a diverse range of tubular severance projects. The band saw range delivers a cost-effective solution to cold cutting requirements in either surface or subsea situations. Diamond wire saws are ideal for cutting through dissimilar materials quickly.

Applications

- Offshore platform decommissioning
- Conductors, caissons, piles
- Multiple grouted strings
- Subsea ROV-applications
- Subsea structures
- Pipes, casings and risers

Items included with each machine:

- Diamond wire rope
- Tool kit
- Storage / shipping crate
- CE Certificate
- Packing list and manual.

Cutting the toughest materials in the most challenging environments

- **Strong aluminum frame**
- **Overload clutch for bow damage prevention**
- **Hydraulic auto clamp and auto-feed**
- **Diver and ROV compatible**
- **Available with optional flotation modules for deep water use**
- **User replaceable clamp contact pads, wheels, and wheel liners**
- **Crimped or continuous loop wires available**

▲ *MDWS Diamond Wire Saw lowered into sea.*

▼ *Subsea pile cutting.*

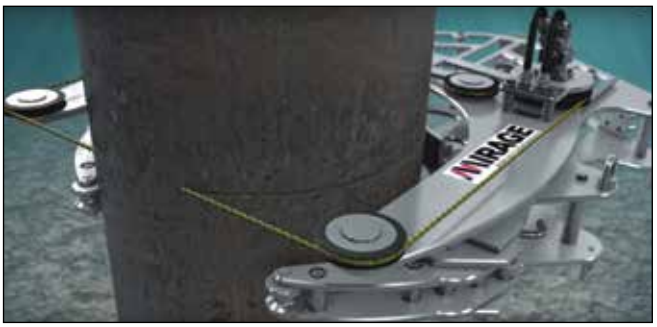

Decommissioning Diamond Wire Saws

Cutting Diameters (Min. - Max.) (inch)	Cutting Diameters (Min. - Max.) (mm)	Machine Model Number	Main Application	Hydraulic Drive Power
6 – 20	152 – 508	**MDWS620-H**	Subsea	•
16 – 38	406 – 965	**MDWS1638-H**	Subsea	•
36 – 60	914 – 1524	**MDWS3660-H**	Subsea	•

▼ BS1636-H

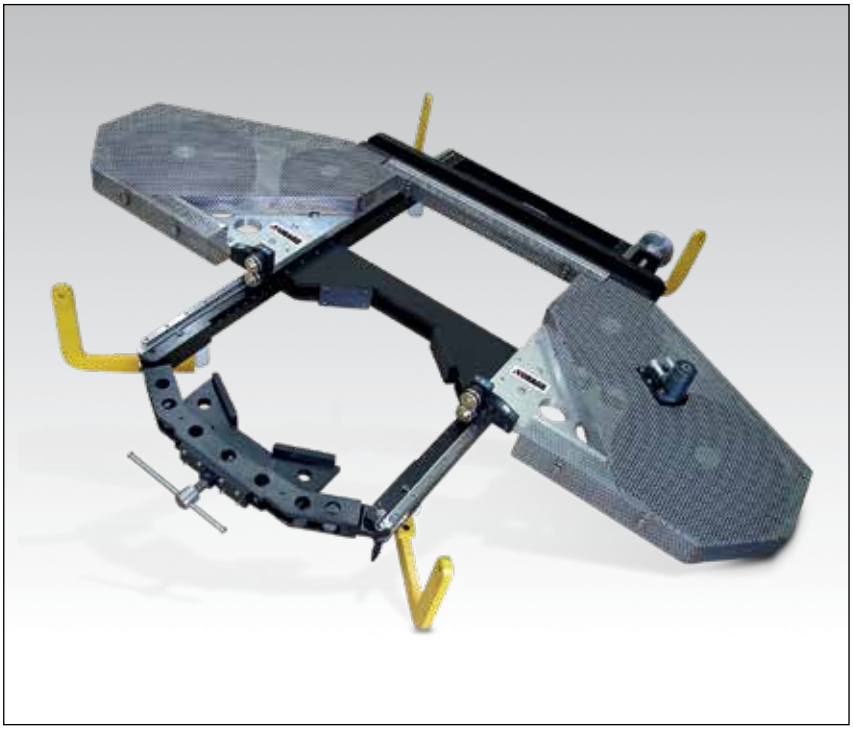

Cutting the toughest materials in the most challenging environments

- **Fast, efficient and cost-effective cold cutting**
- **Cuts grouted multiple casings**
- **Fast mounting system**
- **Vertical or parallel operation**
- **Fast clamping and set up**
- **Low height design for minimum clearances**
- **Extensive blade selection for all materials**

BS
Series

Cutting Diameters:
9 - 36 inches

Portable Band Saws

Hydraulically powered portable band saws designed for tubular severance. Designed primarily for topside use, but also suitable for subsea applications.

Applications
- Offshore platform decommissioning
- Conductors, caissons, piles
- Multiple grouted strings
- Subsea ROV-applications
- Subsea structures
- Pipes, casings and risers

Items included with each machine:
- Band saw blade (2-3TP carbide tipped)
- Tool kit
- Storage / shipping crate
- CE Certificate
- Packing list and manual

▲ *Pipe cutting with BS portable band saw.*

▼ *Decommissioning job with band saw.*

Portable Band Saws

Cutting Diameters (Min. - Max.) (inch)	Cutting Diameters (Min. - Max.) (mm)	Machine Model Number	Main Application	Hydraulic Drive Power
9 – 24	228 – 610	**BS924-H**	Topside	•
16– 36	406 – 914	**BS1636-H**	Topside	•

Portable Drilling Machines

HT20
- 4MT spindle accepts standard tooling
- Linear rails and guides provide accuracy and high-load carrying capacity
- Direct spindle drive
- Manual and variable auto feed

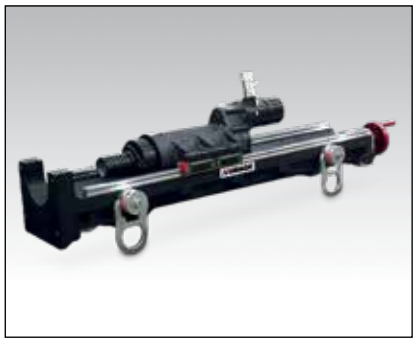

HT50
- ISO50 geared spindle
- Linear rails and guides provide accuracy and high-load carrying capacity
- Geared reduction spindle drive
- Manual and variable auto feed

HT40
- ISO40 geared spindle
- Linear rails and guides provide accuracy and high load-carrying capacity
- Geared reduction spindle drive
- Manual and variable feed

▼ *HT40 portable drilling machine.*

HT
Series

Drilling Capability:
Up to 5 inches

Maximum Stroke:
11 - 17 inches

Drilling and Tapping

Make light work of the toughest drilling and tapping applications

Drilling and tapping projects on-site require powerful and stable machines that deliver precise results first time. Our machines are designed to do exactly this - giving you reassurance that the job will be done efficiently and to the right specification. They offer high torque and easy operation through their heavy-duty spindles with ISO standard tapers.

Optional switch magnet mounts and chain clamps are also available for a quick and easy setup.

For large scale offshore decommissioning projects, casing pin drills provide an effective solution for creating lift holes into casings - especially in the most challenging of working environments.

Applications
- Drilling through armor plate
- Bulkhead hole cutting
- Flange stud drilling
- Flange stud re-threading
- Motor pump stud removal
- Short stroke line boring
- Turbine case stud removal
- Turbine pill drilling
- Casing pin drilling

Portable Drilling Machines

Maximum Diameter with Standard Drills		Maximum Standard Stroke		Machine Model Number	Drive Power Options	
(inch)	(mm)	(inch)	(mm)		Pneumatic	Hydraulic
2	50.8	11	279	**HT20**	•	•
4	101.6	16	406	**HT40**	•	•
5	127.0	17	432	**HT50**	•	•

Portable Tapping Machines

T30
- Rigid three pillar construction
- High-torque reduction drive
- Quick keyhole mounting
- Capable of tapping blind and through holes
- Hydraulic drive
- Pressure relief self-feed system

T725
- Heavy-duty four pillar construction
- Quick keyhole mounting system
- Capable of tapping blind and through holes
- High-torque reduction drive
- Hydraulic drive
- Pressure relief self-feed system

Casing Pin Drilling Machine

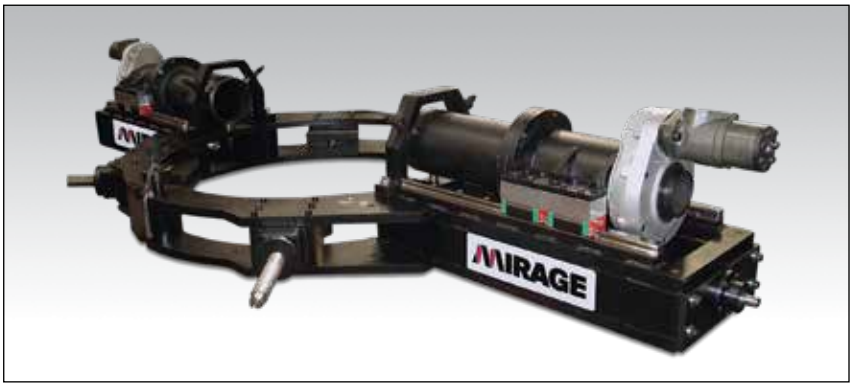

DDU1636
- Efficient pin drilling cold cut method
- Horseshoe mount options
- Helical drive spindle
- 4-inch cutter assembly supplied as standard
- Alternative cutter kits available up to 12 inches

T, DDU
Series

Tapping Capability:
Up to 7¼ inches

Case Pin Drilling Diameter:
Up to 12 inches

Maximum Stroke:
12 - 16 inches

GeniSYS IV Portable CNC Mill

Ideal for removal of cracked or broken studs and refurbishment of damaged threads. For hole diameters up to 11 inches and maximum 15.1 inch depths.

Page: 394

Included as Standard with each Machine

- Tool kit
- All required mounting legs and connections
- Storage/shipping box
- CE certificate
- Operator's manual
- Packing list

Portable Tapping and Casing Pin Drilling Machines

Maximum Diameter with Standard Drills		Maximum Standard Stroke		Casing Pin Drill Clamping Diameter		Machine Model Number	Drive Power Options	
(inch)	(mm)	(inch)	(mm)	(inch)	(mm)		Pneumatic	Hydraulic
3	76	12	305	–	–	**T30**	•	•
7¼	184	13	330	–	–	**T725**	•	•
12	305	16	406	9 – 24	228 – 609	**DDU924**		•
12	305	16	406	16 – 36	406 – 914	**DDU1636**		•

▼ *DDU1636 casing pin drilling.*

▼ GeniSYS™ IV Portable CNC Mill

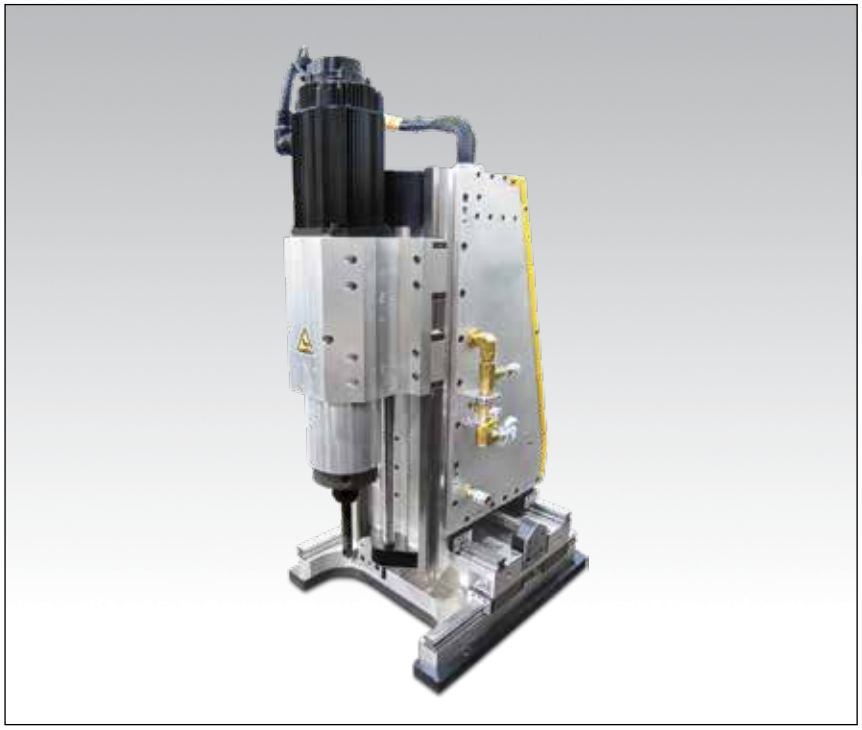

For removal of cracked or broken studs, and refurbishment of damaged threads

- **CNC software allows the GeniSYS IV to be programmed to perform multiple tasks within its working envelope**
- **Can create bore and thread hole diameters ranging from 0.875 – 11 inches (22,2 mm – 279,4 mm)**
- **Hole depths up to 15.12 inches (384 mm)**
- **High tolerance profile rails produce consistent results**
- **All three axes utilize precision ground ball screws, providing precise movement of the milling head**
- **Accurate and repeatable machining**
- **A cold cutting operation**
- **Ejects chips during operation**
- **Single machine capable of drilling, threading and general milling applications**

Included as Standard

The machine is supplied complete with the following items:

- GeniSYS IV milling machine
- Control System
- Laptop
- Motor and cables
- Storage / shipping boxes
- Operator's manual

▼ *Thread cutting*

▼ *GeniSYS IV CNC Milling Machine.*

GeniSYS™ IV Portable 3-Axis CNC Milling Machine

GeniSYS™ IV Portable CNC Mill

The GeniSYS IV is a highly portable 3-axis CNC milling machine. The motion control command center provides the ultimate in performance monitoring and technician safety.

Designed for the accurate removal of cracked or broken studs up to 11-inch diameter and the precise refurbishment of damaged threads. This is achieved without the need for manually controlled drilling or metal disintegration techniques.

Can be used for automated general profile milling applications.

Typical examples

- Manway covers
- Reactor studs
- Bolt extraction and threading applications
- Recirculation pumps
- Turbine cases
- Heat exchangers
- Motor bases and many more high impact assets

GeniSYS



Hole Diameter:

⅞ - 11 inches

Hole Depths:

Up to 15.12 inches

▲ *A typical thread before refurbishment*

▲ *New machined thread*

Tooling

Standard tooling packages available to support general milling and thread milling applications.

▲ *Enlarging a hole*

▲ *Coring out the center of a bolt (minor diameter).*



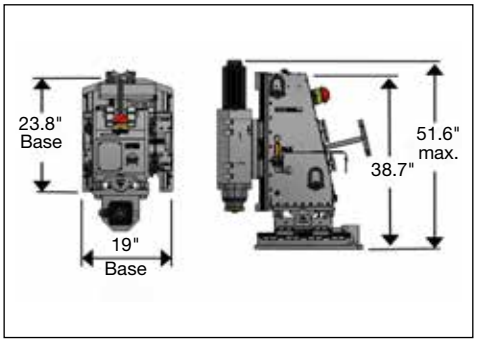

Dimensions GeniSYS IV

Base Length		Base Width		Total Height		Weight	
(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(lbs)	(kg)
23.8	605	19	483	51.6	1311	1100	499

Specifications GeniSYS IV Portable 3-axis CNC Milling Machine

Hole Diameters (Min. - Max.)		Machine Model Number	Maximum Hole Depth		Milling Head Maximum Travel						Spindle Speed	Spindle Motor		Motor Voltage
					X-axis		Y-axis		Z-axis					
(inch)	(mm)		(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(RPM)	(hp)	(kW)	(Volt, 3 phase)
⅞ – 11	22.2 – 279.4	**GeniSYS IV**	15.12	384	8	203.2	8	203.2	17	431.8	3000	6.7	5.0	380 - 440

▼ Shown: **MITT6A, MITT16A, MITT2A, MITT1A**

Ultimate Versatility in Piping Isolation and Pressure Testing

- **Combination Isolation and Test Tool assures vapor-free isolation for hot work and high-pressure capability between seals for testing welds with one tool**
- **Multi-schedule capability – up to 6 schedules covered per tool, 40 tools cover 154 pipe diameter / schedule combinations**
- **Lightweight, slim and versatile design – no crane required, able to mount in elbows and tees, able to test mismatched schedules**
- **High-pressure capability – test welds with relative ease up to 4500 psi**
- **Self-centering tools are user-friendly and require minimal training**
- **Hydrodynamic capability for heat treating**

Inline Isolation and Test Tools

MITT-series tools obsolete traditional pipe cleaning and hydrotesting methods used for maintenance and construction operations.

The MITT series tools improve safety by limiting the test pressure volume and reduce downtime by eliminating cleaning requirements.

Key benefits of the tools include:

- Significantly reduce maintenance project timelines
- Safely perform welding on hydrocarbon lines with the peace of mind of a positive pressurized hydrostatic isolation
- Achieve significant reduction in wastewater (<1/4 gallon of water required for a 24-inch test)
- Patent Pending.

MITT Isolation / Vapor Barrier Arrangement

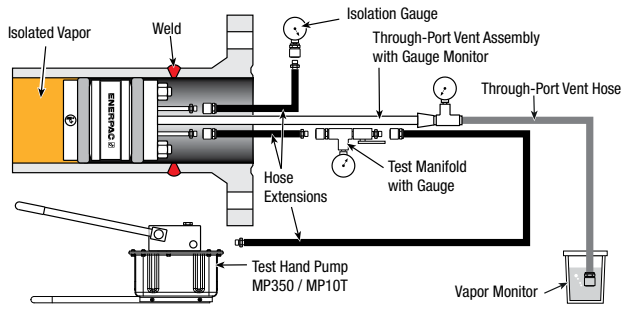

MITT Isolation Pressure Test Arrangement

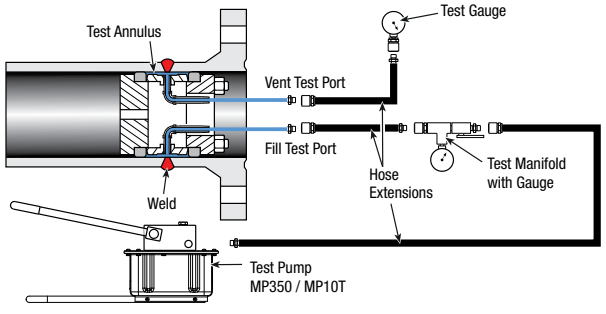

Nominal Pipe Diameter (in)	Model Number	Pipe Schedules Covered	Max. Tool Pressure Rating (psi)	Tool Body Diameter (in)	Overall Length (in)	Stud, Nut, Washer Size (in)	Pressure Port Size (ASME NPT)	Wt. (lbs)
¾	MITT075A	5, 10, STD/40	4500	0.7	14	1/8"	Female 1/8"	1.7
	MITT075B	XS/80, 160	4500	0.6	14	1/8"	Female 1/8"	1.5
1	MITT1A	5, 10, STD/40	4500	0.9	14	1/8"	Female 1/8"	1.9
	MITT1B	XS/80, 160	4500	0.7	14	1/8"	Female 1/8"	1.6
1¼	MITT125A	5, 10, STD/40 XS/80	4500	1.1	14	1/4"	Female 1/4"	2.9
1½	MITT150A	5,10, XS/80	4500	1.4	14	1/4"	Female 1/4"	4.1
	MITT150B	160	4500	1.1	14	1/4"	Female 1/4"	3.4
2	MITT2A	5,10, STD/40, XS/80	4500	1.8	14	1/4"	Female 1/4"	5.4
	MITT2B	160, XXS	4500	1.4	14	1/4"	Female 1/4"	4.3
3	MITT3A	5,10, STD/40, XS/80	4500	2.8	7	3/8"	Male 1/8"	5
	MITT3B	160, XXS	4500	2.3	7	3/8"	Male 1/8"	4.5
4	MITT4A	5,10, STD/40, 60, XS/80	4500	3.7	7	5/16"	Male 1/8"	5.59
	MITT4B	120, 160	4500	3.2	7	5/16"	Male 1/8"	4.81
	MITT4C	XXS	4500	3.0	7	5/16"	Male 1/8"	4.25
6	MITT6A	10 , STD/40, 60	4500	5.7	7	5/8"	Male 1/4"	13
	MITT6B	XS / 80, 120	4500	5.4	7	5/8"	Male 1/4"	12
	MITT6C	160, XXS	4500	4.8	7	5/8"	Male 1/4"	10
8	MITT8A	10, 20, 30, STD/40, XS/80	4500	7.4	7	5/8"	Male 1/4"	19
	MITT8B	100, 120, 140, XXS, 160	4500	6.6	7	5/8"	Male 1/4"	16
10	MITT10A	20, 30, STD/40, XS/60, 80	4500	9.4	7	5/8"	Male 1/4"	29
	MITT10B	100, 120, XXS/140, 160	4500	8.4	7	5/8"	Male 1/4"	25
12	MITT12A	10, 20, 30, STD, 40, XS	4500	11.6	7	5/8"	Male 1/4"	43
	MITT12B	60, 80, 100, XXS/120	4500	10.7	7	5/8"	Male 1/4"	41
	MITT12C	140, 160	4500	9.8	7	5/8"	Male 1/4"	32
14	MITT14A	10, 20, STD/30, 40	4500	12.8	7	5/8"	Male 1/4"	45
	MITT14B	XS, 60, 80	4500	12.8	7	5/8"	Male 1/4"	42
	MITT14C	100, 120, 140, 160	4500	11.1	7	5/8"	Male 1/4"	38
16	MITT16A	10, 20, STD/30, XS/40, 60	4500	14.6	7	5/8"	Male 1/4"	54
	MITT16B	80, 100	4500	13.6	7	5/8"	Male 1/4"	48
	MITT16C	120, 140, 160	4500	12.8	7	5/8"	Male 1/4"	45
18	MITT18A	10, 20, STD, 30, XS, 40	4500	16.5	7	5/8"	Male 1/4"	64
	MITT18B	60, 80	4500	15.8	7	5/8"	Male 1/4"	60
	MITT18C	100, 120	4500	14.9	7	5/8"	Male 1/4"	55
	MITT18D	140, 160	4500	14.1	7	5/8"	Male 1/4"	52
20	MITT20A	10, STD/20, XS / 30	4500	18.9	7	5/8"	Male 1/4"	80
	MITT20B	40, 60	4500	18.0	7	5/8"	Male 1/4"	73
	MITT20C	80, 100	4500	17.1	7	5/8"	Male 1/4"	67
	MITT20D	120, 140	4500	16.1	7	5/8"	Male 1/4"	61
	MITT20E	160	4500	15.7	7	5/8"	Male 1/4"	60
22	MITT22A	STD, XS	4500	20.6	7	5/8"	Male 1/4"	89
	MITT22B	60, 80	4500	19.4	7	5/8"	Male 1/4"	81
	MITT22C	100, 120	4500	18.4	7	5/8"	Male 1/4"	75
	MITT22D	140, 160	4500	17.4	7	5/8"	Male 1/4"	69
24	MITT24A	10, STD/20, XS, 30	1150	22.6	7	5/8"	Male 1/4"	99
	MITT24B	40, 60	2250	21.7	7	5/8"	Male 1/4"	94
	MITT24C	80, 100	3375	20.6	7	5/8"	Male 1/4"	88
	MITT24D	120, 140	4500	19.5	7	5/8"	Male 1/4"	82
	MITT24E	160	4500	18.9	7	5/8"	Male 1/4"	80
26	MITT26A	10, STD, XS	1150	24.6	7	55/8"	Male 1/4"	115
30	MITT30A	10, STD, XS/20, 30	1150	28.6	7	5/8"	Male 1/4"	147
	MITT30B	40	1150	28.1	7	5/8"	Male 1/4"	140
32	MITT32A	10, STD, XS/20, 30	1150	30.6	7	5/8"	Male 1/4"	158
	MITT32B	40	1150	30.3	7	5/8"	Male 1/4"	155
34	MITT34A	10, STD, XS/20, 30	425	32.6	7	5/8"	Male 1/4"	168
	MITT34B	40	425	32.2	7	5/8"	Male 1/4"	165
36	MITT36A	10, STD, XS	425	34.6	7	5/8"	Male 1/4"	187
38	MITT38A	STD, XS	425	36.6	7	5/8"	Male 1/4"	208
40	MITT40A	STD, XS	425	38.6	7	5/8"	Male 1/4"	230

MITT Series

Pipe Diameters:
¾ - 40 inches

Water Capacity per Test:
0.10 - 0.75 gallon

Maximum Test Pressure:
4500 psi

Cost-Effective Spares

Buna 90 shore hardness seals and stainless steel seal backing rings provide additional pressure capacity for a low cost.

Ancillary Kit – MITTAK

All ancillary components required to safely isolate piping and test new welds (includes manual valves, gauge set, hoses, hand tools, fittings).

Pump and Reservoir

To match the full capability of the tools, the **MP350** hand pump and **MP10T** reservoir are recommended.

▼ *MITT2A tool being torqued in a test stand for high-pressure testing.*

Enerpac “Yellow Pages”
stand for
Hydraulic Information!

If selecting hydraulic equipment is not your daily routine then you will appreciate these pages. The “Yellow Pages” are designed to help you work with hydraulics. They will help you to better understand the basics of hydraulics, of system set-ups and of the most commonly used hydraulic techniques. The better your choice of equipment, the better you will appreciate hydraulics.
Take the time to go through these “Yellow Pages” and you will benefit even more from Enerpac High Pressure Hydraulics.

ENERPAC WARRANTY STATEMENT
Visit our website for the complete Global Lifetime Warranty or call your Authorized Service Center.

Learn More About Hydraulics
Visit www.enerpac.com to learn more about hydraulics and system set-ups.

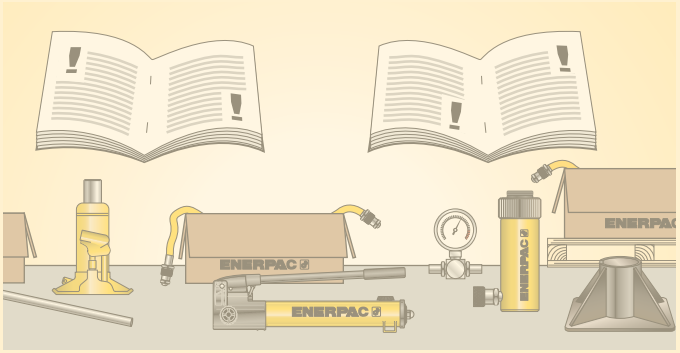

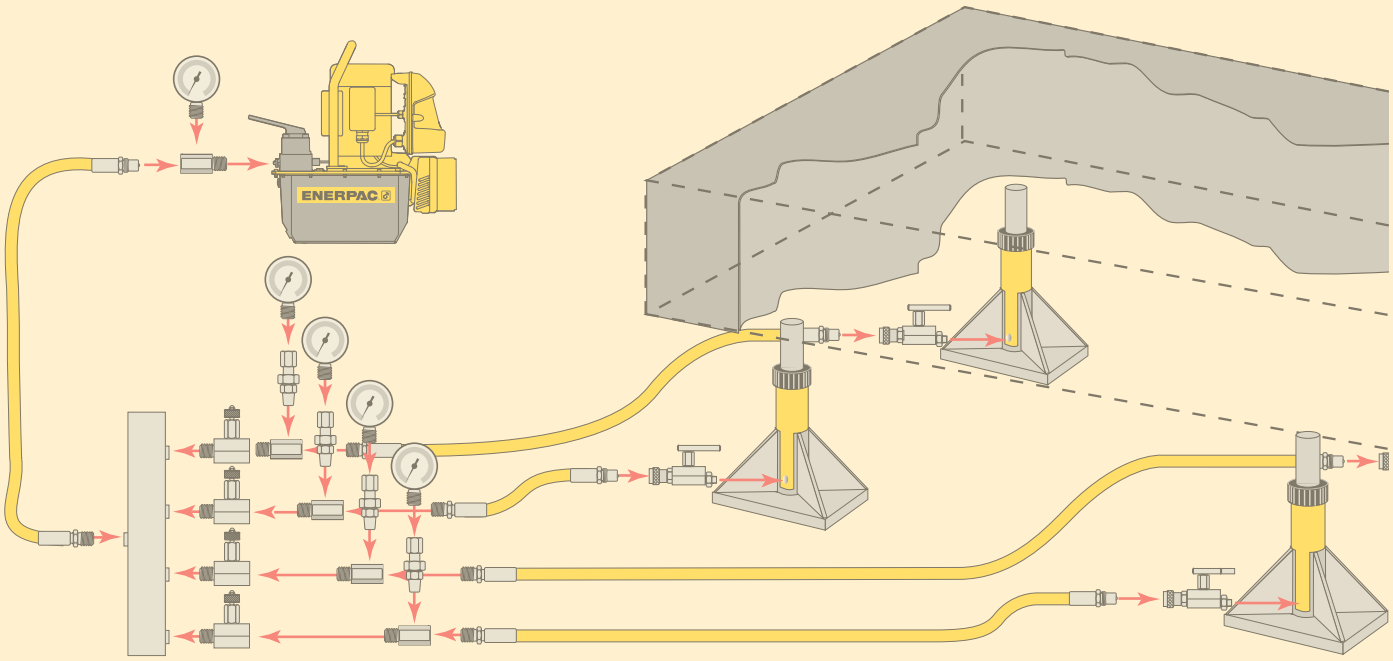

Yellow Pages Overview

Section	Page
Safety Instructions	400-401 ▶
Product Selection & Worksheet	402-403 ▶
Basic System Set-ups	 404-405 ▶
Basic Hydraulics	 406-407 ▶
Conversion Tables and Speed Charts	408-409 ▶
Valve Information	 410 ▶
Hexagon Bolt and Nut Sizes	411 ▶
Torque Tightening Torque Tensioning	 412-415 ▶
Bolting Integrity Software	416-417 ▶

ISO 9001 REGISTERED

ENERPAC, 199 Gateway Court, Columbus WI 53925 USA

Enerpac is certified for several quality standards. These standards require compliance with standards for management, administration, product development and manufacturing.

Enerpac worked hard to earn the quality rating ISO9001, in its ongoing pursuit of excellence.

DIN-ISO 1402

Enerpac Thermoplastic and Rubber Hoses have been tested and confirm to this Standard.

ASME B30.1–2015

Our cylinders fully comply with the criteria set forth by the American Society of Mechanical Engineers (except RD, BRD, HCL, LPL, CUSP and JHA-Series).

Product Design Criteria

All hydraulic components are designed and tested to be safe for use at maximum 10,000 psi unless otherwise specifically noted.

Where specified, Enerpac electric power units meet the design, assembly and test requirements of The Standards Council of Canada (CAN C22.2 No. 68-92), and UL73 for the United States. Units were tested and certified for both USA and Canada by TŰV, and by CSA, USA-OSHA-NRTLs.,(Nationally Recognized Testing Laboratories.)

EMC Directive

Where specified, Enerpac electric power pumps meet the requirements for Electromagnetic Compatibility per EMC Directive 2014/30/EU.

CE Marking & Conformity

Enerpac provides Declarations of Conformity or Incorporation, as applicable, and CE Marks for products according to the EU Directives.

ATEX 95 Certified

The S, W, DSX and HMT-Series torque wrenches, ZA, XA, LAT and ATP-Series air-driven pumps, SWi-Ex-flange spreaders, HP-EX hand pumps and the 144 type hoses are tested and certified according to the Directive 2014/34/EU "ATEX Directive".
The explosion protection is for Equipment Group II, Equipment Category 2 (Hazardous Zone Area 1 in Gas and/or Dust atmospheres).

S, W-Wrenches:	**Ex II 2 GD T4**
DSX, HMT-Wrenches:	**Ex II 2 G c T6**
NSH-Nut Splitters:	**Ex II 2 G c T6**
ZA4, ZA4T-Air Pumps:	**Ex II 2 GD ck T4**
ZA4TX-QROP-Pumps:	**Ex IIC T4 Gc** **Ex IIIC T135°C Dc**
ATP, XA-Air Pumps:	**Ex II 2 GD ck T4**:
LAT-Air Pumps:	**Ex IIC T4 Gc and** **Ex IIIC T135°C Dc**
Swi-Ex Spreaders:	**II 2G Ex h IIB T5 Gb** and **II 2D Ex h IIIC T85°C Db**
HP-Ex Hand Pumps:	**II 2G Ex h IIB T5 Gb** and **II 2D Ex h IIIC T100°C Db**
144 Hoses:	**II 2G Ex h IIB T5 Gb** and **II 2D Ex h IIIC T100°C Db**

When used correctly, hydraulic power is one of the safest methods of applying force to your work. To that end we offer some DO's and DON'Ts, simple common sense points which apply to practically all Enerpac hydraulic products.

- Lift slowly and check often
- Avoid standing in the line of force
- Anticipate possible problems and take steps to avoid them

The illustrations and application photos of Enerpac products throughout this catalog are used to portray how some of our customers have used hydraulics in industry.

In designing similar systems, care must be taken to select the proper components that provide safe operation and fit your needs.

Check to see if all safety measures have been taken to avoid the risk of injury and property damage from your application or system.

Enerpac cannot be held responsible for damage or injury caused by unsafe use, maintenance or application of its products.

Please contact the Enerpac office or a representative for guidance when you are in doubt as to the proper safety precautions to be taken in designing and setting up your particular system.

In addition to these tips, every Enerpac product comes with specific safety information and instructions. Please read them carefully.

Jacks





◀ **Provide a level and solid support for the entire jack base area.**





◀ **The entire jack saddle must be in contact with the load. Movement of the load must be in the same direction as jack plunger.**

◀ **Never place any part of your body under the load. Ensure the load is on a solid support before venturing under.**



◀ **Remove the jack handle when it is not being used.**

Cylinders





◀ **Provide a solid support for the entire cylinder base area. Use cylinder base attachment for more stability.**





◀ **The entire cylinder saddle must be in contact with the load. Movement of the cylinder must be parallel with the movement of the load.**





◀ **Do not use cylinder without saddle. This will cause plunger to "mushroom". Saddles distribute load evenly on the plunger.**



◀ **As with jacks, never place any part of your body under the load. Load must be on cribbing before venturing under.**

◀ **Always protect cylinder threads for use with attachments.**

◀ **Keep hydraulic equipment away from open fire and temperatures above 150 °F (65 °C).**

General

80% Manufacturer's rating of load and stroke are maximum safe limits. Good practice encourages using only 80% of these ratings! 80%

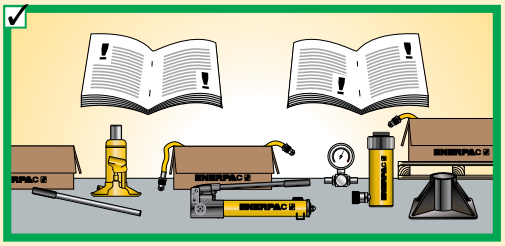

Always read instructions and safety warnings that come with your Enerpac hydraulic equipment.





Both couplers must be connected when using double-acting cylinders. Ensure return hose is fitted.

Pumps





Don't use handle extenders. Hand pumps should be easy to operate when used correctly.





Close release valve finger tight. Using force will ruin the valve.





Fill pump only to recommended level. Fill only when connected cylinder is fully retracted.





Always use genuine Enerpac hydraulic oil.

Hoses and couplers





Clean both coupler parts before connecting. Use dust caps when coupler parts are not connected.





Detach cylinder only when fully retracted or use shut-off valves or safety valves to lock-in cylinder pressure.





Keep hoses away from the area beneath loads.





Don't kink hoses. Bending radius should be at least 4½ inch. Don't drive over or drop heavy objects on hoses.





Don't lift hydraulic equipment by the hoses.





Never allow the cylinder to be lifted off of the ground through the couplers.

▼ HAND PUMP AND SINGLE-ACTING CYLINDER MATCHING CHART

Capacity (tons) ▶ ▼ Stroke (inches)	5 t	10 t	15 t	25 t	30 t	50 t	60 t	75 t	100 t	150 t
< 1.00										
1.00										
2.00										
3.00										
4.00										
5.00										
6.00										
7.00										
8.00										
9.00										
10.00										
12.00										
13.00										
14.00										

P392

Page: 86

P80

Page: 88

P462

Page: 88

Note: Selection based on oil capacity requirements of cylinders.

▼ POWER PUMP SELECTION CHART

Oil Flow*	Low (20 in³/min)		Medium (60 to 100 in³/min)		High (33 to 305 in³/min)	
Reservoir Oil Capacity	0.5-1 gal.	1.5 gal.	1.2-10.3 gal.	1.2-10.3 gal.	2.6-10.3 gal.	5, 10, 40 gal.
Duty Cycle**	Intermittent	Extended	Intermittent	Extended	Extended	Extended
Portable/Stationary***	Portable	Stationary	Portable	Stationary	Stationary	Stationary
Recommended Series	**PU-Series Economy**	**E-Series E-Pulse®**	**ZU4-Series**	**ZE3-, ZE4- and ZE5-Series**	**ZE6-Series**	**SFP-Series**
	Page: 101	Page: 102	Page: 106	Page: 112	Page: 112	Page: 132

* Oil Flow
- Determined by motor size
- Directly affects electrical power requirements
- Determines cylinder or tool speed

** Duty Cycle
- Extended applications require more than one hour of uninterrupted pump use
- Intermittent use – from 20 minutes to one hour, depending on reservoir capacity (contact Enerpac for details)

*** Portability

Portable
- Ergonomic handles
- Flexible power requirements

Stationary
- Mounting options
- Normally requires stable power

Product Selection Worksheet

▼ **Complete the following information to select the right products:**

Cylinder Selection

Question:	*Tips/help*	*Data*	*Model Number*
Total force required in tons:	Total load		
Number of cylinders required:	Number of lifting points		
Force per cylinder in tons:	Should be 80% of total cylinder cap.		
Stroke required:	Plunger travel		
Single or double acting (D/A):	D/A used when pull force is required, or retract speed is critical		
Type of plunger required:	Hollow or solid		
Collapsed height required:	Height with plunger fully retracted		
Optional saddle required:	Tilt, Grooved, Flat		
Cylinder base:	Improves stability		
Cylinder attachments: (RC-series)	Expanded functions		
Selected cylinder model:		▶	
Including coupler model:			

Pump Selection

The three most commonly selected pumps are hand pumps, electric pumps and air-driven pumps. Gas powered pumps, however can be selected in the same way.

Available power source: ☐ **Manual** ☐ **Battery** ☐ **Electric** ☐ **Compressed Air** ☐ **Gasoline**

Hand pump			
Single- or double-acting operation	Not for high-cycle applications Use 4-way valve for D/A applications Check speed chart on page 409 for number of strokes per inch)		
Selected hand pump:		▶	
Electric or compressed air pump			
Need for portability:	Weight and power requirements		
Duty cycle:	Intermittent or extended		
Required usable oil capacity:	Intermittent =1.2 x cylinder oil capacity high cycle = 2 x cylinder oil capacity		
Available voltage:	Single phase or Three phase		
Lifting speed (Important/not important):	Use speed chart on page 409		
Type of control:	Manual/remote pendant		
Type of actuation/function:	Advance/hold/retract		
Accessories:	Roll bar, Oil Filter kit, ...		
Selected pump:		▶	
To suit hose:	Oil connection		

System Components

Number of hoses and length required:			
Selected hoses:		▶	
Manifold or tee:		▶	
Extra hose per manifold (2):		▶	
Gauge (psi, lbs or tons scale):	GF-series glycerine for high cycle	▶	
Gauge adaptor:		▶	
Fittings:		▶	
Pressure relief safety valve:		▶	
Load-holding valve(s):		▶	
Hydraulic oil:		▶	

1 Cylinder
Applies hydraulic force.
Page **5**

2 Cylinder Base Plate
For applications such as lifting where additional cylinder stability is required.
Page **10**

3 Pump
Provides hydraulic flow.
Page **84**

4 Hose
Transports hydraulic fluid.
Page **148-149**

5 Male Coupler
For quick connection of the hose to system components.
Page **150-151**

6 Female Coupler
For quick connection of the hose end to the system components (usually included with the cylinder).
Page **150-151**

7 Gauge
To monitor pressure of the hydraulic circuit.
Page **156-157**

8 Gauge Adaptor
For quick and easy gauge installation.
Page **162**

9 Swivel Connector
Allows proper allignment of valves and/or gauges. Used when units being connected cannot be rotated.
Page **163**

10 Auto-damper Valve V10
Used to protect gauge from damage due to sudden pulses in the system. Needs no adjustment and allows correct positioning of gauge, prior to tightening.
Page **164-165**

11 4-Way Directional Control Valve
Controls the direction of hydraulic fluid in a double-acting system (usually included with the powerpack).
Page **164-165**

Single-acting push application, such as in a press.
The hand pump offers controlled cylinder advance, but may require many hand pump strokes in longer stroke applications when the cylinder capacity is 25 ton or above.

Examples of pump, hose and cylinder sets can be found on page 62-65.

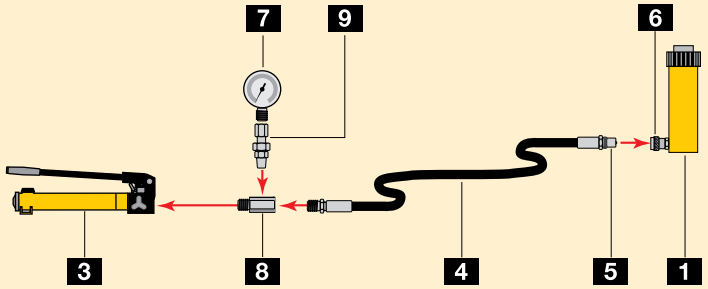

Single-acting cylinder with longer stroke used for lifting applications.

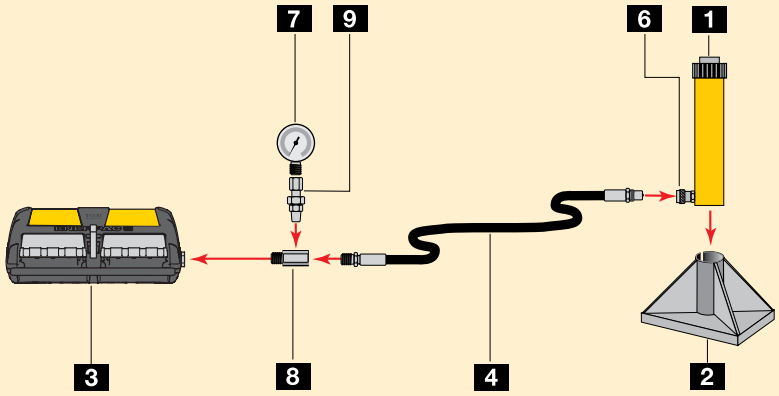

Double-acting cylinder set-up used for lifting applications where a slow controlled descent of the load must be maintained.

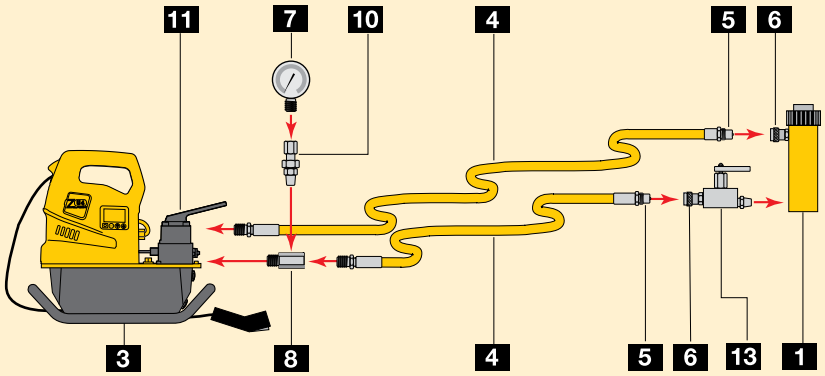

Double-acting cylinder set-up used in a push/pull application.

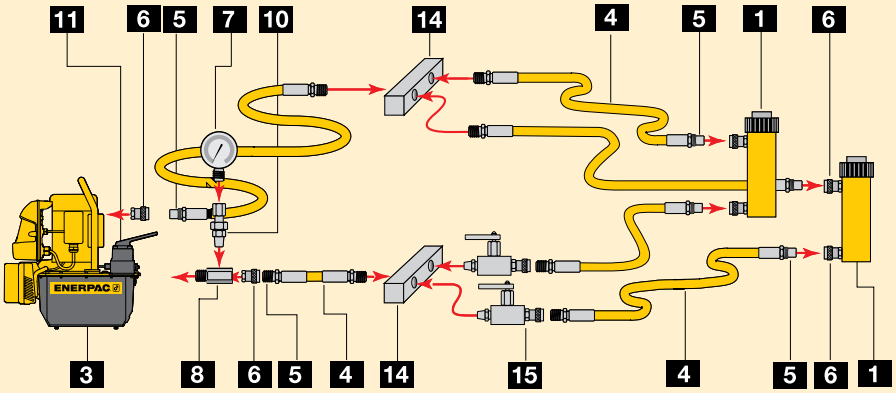

Two point lifting set-up using single-acting cylinders.

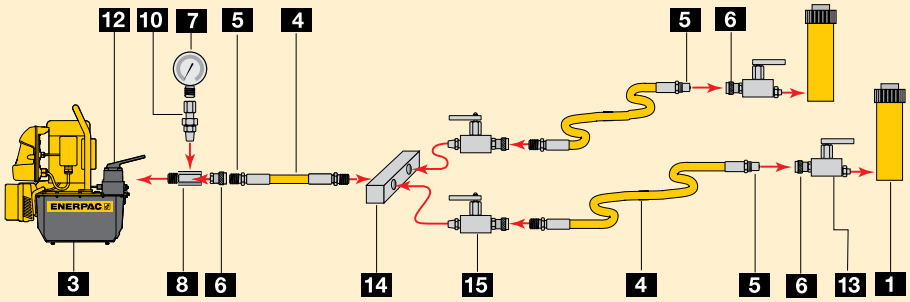

Four point lifting set-up, using single-acting cylinders, flow control valves and safety valves.

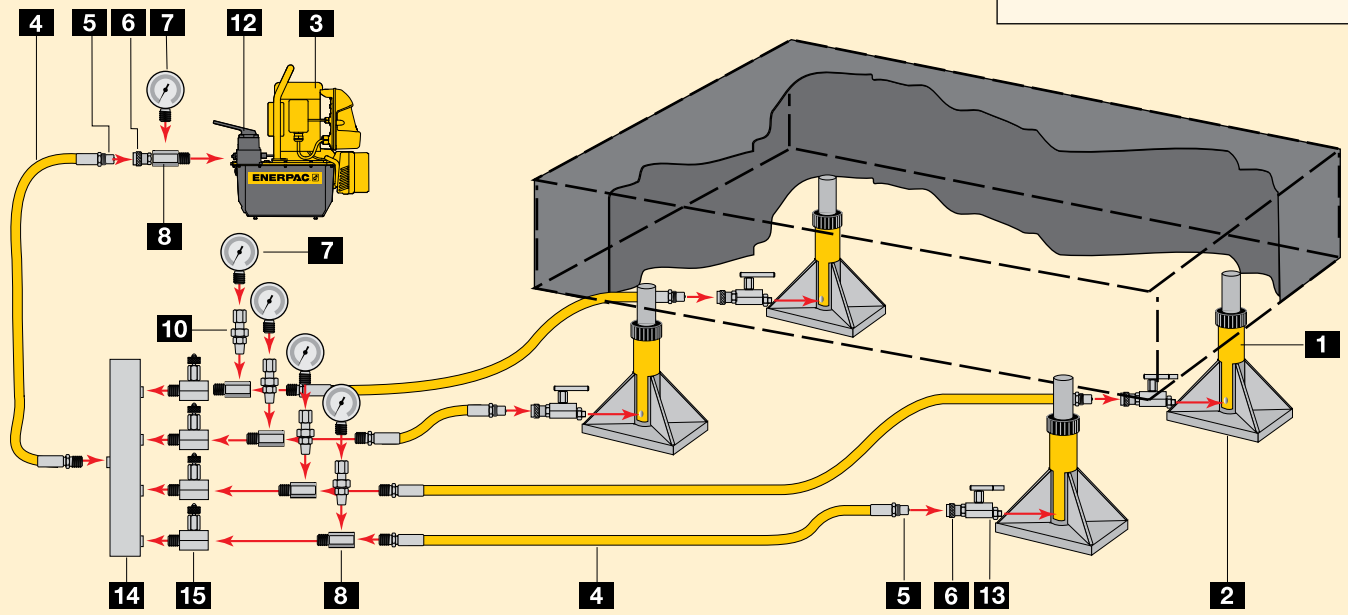

12 3-Way Directional Control Valve
Controls the direction of hydraulic fluid in a single-acting system (usually included with the powerpack).
Page **164-165**

13 Safety Holding Valve
Holds the load in lifting applications.
Page **165**

14 Manifold
Allows distribution of hydraulic fluid from one power source to several cylinders

Split-Flow Manifold
Allows distribution of hydraulic fluid from one power source to several single-acting cylinders
Page **152 & 154**

15 Needle Valve
Regulates the flow of hydraulic fluid to or from the cylinders.
Page **165**

www.enerpac.com
Visit our web site to learn more about hydraulics and system set-ups.

Flow

A hydraulic pump produces flow



Pressure

Pressure occurs when there is resistance to flow

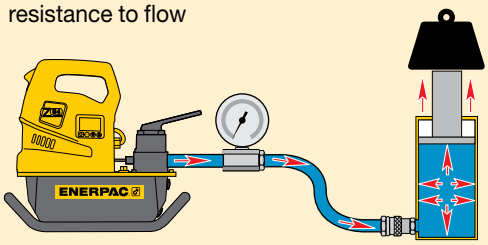

Pascal's Law

Pressure applied at any point upon a confined liquid is transmitted undiminished in all directions (Fig.1).

This means that when more than one hydraulic cylinder is being used, each cylinder will lift at its own rate, depending on the force required to move the load at that point (Fig. 2).

Cylinders with the lightest load will move first, and cylinders with the heaviest load will move last (Load A), as long as the cylinders have the same capacity.



Figure 1

To have all cylinders operate uniformly so that the load is being lifted at the same rate at each point, either control valves (see Valve section) or Synchronous Lift System components (see Cylinder section) must be added to the system (Load B).

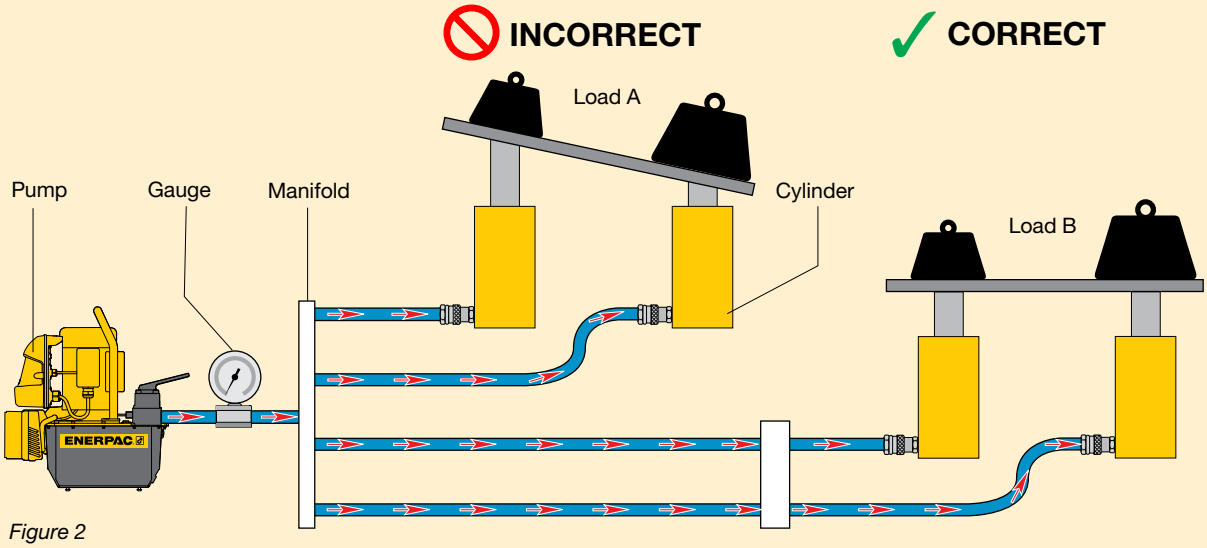

Figure 2

Synchronous Lift or Control Valves to provide uniform lifting of load.

CAUTION!

When lifting or pressing, always use a gauge.

A gauge is your "window" to the system. It lets you see what's going on. You will find the gauges in the System Components section.

Page: 147

Learn more about hydraulics

Visit **www.enerpac.com** to learn more about hydraulics and system set-ups.

Force

The amount of force a hydraulic cylinder can generate is equal to the hydraulic pressure times the "effective area" of the cylinder (see cylinder selection charts).

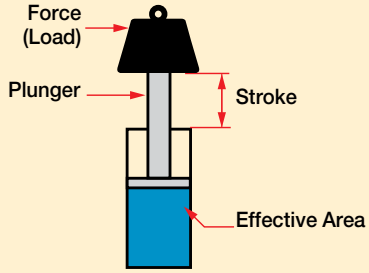

Force	=	Hydraulic Working Pressure	x	Cylinder Effective Area
F	=	P	x	A

Use this formula to determine either force, pressure or effective area if two of the variables are known.

Example 1
An RC106 cylinder with 2.24 in^2 effective area operating at 8,000 psi will generate what force?
Force = 8,000 psi x 2.24 in^2 = 17,920 lbs.

Example 2
An RC106 cylinder lifting 14,000 lbs will require what pressure?
Pressure = 14,000 lbs ÷ 2.24 in^2 = 6,250 psi.

Example 3
An RC256 cylinder with 5.15 in^2 effective area is required to produce a force of 41,000 lbs. What pressure is required?
Pressure = 41,000 lbs. ÷ 5.15 in^2 = 7961 psi.

Example 4
Four RC308 cylinders each with 6.49 in^2 effective area are required to produce a force of 180,000 lbs. What pressure is required?
Pressure = 180,000 lbs ÷ (4 x 6.49 in^2) = 6933 psi.
Remember, since four cylinders are used together, the area for one cylinder must be multiplied by the number of cylinders used.

Example 5
A HCL2506 cylinder with 56.27 in^2 effective area is going to be used with a power source that is capable of 7,500 psi. What is the theoretical force available from that cylinder?
Force = 7,500 psi x 56.27 in^2 = 422,025 lbs.

Cylinder Oil Capacity

The volume of oil required for a cylinder (cylinder oil capacity) is equal to the effective area of the cylinder times the stroke*.

Cylinder Oil Capacity	=	Cylinder Effective Area	x	Cylinder Stroke

* **Note**: these are theoretical examples and do not take into account the compressibility of oil under high pressure.

Example 1
An RC158 cylinder with 3.14 in^2 effective area and an 8 in. stroke will require what volume of oil?
Oil Capacity = 3.14 in^2 x 8 in = 25.12 in^3



Example 2
An RC5013 cylinder has an effective area of 11.05 in^2 and a stroke of 13.25 in. How much oil will be required?
Oil Capacity = 11.05 in^2 x 13.25 in = 146.41 in^3

Example 3
An RC10010 cylinder has an effective area of 20.63 in^2 and a stroke of 10.25 in. How much oil will it require?
Oil Capacity = 20.63 in^2 x 10.25 in = 211.46 in^3

Example 4
Four RC308 cylinders are being used, each with an effective area of 6.49 in^2 and stroke of 8.25 in. How much oil will be required?
Oil Capacity = 6.49 in^2 x 8.25 in = 53.54 in^3 for one cylinder
Multiply by four to obtain the required capacity: 214.17 in^3

CAUTION!
Enerpac oil will compress 2.28% at 5,000 psi and 4.1% at 10,000 psi.

Page: 152

Key to cylinder dimensions

Dimensions shown in the Selection Charts of the cylinder section are identified on the relevant drawings by the capital letter references listed here: A for collapsed height through Z for depth of internal base thread.

A = Collapsed height
B = Extended height
C = Cylinder body length
D = Cylinder outside diameter
D1 = Cylinder width
E = Cylinder inside diameter (bore)
F = Plunger rod diameter
G = Oil inlet thread
H = Cylinder bottom to advance port
I = Cylinder top to retract port
J = Saddle outside diameter
K = Saddle protrusion from plunger
L = Plunger center to side of base
M = Mounting holes to plunger center
N = Length of smaller cylinder part
O = Plunger hole or thread of saddle
P = Plunger thread length
Q = Plunger outside thread (pull cylinders only)
U = Bolt circle diameter of mounting holes
V = Thread of cylinder mounting holes
W = Collar thread
X = Collar thread length
Y = Center hole diameter (hollow cylinders only)
Z = Depth of base hole thread

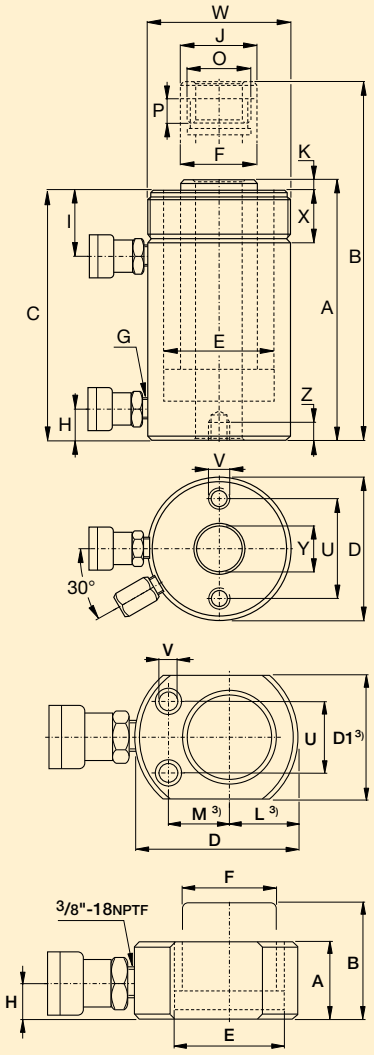

Key to measurements

All capacities and measurements in the catalog are expressed in uniform values.

The conversion chart provides helpful information for their translation into equivalent systems.

You can also visit our website at www.enerpac.com to download a FREE conversion calculator.

Pressure:

1 psi	= 0.069 bar
1 bar	= 14.50 psi
1 kPa	= 0.145 psi

Volume:

1 in^3	= 16.387 cm^3
1 cm^3	= 0.061 in^3
1 liter	= 61.02 in^3
1 liter	= 0.264 gal
1 US gal	= 3,785 cm^3
	= 3.785 l
	= 231 in^3

Weight:

1 pound (lb)	= 0.4536 kg
1 kg	= 2.205 lbs
1 metric ton	= 2,205 lbs
1 ton (short)	= 2,000 lbs
1 ton (short)	= 907.18 kg

Temperature:

To convert °F to °C:
$T_{°C} = (T_{°F} - 32) \div 1.8$
To convert °C to °F:
$T^{°F} = (T_{°C} \times 1.8) + 32$

Torque:

1 Ft.lbs	= 1.356 Nm
	= 0.138 kgf.m
1 Nm	= 0.738 Ft.lbs
	= 0.102 kgf.m

Other measurements:

1 in	= 25.4 mm
1 mm	= 0.039 in
1 in^2	= 6.452 cm^2
1 cm^2	= 0.155 in^2
1 hp	= 0.735 kW
1 kW	= 1.359 hp
1 Nm	= 0.73756 Ft.lbs
1 Ft.lbs	= 1.355818 Nm

Imperial to metric

Inches	Decimal	mm
1/16	0.06	1.59
1/8	0.13	3.18
3/16	0.19	4.76
1/4	0.25	6.35
5/16	0.31	7.94
3/8	0.38	9.53
7/16	0.44	11.11
1/2	0.50	12.70
9/16	0.56	14.29
5/8	0.63	15.88
11/16	0.69	17.46
3/4	0.75	19.05
13/16	0.81	20.64
7/8	0.88	22.23
15/16	0.94	23.81
1	1.00	25.40

Cylinder Speed Charts

Cylinder Speed

This chart will help you calculate the time required for an Enerpac cylinder to lift a load when powered by a 10,000 psi Enerpac hydraulic pump.

The Cylinder Speed Chart can also be used to determine the pump type and model best suited for an application when you know the plunger speed required.

To determine: Cylinder plunger speed

An RC-308 cylinder (30 ton) is powered by a ZE-5 pump. While lifting the load, the cylinder plunger will require 3.2 seconds to travel 1 inch. While extending towards the load, the cylinder plunger travels at 0.47 sec/in.



30 ton		50 ton		75 ton		100 ton		
No Load	Load	No Load	Load	No Load	Load	No Load	Load	Pump Type
13.0	26.0	22.1	44.2	31.8	63.6	41.3	82.5	XC Series
1.2	12.2	2.0	20.7	2.9	29.8	3.8	38.7	ZC3 Series
1.8	12.2	3.0	20.7	4.3	29.8	5.6	38.7	E-Series, E-Pulse
1.9	19.5	3.3	33.1	4.8	47.7	6.2	61.9	PU Economy
1.0	9.7	1.7	16.6	2.5	23.9	3.2	30.9	ZE3 Series
0.65	6.5	1.1	11.0	1.6	15.9	2.1	20.6	ZE4 Series
0.47	3.2	0.80	5.5	1.2	8.0	1.5	10.3	ZE5 Series
0.44	1.9	0.74	3.3	1.1	4.8	1.4	6.2	ZE6 Series
0.73	6.5	1.2	11.0	1.8	15.9	2.3	20.6	ZU4 Series
0.38	0.84	0.65	1.4	0.94	2.1	1.2	2.7	8000 Series, PE
3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	XA Series

To determine: Best matching pump

Your 30 ton cylinder needs to move a load at a speed of 6.50 sec/in. Simply go down from the top of the chart, to the value of 6.50 sec/in. Then follow the chart to the right to find that the ZE4 pump or ZU4 is most suitable for your application.



30 ton		50 ton		75 ton		100 ton		
No Load	Load	No Load	Load	No Load	Load	No Load	Load	Pump Type
13.0	26.0	22.1	44.2	31.8	63.6	41.3	82.5	XC Series
1.2	12.2	2.0	20.7	2.9	29.8	3.8	38.7	ZC3 Series
1.8	12.2	3.0	20.7	4.3	29.8	5.6	38.7	E-Series, E-Pulse
1.9	19.5	3.3	33.1	4.8	47.7	6.2	61.9	PU Economy
1.0	9.7	1.7	16.6	2.5	23.9	3.2	30.9	ZE3 Series
0.65	6.5	1.1	11.0	1.6	15.9	2.1	20.6	ZE4 Series
0.47	3.2	0.80	5.5	1.2	8.0	1.5	10.3	ZE5 Series
0.44	1.9	0.74	3.3	1.1	4.8	1.4	6.2	ZE6 Series
0.73	6.5	1.2	11.0	1.8	15.9	2.3	20.6	ZU4 Series
0.38	0.84	0.65	1.4	0.94	2.1	1.2	2.7	8000 Series, PE
3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	XA Series

Number of Pump Handle Strokes per Inch of Cylinder Plunger Travel

Cyl. Capacity ▶	5 ton		10 ton		15 ton		25 ton		30 ton		50 ton		75 ton		100 ton			
▼ Power Source	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	Pump Type	Page
Manual	18.0	18.0	40.7	40.7	57.1	57.1	93.8	93.8	118.0	118.0	200.7	200.7	289.1	289.1	375.1	375.1	**P141**	**87**
	6.6	6.6	14.9	14.9	20.9	20.9	34.4	34.4	43.3	43.3	73.6	73.6	106.0	106.0	137.5	137.5	**P39**	**89**
	6.6	6.6	14.8	14.8	20.8	20.8	34.2	34.2	43.0	43.0	73.1	73.1	105.3	105.3	136.6	136.6	**P391**	**87**
	4.5	18.0	10.1	40.7	14.2	57.1	23.3	93.8	29.4	118.0	50.0	200.7	71.9	289.1	93.3	375.1	**P142/202**	**87**
	1.4	6.6	3.3	14.8	4.6	20.8	7.5	34.2	9.4	43.0	16.1	73.1	23.1	105.3	30.0	136.6	**P392**	**87**
	1.0	6.6	2.2	14.9	3.1	20.9	5.2	34.4	6.5	43.3	11.0	73.6	15.9	106.0	20.6	137.5	**P77/80/84/801**	**89**
	0.4	6.6	0.9	14.8	1.3	20.8	2.2	34.2	2.7	43.0	4.6	73.1	6.6	105.3	8.6	136.6	**P802/842**	**87**
	0.1	3.4	0.3	7.7	0.4	10.8	0.7	17.8	0.8	22.4	1.4	38.1	2.1	54.8	2.7	71.1	**P462/464**	**89**

Seconds per Inch of Cylinder Plunger Travel

Cyl. Capacity ▶	5 ton		10 ton		15 ton		25 ton		30 ton		50 ton		75 ton		100 ton			
▼ Power Source	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	Pump Type	Page
Electric (speed based on 60 Hz) * XC based on 28V battery	2.0	4.0	4.5	9.0	6.3	12.6	10.3	20.6	13.0	26.0	22.1	44.2	31.8	63.6	41.3	82.5	**XC-Series**	**96-97**
	0.18	1.9	0.41	4.2	0.57	5.9	0.94	9.7	1.2	12.2	2.0	20.7	2.9	29.8	3.8	38.7	**ZC3-Series**	**98-99**
	0.27	1.9	0.61	4.2	0.86	5.9	1.4	9.7	1.8	12.2	3.0	20.7	4.3	29.8	5.6	38.7	**E-Series, E-Pulse**	**102-103**
	0.30	3.0	0.67	6.7	0.94	9.4	1.5	15.5	1.9	19.5	3.3	33.1	4.8	47.7	6.2	61.9	**PU-Economy**	**100-101**
	0.15	1.5	0.35	3.4	0.49	4.7	0.80	7.7	1.0	9.7	1.7	16.6	2.5	23.9	3.2	30.9	**ZE3-Series**	**112-115**
	0.10	1.0	0.22	2.2	0.31	3.1	0.52	5.2	0.65	6.5	1.1	11.0	1.6	15.9	2.1	20.6	**ZE4-Series**	**112-115**
	0.07	0.50	0.16	1.12	0.23	1.6	0.38	2.6	0.47	3.2	0.80	5.5	1.2	8.0	1.5	10.3	**ZE5-Series**	**112-115**
	0.07	0.30	0.15	0.67	0.21	0.94	0.35	1.5	0.44	1.9	0.74	3.3	1.1	4.8	1.4	6.2	**ZE6-Series**	**112-115**
	0.11	1.0	0.25	2.2	0.35	3.1	0.58	5.2	0.73	6.5	1.2	11.0	1.8	15.9	2.3	20.6	**ZU4-Series**	**106-111**
	0.06	0.13	0.13	0.29	0.19	0.41	0.30	0.67	0.38	0.84	0.65	1.4	0.94	2.1	1.2	2.7	**8000-Series, PE**	**118-119**
Air (at 100 psi air pressure)	0.05	4.0	1.1	9.0	1.6	12.6	2.6	20.6	3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	**XA-Series**	**124-125**
	1.0	5.9	2.2	13.4	3.1	18.8	5.2	30.9	6.5	39.0	11.0	66.3	15.9	95.5	20.6	123.9	**Turbo II Pump**	**122-123**
	1.2	7.4	2.7	16.8	3.8	23.6	6.2	38.6	7.8	48.7	13.3	82.9	19.1	119.3	24.8	154.7	**PA133**	**120**
	0.09	6.6	0.21	14.9	0.29	20.9	.48	34.3	0.60	43.3	1.0	73.7	1.5	106.0	1.9	137.5	**PAM-Series**	**121**
	0.07	0.74	0.16	1.7	0.22	2.4	.36	3.9	0.46	4.9	0.78	8.3	1.1	11.9	1.5	15.5	**ZA4-Series**	**126-127**
Gasoline	0.08	0.59	0.19	1.3	0.27	1.9	0.44	3.1	0.56	3.9	0.95	6.6	1.4	9.5	1.8	12.4	**ZG5-Series, Briggs**	**128-129**
	0.15	0.59	0.34	1.3	0.47	1.9	0.77	3.1	0.97	3.9	1.7	6.6	2.4	9.5	3.1	12.4	**ZG5-Series, Honda**	**128-129**
	0.07	0.30	0.15	0.67	0.21	0.94	0.34	1.5	0.43	1.9	0.74	3.3	1.1	4.8	1.4	6.2	**ZG6-Series**	**130**

No Load indicates the plunger speed as the plunger extends toward the load (1st stage).

Load indicates the plunger speed as the load is lifted at a system pressure of 10,000 psi (2nd stage).

Formula V = A ÷ Q

V (sec/in) = **A** (in^2) ÷ **Q** (in^3/min)

V = Cylinder plunger speed in seconds per inch

A = Cylinder effective area in square inches

Q = Pump oil flow in cubic inches

Example: At what speed **(V)** will the RC308 (30 ton) cylinder move when powered by a ZE3 electric driven pump?

RC308 Cylinder effective area **A** = 6.50 in^2

ZE3 pump oil flow **Q**, (no load) is 450 in^3/min

V = 6.50 in^2 ÷ 450 in^3/min x 60 = **0.87 sec/in**

$$\text{Cylinder Plunger Speed (sec/in)} = \frac{\text{Cylinder Effective Area}}{\text{Pump Flow Rate}} \times \frac{60 \text{ sec}}{1}$$

Ways

The (oil) ports on a valve.
A 3-way valve has 3 ports:
pressure **(P)**, tank **(T),** and cylinder **(A)**.
A 4-way valve has 4 ports:
pressure **(P)**, tank **(T)**, advance **(A)** and retract **(B)**.

Single-acting cylinders require at least a 3-way valve, and can, under certain instances, be operated with a 4-way valve.

Double-acting cylinders require a 4-way valve, providing control of the flow to each cylinder port.

Positions

The number of control points a valve can provide. A 2-position valve has the ability to control only the advance or retraction of the cylinder. To be able to control the cylinder with a hold position, the valve requires a 3rd position.

Center Configuration

The center position of a valve is the position at which there is no movement required of the hydraulic component, whether a tool or cylinder.



The most common is the **Tandem Center**. This configuration provides for little to no movement of the cylinder and the unloading of the pump. This provides for minimum heat build-up.



The next most common is the **Closed Center** configuration, which is used mostly for independent control of multi-cylinder applications. This configuration again provides for little to no movement of the cylinder, but also dead-heads the pump, isolating it from the circuit.
Use of this type of valve may require some means of unloading the pump to prevent heat build-up.

There are many more types of valves, such as Open Center and Float Center. These valves are used mostly in complex hydraulic circuits and require other special considerations.



Open Center



Float Center

Directional Control Valves

3-Way Valves

are used with single-acting cylinders



4-Way Valves

are used with double-acting cylinders



Valves may be either pump mounted or remote mounted.

Pump Mounted



Remote Mounted



Valves may be either manually or solenoid operated.

Manually Operated



Solenoid Operated



Advance Hold Retract

Single-acting cylinder

Controlled by a 3-way, 3-position valve.



Advance

The oil flows from the pump pressure port P to the cylinder port A: the cylinder plunger will extend.



Hold

The oil flows from the pump pressure port P to the tank T. The cylinder port A is closed: the cylinder plunger will maintain its position.



Retract

The oil flows from the pump port P and cylinder port A to the tank T: the cylinder plunger will retract.

Double-acting cylinder

Controlled by a 4-way, 3-position valve.



Advance

The oil flows from the pump pressure port P to the cylinder port A, and from cylinder port B to tank T: the cylinder plunger will extend.



Hold

The oil flows from the pump pressure port P to the tank T. The cylinder ports A and B are closed: the cylinder plunger will maintain position.



Retract

The oil flows from the pump pressure port P to cylinder port B, and from cylinder port A to tank T: the cylinder plunger will retract.

Hexagon Nut and Bolt Sizes

METRIC SIZES

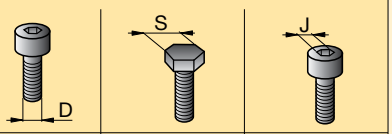

Thread Size D (mm)	Hexagon Size S (mm)	Hexagon Size J (mm)
M 10	17	8
M 12	19	10
M 14	22	12
M 16	24	14
M 18	27	14
M 20	30	17
M 22	32	17
M 24	36	19
M 27	41	19
M 30	46	22
M 33	50	24
M 36	55	27
M 39	60	27 (30)
M 42	65	32
M 45	70	-
M 48	75	36
M 52	80	36
M 56	85	41
M 60	90	46
M 64	95	46
M 68	100	50
M 72	105	55
M 76	110	60
M 80	115	65
M 85	120	70
M 90	130	70 (75)
M 95	135	-
M 100	145	85
M 105	150	-
M 110	155	-
M 115	165	-
M 120	170	-
M 125	180	-
M 130	185	-
M 140	200	-
M 150	210	-

IMERIAL SIZES

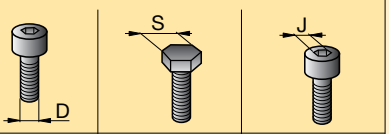

Thread Size D (in)	Hexagon Size * S (in)	Hexagon Size J (in)
5/8"	1 1/16"	1/2"
3/4"	1 1/4"	5/8"
7/8"	1 7/16"	3/4"
1"	1 5/8"	3/4"
1 1/8"	1 13/16"	7/8"
1 1/4"	2"	7/8"
1 3/8"	2 3/16"	1"
1 1/2"	2 3/8"	1"
1 5/8"	2 9/16"	-
1 3/4"	2 3/4"	1 1/4"
1 7/8"	2 15/16"	1 3/8"
2"	3 1/8"	1 5/8"
2 1/4"	3 1/2"	1 3/4"
2 1/2"	3 7/8"	1 7/8"
2 3/4"	4 1/4"	2"
3"	4 5/8"	2 1/4"
3 1/4"	5"	2 1/4"

* Heavy hexagon nuts.

Determine the maximum torque according to the bolt (nut) size and grade. Always consult the manufacturer's instructions or engineering recommendations when making bolted connections.

IMPORTANT

The hexagon sizes shown in the tables should be used as a guide only. Individual sizes should be checked before specifying any equipment.

BSH-Series Sockets

Use only Heavy Duty Impact Sockets for power driven torquing equipment, according to ISO2725 and ISO1174; DIN3129 and DIN3121 or ASME-B107.2/1995.

Page: **244**

Tightening Methods

Principally there are two modes of tightening: "Uncontrolled" and "Controlled".

Uncontrolled tightening

Uses equipment and/or procedures that cannot be measured. Preload is applied to a bolt and nut assembly using a hammer and spanner or other types of impact tools.

Controlled tightening

Employs calibrated and measurable equipment, follows prescribed procedures and is carried out by trained personnel.

Advantages of Controlled Tightening

Known, controllable and accurate bolt loads

Employs tooling with controllable outputs and adopts calculation to determine the required tool settings.

Uniformity of bolt loading

Especially important on gasketed joints as an even and consistent compression is required for the gasket to be effective.

Safe operation following prescribed procedures

Eliminates the dangerous activities of manual uncontrolled tightening and requires that the operators be skilled and follow procedures.

Reduces operational time resulting in increased productivity

Reduces tightening time and operator fatigue by replacing manual effort with the use of controlled tooling.

Reliable and repeatable results

Using calibrated, tested equipment, following procedures and employing skilled operators achieves known results consistently.

The right results first time

Many of the uncertainties surrounding in-service joint failures are removed by ensuring the correct assembly and tightening of the joint are carried out the first time.

Bolting Integrity Software

A comprehensive on-line software solution for Bolted Joint integrity.

Integral databases hold data for:

- ASME B16.5, ASME B16.47, API 6A and API 17D flanged joints
- Common gasket materials and configurations
- Comprehensive range of bolt materials
- Comprehensive range of lubricants
- Enerpac's Controlled Bolting Equipment including: Torque Multipliers, Hydraulic Wrenches and Bolt Tensioning tools

Custom Joint information can also be entered.

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application data sheet and Joint completion report.

www.enerpac.com

What is Torque?

It is a measure of how much force acting on an object which causes that object to rotate.

What is Torque Tightening?

The application of preload to a fastener by the turning of the fastener's nut.

Torque Tightening and Preload

The amount of preload created when torquing is largely dependant on the effects of friction.

Principally there are three different "torque components":

- torque to stretch the bolt
- torque to overcome the friction in bolt and nut threads
- torque to overcome friction at the nut spot face (bearing contact surface).

Torque Tightening

Turning movement

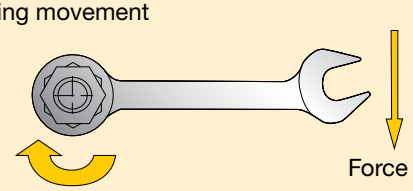

Stretch of Fastener (Pre-load)

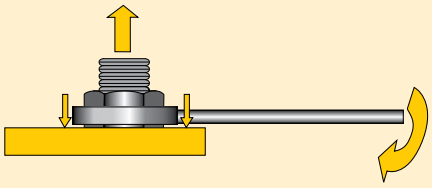

Preload (residual load) = Applied Torque *minus* Frictional Losses

Lubrication Reduces Friction

Lubrication reduces the friction during tightening, decreases bolt failure during installation and increases bolt service life. Variation in friction coefficients affect the amount of preload achieved at a specified torque. Higher friction results in less conversion of torque to preload. The value for the friction coefficient provided by the lubricant manufacturer must be known to accurately establish the required torque value.

Lubricant or anti-seizure compounds should be applied to both the nut bearing surface and the male threads.

Frictional Losses



Frictional Losses (dry steel bolt)

Lubrication Reduces Friction

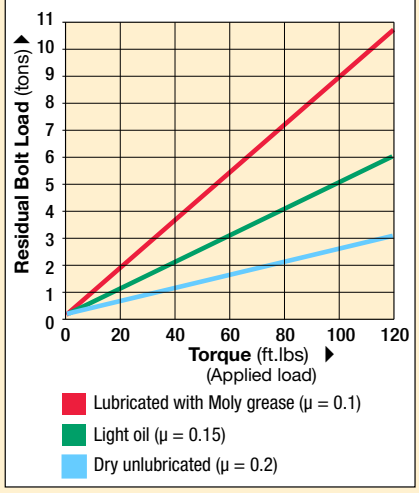

Example of how a lubricant can reduce the effect of friction and convert more torque to bolt preload.

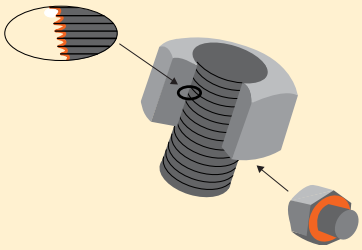

Friction points should always be lubricated when using the torque tightening method.

Torque Procedure

When torquing it is common to tighten only one bolt at a time, this can result in Point Loading and Load Scatter. To avoid this, torque is applied in stages following a prescribed pattern:

Torque Sequence

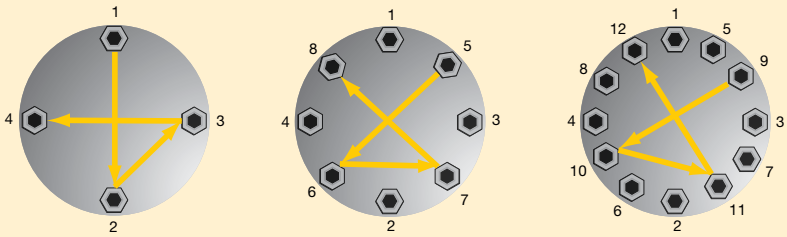

Step 1 Spanner tight ensuring that 2 - 3 threads extend above nut.

Step 2 Tighten each bolt to **one-third** of the final required torque following the pattern as shown above.

Step 3 Increase the torque to **two-thirds** following the pattern shown above.

Step 4 Increase the torque to **full torque** following the pattern shown above.

Step 5 Perform one final pass on each bolt working clockwise from bolt 1, at the full final torque.

Select the Right Wrench

Choose your Enerpac torque wrench using the untightening rule of thumb:

- When loosening a nut or bolt more torque is usually required than when tightening.
- For general conditions it can take up to 2½ times the input torque to breakout.
- Do not apply more than 75% of the maximum torque output of the tool when loosening nuts or bolts.

Conditions of bolted joints

- Humidity corrosion (rust) requires up to twice the torque required for tightening.
- Sea water and chemical corrosion requires up to 2½ times the torque required for tightening.
- Heat corrosion requires up to 3 times the torque required for tightening.

Breakout Torque

When loosening bolts a torque value higher than the tightening torque is normally required. This is mainly due to corrosion and deformations in the bolt and nut threads.

Breakout torque cannot be accurately calculated, however, depending on conditions it can take up to 2½ times the input torque to breakout.

The use of penetrating oils or anti-seize products is always recommended when performing breakout operations.

Tensioning requires longer bolts

INCORRECT



CORRECT



What is Bolt Tensioning?

Tensioning is the direct axial stretching of the bolt to achieve **preload**. Inaccuracies created through friction are eliminated. Massive mechanical effort to create torque is replaced with simple hydraulic pressure. A uniform load can be applied by tensioning multiple studs simultaneously.

Tensioning requires longer bolts, and a seating area on the assembly around the nut. Tensioning can be done using detachable Bolt Tensioners or Hydraulic Nuts.

Preload (residual load) = Applied Load *minus* Load Losses

What is Load Loss?

Load loss is a loss of bolt elongation depending on factors such as thread deflections, radial expansion of the nut, and embedding of the nut into the contact area of the joint. Load loss is accounted for in calculation and is added to the preload value to determine the initial **Applied Load**.

The preload depends on Applied Load and Load Loss (load loss factor).

GLOSSARY OF TERMS

Applied Load: The load applied to a bolt during tensioning which includes an allowance for Load Loss.

Bolt Tensioning: A method of controlled tightening which applies preload to a bolt by stretching it axially.

Breakout Torque: The amount of torque required to loosen a tightened bolt. (Usually more torque is required to loosen a bolt than was used to tighten it.)

Elastic Range: The range on a bolt's stress / strain curve where stress is directionally proportional to strain.

Load Loss: The losses in a bolt which occur on transfer of load from a tensioning device to the bolt assembly (these may arise from phenomena such as thread deflection and embedding of the nut to the contact area of the joint, and is calculated as a factor of the length to diameter ratio of the bolt).

Load Scatter: The spread of differing loads in a sequence of bolts after they have been loaded. It is mostly due to the elastic interaction of the bolts and the joint member; as subsequently tightened bolts further compress the joint, previously tightened bolts are subject to some relaxation.

Plastic Range: The range on a stress/strain curve where the tensile load applied to a bolt results in permanent deformation.

Preload: The load in a bolt immediately after it has been tightened.

Proof Load: Proof load is often used interchangeably with Yield Strength but is usually measured at 0.2% plastic strain.

Tensile Point: The point at which the tensile loading on a bolt causes the bolt to rupture.

Torque Tightening: The application of Preload to a bolt by turning of the bolt's nut.

Ultimate Strength: The maximum tension which can be created by tensile load on a bolt.

Yield Strength: The point at which a bolt begins to plastically deform under tensile loading.

NOTE: Bolt is used as a generic term for a threaded fastener.

Manufacturer's rating of pressure and load are maximum safe limits.
Good practice encourages using only 80% of these ratings!

Tensioning Operation

Tensioning permits the simultaneous tightening of multiple bolts; the tools are connected in sequence via a high-pressure hose assembly to a single pump unit. This ensures each tool develops the exact same load and provides a uniform clamping force across the joint. This is especially important for pressure containing vessels requiring even gasket compression to affect a seal.

General Procedure

Step 1: The bolt tensioner is fitted over the stud
Step 2: Hydraulic pressure is applied to the tensioner which then stretches the stud.
Step 3: The Stud's nut is wound down against the joint face
Step 4: Pressure is released and the tool removed.

The bolt behaves like a spring, when the pressure is released the bolt is under tension and attempts to contract, creating the required clamping force across the joint.

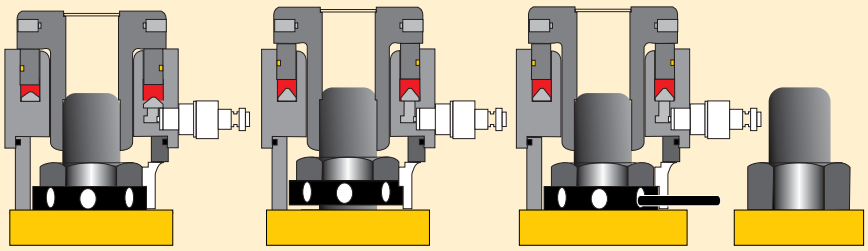

Step 1 **Step 2** **Step 3** **Step 4**

Less than 100% Tensioning

Not all applications allow for the simultaneous fit of a tensioning device on each bolt, in these cases at least two tensioning pressures are applied. This is to account for a load loss in those bolts already tensioned as the next sets are tightened. The load losses are accounted for in calculation and a higher load is applied to allow the first sets to relax back to the target preload.

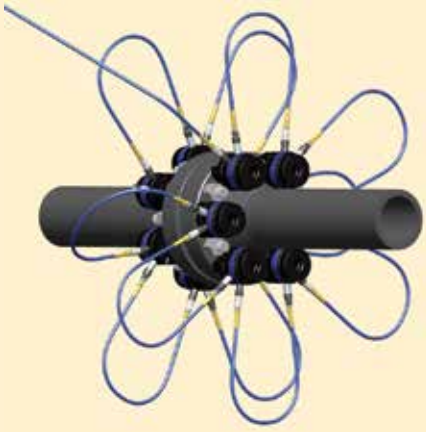

Set-up using a 100% tensioning procedure

All bolts are tensioned simultaneously.

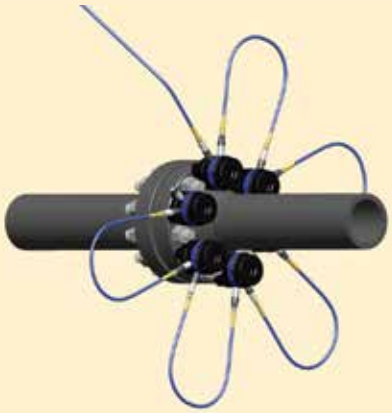

Set-up using a 50% tensioning procedure

Half the bolts are tensioned simultaneously, the tools are relocated on the remaining bolts and they are subsequently tensioned.

Read Instruction Manuals

Please refer to the product Instruction Sheets for safe use guidelines and detail on the correct set up and operation of the equipment.

Bolting Integrity Software

Enerpac Bolting Integrity Software Solutions play a key role in implementing and managing an Integrity Program for bolted connections. The software is used extensively within Enerpac and increasingly by a wide range of clients worldwide often interfacing with maintenance, construction and commissioning management systems.

- First developed over 20 years ago, we have continued to update and enhance the software based on user feedback, technology advances and our roles on industry standard committees, to produce the most comprehensive suite of joint integrity software available.
- Recommended bolt loads for standard joints are derived from independently verified calculation methods and traceable back to standards

Integral databases hold data for:

- ASME B16.5, ASME B16.47, API 6A and API 17D flanged joints
- Common gasket materials and configurations
- Comprehensive flange and bolt materials
- Comprehensive range of lubricants
- Enerpac controlled bolting equipment includes torque, multipliers, hydraulic wrenches and bolt tensioners.
- Custom joint information can also be entered.

▲ **Standard flange calculation menu (INFORMATE)**

The Enerpac Bolting Software Suite includes:

- **Bolt-Up** - Online bolt load calculator. Free access and use on www.enerpac.com.
- **INFORMATE** - Advanced calculation and procedure software. Contact Enerpac for user licenses and dedicated support.
- **iDMS Integrity Data Management System** - A complete Integrity Assurance project management package for managing bolted joints from cradle to grave. Contact Enerpac for user licenses and dedicated support.

Bolt-Up

Bolt-Up is a simple to use online calculator, built upon the Informate calculation engine, providing reliable, repeatable bolt loads for:

- Carbon steel weldneck ANSI 16.5 standard flanges, using a limited range of bolt materials; selected gasket options and a fixed lubrication value.
- Inputting basic joint configuration information allows Bolt-Up to determine: bolt load; bolt stress and the required torque. These outputs are displayed alongside basic flange and bolt information e.g. joint thickness and bolt size/quantity.

Bolting Integrity Software

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as, a combined Application data sheet and Joint completion report.

This software includes the following hydraulic tool selections:

- S, W, RSL, DSX and HMT Torque Wrenches,
- HM-Series HydraMax®, GT-Series Bolt Tensioners, and EAJ-Series AquaJack Subsea Tensioners

Software Model No.	INFORMATE Subscriptions Contact Enerpac for details
BS01PP	Bolting software 1 person purchase
BS01PAS	Bolting software 1 person annual support
BS05PP	Bolting software 5 person purchase
BS05PAS	Bolting software 5 person annual support

Bolting Integrity Software

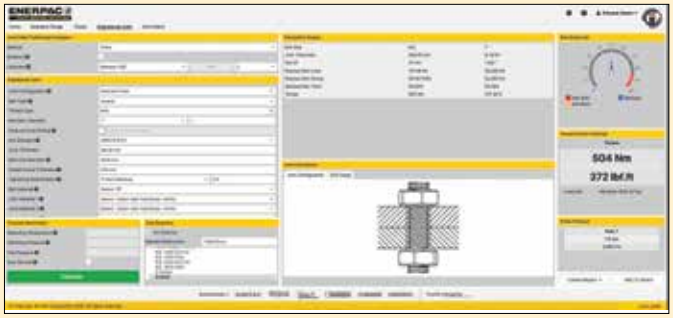

▲ **Engineered Joint menu (INFORMATE)**

▲ **Clamp menu (INFORMATE)**

INFORMATE Bolt Load Calculation Software

INFORMATE can be used on a huge range of flanged joints and clamped connections in virtually any situation from process piping to custom-designed flange connections.

- Calculate bolt loads and stresses, determine tooling pressures for Enerpac torque and tensioning equipment; analyse existing connections and test custom designed connections.
- Extensive material database covering all common standards:
  - Common and industry specific lubricants
  - 200+ bolting materials
  - 500+ flange materials
  - 60+ gasket materials
- Engineered Joint Calculation Features - allows for different types of bolted application for non-circular or structural applications.
- Installed direct to the desktop or accessed via the internet, Informate is available in a single version that is configurable to client requirements and includes multiple international standards and the latest and forthcoming regulatory data, when taken with a maintenance package.

Integrity Data Management System (iDMS)

iDMS is a flexible data management and activity planning system specifically for use on assets featuring bolted connections.

Designed to store the entire lifecycle data relating to every critical bolted joint on an installation, it aids planning, ensures joint integrity, as well as reducing construction and maintenance schedules and costs.

- Provides managers and technicians with essential information about joint components used in assembly, in addition it specifies the tools and the torque or tension values to deliver a leak-free joint.
- Allows planner and maintenance engineers to rapidly build packages of work complete with all documentation and then track them to completion
- Whenever a joint is worked on, all of the previous history and experience of that joint is available, allowing any particular requirements of the joint to be taken into account proactively prior to joint assembly and tightening.

iDMS Custom Tailored Solutions available to meet client needs, for example:

- Embedded Informate bolted joint calculator
- Export and import of data to asset management systems
- Exporting data to populate customer documentation
- Color coding of the joint provides an instant review of the status

Contact Enerpac for User License

The Enerpac Academy is our in-house training program, offering Enerpac product operators and maintenance staff the opportunity to be trained in the safe use and maintenance of high-pressure hydraulic tools.

Operating these tools requires sound knowledge of how they work and how they should be maintained. Correct use of these tools increases safety and reduces risk – both for the operator and the environment in which the tools are used. Having the right training enables the operator to use the tools safely and properly.

Enerpac Academy

- Safety focus for operators, tools and environment
- Dedicated in-house Enerpac training centers
- Both standard training courses and specialized training services
- Highly experienced training staff
- Develops alternative training options such as
  - eLearning modules
  - vLearning sessions
  - Instructional videos

In-house Training Centers

Do you work with high-pressure hydraulic tools on a regular basis or even every day? The training courses are designed to be highly interactive with a strong hands-on element. Each training course is led by a qualified trainer, an Enerpac specialist capable of providing high quality training. A written or practical exam is part of certain training courses.

Training Center Locations

- **Columbus, Wisconsin (USA)**
- **Ede (The Netherlands)**
- **Bangalore (India)**
- **Singapore**
- **Perth (Australia)**

Enerpac Academy offers a meticulously compiled training program covering tool knowledge, repairs and maintenance, and safe operation of Enerpac hydraulic tools. If you would like to schedule a training course, please contact Enerpac for a training calendar, application form, and brochure at www.enerpac.com.

The Power of Knowledge

In-Person Training

- Highly experienced training staff
- Class sizes range from 8 to 20, depending on class and location
- Commercial Sales, Service and Repair Class capabilities
- Most classes consist of theoretical and hands-on training

eLearning Modules

- Enerpac Training available on “your” schedule
- Courses available to support New Product Launches, Product Awareness Training and Enerpac Academy Courses
- Available to external viewers through Enerpac’s “LDMS” system

vLearning Sessions

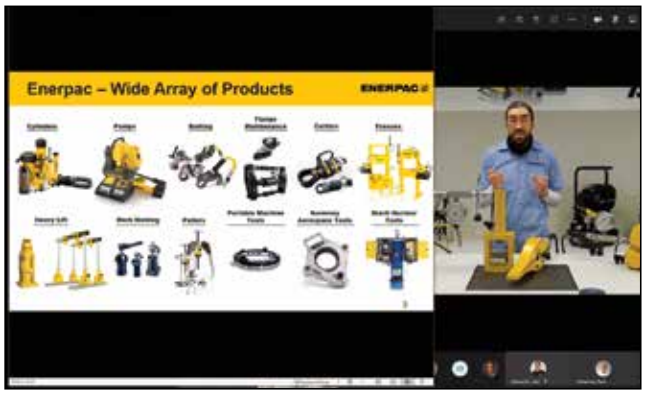

- Interactive training available on-line
- Sessions contain Technical Presentations, Hands-on product demos and end with a Q&A session
- Classes cover many topics, such as Product Operational information and Service & Repair Training
- Look for scheduling and registration details on www.Enerpac.com

Instructional Videos

- Informational videos created with Enerpac Academy Training processes in-mind
- Topics range from product “how-to” videos to application and operational videos
- Videos are available on the Enerpac “You-Tube” channel and other venues, where appropriate

Enerpac Worldwide Locations

ENERPAC

http://www.enerpac.com/en/enerpac-locations

Australia and New Zealand
Actuant Australia Pty Ltd.
3 Orion Rd, Jandakot, WA 6164
Australia
Tel: +61 287 177 200
Fax: +61 297 438 648
Australia Toll Free: +1800 225 084
New Zealand Toll Free: +0800 363 772

Brazil
Power Packer do Brasil Ltda.
Rua Luiz Lawrie Reid, 548
09930-760 - Diadema (SP)-Brasil
Tel: +55 11 5687 2211
Toll Free: 0800 891 5770

China (Taicang)
Actuant (China) Industries Co.Ltd.
No. 6 Nanjing East Road,
Taicang Economic Dep Zone,
Jiangsu, China
T +86 0512 5328 7500
F +86 0512 5335 9690
Toll Free:
T +86 400 885 0369

Enerpac Heavy Lifting Technology B.V.
Zuidelijke Havenweg 3, 7554 RR Hengelo
P.O. Box 421, 7550 AK Hengelo
The Netherlands
T +31 74 242 20 45
F +31 74 243 03 38

France and French speaking Switzerland
ENERPAC France S.A.S.
6 rue du 4 septembre,
Immeuble Le Poversy, Bâtiment B - 6ème étage,
92130 Issy-les-Moulineaux, France
Tel: +33 1 60 13 68 68
Fax: +33 1 69 20 37 50

Germany, Austria and German speaking Switzerland
Actuant GmbH
Boelckestrasse 21-23
D-50171 Kerpen, Germany
T +49 2237 92301-0
F +49 2237 9230-180

Central and Eastern Europe, Russia Baltic States and CIS countries
Enerpac Eastern Europe Sp. z o.o.
Krakowska Street 280,
building: Eximius Park 200, floor 1,
32-080 Zabierzów, Poland

India
Enerpac India Private Limited
No. 10, Bellary Road, Sadashivanagar,
Bangalore, Karnataka - 560 080 India
T +91 80 3928 9000

Italy, Greece and Turkey
ENERPAC S.p.A.
Via Leonardo da Vinci, 97
20090 Trezzano sul Naviglio (Milano)
Italy
T +39 02 4861 111
F +39 02 4860 1288

Japan
Enerpac Co., Ltd.
Besshocho 85-7
Kita-ku, Saitama-shi 331-0821
Japan
T +81 48 662 4911
F +81 48 662 4955

Middle East, North Africa and Caspian Sea Countries
ENERPAC Middle East FZE
Swiss Tower, Office 902, Cluster Y,
Jumeirah Lake Towers
Dubai-United Arab Emirates
Tel: +971 4 527 0700

Norway
ENERPAC AS
Kirkegata 3, NO-2000, Lillestrom
P.O. Box 3051, NO-2028, Lillestrom
Norway
Tel: +47 91 578 300

Southeast Asia, Hong Kong and Taiwan
25 Pandan Crescent
Tic Tech Centre
Singapore 128477
T +65 68 63 0611
F +65 64 84 5669
Toll Free:
T +1800 363 7722

South Korea
Actuant Korea Ltd.
48, Mayu-ro, 20-beon-gil, Shiheung-si
Gyeonggdi-do, 15116 South Korea
T +82 31 434 4506
M +82 (0)10 7134 4508

Spain and Portugal
ENERPAC SPAIN, S.L.
Avenida Valdelaparra N° 27 3ª - L8
28108 Alcobendas (Madrid), Spain
T +34 91 884 86 06
F +34 91 884 86 11

South Africa and other English speaking African countries
ENERPAC AFRICA (PTY) Ltd.
Cambridge Office Park, Block E
5 Bauhinia Avenue
Highveld Techno Park, Centurion 0157
Republic of South-Africa
T 0027 (0) 12 940 0656

Sweden, Denmark, Finland and Iceland
Enerpac Scandinavia AB
Box 83
82222 Alfta, Sweden
Tel: +46 (0) 415 000

The Netherlands, Belgium, Luxembourg
ENERPAC B.V.
Galvanistraat 115, 6716 AE Ede
P.O. Box 8097, 6710 AB Ede
The Netherlands
T +31 318 535 911
F +31 318 535 848

United Kingdom and Ireland
ENERPAC UK LTD
5 Coopies Field
Morpeth, Northumberland
NE61 6JR, England
T +44 800 1380 500
F +44 1670 5016 51

USA, Latin America and Caribbean
ENERPAC World Headquarters
P.O. Box 3241
Milwaukee, WI 53201-3241 USA
N86 W12500 Westbrook Crossing
Menomonee Falls, Wisconsin 53051
T +1 262 293 1600
F +1 262 293 7036
User inquiries:
+1 800 433 2766
Distributor inquiries/orders:
+1 800 558 0530
+1 800 628 0490

While every care has been taken in the preparation of this catalog and all data contained within is deemed accurate at the time of printing, Enerpac does reserve the right to make changes to the specifications of any product, or discontinue any product, contained within this catalog without prior notice.

All illustrations, performance specifications, weights and dimensions reflect the nominal values and slight variations may occur due to manufacturing tolerances. Please consult Enerpac if final dimensions are critical.

All information in this catalog can be changed due to product improvements without prior notice.

© Copyright 2021, Enerpac.

All rights reserved. Any copying or other use of material in this catalog (text, illustrations, drawings, photos) without express written consent is prohibited.

Model Number Index

A

A 151-153, 174-176, 217
A5-A10 206-207
A12 10
A13-A28 206-207
A29-A53 10
A64-A66 152
A92 217
A102 . . . . . .10, 39
A128-A192 206-207
A152 10
A185 206
A200-A200R 176
A205-A220 174-175
A218 206-207
A242-A305 206-207
A252 . . . . . .10, 41
A310, A330 174-175
A530-A595 206-207
A604 151
A607 206-207
A630 . . . . . .148-149, 151
A650 206-207
A92 217
AD 39
AH 148-149,151
AM 152-153
AMGC 29, 152, 162
AR 151
ATM 330-331
ATP 327
AW 10

B

B 225, 325
BC 225
BFZ 153
BH 325
BHP 184-187, 193, 198
BK 144
BLJS 367
BLS 72-73
BR 325
BRC 32-33
BRP 32-33
BS 391
BSH 244
BUS 245
BW 325
BZ 219

C

C 150-151
CATS . . . . 10, 13, 15, 21, 27, 41 . . . . . 49, 51, 53, 55, 57, 59
CD 151
CF 151
CH 151, 236-237
CHT 389
CM 151, 216
CR 151
CULP 22
CUSP 23
CT 151
CW 186

D

DDA 276
DDU 393
DGR 161
DLR 382-383
DSX 274-276

E

E. . 102-103, 284-285, 294-295
EAJ 316-317
EBC 225
EBE 224
EBH 222-223
ECCE 228-229
ECSE 233
EDCH 226
EFBE 227
EGM 131
ELB 214
ELP 214-215
EP 102-103, 290-291
EPH 201
ER 214-215
ERA 269
ERH 214
ERT 269
ES 214-215
ETT 82
ETR 370-371
EVO 134, 136-137
EWCE 232
EWCH 230-231

F

F 150-151
FC 355
FF 340-341, 380
FH 151
FR 151
FRL 286
FS 332
FSB 332
FSC 332-333
FSH 332-333
FSM 332-337
FTE 322-323
FTR 320-321
FZ 153

G

G 111,158-159
GA 162-163
GBJ 67
GF 156-157
GeniSYS™ IV 394-395
GKHC 226
GMRF 387
GP 156-157
GPS 192
GT 299, 314-315

H

H 148-149, 157, 158-159
HA 149
HB 149
HC 149
HCG 44-51
HCL 44-47, 56-59
HCR 44-47, 52-55
HCRL 44-47, 60-61
HF 152
HLP 280-281
HM 310-313
HMT 278-279, 282-283
HP 19, 35, 37, 357
HPT 324
HSK 360-361
HSL 362-363
HSQ 283
HT 325, 392
HTM 388

I

IP. 168-171, 177
IPK 176
IPL 176
IPM 200
IPR 172-173, 176

J

JBI 10
JBA 13
JH 66
JHA 66
JS 366-367

L

LAT 304-305
LGH 195, 196-199
LGHMS 199
LGM 194-195
LH 78-81, 180, 360-361
LHPP 80
LHSB. 80
LHST 81
LMR 386
LPHT 388
LPL 24-25
LSA 389
LW / LWC 212
LX 152

M

MCS. 290
MDWS 390
MG. 354
MITT 396-397
MHT 388
MM 380-381
MP. 93
MPS 191
MR 386
MRY 386
MS 204-207
MSP. 209
MZ 206-207

N

NC 334-335
NCB 335
NSC 336-337
NSH 336-339
NSPH 339
NV 163

O

OM 384

P

P 64, 86-91, 94-95
P142ALSS 64
P392AL 87
P392ALSS 64
P392FP 92
PA 120
PAM 121
PAMG 122-123
PARG 122-123
PATG 122-123
PC 88, 120
PEM 118-119
PER 118-119
PGT 318-319
PK 176
PL 70-71
PMB. 176
PR 68-69
PTW 286-289
PUD 100-101

R

RA 11
RAC 12-13
RACH 16-17
RACL 14-15
RARH 18-19
RAR 20-21
RB 10
RC 6-9, 64
RCH 34-35
RCS 26-27
RD 38-39
REB 10
REP 10
RFL 122, 125
RLP 264-271
RLT 28-29
RR 40-43
RRH 36-37
RSL 262-273
RSM 26-27
RSQ 272-273
RT 30-31
RTE 243
RWH 184-186

S

S 240-242
SB 337
SBL 364-365
SBZ 111, 116, 301, 309
SC 62-63
SCH 63
SCJ 74-77
SCL 63, 65
SCR 63, 65
SDA 242
SFM 154-155
SFP 132-135
SG 191-192, 348-351
SGH 188-189,191
SGM 188-190, 195, 199
SHS 368-369
SHAS 368-369
SL 364-365
SLPP 363
SOH 213
SP 209, 210-211
SPD 208-209
SPMT 372
SRS 65, 243
STB 218-219
STC 234
STF 333
STN 334
STP 209
STTL 246-247
SWH 240, 248, 258, 274
SWi 344-347

T

T 150-151, 160, 393
TFA 356
TH 151
THQ 259, 263, 272, 282
TM 180
TQ 296-297
TR 151
TSP 243, 260
TWMPS 269

V

V 64, 163-165
VA2 121
VB 179
VC 142-143, 352-353
VE 140-141, 143-145
VLP 178-179
VM 140-141, 143
VM33RVK 141
VS 144
VUV5 141

W

W 248-257
WCB. 234-235
WHC 234
WHR 234
WMC 235
WP 385
WR 217
WRP 260
WSL 258-259
WTE 260

X

XA 124-125
XC 96-97, 292-293
XLK1 124
XLP 178-179
XSC1 124

Z

Z 151
ZA4 126-127
ZA4T 306-309
ZC 98-99, 110, 11, 237
ZE 112-117, 236-237, 302-303
ZG 128-130
ZH 110, 117, 301
ZL 111,116
ZP 110-111, 116-117
ZR 110, 116, 301, 309
ZU4 106-111
ZU4T 298-301
ZUTP 328-329
ZTM 301, 309

Numeric

11 . . . . . 94-95, 160
41- 95
43- 95, 160
45- 95
67- 353
72-750. 94
83- 95, 160
144- 357
302- 357
8000 . . . . . .118-119, 131

Cylinders & Lifting Products

Pumps & Directional Control Valves

System Components & Control Valves

Presses

Pullers

Specialty Tools

Cutters

Bolting Tools

Flange Maintenance Tools

Heavy Lifting Technology

On-site Machining Tools

EXTENSIVE GLOBAL DISTRIBUTION NETWORK

WHERE TO BUY THE RIGHT TOOLS

With over 1500+ distributors and 3500+ points of sale in over 100+ countries, Enerpac has a vast distribution network to reach all your local industrial tool needs.

Find on-demand access to application experts who can provide hands-on demonstrations, help with product selection or discuss rental options along with on-going service.

WORLD CLASS SUPPORT RESULTS IN THE RIGHT TOOL

Whether you're looking for help identifying the right product, receive technical support, training or request product materials, we have experts ready to answer your questions and provide guidance on the tool or accessory that will help get your toughest job done. Reach out to us at Enerpac.com/support.

VISIT STORE.ENERPAC.COM

Buy in person at your local Enerpac Tool Center or purchase select tools directly online.

GET THE LATEST VERSION

Enerpac © 2021 100 EN-US